



**Recommendation ITU-R BO.1443-3**  
(12/2013)

**Reference BSS earth station antenna  
patterns for use in interference assessment  
involving non-GSO satellites in frequency  
bands covered by RR Appendix 30**

**BO Series**  
**Satellite delivery**



International  
Telecommunication  
Union

## Foreword

The role of the Radiocommunication Sector is to ensure the rational, equitable, efficient and economical use of the radio-frequency spectrum by all radiocommunication services, including satellite services, and carry out studies without limit of frequency range on the basis of which Recommendations are adopted.

The regulatory and policy functions of the Radiocommunication Sector are performed by World and Regional Radiocommunication Conferences and Radiocommunication Assemblies supported by Study Groups.

## Policy on Intellectual Property Right (IPR)

ITU-R policy on IPR is described in the Common Patent Policy for ITU-T/ITU-R/ISO/IEC referenced in Annex 1 of Resolution ITU-R 1. Forms to be used for the submission of patent statements and licensing declarations by patent holders are available from <http://www.itu.int/ITU-R/go/patents/en> where the Guidelines for Implementation of the Common Patent Policy for ITU-T/ITU-R/ISO/IEC and the ITU-R patent information database can also be found.

### Series of ITU-R Recommendations

(Also available online at <http://www.itu.int/publ/R-REC/en>)

Series	Title
<b>BO</b>	<b>Satellite delivery</b>
<b>BR</b>	Recording for production, archival and play-out; film for television
<b>BS</b>	Broadcasting service (sound)
<b>BT</b>	Broadcasting service (television)
<b>F</b>	Fixed service
<b>M</b>	Mobile, radiodetermination, amateur and related satellite services
<b>P</b>	Radiowave propagation
<b>RA</b>	Radio astronomy
<b>RS</b>	Remote sensing systems
<b>S</b>	Fixed-satellite service
<b>SA</b>	Space applications and meteorology
<b>SF</b>	Frequency sharing and coordination between fixed-satellite and fixed service systems
<b>SM</b>	Spectrum management
<b>SNG</b>	Satellite news gathering
<b>TF</b>	Time signals and frequency standards emissions
<b>V</b>	Vocabulary and related subjects

*Note: This ITU-R Recommendation was approved in English under the procedure detailed in Resolution ITU-R 1.*

Electronic Publication  
Geneva, 2013

© ITU 2013

All rights reserved. No part of this publication may be reproduced, by any means whatsoever, without written permission of ITU.

## RECOMMENDATION ITU-R BO.1443-3

**Reference BSS earth station antenna patterns for use in interference assessment involving non-GSO satellites in frequency bands covered by RR Appendix 30\***

(Question ITU-R 280/4)

(2000-2002-2006-2013)

**Scope**

This Recommendation intends to provide tri-dimensional reference earth station antenna patterns for the broadcasting-satellite service (BSS) that can be used for the calculation of interference generated by non-GSO FSS satellites into BSS earth station antennas.

**Keywords**

Gain pattern, GSO, BSS.

**Abbreviations/Glossary**

The gain pattern is defined in the form:

$$\text{Gain} = G(\varphi, \theta)$$

where:

$\varphi$ : off-axis angle of the antenna relative to boresight (degrees)

$\theta$ : planar angle of the antenna (degrees) (0° azimuth is the horizontal plane).

**Related ITU Recommendations, Reports**

- |                               |   |
|-------------------------------|---|
| Recommendation ITU-R S.672-4  | Satellite antenna radiation pattern for use as a design objective in the fixed-satellite service employing geostationary satellites   |
| Recommendation ITU-R S.1428-1 | Reference FSS earth-station radiation patterns for use in interference assessment involving non-GSO satellites in frequency bands between 10.7 GHz and 30 GHz   |
| Recommendation ITU-R S.1503-1 | Functional description to be used in developing software tools for determining conformity of non-geostationary-satellite orbit fixed-satellite system networks with limits contained in Article 22 of the Radio Regulations |

---

\* The basis for the patterns contained in this Recommendation, including the methodology for analysing and plotting the data which measures the goodness of fit of the data sets to the recommended pattern are contained in Report ITU-R BO.2029 – Broadcasting-satellite service earth station antenna pattern measurements and related analyses. This Report along with the raw data sets and the spread sheets used to perform the graphical analysis are contained on a CD-ROM available from ITU.

The ITU Radiocommunication Assembly,

*considering*

- a) that for earth station antennas in the BSS the reference antenna radiation patterns for GSO BSS receive antennas in Annex 5 to RR Appendix 30 were used to develop the BSS Plans and prescribe a reference radiation pattern which represents an envelope of the side lobes;
- b) that such reference radiation patterns are necessary for interference calculations involving fixed or transportable BSS receivers and GSO satellites to ensure adequate protection of the BSS Plans;
- c) that in circumstances where there are multiple interfering sources whose positions vary substantially with time, the level of interference received inevitably depends on the troughs as well as the peaks in the gain pattern of the victim BSS earth station antenna;
- d) that for BSS earth stations, suitable reference radiation patterns are needed for use in assessing interference from non-GSO FSS systems;
- e) that to facilitate computer simulations of interference, the reference patterns should cover all off-axis angles from  $0^\circ$  to  $\pm 180^\circ$  in all planes;
- f) that the reference patterns should be consistent with the results of measurements on a wide range of consumer BSS earth station antennas;
- g) that it is appropriate to establish different reference patterns for different ranges of antenna sizes;
- h) that the patterns may exhibit characteristics that may be important when modelling non-GSO interference, for example in the case of small offset-fed antennas,

*recommends*

- 1 that for calculations of interference generated by non-GSO FSS satellites into BSS earth station antennas, the reference earth station antenna radiation patterns described in Annex 1 should be employed;
- 2 that the methodology described in Annex 2 be used to convert the relative azimuth and elevation angle of the non-GSO satellite under investigation into the same coordinate system as employed for the three-dimensional antenna pattern;
- 3 that the following Notes be considered part of this Recommendation:

NOTE 1 – The cross-polarization radiation pattern may be of importance in non-GSO interference calculations. This issue requires further study.

NOTE 2 – This Recommendation is based on measurements and analysis of paraboloid antennas. If new earth station antennas are developed or are considered for use in the BSS, the reference antenna patterns in this Recommendation should be updated accordingly.

## Annex 1

## Reference BSS antenna radiation patterns

For  $11 \leq D/\lambda \leq 25.5$

$$\begin{aligned}
 G(\varphi) &= G_{max} - 2.5 \times 10^{-3} \left( \frac{D\varphi}{\lambda} \right)^2 & \text{for } 0 \leq \varphi < \varphi_m \\
 G(\varphi) &= G_1 & \text{for } \varphi_m \leq \varphi < 95\lambda/D \\
 G(\varphi) &= 29 - 25 \log(\varphi) & \text{for } 95\lambda/D \leq \varphi < 36.3^\circ \\
 G(\varphi) &= -10 & \text{for } 36.3^\circ \leq \varphi < 50^\circ
 \end{aligned}$$

For  $56.25^\circ \leq \theta < 123.75^\circ$

$$\begin{aligned}
 G(\varphi) &= M_1 \cdot \log(\varphi) - b_1 & \text{for } 50^\circ \leq \varphi < 90^\circ \\
 G(\varphi) &= M_2 \cdot \log(\varphi) - b_2 & \text{for } 90^\circ \leq \varphi < 180^\circ
 \end{aligned}$$

where:

$$M_1 = \frac{2 + 8 \cdot \sin(\theta)}{\log\left(\frac{90}{50}\right)} \quad \text{and} \quad b_1 = M_1 \cdot \log(50) + 10$$

where:

$$M_2 = \frac{-9 - 8 \cdot \sin(\theta)}{\log\left(\frac{180}{90}\right)} \quad \text{and} \quad b_2 = M_2 \cdot \log(180) + 17$$

For  $0^\circ \leq \theta < 56.25^\circ$  and  $123.75^\circ \leq \theta < 180^\circ$

$$\begin{aligned}
 G(\varphi) &= M_3 \cdot \log(\varphi) - b_3 & \text{for } 50^\circ \leq \varphi < 120^\circ \\
 G(\varphi) &= M_4 \cdot \log(\varphi) - b_4 & \text{for } 120^\circ \leq \varphi < 180^\circ
 \end{aligned}$$

where:

$$M_3 = \frac{2 + 8 \cdot \sin(\theta)}{\log\left(\frac{120}{50}\right)} \quad \text{and} \quad b_3 = M_3 \cdot \log(50) + 10$$

where:

$$M_4 = \frac{-9 - 8 \cdot \sin(\theta)}{\log\left(\frac{180}{120}\right)} \quad \text{and} \quad b_4 = M_4 \cdot \log(180) + 17$$

For  $180^\circ \leq \theta < 360^\circ$

$$\begin{aligned}
 G(\varphi) &= M_5 \cdot \log(\varphi) - b_5 & \text{for } 50^\circ \leq \varphi < 120^\circ \\
 G(\varphi) &= M_6 \cdot \log(\varphi) - b_6 & \text{for } 120^\circ \leq \varphi < 180^\circ
 \end{aligned}$$



where:

$$M_5 = \frac{2}{\log\left(\frac{120}{50}\right)} \quad \text{and} \quad b_5 = M_5 \cdot \log(50) + 10$$

where:

$$M_6 = \frac{-9}{\log\left(\frac{180}{120}\right)} \quad \text{and} \quad b_6 = M_6 \cdot \log(180) + 17$$

where:

$D$ : antenna diameter

$\lambda$ : wavelength expressed in the same unit as the diameter

$G$ : gain

$\varphi$ : off-axis angle of the antenna relative to boresight (degrees)

$\theta$ : planar angle of the antenna (degrees) ( $0^\circ$  azimuth is the horizontal plane).

$$G_{max} = 20 \log\left(\frac{D}{\lambda}\right) + 8.1 \quad \text{dBi}$$

$$G_1 = 29 - 25 \log\left(95 \frac{\lambda}{D}\right) \quad \text{dBi}$$

$$\varphi_m = \frac{\lambda}{D} \sqrt{\frac{G_{max} - G_1}{0.0025}} \quad \text{degrees}$$

For  $25.5 < D/\lambda \leq 100$

$$\begin{aligned} G(\varphi) &= G_{max} - 2.5 \times 10^{-3} (D\varphi/\lambda)^2 \quad \text{dBi} & \text{for} & \quad 0 < \varphi < \varphi_m \\ G(\varphi) &= G_1 & \text{for} & \quad \varphi_m \leq \varphi < (95\lambda/D) \\ G(\varphi) &= 29 - 25 \log \varphi \quad \text{dBi} & \text{for} & \quad (95\lambda/D) \leq \varphi < 33.1^\circ \\ G(\varphi) &= -9 \quad \text{dBi} & \text{for} & \quad 33.1 < \varphi \leq 80^\circ \\ G(\varphi) &= -4 \quad \text{dBi} & \text{for} & \quad 80 < \varphi \leq 120^\circ \\ G(\varphi) &= -9 \quad \text{dBi} & \text{for} & \quad 120 < \varphi \leq 180^\circ \end{aligned}$$

where:

$$G_{max} = 20 \log (D/\lambda) + 8.1 \quad \text{dBi}$$

$$G_1 = 29 - 25 \log (95\lambda/D) \quad \text{dBi}$$

$$\varphi_m = (\lambda/D) \sqrt{\frac{G_{max} - G_1}{0.0025}}$$

For  $D/\lambda > 100$

$$\begin{aligned} G(\varphi) &= G_{max} - 2.5 \times 10^{-3} (D\varphi/\lambda)^2 \quad \text{dBi} & \text{for} & \quad 0 < \varphi < \varphi_m \\ G(\varphi) &= G_1 & \text{for} & \quad \varphi_m \leq \varphi < \varphi_r \\ G(\varphi) &= 29 - 25 \log \varphi \quad \text{dBi} & \text{for} & \quad \varphi_r \leq \varphi < 10^\circ \\ G(\varphi) &= 34 - 30 \log \varphi \quad \text{dBi} & \text{for} & \quad 10 \leq \varphi < 34.1^\circ \\ G(\varphi) &= -12 \quad \text{dBi} & \text{for} & \quad 34.1^\circ \leq \varphi < 80^\circ \end{aligned}$$

$$\begin{array}{lll}
 G(\varphi) = -7 & \text{dBi} & \text{for } 80^\circ \leq \varphi < 120^\circ \\
 G(\varphi) = -12 & \text{dBi} & \text{for } 120^\circ \leq \varphi < 180^\circ
 \end{array}$$

where:

$$\begin{array}{ll}
 G_{max} = 20 \log (D/\lambda) + 8.1 & \text{dBi} \\
 G_1 = -1 + 15 \log (D/\lambda) & \text{dBi} \\
 \varphi_m = (\lambda/D) \sqrt{\frac{G_{max} - G_1}{0.0025}} & \\
 \varphi_r = 15.85 (D/\lambda)^{-0.6} & \text{degrees}
 \end{array}$$

## Annex 2

### Geometric conversions for use with the 3-D antenna model

#### Definition of $\theta$

$\theta$  is defined as the planar angle of the non-GSO satellite relative to the zero degree plane of the antenna model (corresponding to the standard bottom-mounted offset feed assembly). As seen by the earth station, the  $\theta = 0$  line is to the right, and  $\theta$  increases in an anticlockwise direction.

#### Calculation approach


Figure 1 shows a geometric approach to calculate the planar angle  $\theta$ . All calculations are shown using degrees, though typically these must be converted into radians when computing trigonometric values.

#### Inputs

GSO satellite	(az, el)
Non-GSO satellite	(az, el)

NOTE 1 – What is required is the difference in azimuth, so if that is available the actual azimuths would not be needed.

The following section shows how to calculate these parameters from the vectors of each station.

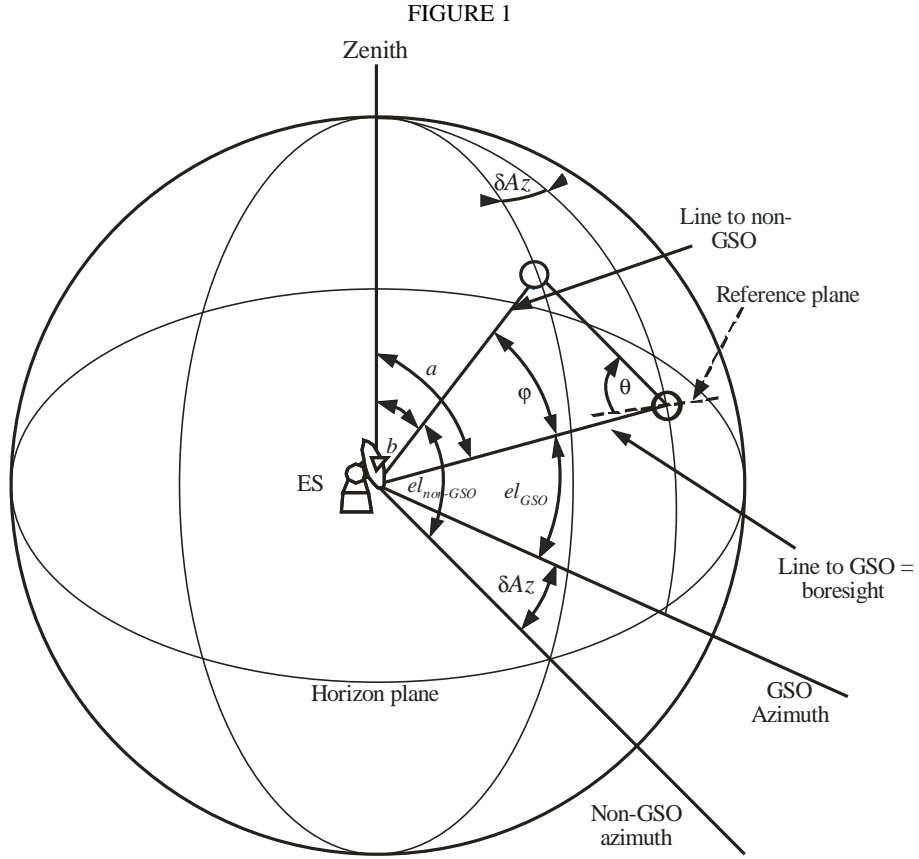

BO.1443-01

From Fig. 1:

$$a = 90 - el_{GSO}$$

$$b = 90 - el_{non-GSO}$$

$$\delta Az = Az_{non-GSO} - Az_{GSO}$$

$\delta Az$  should be set to be in the range  $\{-180 \text{ to } +180\}$

Then the off-axis angle  $\varphi$  (topocentric separation angle between the satellites) can be calculated by using the spherical geometry formula:

$$\cos(c) = \cos(a)\cos(b) + \sin(a)\sin(b)\cos(C)$$

with  $C = \delta Az$  and  $c = \varphi$ .

The same formula can be used to define an angle  $B$ :

$$\cos(B) = \frac{\cos(b) - \cos(c)\cos(a)}{\sin(c)\sin(a)}$$

from which the planar angle  $\theta$  can be derived:

if ( $\delta Az > 0$ and $B < 90$ )	$\theta = 90 - B$
if ( $\delta Az > 0$ and $B > 90$ )	$\theta = 450 - B$
if ( $\delta Az < 0$ )	$\theta = 90 + B$



In the case that both satellites have the same azimuth and so  $\delta A_z = 0$ , then

$$\phi = |el_{GSO} - el_{non-GSO}|$$

$$\text{if } el_{GSO} > el_{non-GSO} \quad \theta = 270$$

$$\text{else} \quad \theta = 90$$

*Example data*

For the following positions:

Station	Latitude (degrees)	Longitude (degrees)	Height (km)
Earth station	10	20	0
GSO sat	0	30	35 786.055
Non-GSO sat	0	-5	1 469.200

Then for the earth station, the following az/els can be calculated (with respect to the earth station horizon and north direction):

Station	Azimuth (degrees)	Elevation (degrees)
GSO sat	134.5615	73.4200
Non-GSO sat	-110.4248	10.0300

Hence, the off-axis angles and planar angles are:

Station	$\phi$ (off-axis) (degrees)	$\theta$ (planar) (degrees)
Non-GSO sat	87.2425	26.69746

*Calculation of azimuth and elevation*

The following can be used to calculate azimuth and elevation from the vectors involved.

Given:

Position vector of earth station:  $\underline{r}_G$

Position vector of GSO satellite:  $\underline{r}_S$

Position vector of non-GSO satellite:  $\underline{r}_N$

Then create:

Vector from earth station to GSO  $\underline{r}_{GS} = \underline{r}_S - \underline{r}_G$

Vector from earth station to non-GSO  $\underline{r}_{GN} = \underline{r}_N - \underline{r}_G$

Unit vector of earth station position vector  $\hat{\underline{r}}_G$

Then the elevation angles are:

$$el_S = 90 - \angle(\underline{r}_{GS}, \underline{r}_G)$$

$$el_N = 90 - \angle(\underline{r}_{GN}, \underline{r}_G)$$

To calculate the difference in azimuth, convert vectors from earth station to GSO/non-GSO to be in the horizontal plane that is perpendicular to the zenith vector, i.e.

$$\underline{r}'_{GS} = \underline{r}_{GS} - (\hat{r}_G \cdot \underline{r}_{GS}) \hat{r}_G$$

$$\underline{r}'_{GN} = \underline{r}_{GN} - (\hat{r}_G \cdot \underline{r}_{GN}) \hat{r}_G$$

Then:

$$\delta Az = \angle(\underline{r}'_{GS}, \underline{r}'_{GN})$$

The sign of  $\delta Az$  will be the same as the sign of the difference in longitude of the two satellites.

---