

International Telecommunication Union



ITU

ITU REGIONAL
RADIOCOMMUNICATION
SEMINAR FOR ASIA-PACIFIC

MANILA, PHILIPPINES
25-30 MAY 2015

www.itu.int/go/ITU-R/seminars



Organized by:



ARTICLE 11 NOTIFICATION PROCEDURES FOR BROADCASTING

Evghenii Sestacov
Radiocommunication Bureau

Overview

- Importance of notification
- Bands allocated to Broadcasting
- Art.11 Flowchart
- Art.11 non Plan > 28 MHz
- Art.11 LF/MF assignments
- Art.11 VHF/UHF assignments (not GE06)


Art. 11 Importance of notification

- ✓ Inform others of the bringing into use of a frequency assignment.
- ✓ Recording in the MIFR results in rights and obligations for the notifying Administration

Broadcasting Bands (≠ HF)

Band	Frequency (kHz/MHz)	BC/BT	Region Geo. zone	Plan
LF	148.5 – 283.5 kHz	BC	R1	GE75
MF	526.5 – 1606.5 kHz	BC	R1 and R3	GE75
	535 – 1605 kHz	BC	R2	RJ81
	1605 – 1705 kHz	BC	R2	RJ88
VHF /UHF	47 – 68 MHz	BC, BT	EBA	ST61
	47 – 68 MHz	BT	ABA	GE89
	66 – 68 MHz	BC	EBA	ST61
	87.5 – 100 MHz	BT	EBA	ST61
	87.5 – 108 MHz	BC	R1+IRN+AFG	GE84
	162 – 170 MHz	BT	MRC	ST61
	(170 MRC) 174 – 230 MHz	BC, BT	R1-MNG+IRN	GE06
	230-238, 246-254 MHz	BT	See RR 5.252	GE89
470 – 862 MHz	BT	R1-MNG+IRN	GE06	

FLOWCHART

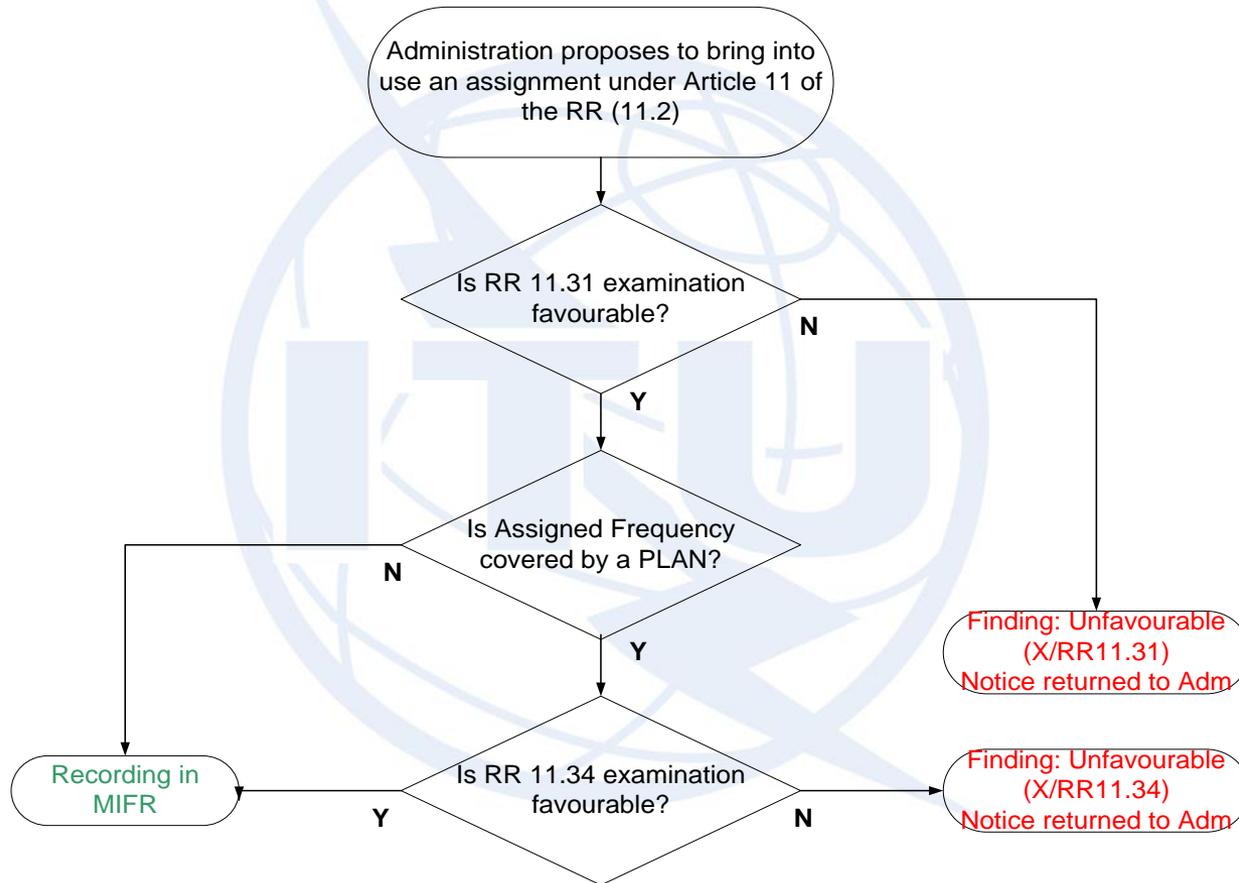

Art.11 non Plan bands > 28 MHz

- Publication in BRIFIC Part 1
- Examination with respect to 11.31 only
- Publication in Parts 2 or 3
- Objections to Publication not receivable
- In case of interference Administrations can apply procedures of Article 15 of the Radio Regulations.

Art.11 for Plans

- ▶ First complete the Plan modification procedure (according to Art.4 of the respective Agreement) using proper form.
- ▶ Publication in Part A of a Special Section (SS).
- ▶ Comment period(16 weeks, 100 days, etc.)
- ▶ Administration requests publication in Part B.
- ▶ BR publishes the modifications in Part B of SS and the frequency assignments are entered in to the Plan.

Art.11 LF/MF (GE75) parameters same as Plan

- Form TB7
- Publication in BRIFIC Part 1
- Examination with respect to 11.31 and 11.34
- Publication in Parts 2 or 3

Art.11 LF/MF (cntd)

- T03 form must be used for:
 - Slight changes to Plan parameters
 - Modification of MIFR entry
- Procedure of Article 5 of the Agreement
- Site tolerances of Art.4 accepted

Art.11 VHF/UHF assignments (not GE06)

Notice type	Applicable for
T01	VHF Sound broadcasting station
T02	VHF/UHF TV broadcasting station

Thank you for your attention!

Questions?

ITU

evghenii.sestacov@itu.int