



INTERNATIONAL TELECOMMUNICATION UNION

ITU-T

TELECOMMUNICATION
STANDARDIZATION SECTOR
OF ITU

G.168

(06/2002)

SERIES G: TRANSMISSION SYSTEMS AND MEDIA,
DIGITAL SYSTEMS AND NETWORKS

International telephone connections and circuits –
Apparatus associated with long-distance telephone circuits

Digital network echo cancellers

ITU-T Recommendation G.168

ITU-T G-SERIES RECOMMENDATIONS
TRANSMISSION SYSTEMS AND MEDIA, DIGITAL SYSTEMS AND NETWORKS

INTERNATIONAL TELEPHONE CONNECTIONS AND CIRCUITS	G.100–G.199
General definitions	G.100–G.109
General Recommendations on the transmission quality for an entire international telephone connection	G.110–G.119
General characteristics of national systems forming part of international connections	G.120–G.129
General characteristics of the 4-wire chain formed by the international circuits and national extension circuits	G.130–G.139
General characteristics of the 4-wire chain of international circuits; international transit	G.140–G.149
General characteristics of international telephone circuits and national extension circuits	G.150–G.159
Apparatus associated with long-distance telephone circuits	G.160–G.169
Transmission plan aspects of special circuits and connections using the international telephone connection network	G.170–G.179
Protection and restoration of transmission systems	G.180–G.189
Software tools for transmission systems	G.190–G.199
GENERAL CHARACTERISTICS COMMON TO ALL ANALOGUE CARRIER-TRANSMISSION SYSTEMS	G.200–G.299
INDIVIDUAL CHARACTERISTICS OF INTERNATIONAL CARRIER TELEPHONE SYSTEMS ON METALLIC LINES	G.300–G.399
GENERAL CHARACTERISTICS OF INTERNATIONAL CARRIER TELEPHONE SYSTEMS ON RADIO-RELAY OR SATELLITE LINKS AND INTERCONNECTION WITH METALLIC LINES	G.400–G.449
COORDINATION OF RADIOTELEPHONY AND LINE TELEPHONY	G.450–G.499
TESTING EQUIPMENTS	G.500–G.599
TRANSMISSION MEDIA CHARACTERISTICS	G.600–G.699
DIGITAL TERMINAL EQUIPMENTS	G.700–G.799
DIGITAL NETWORKS	G.800–G.899
DIGITAL SECTIONS AND DIGITAL LINE SYSTEM	G.900–G.999
QUALITY OF SERVICE AND PERFORMANCE	G.1000–G.1999
TRANSMISSION MEDIA CHARACTERISTICS	G.6000–G.6999
DIGITAL TERMINAL EQUIPMENTS	G.7000–G.7999
DIGITAL NETWORKS	G.8000–G.8999

For further details, please refer to the list of ITU-T Recommendations.

ITU-T Recommendation G.168

Digital network echo cancellers

Summary

Echo has a major effect on voice quality in telecommunication networks. The objectionable effect of echo results from a combination of reflections from network components such as 2- to 4-wire converters, together with signal processing and transmission delay. Echo may cause users difficulty in talking or listening over a telephone connection. It may also affect the transmission of voiceband data, fax and text telephones.

Digital network echo cancellers are designed to eliminate echo for the user and to allow successful transmission of voiceband data and fax. This Recommendation describes the characteristics of an echo canceller, including the requirement for in-band tone disabling and other control mechanisms. It also describes a number of laboratory tests that should be performed on an echo canceller to assess its performance under conditions likely to be experienced in the network.

This version of G.168 is a revision of the previously published version of April 2000. Many of the tests have been updated and improved. A PCM offset test has been added. Annex A has been deleted and transferred to clause 7. Annex D has been revised and a new double reflection echo-path model has been added. Appendix I has been shortened, with the planning and interaction aspects of echo cancellers moved to other ITU-T Recommendations. Appendix II has also been updated with some examples of European echo path characteristics.

Source

ITU-T Recommendation G.168 was revised by ITU-T Study Group 15 (2001-2004) and approved under the WTSA Resolution 1 procedure on 13 June 2002.

FOREWORD

The International Telecommunication Union (ITU) is the United Nations specialized agency in the field of telecommunications. The ITU Telecommunication Standardization Sector (ITU-T) is a permanent organ of ITU. ITU-T is responsible for studying technical, operating and tariff questions and issuing Recommendations on them with a view to standardizing telecommunications on a worldwide basis.

The World Telecommunication Standardization Assembly (WTSA), which meets every four years, establishes the topics for study by the ITU-T study groups which, in turn, produce Recommendations on these topics.

The approval of ITU-T Recommendations is covered by the procedure laid down in WTSA Resolution 1.

In some areas of information technology which fall within ITU-T's purview, the necessary standards are prepared on a collaborative basis with ISO and IEC.

NOTE

In this Recommendation, the expression "Administration" is used for conciseness to indicate both a telecommunication administration and a recognized operating agency.

INTELLECTUAL PROPERTY RIGHTS

ITU draws attention to the possibility that the practice or implementation of this Recommendation may involve the use of a claimed Intellectual Property Right. ITU takes no position concerning the evidence, validity or applicability of claimed Intellectual Property Rights, whether asserted by ITU members or others outside of the Recommendation development process.

As of the date of approval of this Recommendation, ITU had not received notice of intellectual property, protected by patents, which may be required to implement this Recommendation. However, implementors are cautioned that this may not represent the latest information and are therefore strongly urged to consult the TSB patent database.

© ITU 2003

All rights reserved. No part of this publication may be reproduced, by any means whatsoever, without the prior written permission of ITU.

CONTENTS

	Page
1	Scope 1
2	References..... 2
3	Terms and definitions 4
4	Abbreviations..... 9
5	Test signals 9
6	Characteristics of echo cancellers..... 10
6.1	General 10
6.2	Purpose, operation and environment 10
6.3	External enabling/disabling 10
6.4	Tests and requirements for performance with input signals applied to the send and receive paths 11
6.4.1	Transmission performance 11
6.4.2	Echo canceller performance 14
7	Characteristics of an echo canceller tone disabler..... 38
7.1	General 38
7.2	Detector characteristics 39
7.2.1	Phase reversal detection 40
7.3	Guardband characteristics 40
7.3.1	Noise tolerance 41
7.4	Holding-band characteristics 41
7.5	Operate time 42
7.6	False operation due to speech currents..... 42
7.7	False operation due to data signals..... 42
7.8	Release time..... 42
7.9	Other considerations 42
8	NLPs for use in echo cancellers..... 43
8.1	Scope 43
8.2	General principles and guidelines 43
8.2.1	Function..... 43
8.2.2	Suppression threshold..... 44
8.2.3	Control of NLP activation 44
8.2.4	Frequency limits of control paths 45
8.2.5	Signal attenuation below threshold level..... 45
8.2.6	Testing of NLPs..... 46
	Annex A – Description of an echo canceller reference tone disabler..... 46

	Page
Annex B – Description of a Reference NLP	46
B.1 General	46
B.2 Suppression threshold (T_{SUP}).....	47
B.3 Static characteristics of activation control.....	47
B.4 Dynamic characteristics of activation control	47
B.5 Frequency limits of control paths	49
B.6 Testing	49
Annex C – Composite source signals for testing of speech echo cancellers – Signal, description and analysis.....	50
C.1 Introduction	50
C.2 Composite Source Signal – general considerations.....	50
C.2.1 General description of the different sequences	50
C.2.2 Calculation and analysis using a composite source signal	51
C.3 Bandlimited Composite Source Signal with speech like power density spectrum – practical realization for measurements of echo cancellers	52
C.3.1 Composite Source Signal for single talk	52
C.3.2 Bandlimited Composite Source Signal to simulate double talk	54
C.4 Appropriate analyses to determine convergence characteristics of speech echo cancellers using the Composite Source Signal	58
C.4.1 Calculation in the frequency domain.....	58
C.4.2 Calculation in the time domain.....	59
C.4.3 Level calculations according to the active speech level P.56.....	59
Annex D – Echo-path models for testing of speech echo cancellers	60
D.1 Introduction	60
D.1.1 CSS or white noise input	60
D.1.2 Tone(s) input	61
D.2 Echo path models from network hybrid simulator	61
D.3 Echo path models measured from telephone networks in North America.....	65
D.4 Echo path models measured from telephone networks in Europe	69
Appendix I – Guidance for application of echo cancellers	70
I.1 Scope	70
I.2 Echo control in the PSTN.....	70
I.2.1 Echo suppressors	70
I.2.2 Echo cancellers.....	71
I.2.3 Responsibilities of modem manufacturers and end users.....	71
I.3 Application rules and operational constraints	72
I.4 Effect of cancellers on voice and data services	72
I.5 High-level speech	72
I.5.1 Introduction	72

	Page
I.5.2	Double talk detection and activity detection 73
I.5.3	Effects of low bit rate coders 73
I.5.4	Effects of a non-linear echo path 73
I.5.5	Guidelines for R_{out} usage in echo cancellers 73
I.6	Network and service evolutionary considerations 73
I.6.1	Bit transparency of echo cancellers 73
I.6.2	Convergence speed 73
I.6.3	Acoustic echo control and environments 74
I.6.4	Comfort Noise 75
I.7	Considerations regarding echo canceller performance during double talk 75
I.7.1	Introduction 75
I.7.2	Double talk parameters 76
I.7.3	Analysis of technical parameters that influences performance under double talk conditions 76
I.7.4	Conducting the double talk Tests 3A and 3B without inhibiting the adaptation 77
I.7.5	Subjective and objective echo canceller testing 78
I.8	Guidelines on the use of parameters for testing echo cancellers 86
I.9	Bibliography 86
Appendix II – Measurement methods for characteristics of echo paths 87	
II.1	Introduction 87
II.2	Measurement procedure 87
II.2.1	Measurement set-up 88
II.2.2	Computation of the echo path impulse response 89
II.3	Analysis of echo-path characteristics 91
II.3.1	Dispersion time 91
II.3.2	Magnitude response of echo path 92
II.4	Examples of echo path measurements from real networks 92
II.4.1	Echo-path characteristics from measurements in North America 92
II.4.2	Echo path characteristics from measurements in Europe 94
II.5	Conclusions 97
II.6	Bibliography 97
Appendix III – Multiple tail circuits 98	

Digital network echo cancellers

1 Scope

Echo cancellers are voice operated devices placed in the 4-wire portion of a circuit (which may be an individual circuit path or a path carrying a multiplexed signal) and are used for reducing the echo by subtracting an estimated echo from the circuit echo (see Figure 1).

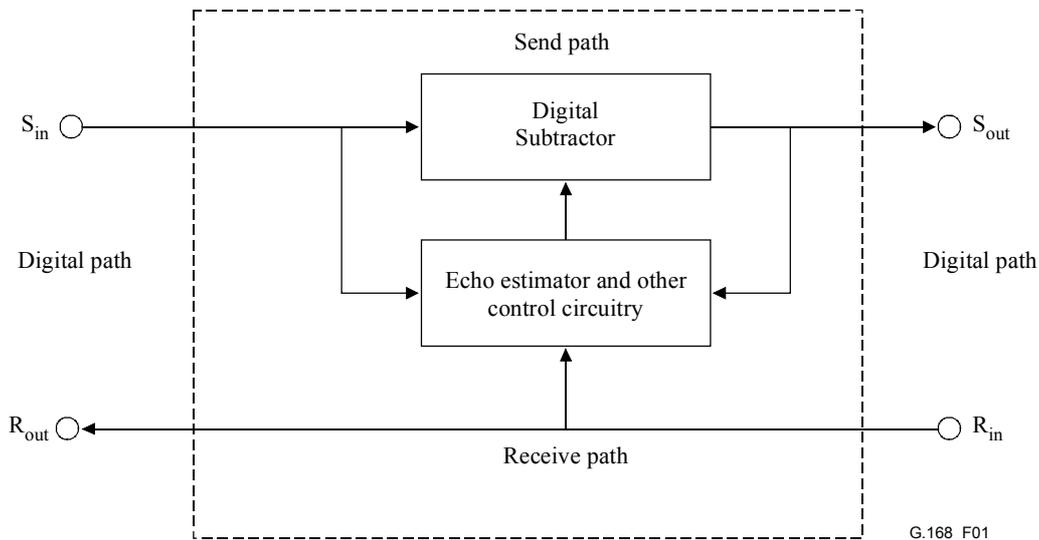


Figure 1/G.168 – Digital transmission echo canceller using digital subtraction

NOTE – Functionally, a digital echo canceller (DEC) interfaces at 64 kbit/s. However, 24 or 30 digital echo cancellers for example may be combined corresponding to the primary digital hierarchy levels of 1544 kbit/s or 2048 kbit/s, respectively.

This Recommendation is applicable to the design of echo cancellers using digital techniques, and intended for use in circuits where the delay exceeds the limits specified by ITU-T Recs G.114 and G.131. It is necessary for all echo control devices used on international connections to be compatible with each other. Echo cancellers designed to this Recommendation will be compatible with each other, with echo cancellers designed in accordance with ITU-T Rec. G.165, and with echo suppressors designed in accordance with ITU-T Rec. G.164. Compatibility is defined as follows:

Given:

- 1) that a particular type of echo control device (say Type I) has been designed so that satisfactory performance is achieved when any practical connections is equipped with a pair of such devices; and
- 2) that another particular type of echo control device (say Type II) has been likewise designed,

then Type II is said to be compatible with Type I if it is possible to replace an echo control device of one type with one of the other type, without degrading the performance of the connection to an unsatisfactory level. In this sense, compatibility does not imply that the same test apparatus or methods can necessarily be used to test both Type I and Type II echo control devices.

Freedom is permitted in design details not covered by the requirements. This Recommendation is for the design of digital echo cancellers and defines tests that ensure that echo canceller performance is adequate under wider network conditions than specified in ITU-T Rec. G.165, such as performance on voice, FAX, residual acoustic echo signals and mobile networks.

This Recommendation does not apply to echo cancellation through active 2-wire/4-wire hybrids or 2-wire repeaters. This Recommendation does not cover acoustic echo cancellation as per ITU-T Rec. P.340.

This Recommendation defines objective tests that if passed will ensure (but will not guarantee) a minimum level of performance when installed in the network. An echo canceller which passes these tests should not harm equipment nor degrade transmission performance of voice-band signals and services below acceptable limits. These tests are lab-type tests and are not designed to be run in-service. Also, these tests are objective tests and do not replace or eliminate the need for subjective tests to measure the perceived quality of echo cancellers. Echo cancellers are complex devices with multiple parameters, and the correlation of these parameters and their interactions to the subjective quality of an echo canceller is difficult to specify. Clause I.7.5 gives some guidelines on how subjective test results were used in order to develop objective tests. ITU-T Rec. P.851 describes methods and procedures for conducting subjective performance evaluation of network echo cancellers. Thus, this Recommendation does not specify nor imply a selection criteria; however, guidelines are provided herein, and Administrations have the freedom to specify criteria in their selection process. This set of criteria may include some or all of the thresholds and/or tests in this Recommendation.

2 References

The following ITU-T Recommendations and other references contain provisions which, through reference in this text, constitute provisions of this Recommendation. At the time of publication, the editions indicated were valid. All Recommendations and other references are subject to revision; users of this Recommendation are therefore encouraged to investigate the possibility of applying the most recent edition of the Recommendations and other references listed below. A list of the currently valid ITU-T Recommendations is regularly published. The reference to a document within this Recommendation does not give it, as a stand-alone document, the status of a Recommendation.

- ITU-T Recommendation G.114 (2000), *One-way transmission time*.
- ITU-T Recommendation G.122 (1993), *Influence of national systems on stability and talker echo in international connections*.
- ITU-T Recommendation G.131 (1996), *Control of talker echo*.
- ITU-T Recommendation G.161 (2002), *Interaction aspects of signal processing network equipment*.
- ITU-T Recommendation G.164 (1988), *Echo suppressors*.
- ITU-T Recommendation G.165 (1993), *Echo cancellers*.
- ITU-T Recommendation G.223 (1988), *Assumptions for the calculation of noise on hypothetical reference circuits for telephony*.
- ITU-T Recommendation G.229 (1988), *Unwanted modulation and phase jitter*.
- ITU-T Recommendation G.711 (1988), *Pulse code modulation (PCM) of voice frequencies*.
- ITU-T Recommendation G.712 (2001), *Transmission performance characteristics of pulse code modulation channels*.
- ITU-T Recommendation G.726 (1990), *40, 32, 24, 16 kbit/s adaptive differential pulse code modulation (ADPCM)*.
- ITU-T Recommendation H.51 (1988), *Power levels for data transmission over telephone lines*.
- ITU-T Recommendation M.1050 (1998), *Lining up an international point-to-point leased circuit with analogue presentation to the user*.
- ITU-T Recommendation P.50 (1999), *Artificial voices*.

- ITU-T Recommendation P.56 (1993), *Objective measurement of active speech level.*
- ITU-T Recommendation P.310 (2000), *Transmission characteristics for telephone-band (300-3400 Hz) digital telephones.*
- ITU-T Recommendation P.340 (2000), *Transmission characteristics and speech quality parameters of hands-free terminals.*
- ITU-T Recommendation P.341 (1998), *Transmission characteristics for wideband (150-7000 Hz) digital hands-free telephony terminals.*
- ITU-T Recommendation P.342 (2000), *Transmission characteristics for telephone band (300-3400 Hz) digital loudspeaking and hands-free telephony terminals.*
- ITU-T Recommendation P.501 (2000), *Test signals for use in telephonometry.*
- ITU-T Recommendation P.800 (1996), *Methods for subjective determination of transmission quality.*
- ITU-T Recommendation P.831 (1998), *Subjective performance evaluation of network echo cancellers.*
- ITU-T Recommendation Q.141 (1993), *Specifications of signalling system No. 5 – Signal code for line signalling.*
- ITU-T Recommendation Q.143 (1988), *Specifications of signalling system No. 5 – Line signal sender.*
- ITU-T Recommendation Q.144 (1993), *Specifications of signalling system No. 5 – Line signal receiver.*
- ITU-T Recommendation Q.271 (1988), *Specifications of signalling system No. 6 – Continuity check of the speech path: General.*
- ITU-T Recommendation Q.552 (2001), *Transmission characteristics at 2-wire analogue interfaces of digital exchanges.*
- ITU-T Recommendation Q.724 (1988), *Specifications of signalling system No. 7 – Telephone user part signalling procedures.*
- ITU-T Recommendation T.24 (1998), *Standardized digitized image set.*
- ITU-T Recommendation T.30 (1999), *Procedures for document facsimile transmission in the general switched telephone network.*
- ITU-T Recommendation V.2 (1988), *Power levels for data transmission over telephone lines.*
- ITU-T Recommendation V.8 (2000), *Procedures for starting sessions of data transmission over the public switched telephone network.*
- ITU-T Recommendation V.18 (2000); *Operational and interworking requirements for DCEs operating in the text telephone mode.*
- ITU-T Recommendation V.21 (1988), *300 bits per second duplex modem standardized for use in the general switched telephone network.*
- ITU-T Recommendation V.23 (1988), *600/1200-baud modem standardized for use in the general switched telephone network.*
- ITU-T Recommendation V.25 (1996), *Automatic answering equipment and general procedures for automatic calling equipment on the general switched telephone network including procedures for disabling of echo control devices for both manually and automatically established calls.*
- ITU-T Recommendation V.26 ter (1988), *2400 bits per second duplex modem using the echo cancellation technique standardized for use on the general switched telephone network and on point-to-point 2-wire leased telephone-type circuits.*

- ITU-T Recommendation V.27 *ter* (1988), 4800/2400 bits per second modem standardized for use in the general switched telephone network.
- ITU-T Recommendation V.29 (1988), 9600 bits per second modem standardized for use on point-to-point 4-wire leased telephone-type circuits.
- ITU-T Recommendation V.32 (1993), A family of 2-wire, duplex modems operating at data signalling rates of up to 9600 bit/s for use on the general switched telephone network and on leased telephone-type circuits.
- ITU-T Recommendation V.34 (1998), A modem operating at data signalling rates of up to 33 600 bit/s for use on the general switched telephone network and on leased point-to-point 2-wire telephone-type circuits.
- IEC 60651 (2001), Sound level meters.

3 Terms and definitions

In the definition and text, L will refer to the relative power level of a signal, expressed in dBm0 (as defined by ITU-T Rec. G.711) and A will refer to the attenuation or loss of a signal path expressed in dB. These definitions assume that non-linearities are not present in the echo path and that the signal at S_{in} is purely echo. It is recognized that non-linearities may be present in a network.

This Recommendation defines the following terms:

3.1 acoustic echo

F: *écho acoustique*

S: *eco acústico*

Acoustic echoes consist of reflected signals caused by acoustic environments, e.g. analogue hands-free phones which are connected with a 2-wire circuit to a hybrid. An echo path is introduced by the acoustic path from earphone to microphone.

3.2 cancelled end

F: *côté annulé*

S: *extremo compensado*

The side of an echo canceller which contains the echo path on which this echo canceller is intended to operate. This includes all transmission facilities and equipment (including the hybrid and terminating telephone set) which is included in the echo path. In previous versions of ITU-T Rec. G.168 this was defined as the near end.

3.3 combined loss (A_{COM})

F: *affaiblissement combiné (A_{COM})*

S: *atenuación combinada (A_{COM})*

The sum of echo return loss, echo return loss enhancement and non-linear processing loss (if present). This loss relates L_{Rin} to L_{RET} by:

$$L_{RET} = L_{Rin} - A_{COM}, \text{ where}$$

$$A_{COM} = A_{ECHO} + A_{CANC} + A_{NLP}$$

3.4 comfort noise

F: bruit de confort

S: ruido de confort; ruido nivelador

Insertion of pseudo-random noise during the silent interval when the NLP operates or allowance of some of the background or idle channel noise to pass through the NLP in order to prevent the annoyance of intervals of speech with background noise followed by intervals of silence.

3.5 composite echo

F: écho composite

S: eco compuesto

Composite echoes consist of the electric echoes and acoustic echoes caused by reflected signals at hybrids and acoustic environments, e.g. analogue hands-free telephones.

3.6 convergence

F: convergence

S: convergencia

The process of developing a model of the echo path which will be used in the echo estimator to produce the estimate of the circuit echo.

3.7 convergence time

F: temps de convergence

S: tiempo de convergencia

For a defined echo path, the interval between the instant a defined test signal is applied to the receive-in port of an echo canceller with the estimated echo path impulse response initially set to zero, and the instant the returned echo level at the send-out port reaches a defined level.

3.8 double-talk

F: conversation simultanée

S: habla simultánea

The simultaneous application of signals at R_{in} and S_{gen} .

3.9 echo canceller

F: annuleur d'écho

S: compensador de eco; cancelador de eco

A voice operated device placed in the 4-wire portion of a circuit and used for reducing the cancelled end echo present on the send path by subtracting an estimation of that echo from the cancelled end echo (see Figure 2).

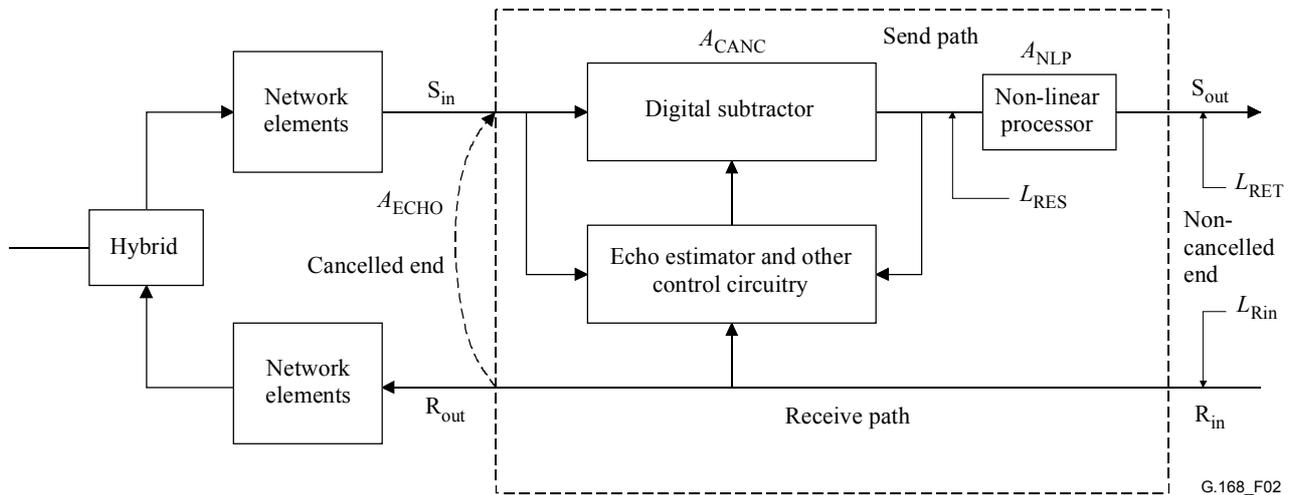


Figure 2/G.168 – Location of levels and loss of an echo canceller

3.10 echo path

F: trajet d'écho

S: trayecto del eco

The transmission path between R_{out} and S_{in} of an echo canceller. This term is intended to describe the signal path of the echo.

3.11 echo path capacity (Δ)

F: capacité en trajet d'écho (Δ)

S: capacidad del trayecto del eco (Δ)

The maximum echo path delay for which an echo canceller is designed to operate.

3.12 echo path delay (t_d)

F: retard de trajet d'écho (t_d)

S: retardo del trayecto del eco (t_d)

The delay from the R_{out} port to the S_{in} port due to the delays inherent in the echo path transmission facilities *including* dispersion time due to the network elements. In case of multiple echo paths, all delays and dispersions of any individual echo path are included. The dispersion time, which varies with different networks, is required to accommodate the band-limiting, and hybrid transit effects (see Figure 3).

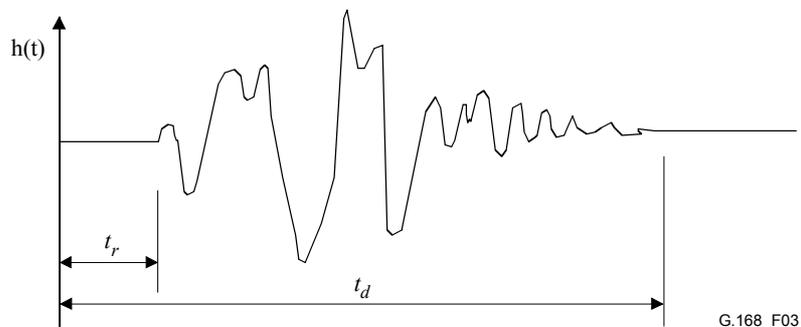


Figure 3/G.168 – Example of an impulse response of an echo path

3.13 echo return loss (ERL) (A_{ECHO})

F: *affaiblissement d'adaptation pour l'écho (ERL) (A_{ECHO})*

S: *atenuación del eco (ERL) (A_{ECHO})*

The attenuation of a signal from the receive-out port (R_{out}) to the send-in port (S_{in}) of an echo canceller, due to transmission and hybrid loss, i.e. the loss in the (cancelled-end) echo path.

NOTE – This definition does not strictly adhere to the echo loss definition given in 2.2/G.122, which applies to loss of the *a-t-b* path viewed from the virtual switching point of the international circuit. The echo canceller may be located closer to the echo reflection point.

3.14 echo return loss enhancement (ERLE) (A_{CANC})

F: *renforcement de l'affaiblissement d'adaptation pour l'écho (ERLE) (A_{CANC})*

S: *atenuación reforzada del eco (ERLE) (A_{CANC})*

The attenuation of the echo signal as it passes through the send path of an echo canceller. This definition specifically excludes any non-linear processing on the output of the canceller to provide for further attenuation.

3.15 electric echo

F: *écho électrique*

S: *eco eléctrico*

Electric echoes consist of reflected signals caused by the cancelled-end impedance mismatch, e.g. at a 2-wire/4-wire conversion unit (hybrid).

3.16 H register

F: *registre H*

S: *registro H*

The register within the echo canceller which stores the impulse response model of the echo path.

3.17 leak time

F: *temps de fuite*

S: *tiempo de fuga*

The interval between the instant a test signal is removed from the receive-in port of a fully-converged echo canceller and the instant the echo path model in the echo canceller changes such that, when a test signal is reapplied to R_{in} with the convergence circuitry inhibited, the returned echo is at a defined level.

This definition refers to echo cancellers employing, for example, leaky integrators in the convergence circuitry.

3.18 non-cancelled end

F: *côté non annulé*

S: *extremo no compensado*

The side of an echo canceller which does not contain the echo path on which this echo canceller is intended to operate. In previous versions of ITU-T Rec. G.168 this was defined as the far end.

3.19 non-linear processor (NLP)

F: *processeur non linéaire (NLP)*

S: *procesador no lineal (NLP)*

A device having a defined suppression threshold level and in which:

- a) signals having a level detected as being below the threshold are suppressed; and
- b) signals having a level detected as being above the threshold are passed although the signal may be distorted (for example see Annex B).

NOTE 1 – The precise operation of a NLP depends upon the detection and control algorithm used.

NOTE 2 – An example of a NLP is an analogue center clipper in which all signal levels below a defined threshold are forced to some minimum value.

3.20 non-linear processing loss (A_{NLP})

F: *affaiblissement de traitement non linéaire (A_{NLP})*

S: *atenuación por procesamiento no lineal (A_{NLP})*

Additional attenuation of residual echo level by a NLP placed in the send path of an echo canceller.

NOTE – Strictly, the attenuation of a non-linear process cannot be characterized by a loss in dB. However, for purposes of illustration and discussion of echo canceller operation, the careful use of A_{NLP} is helpful.

3.21 pure delay (t_r)

F: *retard pur (t_r)*

S: *retardo puro (t_r)*

The delay from the R_{out} port to the S_{in} port due to the delays inherent in the near-end echo path transmission facilities, not including dispersion time due to the network elements. In this case, the transit time directly across the hybrid is assumed to be zero (see Figure 3).

3.22 residual echo level (L_{RES})

F: *niveau d'écho résiduel (L_{RES})*

S: *nivel de eco residual (L_{RES})*

The level of the echo signal which remains at the send-out port of an operating echo canceller after imperfect cancellation of the circuit echo. It is related to the receive-in signal L_{Rin} by:

$$L_{RES} = L_{Rin} - A_{ECHO} - A_{CANC}$$

Any non-linear processing is not included.

3.23 returned echo level (L_{RET})

F: *niveau de retour d'écho (L_{RET})*

S: *nivel del eco devuelto (L_{RET})*

The level of the signal at the send-out port of an operating echo canceller which will be returned to the talker. The attenuation of a NLP is included, if one is normally present. L_{RET} is related to L_{Rin} by:

$$L_{RET} = L_{Rin} - (A_{ECHO} + A_{CANC} + A_{NLP})$$

If non-linear processing is not present, note that $L_{RES} = L_{RET}$.

3.24 Open echo path

F: *trajet d'écho ouvert*

S: *trayecto de eco abierto*

An echo path with infinite echo return loss.

NOTE – In tests where an open echo path is used, it is important to break the path at a specific location. This location is stated in each individual test.

4 Abbreviations

This Recommendation uses the following abbreviations:

ADPCM	Adaptive Differential Pulse Code Modulation
ATME	Automatic Test and Measurement Equipment
CED	Called Station Identification
CNG	CalliNG Tone
CPE	Customer Premises Equipment
CSI	Called Subscriber Identification
CSS	Composite Source Signal
DCME	Digital Circuit Multiplication Equipment
DCS	Digital Command Signal
DEC	Digital Echo Canceller
DIS	Digital Identification Signal
DTDT	Double Talk Detection Threshold
FAX	Facsimile
FFT	Fast Fourier Transform
FIR	Finite Impulse Response
HDLC	High-level Data Link Control
IEC	International Electrotechnical Commission
NSF	Non-Standard Facilities
NSS	Non-standard Set-up
PCME	Packet Circuit Multiplication Equipment
PCM	Pulse Code Modulation
RMS	Root Mean Square
TBD	To Be Determined
TSI	Transmitting Subscriber Identification

5 Test signals

The tests in this Recommendation use special signals such as noise, tones, Group 3 facsimile signals, and a subset of the composite source signals (CSS) consisting of the bandlimited CSS with speech like power density spectrum (pseudo noise signal generated using 8192 pt. FFT) and the bandlimited CSS for double talk (see Annex C and ITU-T Rec. P.501). The CSS emulates the characteristics of speech, and its use as a test signal improves the ability to measure echo canceller performance for speech signals.

Furthermore, network echo cancellers should perform adequately on many non-speech signals, e.g. voice-band data, as well as under non-ideal network scenarios. Tests are included to test performance for Group 3 facsimile signals, residual acoustic echoes (optional), and non-linearities in the echo path such as may arise with low bit rate encoding in the echo path (optional).

6 Characteristics of echo cancellers

6.1 General

This Recommendation is applicable to the design of echo cancellers. The echo cancellers are assumed to be "half" echo cancellers, i.e. those in which cancellation takes place only in the send path due to signals present in the receive path. A full echo canceller is possible consisting of two half echo cancellers, with each pointing in the opposite direction.

6.2 Purpose, operation and environment

Echo cancellers have the following fundamental requirements:

- 1) rapid convergence;
- 2) low returned echo level during single talk;
- 3) low divergence during double talk and cancelled end speech;
- 4) assured double talk detection and cancelled end speech detection;
- 5) proper operation during facsimile and low speed (< 9.6 kbit/s) voice-band data transmissions.

Echo cancellers may remain active for several non-voice signals as well, in particular, Group 3 facsimile and low speed (< 9.6 kbit/s) voice-band data transmissions. Tests 10 and 14 address these issues.

It is increasingly common to have echo cancellers operate in tandem, especially in cellular applications. Tests for adequate performance are not defined. Test 11 is under study for this purpose.

When echo cancellers are located on the subscriber side of the international signalling equipment, signalling tones do not pass through the cancellers so no special action is necessary. When cancellers are on the international side of the signalling equipment, they are normally disabled by the switch during the active signalling exchange intervals in order to prevent distortion of the signalling tones by the echo canceller. When signalling tones simultaneously appear at the canceller receive and send ports (double talk), the receive signal will be processed through the echo path model contained in the canceller. The signal estimate produced by the canceller may sufficiently distort the send side signal so that it will not be properly recognized by the signalling receive unit (see Note 1).

An echo canceller should be disabled during the transmission of the ITU-T No. 6 and No. 7 continuity check signal (Note 2). If an echo canceller conforming to this Recommendation is located on the international side of a circuit with ITU-T No. 6 or No. 7 signalling and is not externally disabled by the switch, it will not corrupt the return of the continuity check tone only if it is able to pass the optional Test No. 8. Similarly, if an echo canceller conforming to this Recommendation is located on the international side of ITU-T No. 5 signalling units and is not disabled by the switch, it will not corrupt the continuously compelled line signalling exchange only if it is able to pass the optional Test No. 8.

NOTE 1 – For some echo cancellers this problem may not occur when the send and receive frequencies are different.

NOTE 2 – ITU-T Rec. Q.271 on ITU-T No. 6 and ITU-T Rec. Q.724 on ITU-T No. 7 both include the following statement: "As the presence of active echo suppressors in the circuit would interfere with the continuity check, it is necessary to disable the suppressors during the check and to re-enable them, if required, after the check has been completed." This consideration also applies to echo cancellers.

6.3 External enabling/disabling

Certain digital echo cancellers may be disabled directly by a digital signal (e.g. see ITU-T Rec. Q.55). These echo cancellers should provide 64 kbit/s bit sequence integrity (i.e. if integrated, the A-law to μ -law or μ -law to A-law conversion will also be disabled) in the externally disabled state.

6.4 Tests and requirements for performance with input signals applied to the send and receive paths

6.4.1 Transmission performance

The performance characteristics apply, unless otherwise noted, when steady state signals are separately applied to the send and receive paths.

A digital network echo canceller inserted between codecs into a digital transmission path meeting the performance characteristics of ITU-T Rec. G.712 shall not alter performance such that the requirements of ITU-T Rec. G.712 are violated.

The appropriate transmission performance requirements as noted below also apply.

6.4.1.1 Group delay

The group delay in the voiceband in the send path should be kept to a minimum and should not exceed 1 ms. No significant delay should occur in the receive path.

NOTE – The creation of frame slips in the echo path can lead to an occasional degradation of the echo cancellation. If a delay is necessary to synchronize the digital send and receive paths, the global admissible delay on the send path, including the group delay mentioned above, should not exceed 1 ms and on the receive path 250 μ s.

6.4.1.2 Measuring input and output levels

For testing purposes, the method defined for measuring the input level of the composite source signals is a RMS method. Unless otherwise specified within a test, the RMS method should also be used for measuring the output levels at S_{out} . Other methods that would give equivalent results are possible (see Annex C). For the RMS method, specifically, CSS is measured using:

$$S(k) = 3.14 + 20 \log \left[\frac{\sqrt{\frac{2^{k-n+1}}{n} \sum_{i=k} e_i^2}}{4096} \right] \quad (\text{A-law encoding})$$
$$S(k) = 3.17 + 20 \log \left[\frac{\sqrt{\frac{2^{k-n+1}}{n} \sum_{i=k} e_i^2}}{8159} \right] \quad (\mu\text{-law encoding})$$

Where:

$S(k)$	=	signal level in dBm0
e_i	=	linear equivalent of the PCM encoded signal at time i
k	=	discrete time index
n	=	number of samples over which the RMS measurement is made, and $n = \alpha\tau$ with $\alpha \geq 1$ (an integer) and τ = period of CSS (5600 for the single-talk portion and 6400 for the double talk portion of CSS).

Some tests in this Recommendation, e.g. Test No. 2, use the RMS value that is measured over the active portion of the CSS (i.e. excluding the pause in the CSS) only. The subscript 'act' in a signal level is used to denote the level measurement in this case. For example, if L_{Rin} is the RMS level of R_{in} including the pause, then $L_{Rin,act}$ is the RMS level of R_{in} excluding the pause. The RMS level of

the CSS excluding the pause is larger than that including the pause. The difference is 1.49 dB for single talk CSS and 1.66 dB for double talk CSS. In other words, given a CSS signal level L_x in the unit of dBm0, $L_{x,act}$ can be obtained from:

$$L_{x,act} = L_x + 1.49 \text{ dB, for single talk CSS}$$


$$L_{x,act} = L_x + 1.66 \text{ dB, for double talk CSS}$$

Refer to Annex C for the details regarding the single talk CSS and double talk CSS.

6.4.1.2.1 Level measurement device

For some of the tests in this Recommendation, e.g. Test No. 2, it is necessary to measure the short-term level of the signal. This is achieved using the following level measurement device.

The measurement device comprises a frequency-weighting network, a squaring circuit, an exponential filter, and a detector-indicator. This device may use either analog or digital methods. The impulse response of the frequency-weighting network is listed in the Table 1. The table is read in columns. The measurement device will have the characteristics that correspond to the following block diagram.

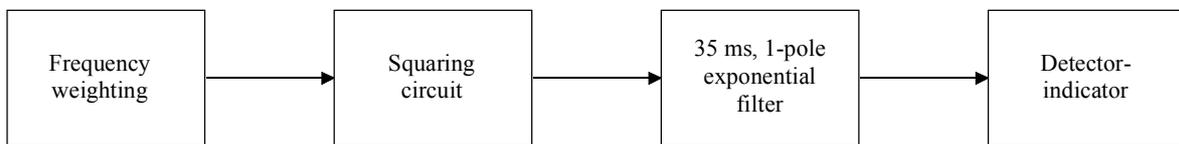

G.168_F6.4.1.2.1

This frequency weighting network is used to provide a greater attenuation of the frequencies outside the band of interest that can be achieved by the filters identified in IEC 60651. This filter is required because of D.C. effects due to the bias induced by A-law encoding. The filter is a 101-element finite impulse response bandpass filter with the impulse response shown in Figure 4 and the frequency response shown in Figure 5. The coefficients of the filter are:

Table 1/G.168 – Coefficients of bandpass filter for level measurement device

f ₀ , f ₁₀₀	0.0000	f ₁₇ , f ₈₃	-0.0019	f ₃₄ , f ₆₆	0.0092
f ₁ , f ₉₉	0.0006	f ₁₈ , f ₈₂	-0.0033	f ₃₅ , f ₆₅	0.0000
f ₂ , f ₉₈	0.0005	f ₁₉ , f ₈₁	-0.0047	f ₃₆ , f ₆₄	0.0164
f ₃ , f ₉₇	0.0004	f ₂₀ , f ₈₀	-0.0000	f ₃₇ , f ₆₃	-0.0210
f ₄ , f ₉₆	0.0011	f ₂₁ , f ₇₉	-0.0068	f ₃₈ , f ₆₂	0.0161
f ₅ , f ₉₅	-0.0000	f ₂₂ , f ₇₈	0.0036	F ₃₉ , F ₆₁	-0.0375
f ₆ , f ₉₄	0.0015	f ₂₃ , f ₇₇	-0.0057	f ₄₀ , f ₆₀	0.0000
f ₇ , f ₉₃	-0.0003	f ₂₄ , f ₇₆	0.0054	f ₄₁ , f ₅₉	-0.0406
f ₈ , f ₉₂	0.0012	f ₂₅ , f ₇₅	0.0000	f ₄₂ , f ₅₈	-0.0357
f ₉ , f ₉₁	-0.0002	f ₂₆ , f ₇₄	0.0044	f ₄₃ , f ₅₇	-0.0267
f ₁₀ , f ₉₀	0.0000	f ₂₇ , f ₇₃	0.0095	f ₄₄ , f ₅₆	-0.0871
f ₁₁ , f ₈₉	0.0002	f ₂₈ , f ₇₂	0.0017	f ₄₅ , f ₅₅	-0.0000
f ₁₂ , f ₈₈	-0.0020	f ₂₉ , f ₇₁	0.0188	f ₄₆ , f ₅₄	-0.1420
f ₁₃ , f ₈₇	0.0005	f ₃₀ , f ₇₀	0.0000	f ₄₇ , f ₅₃	0.0289
f ₁₄ , f ₈₆	-0.0040	f ₃₁ , f ₆₉	0.0225	f ₄₈ , f ₅₂	-0.1843
f ₁₅ , f ₈₅	0.0000	f ₃₂ , f ₆₈	0.0024	f ₄₉ , f ₅₁	0.0475
f ₁₆ , f ₈₄	-0.0047	f ₃₃ , f ₆₇	0.0163	f ₅₀	0.8006

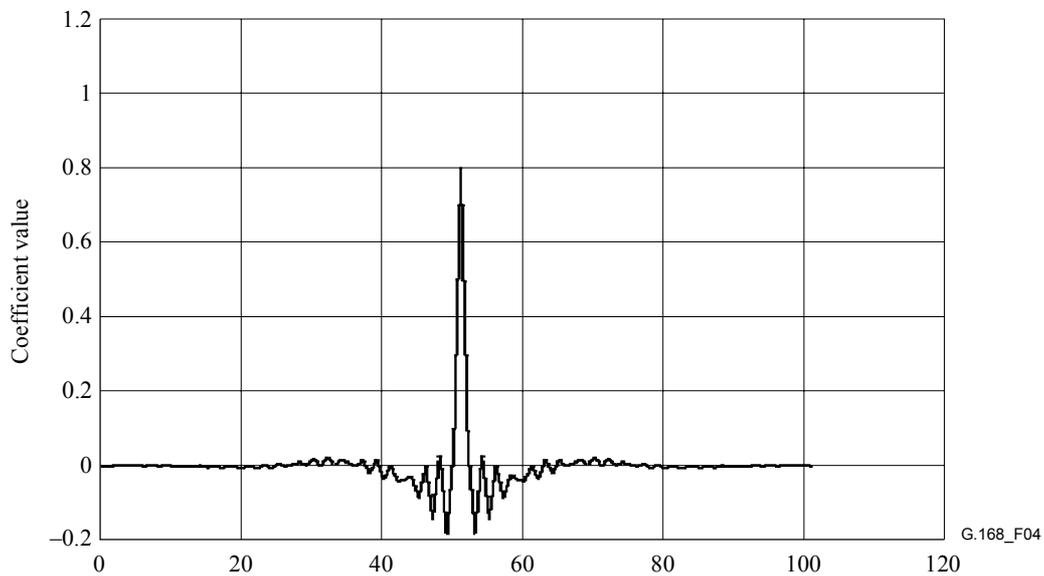


Figure 4/G.168 – Impulse response of frequency weighting network

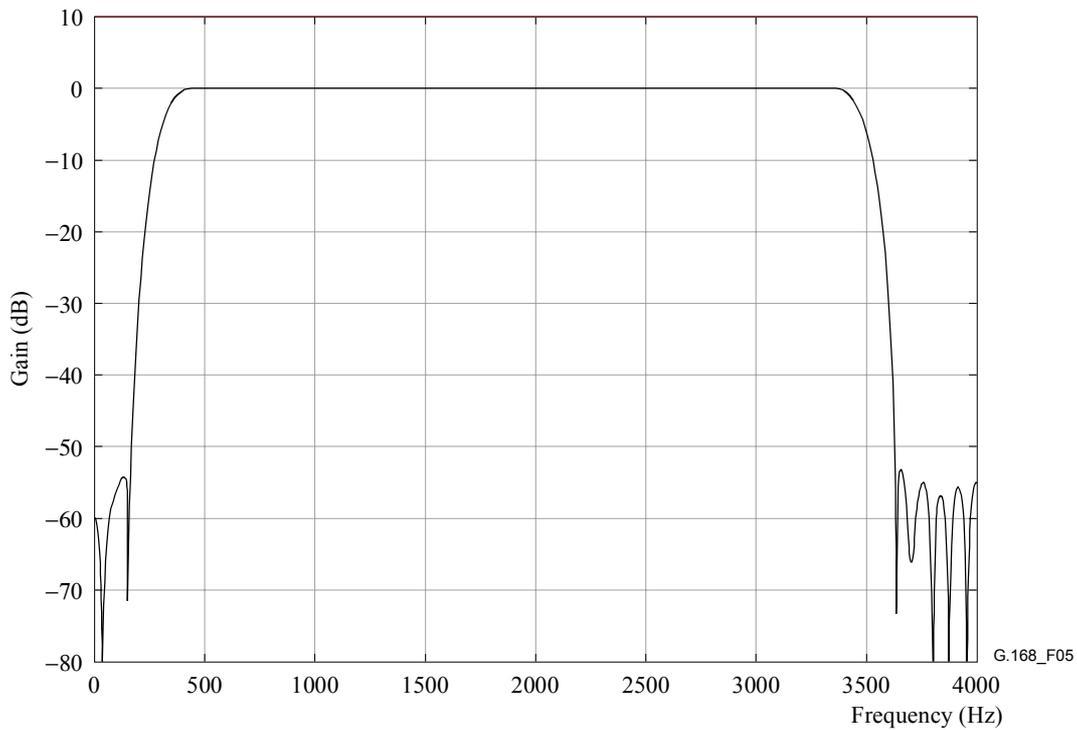


Figure 5/G.168 – Magnitude response of frequency weighting network

The magnitude response given in Figure 5 was generated using the following equation:

$$|H(\omega)| = 10 \log_{10} \left(\left| \sum_{n=0}^{100} h_n e^{-j\omega n} \right|^2 \right) [dB] , \quad 0 < \omega < \pi$$

and the frequency in the x-axis is formed by:

$$f = \frac{\omega}{\pi} 4000 \text{ Hz} .$$

6.4.1.2.2 Level measurement device for peaks

For tests that have requirements on the peaks at S_{out} , the measurement method used is a 35 ms rectangular sliding window in place of the 35 ms one-pole exponential filter of 6.4.1.2.1.

6.4.2 Echo canceller performance

The performance requirements that follow are for echo cancellers that include NLPs.

For testing purposes, it is required that the NLP can be disabled, that the echo path impulse response store (H register) can be reset (set to zero) and that adaptation can be inhibited.

The requirements are described in terms of tests made by applying signals to R_{in} and S_{in} of an echo canceller, and measuring the S_{out} signals. The test set-up is as shown in Figures 6 and 7. The ports are assumed to be at equal relative level points. For all values of R_{in} , and for all tests in this Recommendation, the level at R_{out} should be equal to the level at R_{in} . Any optional processing included in the echo canceller which may affect level transparency between R_{in} and R_{out} should be disabled during all tests in this Recommendation. The composite source signals, which consist of the receive-input test signal and send-input test signal (see Annex C and ITU-T Rec. P.501) are used as the test signals, unless otherwise indicated. For multiple channel implementations, channel-to-channel independence is required, and any channels tested simultaneously should each meet the requirements of this Recommendation. When performing the tests described in this

Recommendation, for enhanced repeatability, all channels not being tested should have idle code (e.g. 01111111 for 1544 kbit/s systems or 01010100 for 2048 kbit/s systems as outlined in ITU-T Rec. Q.522) applied to the inputs. It is generally recognized that some operators may wish to apply simulated traffic loading to the untested channels. This type of channel loading is for further study.


The ERL used in these tests have a minimum value of 6 dB. It should be noted that 6 dB is a typical worst case value encountered for most networks, and most current networks have typical ERL values better than this.

Also, it should be noted that the test configurations specified in this Recommendation are artificial for purposes of test and result repeatability, and do not fully represent all conditions that would be expected in real networks.

The requirements in 6.4.2 are based on the use of the composite source signals, noise, tones, FAX signals, and voice-band data signals as the test signals.

Two echo path models should be used for the tests in this Recommendation (as denoted in Figures 6 and 7).

Comfort noise should be disabled unless otherwise indicated.

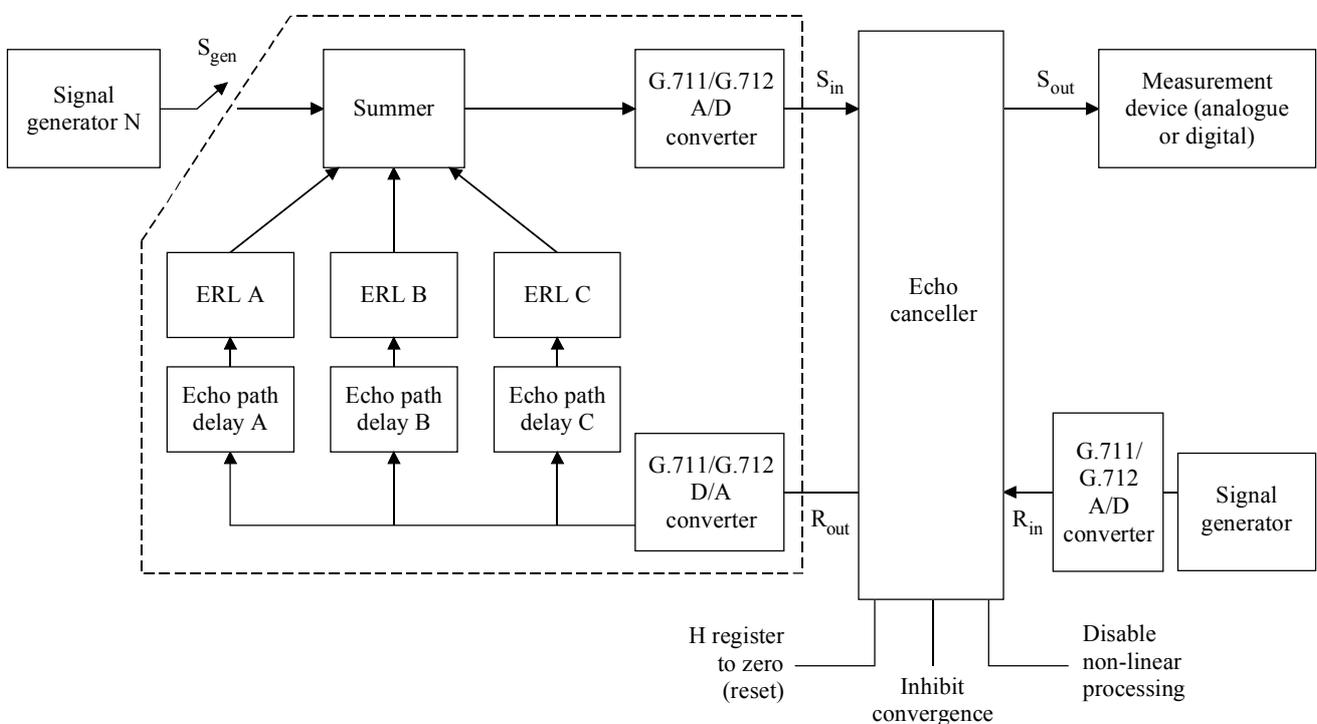

G.168_F06

NOTE – The sum of the absolute values of the gains G_A , G_B , G_C that correspond to ERL A, B, C, respectively, taken in dB, should be less than or equal to -6 dB (i.e. $20\log(|G_A| + |G_B| + |G_C|) \leq -6$ dB), and echo path delay A $\leq \Delta$ ms, echo path delay B $\leq \Delta$ ms, and echo path delay C $\leq \Delta$ ms.

Figure 6/G.168 – Functional diagram for echo canceller performance measurements

An echo path model which allows more realistic end-paths to be modeled can be realized by replacing the dotted box in Figure 6 with Figure 7. The characteristics of the end-path, which include A to μ law converters, can be modelled as an impulse response $g(k)$.

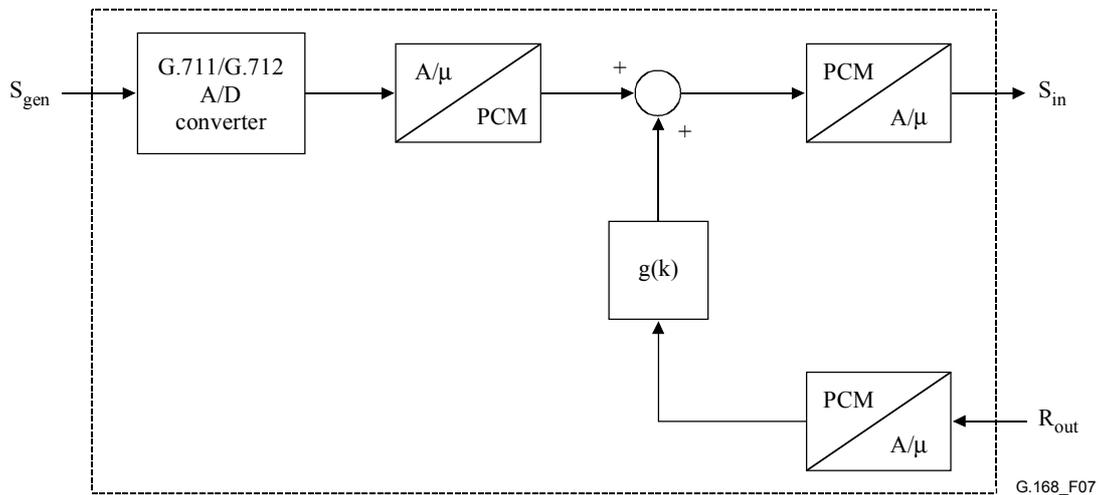


Figure 7/G.168 – Echo path model using $g(k)$

The primary purpose of an echo canceller is to control the echo of a speech signal. This is done by synthesizing a replica of the echo path impulse response and using it to generate an estimate of the echo which is subtracted from the actual circuit echo. The synthesis should be accomplished using a speech input signal. Because of the difficulty of defining a speech test signal, the following tests are type tests and rely upon the use of a composite source signal primarily for convenience and repeatability. These tests should be performed on an echo canceller only after the design has been shown to properly synthesize a replica of the echo path impulse response from a speech input signal and its corresponding echo. Speech signals are not used in the tests in this subclause. Additionally, the NLP in the echo canceller should be designed to minimize and potentially avoid undesirable effects such as double talk clipping, gaps in transmitted speech signals, and noise contrast (see test 9 described later in this Recommendation for noise contrast, and see Appendix I for further discussion on double talk clipping). Tests to ensure proper operation are under study.

Different echo cancellers may be designed to work satisfactorily for different echo path delays depending on their application in various networks. Thus Δ , whenever it appears in this Recommendation, represents the maximum echo path delay for which the echo canceller is designed.

See I.8 for some guidelines on the use of parameters for testing echo cancellers.

6.4.2.1 Echo path models for $g(k)$

See Annex D for the echo path models that may be used as the $g(k)$ in Figure 7 for the tests in this Recommendation. This does not represent an exhaustive set, and other models may be used provided that they meet the echo path requirements for each individual test. Note that the digital version of Figure 6 where three echo path reflection points are present may also be represented by a $g(k)$. A specific model including this is not described in Annex D. A more complex model that includes realistic dispersion and other effects is for further study. See also Appendix III for additional information.

To ensure that the magnitude response of the echo path $g(k)$ does not exceed 0 dB over the frequency range of some of the models contained in Annex D, the minimum ERL values must be greater than 6 dB. See Annex D for the exact minimum ERL value for each model. Note that the minimum ERL values provided in Annex D overrule the requirement of $ERL \geq 6$ dB given in the following tests if there is a conflict between the two.

6.4.2.2 Test No. 1 – Steady state residual and returned echo level test (deleted)

This test has been incorporated into test 2.

6.4.2.3 Test No. 2 – Convergence and Steady state residual and returned echo level tests

This test is meant to ensure that the echo canceller converges rapidly for all combinations of input signal levels, echo paths, and certain echo path changes, and that the returned echo level is sufficiently low. This test is also meant to ensure that the steady state cancellation (A_{CANC}) is sufficient to produce a residual echo level which is sufficiently low to permit the use of non-linear processing without undue reliance on it. In general, given that all other variables are equal, a higher value of ERLE or lower values of L_{RES} will allow for less dependence on the NLP functionality.

The H register is initially set to zero. Alternatively, with an open echo path resulting in $S_{\text{in}} = 0$, the H register content is converged and then the adaptation is inhibited. Adaptation is then enabled at least 200 ms before the start of a CSS burst (see Figure 8). This period is to allow for the latency time in the adaptation control of the canceller. The residual or returned echo level is then measured as a function of time to reveal the convergence and steady-state properties of the echo canceller.

At the beginning of a call the convergence should be fast enough to be subjectively unnoticeable. In general, the convergence should be fast enough to handle changes in the echo path in a subjectively transparent fashion. Faster convergence than required in Figures 10 and 12 is desirable, but only if no degradation is observed during single or double talk and the stability of the canceller can be maintained in all network conditions (e.g. various echo path conditions, including various hybrids) and for all voice-band signals.

In tests 2A-2C, the level at R_{in} is $L_{\text{Rin,act}}$. It is the signal level measure using the RMS method over the active portion of the CSS only (i.e. excluding the pause of the CSS) as described in 6.4.1.2.

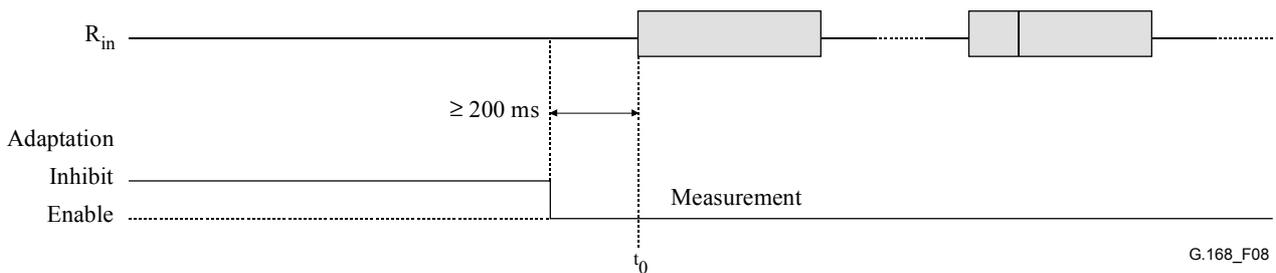


Figure 8/G.168 – Test No. 2A, 2B signal and time relationships

6.4.2.3.1 Test 2A: Convergence test with NLP enabled

Requirement

With the H register initially set to zero, or alternatively, with an open echo path resulting in $S_{\text{in}} = 0$ and the H register content converged to 0, and the NLP enabled, for all values $L_{\text{Rin,act}} \geq -30$ dBm0 and ≤ 0 dBm0 and for all values of ERL ≥ 6 dB and echo path delay, $t_d \leq \Delta$ ms, the combined loss ($L_{\text{Rin,act}} - L_{\text{RET}}$) should be greater than or equal to that shown in Figure 10. After $1 + t_d$ s, the combined loss should be greater than or equal to that in Figure 9. The level at S_{out} is measured using a meter conforming to the characteristics of 6.4.1.2.1. In addition, no peaks (see 6.4.1.2.2) are allowed that exceed 5 dB above the requirements in Figure 9.

The variable $L_{\text{Rin,act}} - L_{\text{RET}}$ in Figure 10 may be replaced by the variable $L_{\text{Sin}} - L_{\text{Sout}} + \text{ERL}$, where L_{Sin} and L_{Sout} are the levels of S_{in} and S_{out} respectively. The signal levels L_{Sin} and L_{Sout} are measured using the measurement device in 6.4.1.2.1, and should be synchronized. The ERL is the value chosen in the test. This method may also be used to observe convergence as a continuous plot over time.

NOTE – The method stated in the preceding paragraph takes into account any dispersion in the echo path, but does not take into account any dispersion present between the S_{in} and S_{out} ports of the echo canceller.

With the H register in any initially converged state other than those in the paragraph above, the requirements of Figure 10 apply after time $1 + t_d$ s.

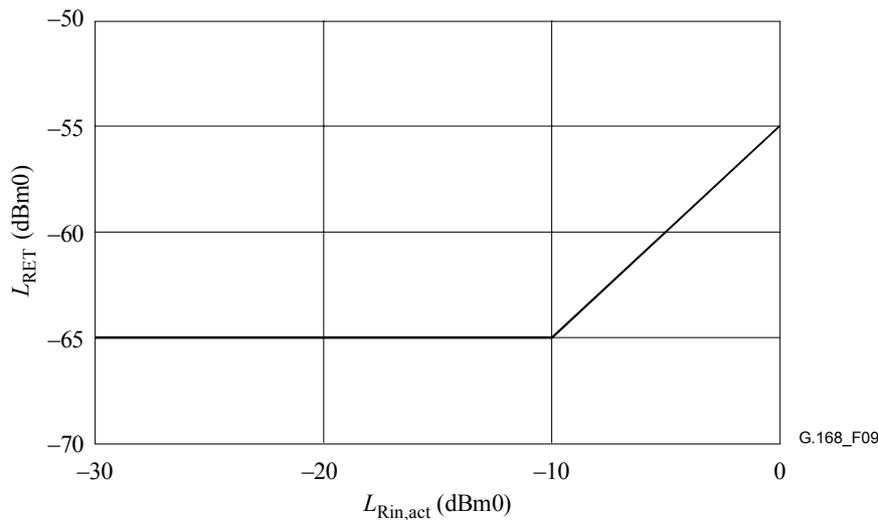


Figure 9/G.168 – Relationship between receive input level ($L_{Rin,act}$) and return echo level (L_{RET}) with NLP enabled

The requirements in Figure 9 may not be met with echo cancellers containing a comfort noise feature, if enabled, and so, for the purposes of this test, comfort noise is disabled. For R_{in} signal levels exceeding -5 dBm0, CSS will be clipped. This does not, however, imply that the requirements of Figures 9 and 10 need not be met at R_{in} levels of -5 dBm0 or above. For this range, special care should be taken to ensure that the echo path is linear. Non-linearities in the real network may result in performance less than indicated in the figure.

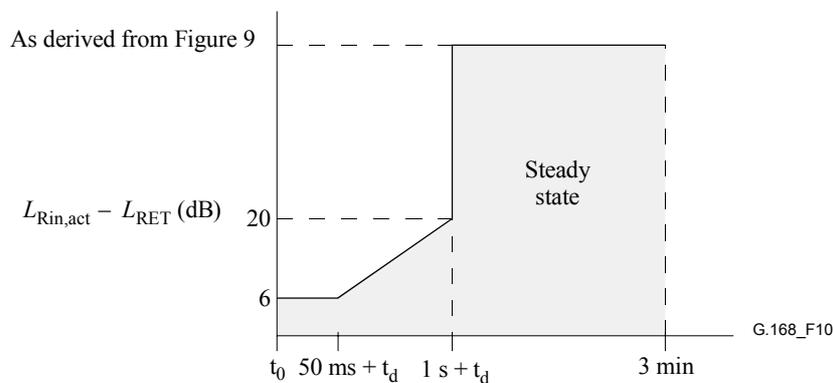


Figure 10/G.168 – Convergence characteristics with NLP enabled

6.4.2.3.2 Test 2B: Convergence test with NLP disabled

Requirement

With the H register initially set to zero, or alternatively, with an open echo path resulting in $S_{in} = 0$, and the H register content converged to 0, and the NLP disabled, for all values $L_{Rin,act} \geq -30$ dBm0 and ≤ 0 dBm0 and for all values of $ERL \geq 6$ dB and echo path delay, $t_d \leq \Delta$ ms, the loss $L_{Rin,act} - L_{RES}$ should be greater than or equal to that shown in Figure 12. After 10 s, the loss $L_{Rin,act} - L_{RES}$ should be greater than or equal to that in Figure 11. The level at S_{out} is measured using a meter conforming to the characteristics of 6.4.1.2.1. In addition, no peaks (see 6.4.1.2.2) are allowed that exceed 5 dB above the requirements in Figure 11.

The variable $L_{Rin,act} - L_{RES}$ in Figure 12 may be replaced by the variable $L_{Sin} - L_{Sout} + ERL$, where L_{Sin} and L_{Sout} are the levels of S_{in} and S_{out} respectively. The signal levels L_{Sin} and L_{Sout} are measured using the measurement device in 6.4.1.2.1, and should be synchronized. The ERL is the value chosen in the test. This method may also be used to observe convergence as a continuous plot over time.

NOTE 1 – The method stated in the preceding paragraph takes into account any dispersion in the echo path, but does not take into account any dispersion present between the S_{in} and S_{out} ports of the echo canceller.

NOTE 2 – Some echo cancellers employ a supplementary NLP function which cannot be disabled. For information covering this case, see 8.2.6, Testing of NLPs.

With the H register in any initially converged state other than those in the paragraph above, the requirements of Figure 12 apply after time $1 + t_d$ s.

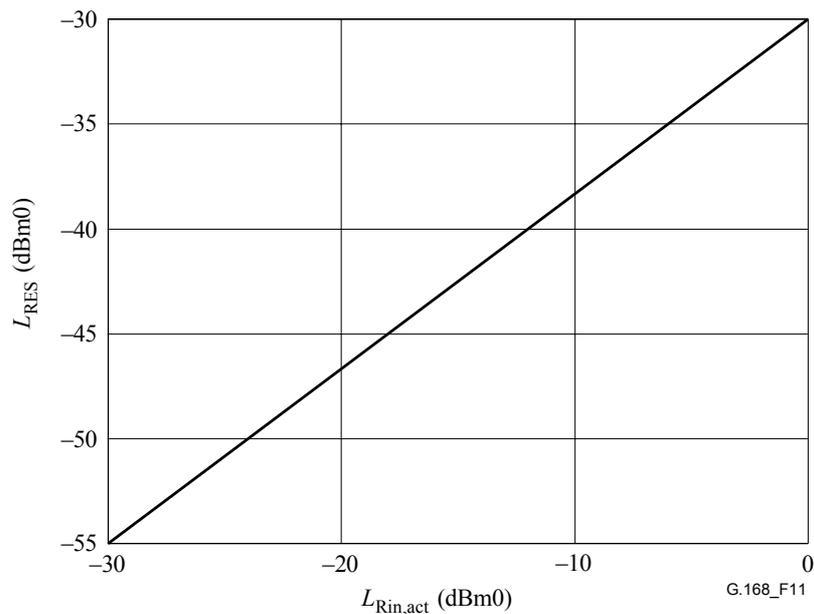


Figure 11/G.168 – Relationship between receive input level ($L_{Rin,act}$) and residual echo level (L_{RES}) with NLP disabled

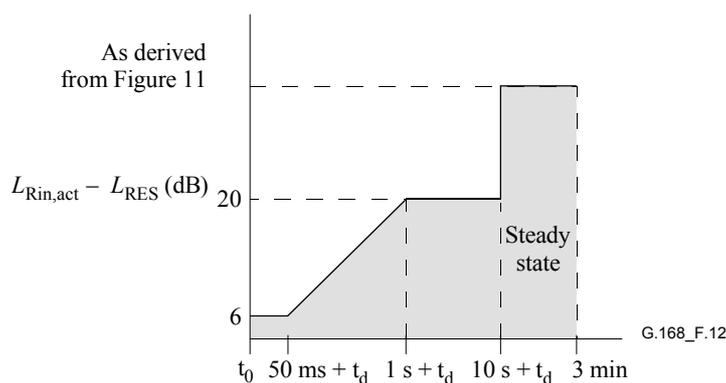


Figure 12/G.168 – Convergence characteristics with NLP disabled

6.4.2.3.3 Test 2C: Convergence test in the presence of background noise


Test No. 2C is meant to ensure that the steady state cancellation is sufficient to produce an echo level that is sufficiently low and that the echo canceller converges rapidly for all combinations of input signal levels and echo paths in the presence of background noise.

The test procedure is to clear the H register and inhibit adaptation. A Hoth noise source (see ITU-T Rec. P.800) with level $L_{S_{gen}}$ is applied at S_{gen} . Adaptation is enabled at least 200 ms before the start of a CSS burst (see Figure 13). After the convergence time, inhibit adaptation, remove S_{gen} and measure the residual echo level.

The level at S_{out} is measured using a meter conforming to the characteristics of 6.4.1.2.1.

The variable $L_{R_{in,act}} - L_{RET}$ in Figure 10 for NLP enabled and $L_{R_{in,act}} - L_{RES}$ in Figure 12 for NLP disabled may be replaced by the variable $L_{S_{in}} - L_{S_{out}} + ERL$, where $L_{S_{in}}$ and $L_{S_{out}}$ are the levels of S_{in} and S_{out} respectively. The signal levels $L_{S_{in}}$ and $L_{S_{out}}$ are measured using the measurement device in 6.4.1.2.1, and should be synchronized. The ERL is the value chosen in the test. This method may also be used to observe convergence as a continuous plot over time.

NOTE 1 – The method stated in the preceding paragraph takes into account any dispersion in the echo path, but does not take into account any dispersion present between the S_{in} and S_{out} ports of the echo canceller.

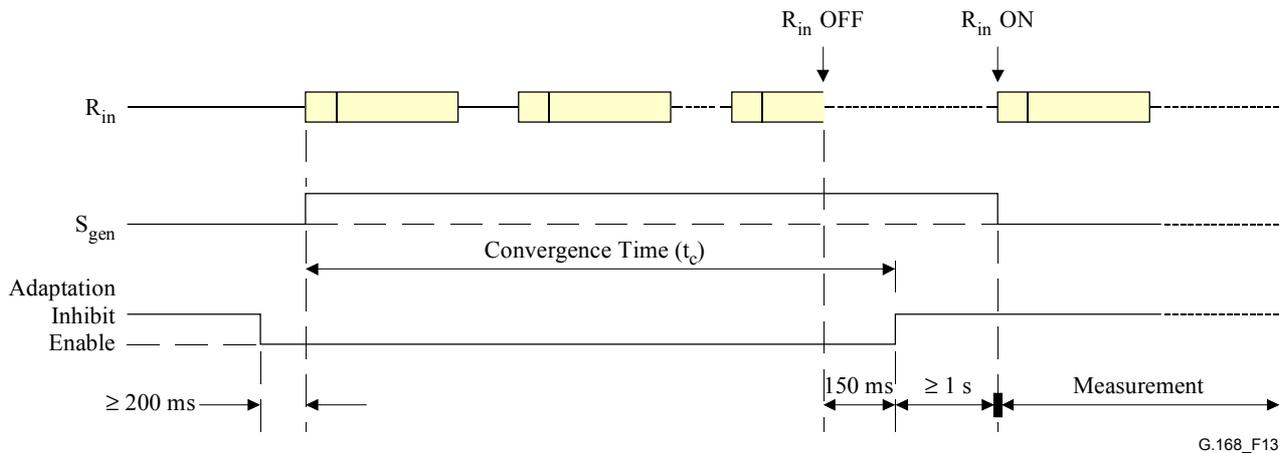

G.168_F13

Figure 13/G.168 – Test No. 2C signal and time relationships

NOTE 2 – At the end of this test, a time period of ≥ 1 s is allowed for possible latency in the adaptation inhibit command. R_{in} is switched off to prevent further adaptation before the inhibit command is effective. A time period of 150 ms is allowed before the adaptation inhibit command to clear the impulse response of an echo path. R_{in} is switched on again to perform the measurement.

a) Convergence test with NLP enabled

Requirement

With the H register initially set to zero and the NLP enabled, for all values of $L_{R_{in,act}} \geq -30$ dBm0 and ≤ 0 dBm0, $L_{S_{gen}} = L_{R_{in,act}} - 15$ dB but no higher than -30 dBm0, $ERL \geq 6$ dB and echo path delay, $t_d \leq \Delta$ ms, convergence should occur within 1.0 s (t_c) and L_{RET} should be $\leq L_{S_{gen}}$ (see Figure 14).

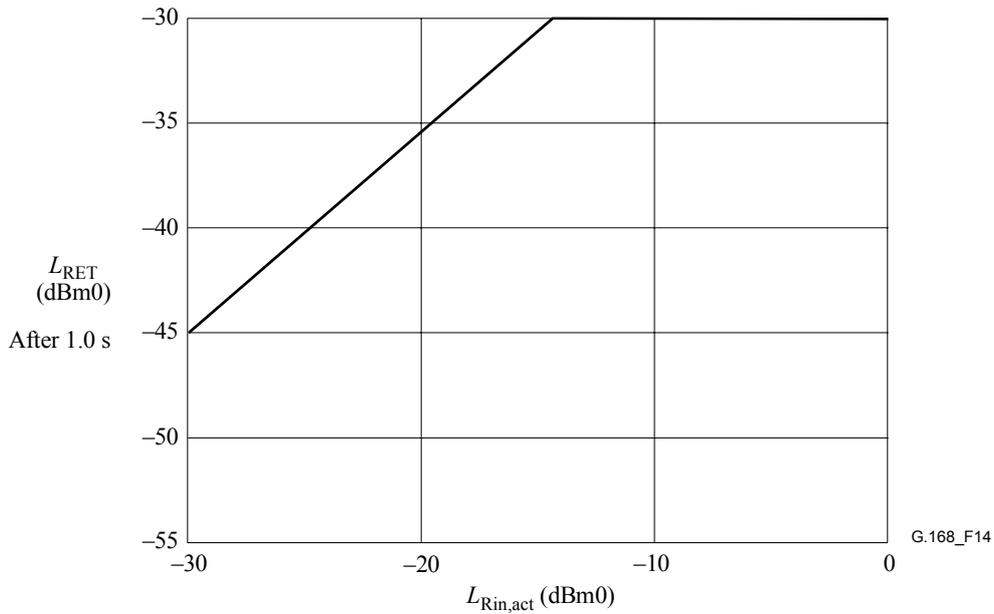


Figure 14/G.168 – Test No. 2C requirements NLP enabled

b) **Steady state cancellation test with NLP disabled**

Requirement

With the H register initially set to zero and the NLP disabled, for all values of $L_{Rin,act} \geq -30$ dBm0 and ≤ 0 dBm0, L_{Sgen} as given in Figure 15, $ERL \geq 6$ dB, echo path delay $t_d \leq \Delta$ ms, and convergence time ≥ 10 s, L_{RES} should be less than that shown in Figure 15 for the corresponding value of L_{Sgen} .

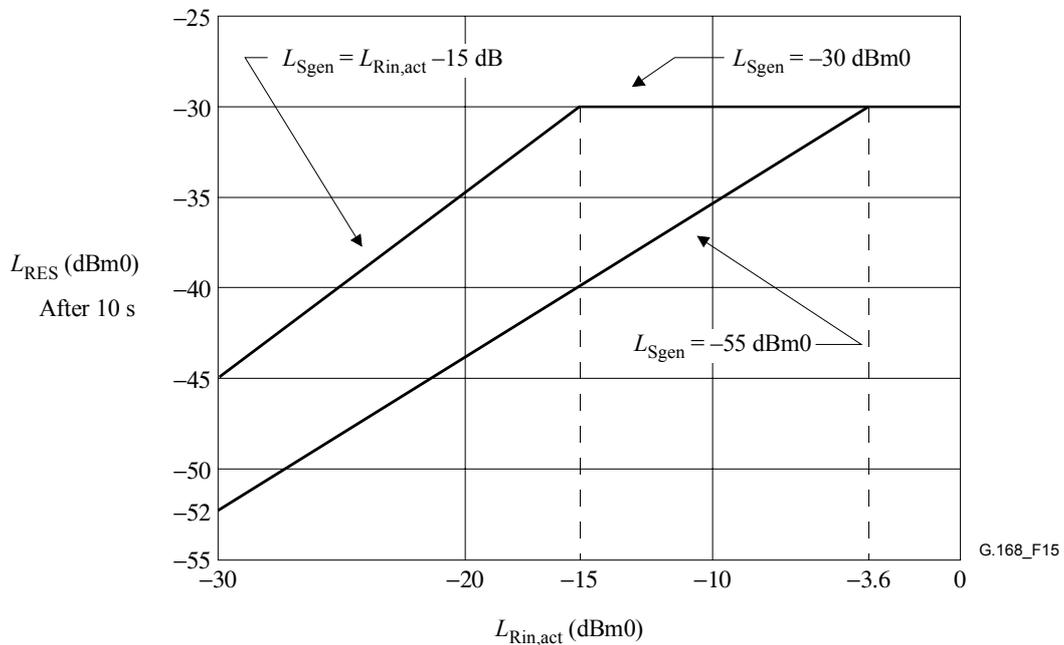


Figure 15/G.168 – Test No. 2C steady state requirements NLP disabled

c) **Convergence test with NLP disabled (for further study)**

Requirement

With the H register initially set to zero and the NLP disabled, for all values of $L_{Rin,act} \geq -30$ dBm0 and ≤ 0 dBm0, $L_{Sgen} = L_{Rin,act} - 15$ dB but no higher than -30 dBm0, $ERL \geq 6$ dB and echo path delay $t_d \leq \Delta$ ms, the loss $L_{Rin,act} - L_{RES}$ should be greater than or equal to that shown in Figure 16. The value X is TBD.

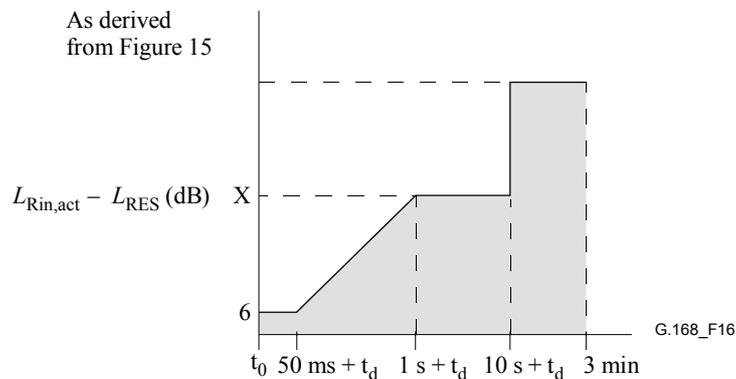


Figure 16/G.168 – Test No. 2C Convergence requirements NLP disabled

6.4.2.4 Test No. 3 – Performance under conditions of double talk

The three parts of this test are meant to test the performance of the canceller under various conditions of double talk. During conditions of double talk the echo canceller can give rise to unwanted artifacts such as clipping, distortion, and noise contrast (see Appendix I). The tests make the assumption that, upon detection of double talk, measures are taken to prevent or slow adaptation in order to avoid excessive reduction in cancellation.

For this test, the R_{in} signal is CSS and the S_{gen} signal is the double talk CSS. While CSS is used for this test it is recognized that it is only a statistical approximation of real speech. Double talk tests performed with actual speech samples may produce results somewhat different than those shown in this test. This test is intended to provide a guideline on how the double talk performance of an echo canceller should be measured. It is possible that this test and its requirements may change as the correlation between CSS and real speech is better understood. Use of different languages have been shown to provide considerable variation in the results for tests 3A and 3B (see Bibliography [1] in I.9 for more details).

See I.7.4 for guidelines on other double talk test methods for tests 3A and 3B.

6.4.2.4.1 Test 3A: Double talk test with low cancelled-end levels

Test No. 3A is meant to ensure that the double talk detection is not so sensitive that echo and low level cancelled end speech falsely cause operation of the double talk detector to the extent that adaptation does not occur. The test procedure is to clear the H register; then for some value of echo path delay and ERL, a signal is applied to R_{in} . Simultaneously (see Figure 17) an interfering signal (double talk CSS), which is sufficiently low in level to not seriously hamper the ability of the echo canceller to converge, is applied at S_{gen} . This signal should allow adaptation and cancellation to occur. After the allowed convergence time the adaptation is inhibited and the residual echo measured. The NLP should be *disabled*.

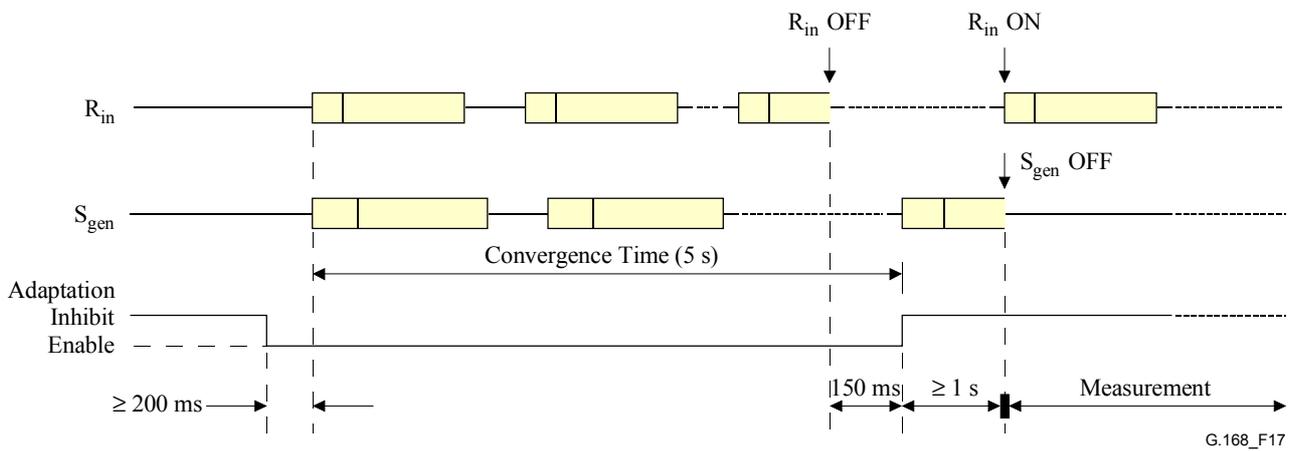


Figure 17/G.168 – Test No. 3A signal and time relationships

NOTE – At the end of this test, a time period of ≥ 1 s is allowed for possible latency in the adaptation inhibit command. R_{in} is switched off to prevent further adaptation before the inhibit command is effective. A time period of 150 ms is allowed before the adaptation inhibit command to clear the impulse response of an echo path. R_{in} is switched on again to perform the measurement.

Requirement

With the H register initially set to zero for all values of $L_{Rin} \geq -25$ dBm0 and ≤ 0 dBm0, $L_{Sgen} = L_{Rin} - 15$ dB, $ERL \geq 6$ dB and echo path delay, $t_d \leq \Delta$ ms, convergence should occur within 5 s and L_{RES} should be $\leq N$.

6.4.2.4.2 Test 3B: Double talk test with high cancelled-end levels

Test No. 3B is meant to ensure that the double talk detector is sufficiently sensitive and operates fast enough to prevent large divergence during double talking.

The test procedure is to fully converge the echo canceller for a given echo path by applying CSS to R_{in} . After the canceller is fully converged (see Figure 18) a signal is applied to S_{gen} that has a level L_{Sgen} at least that of R_{in} . This should cause the double talk detector to operate. After any arbitrary time, $\delta_t > 0$, the adaptation is inhibited, the S_{gen} signal is removed, and the residual echo measured. The NLP should be *disabled*.

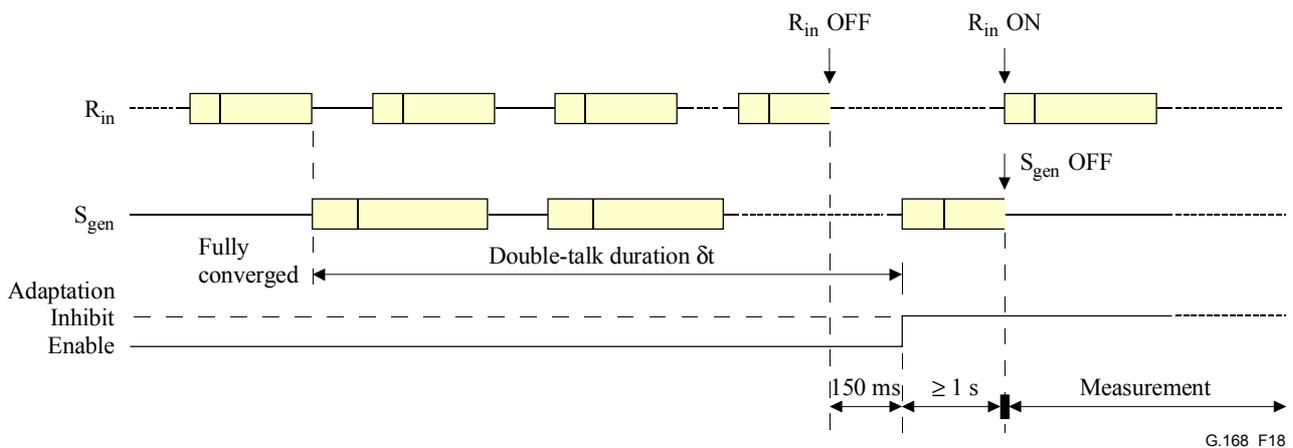


Figure 18/G.168 – Test No. 3B signal and time relationships

NOTE – At the end of this test, a time period of ≥ 1 s is allowed for possible latency in the adaptation inhibit command. R_{in} is switched off to prevent further adaptation before the inhibit command is effective. A time period of 150 ms is allowed before the adaptation inhibit command to clear the impulse response of an echo path. R_{in} is switched on again to perform the measurement.

Bibliography [1] in I.9 shows a wide variation of performance for different languages for this test. Note that test 3B is even more sensitive to real speech variations and CSS may not provide adequate approximation of real speech for this test.

Requirement

With the echo canceller initially in the fully converged state for all values of $L_{Rin} \geq -30$ dBm0 and ≤ 0 dBm0, and for all values of $L_{Sgen} \geq L_{Rin}$ and for all values of $ERL \geq 6$ dB and echo path delay $t_d \leq \Delta$ ms, the residual echo level after the simultaneous application of R_{in} and S_{gen} for any time period should not increase more than 10 dB over the steady state requirements of Figure 11.

6.4.2.4.3 Test 3C: Double talk test under simulated conversation

Test No. 3C is meant to ensure that the echo canceller does not produce undesirable artifacts during and after periods of double talk (see I.8).

The test procedure is to clear the H register. Then for some value of echo path delay, $t_d \leq \Delta$ ms, and $ERL \geq 6$ dB, a signal is applied to R_{in} . Simultaneously (see Figure 19), a signal is applied to S_{gen} that has a level L_{Sgen} at least that of R_{in} . After a time t_1 , S_{gen} is removed and S_{out} is measured. During time t_4 and t_5 , S_{gen} is reapplied and the output is evaluated for artifacts. The NLP should be enabled for this test.

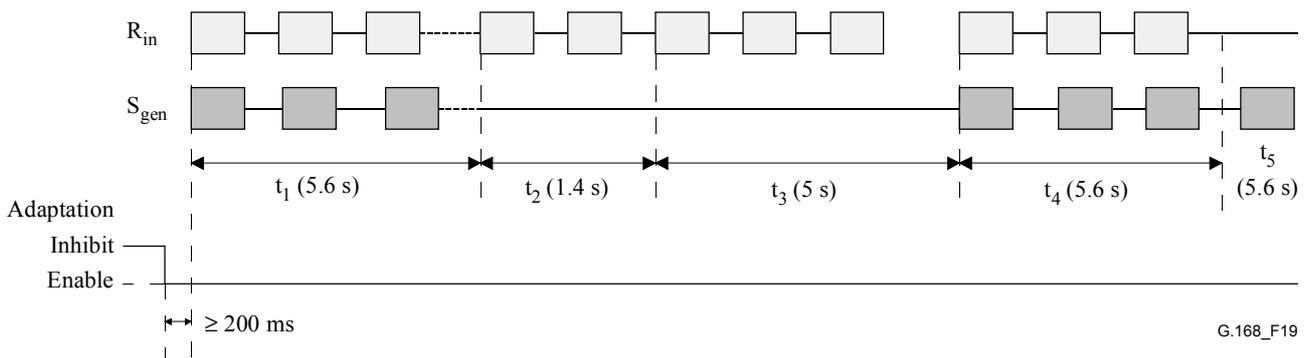


Figure 19/G.168 – Test No. 3C signal and time relationships

Requirement

With the H register initially set to zero, for all values of $L_{Rin} \geq -25$ dBm0 and ≤ 0 dBm0, and for all values of $L_{Sgen} \geq L_{Rin}$ and for all values of $ERL \geq 6$ dB and echo path delay $t_d \leq \Delta$ ms, any peaks (see 6.4.1.2.2) during period t_2 should not exceed the level L_{Sgen} during period t_1 . The residual echo level during time period t_3 should meet the requirements of Figure 9 with NLP enabled. During t_4 and t_5 , no peaks should exceed the level of $L_{Sgen} + 6$ dB.

Level offsets between L_{Rin} and L_{Sgen} can cause inappropriate operation of the NLP and can cause speech degradation and is for further study. Variation of CSS may be useful for this purpose.

6.4.2.5 Test No. 4 – Leak rate test

This test is meant to ensure that the leak time is not too fast, i.e. that the contents of the H register do not go to zero too rapidly.

The test procedure is to fully converge the echo canceller using CSS for a given echo path and then to remove all signals from the echo canceller. After two minutes the contents of the H register are frozen, CSS is reapplied to R_{in} and the residual echo measured (see Figure 20). The NLP should be disabled.

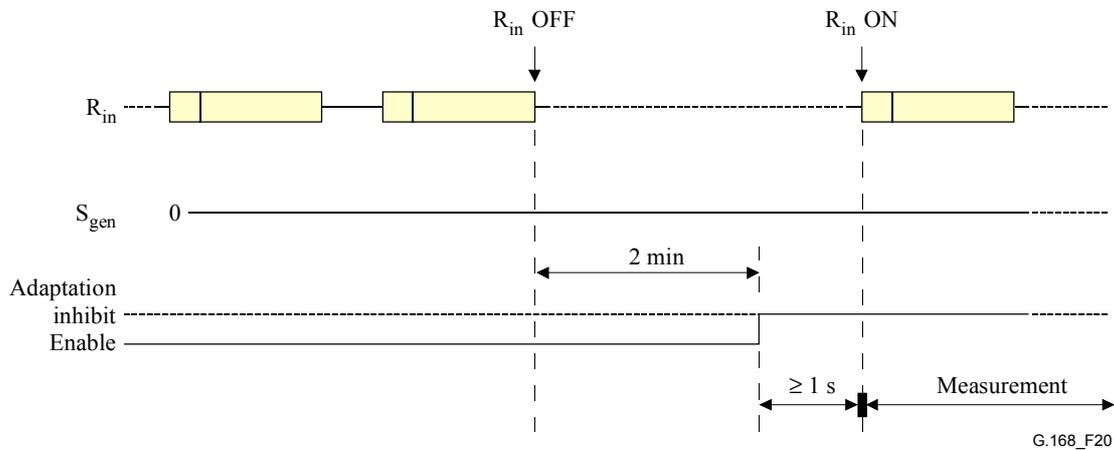


Figure 20/G.168 – Test No. 4 signal and time relationships

NOTE – At the end of this test, a time period of ≥ 1 s is necessary to allow for possible latency in the adaptation inhibit command. R_{in} is switched on to perform the measurement.

Requirement

With the echo canceller initially in the fully converged state for all values of $L_{Rin} \geq -30$ dBm0 and ≤ 0 dBm0, two minutes after the removal of the R_{in} signal, the residual echo level should not increase more than 10 dB over the steady state requirement of Test No. 2 (Figure 11).

6.4.2.6 Test No. 5 – Infinite return loss convergence test

This test is meant to ensure that the echo canceller has some means to prevent the unwanted generation of echo. This may occur when the H register contains an echo path model, either from a previous connection or the current connection, and the echo path is opened (circuit echo vanishes) while a signal is present at R_{in} .

The test procedure is to fully converge the echo canceller using CSS for a given echo path. The echo path is then interrupted at R_{out} while a CSS is applied to R_{in} , and the output at S_{out} measured (see Figure 21). The NLP should be disabled.

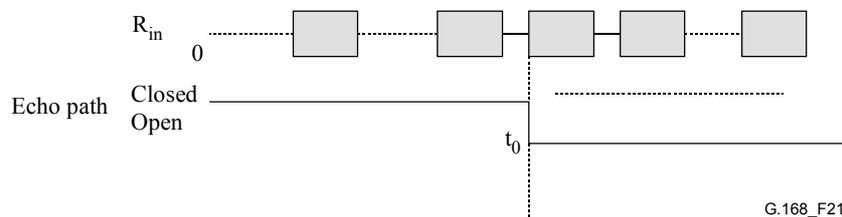


Figure 21/G.168 – Test No. 5 signal and time relationships

The level at R_{in} in the test requirement is $L_{Rin,act}$. It is the signal level measure using the RMS method over the active portion of the CSS only (i.e. excluding the pause of the CSS) as described in 6.4.1.2.

Requirement

With the echo canceller initially in the fully converged state for all values of $ERL \geq 6$ dB, and for all values of $L_{Rin,act} \geq -30$ dBm0 and ≤ 0 dBm0, and at time t_0 the echo path is interrupted with an open echo path, the combined loss $L_{Rin,act} - L_{RES}$ should meet the requirements of Figure 12, as measured using the method of 6.4.1.2.1.

The level at S_{out} is measured using a meter conforming to the characteristics of 6.4.1.2.1.

6.4.2.7 Test No. 6 – Non-divergence on narrow-band signals

This test has the object of verifying that the echo canceller will remain converged for subscriber-originated narrow-band signals after having converged on a wide-band signal. The residual echo level is measured before and after the application of a sinusoidal wave or a wave composed of two frequencies.

The method consists of completely converging the echo canceller as in Test 2. The sequence of tones of Table 2 are then applied at R_{in} . After the sequence is completed, the adaptation is inhibited and the residual echo is measured with the signal of test 2. The NLP should be disabled.

Requirement

The echo canceller is fully converged as in test 2 for all values of $ERL \geq 6$ dB, and echo path delay $t_d \leq \Delta$ ms. Once chosen, the echo path remains the same throughout the test. The sequence of tones of Table 2 (with the higher frequency 2 dB higher than the lower frequency for the dual tone combinations) is then applied for 5 s each to R_{in} such that $L_{Rin} \geq -30$ dBm0 and ≤ 0 dBm0. After the application of the tone sequence, the adaptation is inhibited. Using the same signal as in Test No. 2 the measured residual echo should not degrade more than 10 dB from the requirements of Figure 11 of Test No. 2. The NLP is disabled for this test.

Table 2/G.168 – Sequence of tones

697
941
1336
1633
697 & 1209
770 & 1336
852 & 1477
941 & 1633

6.4.2.8 Test No. 7 – Stability test

The object of this test is to verify that the echo canceller will remain stable for narrow-band signals. The residual echo is measured throughout the application of a mono-frequency sinusoidal wave.

The test method is as follows: with the H register initially set to zero, and the NLP disabled, the echo canceller is converged on the sinusoidal signal for two minutes. The residual echo level is measured continuously throughout the two minutes that the input signal is applied.

Requirement

With the echo canceller H register initially set to zero, apply a mono-frequency signal, except for those identified in Table 3 of test No. 8, for two minutes at R_{in} . The residual echo level, measured continuously throughout the two minutes that the input signal is applied, should be less than or equal to that shown in Figure 22 after an initial convergence period of 10 s. The level of R_{in} for this test

should be in the range $L_{Rin} \geq -30$ dBm0 and $\leq +3$ dBm0, with an echo path consisting of two ERL values of 6 dB and 20 dB, with an echo path delay $t_d \leq \Delta$ ms.

The residual echo level is measured using a meter conforming to the characteristics of 6.4.1.2.1.

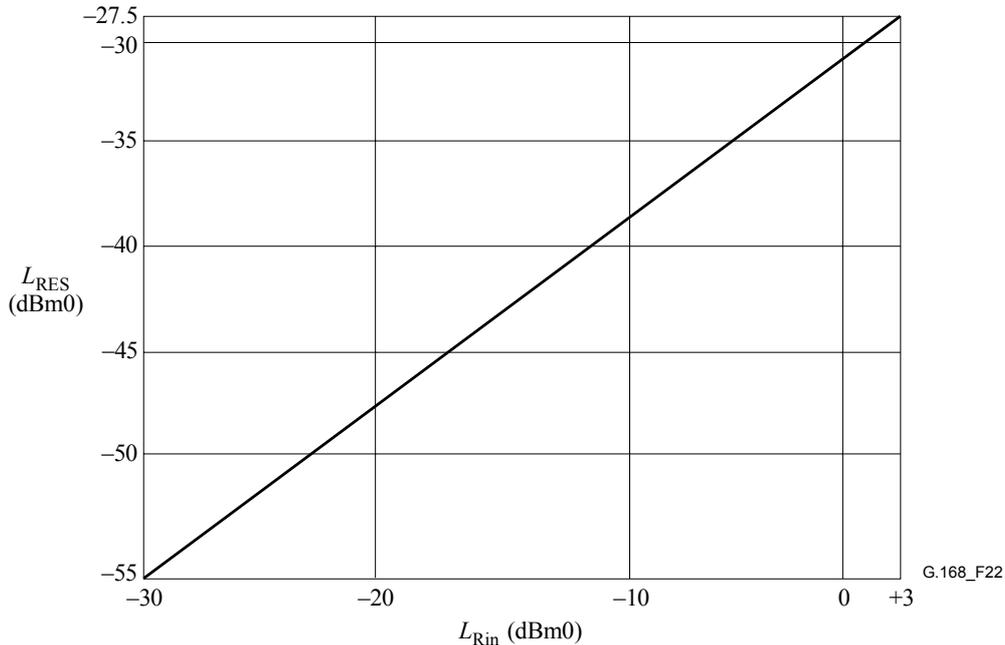


Figure 22/G.168 – Performance requirements for test 7

6.4.2.9 Test No. 8 – Non-convergence of echo cancellers on specific ITU-T No. 5, 6 and 7 in-band signalling and continuity check tones (optional)

Echo cancellers, which are not externally disabled by the switch and which are located on the line side of Signalling System No. 5, 6 and 7 in international exchanges or are associated with national exchanges, should operate properly with specific in-band signalling and continuity check tones. This test is meant to ensure that echo cancellers will not remove or cancel a mono or bi-frequency signal transmitted in a handshaking protocol in the transmit direction either before or after receiving an identical signal (except for amplitude and phase) in the receive direction. This is intended to allow a correct transmission of specific signalling or continuity check tones without externally disabling the echo canceller. The NLP should be enabled.

For an echo canceller equipped with this optional capability, the echo canceller is initially converged using CSS to any echo path with an ERL ≥ 6 dB, and an echo path delay $t_d \leq \Delta$. For simplification, the fully converged state for an ERL of 6 dB may be chosen. First the CSS is removed and then the echo path is opened at R_{out} . Then, any signal from Table 3 is applied at S_{in} . Within 90 ms (either before or after the application of the signal at S_{in}), the same signal is applied at R_{in} . After the detection time, the level at S_{out} is measured.

The power level M , of each signal applied should be within the following limits:

System 5: $-16 \leq M \leq -2$ dBm0

NOTE 1 – This range applies to the single frequency signals f_1 and f_2 . The level of the individual signals in the compound signal may differ from each other by not more than 5 dB. Note that when the levels of the individual signals approach -2 dBm0, the compound signal may be clipped. The nominal transmit level is specified as -9 ± 1 dBm0.

See ITU-T Recs Q.143 and Q.144.

System 6: $-18 \leq M \leq -6$ dBm0

NOTE 2 – The nominal transmit level is -12 ± 1 dBm0.

See ITU-T Rec. Q.271.

System 7: $-18 \leq M \leq -6$ dBm0

NOTE 3 – The nominal transmit level is -12 ± 1 dBm0.

See clause 7/Q.724.

The above levels are designed to ensure that the echo canceller will operate with signals that occupy the entire range of levels given in the appropriate signalling ITU-T Recommendations.

The echo canceller response should be sufficiently long to provide immunity from false operation due to voice signals. Also, the echo canceller response should not be so long as to needlessly extend the time for the signal to appear on the network.

Requirement

The level at S_{out} , as measured using the method of 6.4.1.2.1, should not vary more than 2 dB with respect to the level at S_{in} . The echo canceller should respond to the signals (detection time) within 1 s after application.

Table 3/G.168 – Applicable signalling tones

System 5	System 6	System 7
2400 ± 15 Hz	2000 ± 30 Hz	2000 ± 30 Hz
2600 ± 15 Hz		
2400 ± 15 Hz & 2600 ± 15 Hz		

6.4.2.10 Test No. 9 – Comfort noise test

This test is meant to ensure that the echo canceller is able to provide a comfort noise signal on S_{out} which matches noise received on S_{in} . It also tests whether the canceller is able to adjust the level of this comfort noise signal to compensate for changes in the level of input noise. As this test is not intended as a test of echo cancellation capability, an ERL of 12 dB is used for the entire test. The steps of this test should be applied in sequence. They consist of setting the level of S_{gen} to a value between -50 dBm0 and -40 dBm0, lowering the level of S_{gen} by 10 dB, and then raising the level of S_{gen} by 10 dB. Consequently, the test covers a range of operation for L_{Sgen} between -60 dBm0 and -40 dBm0. The level of R_{in} will be at silence or at -10 dBm0. White noise is used for all input signals for this test. The NLP and comfort noise feature should be enabled.

6.4.2.10.1 Part 1 (matching)

- 1) Set L_{Sgen} to a level between -50 dBm0 and -40 dBm0.
- 2) Set L_{Rin} to silence (< -60 dBm0) and hold for 30 s.
- 3) L_{Rin} to -10 dBm0.
- 4) sure L_{RET} after 2 s.

Requirement

For all values of L_{Sgen} , L_{RET} should be within 2.0 dB of L_{Sgen} . Also, this value should hold as long as noise level L_{Sgen} remains constant.

6.4.2.10.2 Part 2 (adjustment down)

- 1) lower L_{Sgen} by 10 dB from the level in Part 1.
- 2) Set L_{Rin} to silence (< -60 dBm0) and hold for 10 s.

- 3) L_{Rin} to -10 dBm0.
- 4) sure L_{RET} after 2 s.

Requirement

L_{RET} should be within 2.0 dB of L_{Sgen} . Also, this value should hold as long noise level L_{Sgen} remains constant.

6.4.2.10.3 Part 3 (adjustment up)

- 1) Raise L_{Sgen} by 10 dB from the level in Part 2.
- 2) Set L_{Rin} to silence (< -60 dBm0) and hold for 10 s.
- 3) Set L_{Rin} to -10 dBm0.
- 4) Measure L_{RET} after 2 s.

Requirement

L_{RET} should be within 2.0 dB of L_{Sgen} . Also, this value should hold as long noise level L_{Sgen} remains constant.

6.4.2.11 Test No. 10 – Facsimile test during call establishment phase

This test is meant to ensure that the echo cancellers located at each end of a connection converge rapidly on the initial handshaking sequences of a facsimile call and have some means to prevent the unwanted generation of echo. The test is split into three parts. Test 10A looks at the performance of the echo canceller located on the calling station side, and Test 10B looks at the performance of the echo canceller on the called station side. Test 10C looks at the performance of the echo canceller on the calling station side during page transmission.

The test has been designed to run in a laboratory environment using an echo canceller and a fax simulator. The tests should be run separately.

The tests should be performed with the ITU-T Rec. G.165 or this Recommendation tone disabler switched on.

For this purpose, the following signals should be applied (bits are transmitted left to right). The initial flag is repeated 37 times for each sequence.

FAX test sequences:

Calling tone (CNG)

Conditions

Signal	1100 Hz \pm 38 Hz
Duration	On for 0.5 s, Off for 3 s ($\pm 15\%$)

Called station identification (CED)

Conditions

Signal	2100 Hz \pm 15 Hz
Duration	2.6 s-4 s

Binary coded sequences

Sequence No. 1 (called station):

Non-Standard Facilities (NSF) frame:

Flag	HDLC address field	HDLC Control field	Control field NSF	Information field, 8 octets (country, manufacturer, additional code number)	Frame check sequence	Flag
0111 1110	1111 1111	1100 1000	0000 0100	0101 0101, 0101 0101, 0101 0101, ...	1010 1010	0111 1110

Called Subscriber Identification (CSI) frame:

Flag	HDLC address field	HDLC Control field	Control field CSI	Information field, 20 octets (receiver code number)	Frame check sequence	Flag
0111 1110	1111 1111	1100 1000	0000 0100	0101 0101, 0101 0101, 0101 0101, ...	1010 1010	0111 1110

Digital Identification Signal (DIS) frame:

Flag	HDLC address field	HDLC Control field	Control field DIS	Information field, 3 octets	Frame check sequence	Flag
0111 1110	1111 1111	1100 1000	0000 0001	0101 0101, 0101 0101, 0101 0101	1010 1010	0111 1110

Sequence No. 2 (calling station):

Non-Standard Set-up (NSS) frame:

Flag	HDLC address field	HDLC Control field	Control field NSS	Information field, 3 octets	Frame check sequence	Flag
0111 1110	1111 1111	1100 1000	1100 0100	0101 0101, 0101 0101, 0101 0101	1010 1010	0111 1110

Transmitting Subscriber Identification (TSI) frame:

Flag	HDLC address field	HDLC Control field	Control field TSI	Information field, 20 octets (Transmitter code number)	Frame check sequence	Flag
0111 1110	1111 1111	1100 1000	1100 0010	0101 0101, 0101 0101, 0101 0101, ...	1010 1010	0111 1110

Digital Command Signal (DCS) frame:

Flag	HDLC address field	HDLC Control field	Control field DCS	Information field, 20 octets (Transmitter code number)	Frame check sequence	Flag
0111 1110	1111 1111	1100 1000	1100 0001	0101 0101, 0101 0101, 0101 0101, ...	1010 1010	0111 1110

Data transmission conditions

The transmission of sequences No. 1 and No. 2 in the telephone channel is obtained by means of frequency shift (see ITU-T Rec. V.21).

Conditions

Data signalling rate, synchronous	300 bit/s
Center frequency	1750 Hz
Frequency deviation	±100 Hz

Characteristic frequencies 1650/1850 Hz
Tolerances of the characteristic frequencies ± 6 Hz
The higher characteristic frequency corresponds to a binary "0".

6.4.2.11.1 Test No. 10A: Canceller operation on the calling station side

The convergence test procedure is to clear the H register and to inhibit adaptation. Then adaptation is enabled while CNG, CED and sequence No. 1 are applied (see Figure 23). During the adaptation time, the residual/returned echo level is measured. This test should be performed with the NLP both enabled and disabled.

Requirement

With the H register initially set to zero and the value $L_{Rin} = -13$ dBm0 for the entire test, the following specific requirements apply for all values of $ERL \geq 6$ dB and echo path delay $t_d \leq \Delta$ ms. The test should run for at least 7 s while CED and sequence No. 1 are applied. Repeat sequence 1 as necessary.

Region I (converging on CED tone)

- the peaks (see 6.4.1.2.2) of L_{RES} should be $\leq (-13 - A_{ECHO})$ dBm0.
- the time to enter region II should be ≤ 0.15 s.

Region II (converged on CED tone)

- the peaks (see 6.4.1.2.2) of L_{RES} should be ≤ -37 dBm0.

Region III (converging on sequence No. 1)

- the peaks (see 6.4.1.2.2) of L_{RES} should be $\leq (-13 - A_{ECHO})$ dBm0.
- the time to enter region IV should be ≤ 1.1 s.

Region IV (converged on sequence No. 1)

- the peaks (see 6.4.1.2.2) of L_{RES} should be ≤ -24 dBm0.

If the NLP is provisioned on, the peaks (see 6.4.1.2.2) of L_{RET} should be ≤ -37 dBm0 in the regions II and IV.

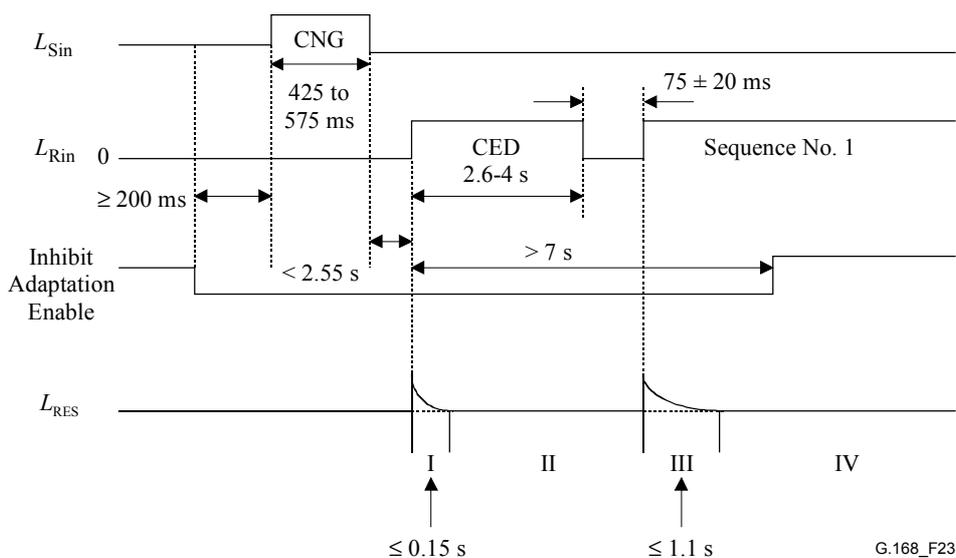


Figure 23/G.168 – Test No. 10A signal and time relationships

6.4.2.11.2 Test No. 10B: Canceller operation on the called station side

The convergence test procedure is to clear the H register and to inhibit adaptation. Then adaptation is enabled for at least 10 s, while sequence No. 2 is applied (see Figure 24). During the adaptation time, the residual/returned echo level is measured. This test should be performed with the NLP both enabled and disabled.

Requirement

With the H register initially set to zero and the value $L_{Rin} = -13$ dBm0 for the entire test, the following specific requirements apply for all values of ERL ≥ 6 dB and echo path delay $t_d \leq \Delta$ ms. The test should run for 10 s as a minimum. Repeat sequence 2 as necessary.

Region I (converging on sequence No. 2)

- the peaks (see 6.4.1.2.2) of L_{RES} should be $\leq (-13 - A_{ECHO})$ dBm0.
- the time to enter region II should be ≤ 1.1 s.

Region II (converged on sequence No. 2)

- the peaks (see 6.4.1.2.2) of L_{RES} should be ≤ -24 dBm0.

If the NLP is provisioned on, the peaks (see 6.4.1.2.2) of L_{RET} should be ≤ -37 dBm0 in the region II.

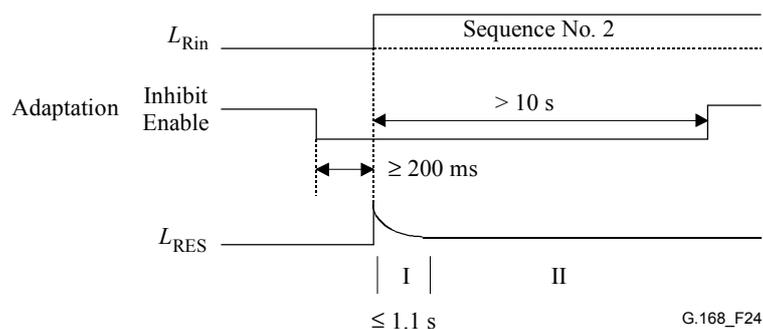


Figure 24/G.168 – Test No. 10B signal and time relationships

6.4.2.11.3 Test No. 10C: Canceller operation on the calling station side during page transmission and page breaks (for further study)

Figure 25 shows the sequence of message exchange for a typical fax transmission consisting of two pages. The sequence begins with a V.21 message handshake procedure. Operation and performance of the echo cancellers at each end of the link are tested during this period by tests 10A and 10B. This test is designed to check the operation and performance of the echo canceller at the calling station side during page transmission and page breaks as shown in Figure 25.

Test 10C uses data files A and B and software implementations of FSK and PSK modems. The test described uses V.29 modulation for the transmission of image data, but can be further extended to cover different types of modems such as V.17 and V.27 *ter* as well as different timing relationships between handshake signals (represented by the V.21 modem) and page transmission (represented by the V.29 modem). The timing relationship shown in Figure 26 has been designed to mimic the real facsimile T.30 protocol.

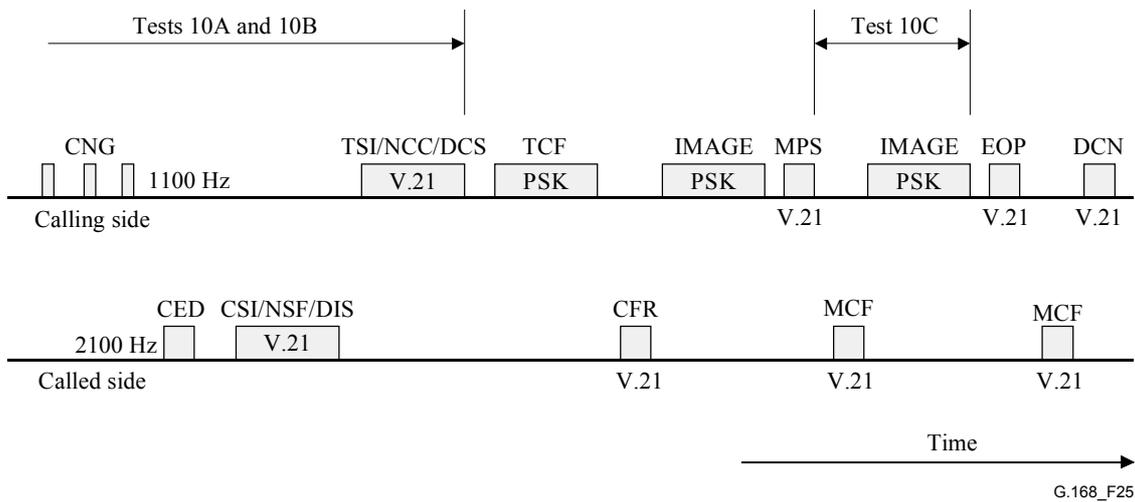


Figure 25/G.168 – Sequence of message exchange for a typical 2-page fax transmission

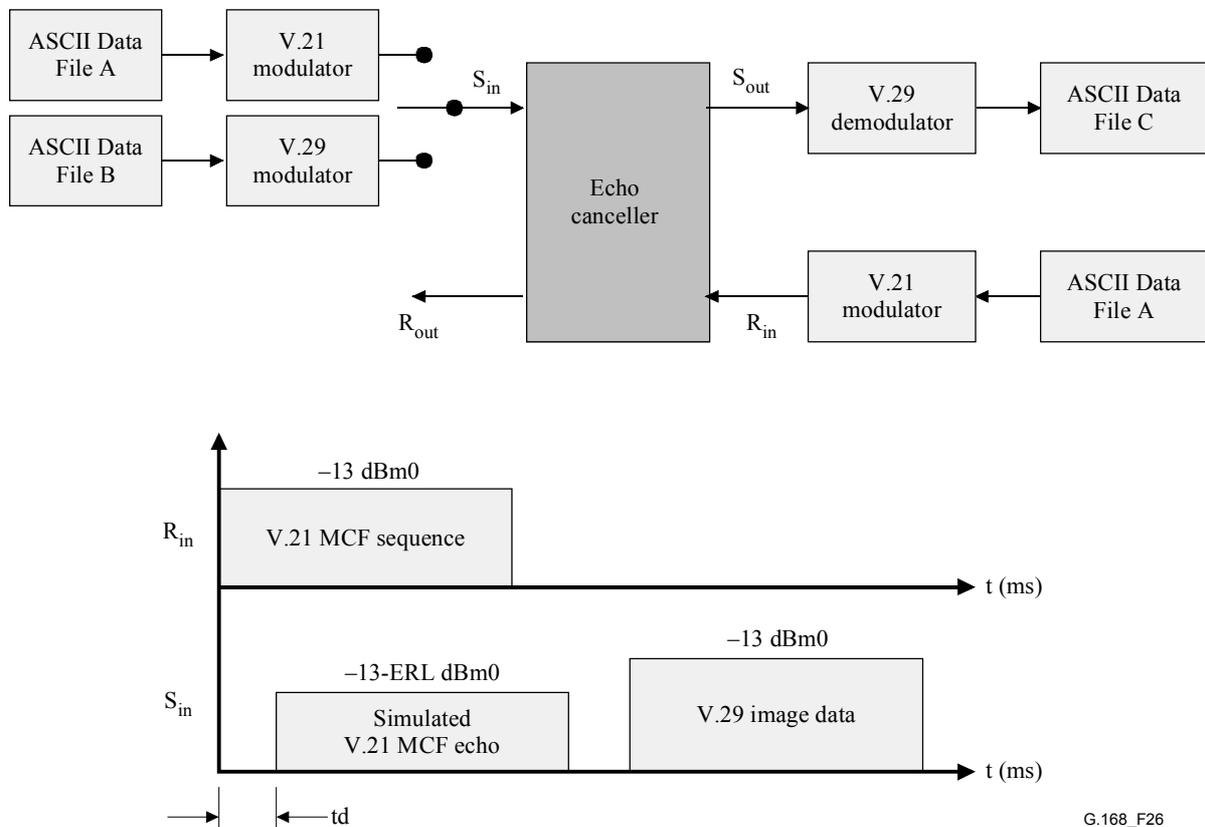


Figure 26/G.168 – Canceller operation during page transmission and page breaks

The test procedure is to clear the H register and inhibit adaptation. Adaptation is then enabled and the canceller is converged by sending data file A via the V.21 modulator, into R_{in} of the echo canceller (see Figure 26). This is meant to simulate the MCF signal transmitted by the called fax machine at the end of the first page. To simulate the echo signal, data file A is also transmitted (using the V.21 modulator) to the echo canceller's S_{in} input, at a level of ≥ 6 dB below R_{in} and with a timing offset of t_d . Following this, data file B is transmitted (using the V.29 modulator) to the echo canceller's S_{in} input.

The V.29 data from the echo canceller's S_{out} output is first collected, stored and demodulated off-line. The recovered file C is then analysed. The data from the echo canceller's R_{out} output is discarded (on the assumption that no impairments are introduced).

Note that in the latest version of T.30, an Echo Protect Tone (EPT) is specified before all V.29 transmissions (TCF and image data). This EPT signal was originally intended to 'turn around' echo suppressors and prevent any front-end clipping of TCF or image data. In the case of echo cancellers, it helps to open the NLP before the transmission of TCF or image data to avoid corruption. However, many of the fax implementations currently in the field do not incorporate this EPT signal, so it has not been included in this test. In this respect, this test therefore represents a worst case scenario.

The NLP should be provisioned enabled during this test. Note that some echo cancellers will automatically disable the NLP on detection of a fax call.

Data File A

In the following table, all data is given in hex. The initial flag is repeated 37 times.

Flag	HDLC address field	HDLC control field	Control field MCF	Frame check sequence	Flag
7E	FF	C8	B1	D4, 07	7E

Data File B

Data File B should be taken from the following ITU-T CD ROM:


- ITU-T Recommendation T.24 (1998), *Standardized digitized image set*, Document No 1, 'slerexe' letter.

Requirement

The intent is to compare the results with the echo canceller first disabled and then enabled. The actual requirements are for further study. The requirements should be based on a comparison of files B and C.

6.4.2.12 Test No. 11 – Tandem echo canceller test (for further study)

Under study. See Appendix I for further discussion on this issue.

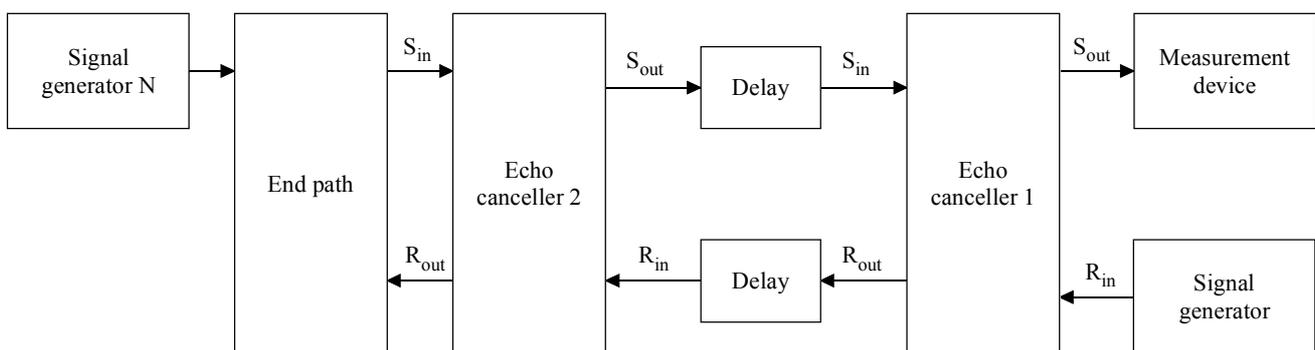

G.168_F27

Figure 27/G.168 – Test No. 11 configuration

6.4.2.13 Test No. 12 – Residual acoustic echo test (for further study)

Under study. See I.6.3, I.6.3.1 and ITU-T Rec. G.161 for further discussion on this issue. This test is meant to check the performance of the echo canceller in the presence of residual acoustic echo and

to ensure that its performance with electric echo is not overly degraded in the presence of acoustic echo.

6.4.2.14 Test No. 13 – Performance with ITU-T low-bit rate coders in echo path (Optional, under study)

This test is meant to ensure that the echo canceller will not degrade the performance of the network when any ITU-T low-bit rate coder, as stated in the requirement, is included in the echo path of the echo canceller. The user should test the echo canceller using the stated ITU-T low-bit rate coders that may appear in the echo path of the echo canceller in the user's network. See I.5.3, I.5.4 and ITU-T Rec. G.161 for further discussion of ITU-T low-bit rate coders and non-linearities in the echo path.

The test method is to place the echo canceller in the test configuration of Figure 28. Tests 2A and 2B are performed with the echo canceller disabled, and the performance recorded as a baseline. Test 2A and test 2B are then repeated with the echo canceller enabled.

The impact on speech quality performance by low-bit-rate coders in the echo path is for further study.

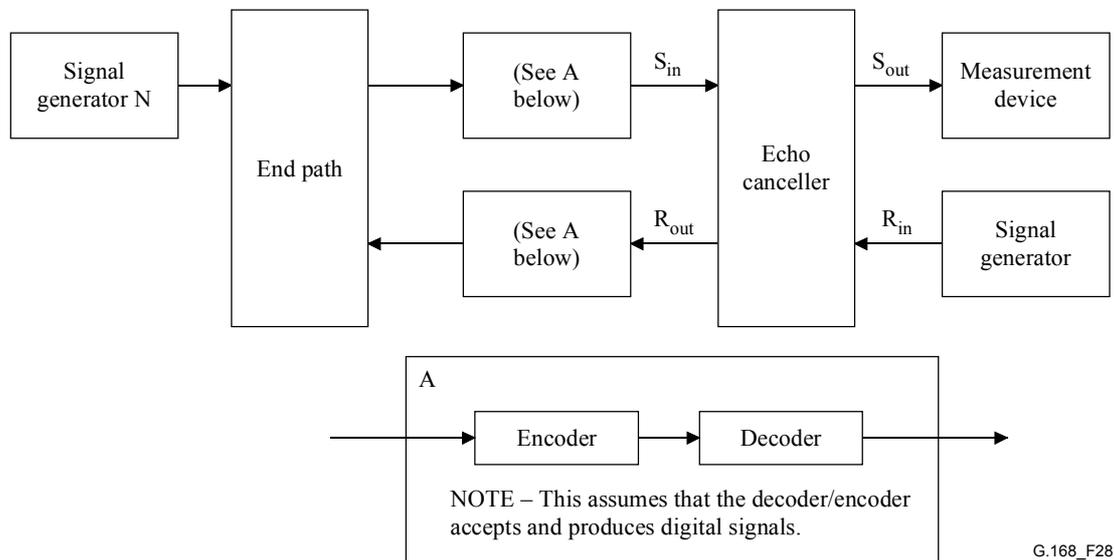


Figure 28/G.168 – Test No. 13 configuration

Requirement

For the stated ITU-T coders, the residual echo power measured with the echo canceller enabled should be equal to or less than the measured baseline with the echo canceller disabled. In addition, no peaks (see 6.4.1.2.2) are allowed that exceed 5 dB above the measured returned echo level. The coders for which this test is applicable are to be stated by the user.

NOTE – This test includes non-linear echo path. See I.5.3, I.5.4, I.6.3 and ITU-T Rec. G.161 for further discussion on this issue.

6.4.2.15 Test No. 14 – Performance with V-series low-speed data modems

This test is meant to ensure that echo cancellers will not impair the performance of V-series low-speed (< 9.6 kbit/s) modem data signals that are preceded by a 2100 Hz CED tone (without phase reversals as specified in ITU-T Rec. V.25), including V.22 *bis* modems and text telephones as specified in Annexes A-G of ITU-T Rec. V.18. The bit-error rate is measured while the echo cancellers operate in a simulated network with low-speed data modems.

The echo canceller is placed in the test configuration of Figure 29. The H register is cleared and NLP enabled and the modems allowed to train. The modems are then operated for a minimum of three minutes. The test should be repeated with the echo canceller both disabled and enabled, and the bit-error rate monitored.

A specific selection of modem(s) to be tested should be done by the Administrations, depending on the most critical and prevalent types in the network. In the test set-up, the artificial 2-wire lines and the hybrids should simulate the actual range of echo paths that the echo canceller under test is intended to cope with.

For the hybrid this means a specification of the equivalent balance network.

NOTE – Examples of typical balance networks are given in Figure 11/Q.552.

For the artificial line this means a specification of the fundamental cable parameters, e.g. ohms/km and nF/km for unloaded cables. The length of the artificial lines should be variable. Test cases should include minimum and maximum lengths as well as that length for which the highest weighted echo loss, calculated according to ITU-T Rec. G.122, is obtained.

The hybrid and artificial line arrangements should be equal at each side of the test set-up.

Requirement

The values of the settings should be as follows:

- R1, R2 = 6 dB to simulate access/egress loss.
- T1 = 3 dB to 9 dB (3 dB is the nominal level, 9 dB simulates a 6 dB level offset).
- T2 = 3 dB.
- DR1, DR2 = echo path delay $\leq \Delta$ ms.
- M1, M2 = modem data transmission levels should be between -8 dBm and -20 dBm.
- N1, N2 = set to produce signal-to-noise ratios of not less than 25 dB, and, no noise.
- D1, D2 = set to produce a round trip delay of up to 520 ms, with $D1 = D2$.

With the H register initially set to zero and the NLP enabled, for the conditions specified above, the percentage of data errors should not increase when the echo canceller is enabled, compared with when the echo canceller is disabled, when data is exchanged between the two terminals for a period of at least three minutes.

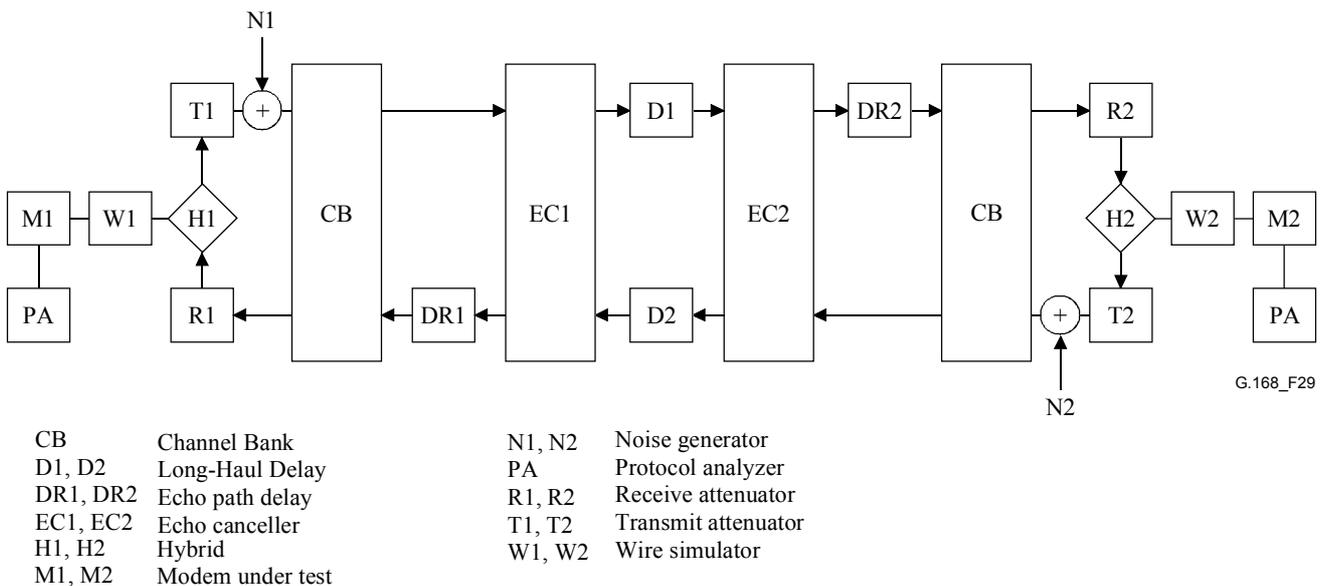


Figure 29/G.168 – Test No. 14 configuration

6.4.2.16 Test No. 15 – PCM offset test (Optional)

This test is meant to ensure that the echo canceller will operate properly in the presence of PCM offset in the speech signal applied to S_{in} or in the speech signal applied to R_{in} .

PCM offset is an unwanted, fixed DC level in the S_{in} signal relative to the R_{out} signal, or in the R_{in} signal itself. This can be caused by some network equipment, such as A/D converters, and can result in degraded performance of echo canceller and other speech processing equipment. The methods consist of:

Part 1

Apply a PCM offset error to the S_{in} signal relative to the R_{in} signal as indicated in Figure 30. Depending on the preference by the users, the PCM offset can be injected at point A – the linear domain, or at point B – the A/ μ law domain.

NOTE 1 – Offset injection at point B is not a linear operation.

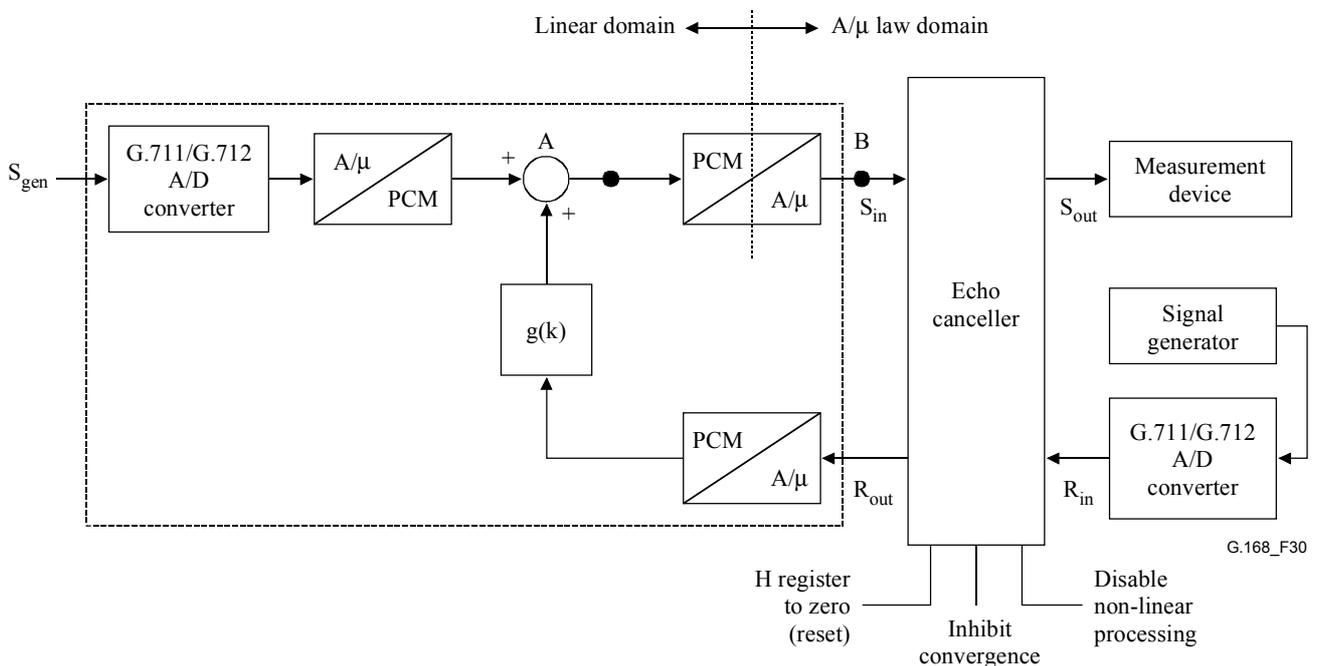


Figure 30/G.168 – Test configuration for S_{in} PCM offset test

Part 2

Apply a PCM offset error to the R_{in} signal as indicated in Figure 31. Depending on the preference by the users, the PCM offset can be injected at point A – the linear domain, or at point B – the A/ μ law domain.

NOTE 2 – Offset injection at point B is not a linear operation.

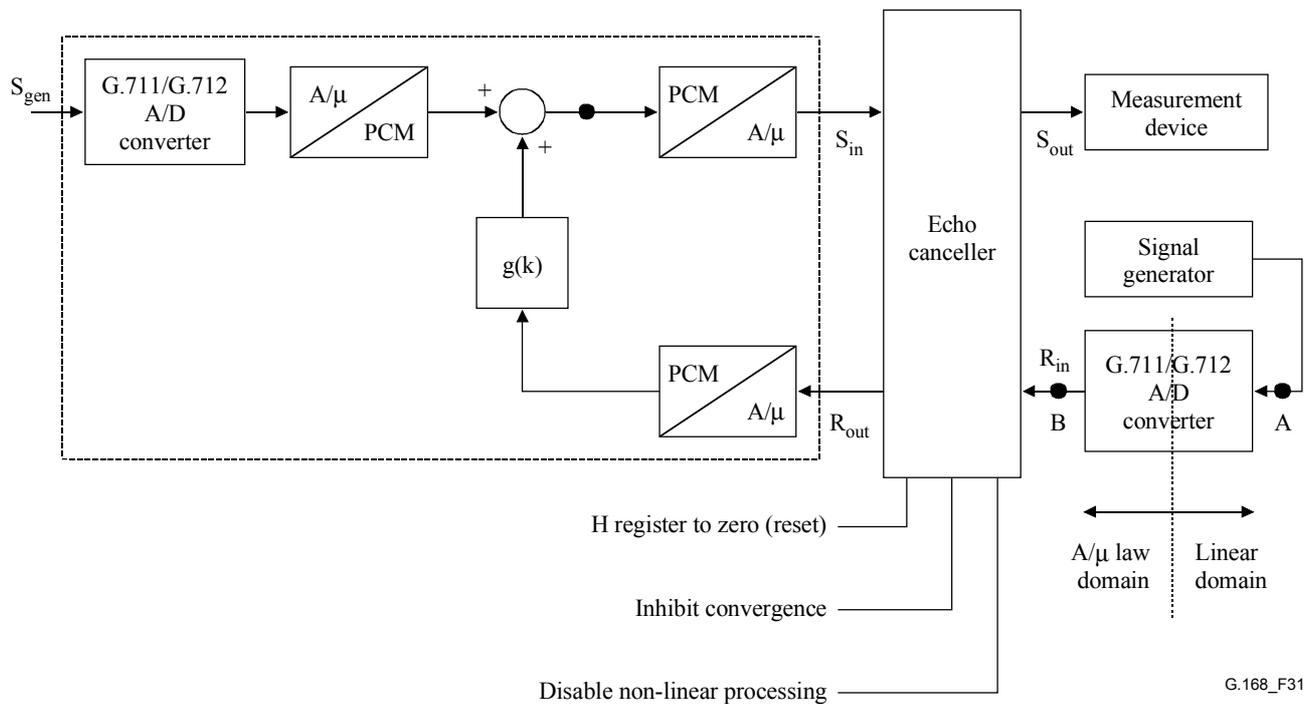


Figure 31/G.168 – Test configuration for R_{in} PCM offset test

The level at R_{in} in the test requirement is $L_{R_{in,act}}$. It is the signal level measure using the RMS method over the active portion of the CSS only (i.e. excluding the pause of the CSS) as described in 6.4.1.2.

Requirement

For both Part 1 and Part 2 above, with the H register initially set to zero, or alternatively, with an open echo path resulting in $S_{in} = 0$, the H register content is converged and then the adaptation is inhibited, DC offset is then injected at either point A or point B in Figures 30 and 31 at the level of -40 dBm0. With the NLP disabled, for all values $L_{R_{in,act}} \geq -30$ dBm0 and ≤ 0 dBm0 and for all values of $ERL \geq 6$ dB and echo path delay, $t_d \leq \Delta$ ms, the loss $L_{R_{in,act}} - L_{RES}$ should be greater than or equal to that shown in Figure 12. The level at S_{out} is measured using a meter conforming to the characteristics of 6.4.1.2.1. In addition, no peaks (see 6.4.1.2.2) are allowed that exceed 5 dB above the requirements in Figure 11.

The variable $L_{R_{in,act}} - L_{RES}$ in Figure 12 may be replaced by the variable $L_{S_{in}} - L_{S_{out}} + ERL$, where $L_{S_{in}}$ and $L_{S_{out}}$ are the levels of S_{in} and S_{out} respectively. The signal levels $L_{S_{in}}$ and $L_{S_{out}}$ are measured using the measurement device in 6.4.1.2.1, and should be synchronized. The ERL is the value chosen in the test. This method may also be used to observe convergence as a continuous plot over time.

NOTE 3 – The method stated in the preceding paragraph takes into account any dispersion in the echo path, but does not take into account any dispersion present between the S_{in} and S_{out} ports of the echo canceller.

NOTE 4 – As the level measurement device includes a band-pass filter, this test does not imply that the echo canceller must remove the DC offset.

NOTE 5 – This test includes a non-linear echo path. See I.5.3, I.5.4 and ITU-T Rec. G.161 for further discussion on this issue.

7 Characteristics of an echo canceller tone disabler

7.1 General

The echo cancellers covered by this Recommendation should be equipped with a tone detector that conforms to this clause. This tone detector should disable the echo canceller only upon detection of a

signal which consists of a 2100 Hz tone with periodic phase reversals inserted in that tone, and not disabled with any other in-band signal, e.g. speech, or a 2100 Hz tone without phase reversals. The tone disabler should detect and respond to a disabling signal which may be present in either the send or the receive path.

To improve the operation of the echo canceller for fax signals and low-speed voiceband data, it may be beneficial for some echo cancellers to disable the NLP for such calls. In this case, the echo canceller may optionally detect any 2100 Hz tone without phase reversals. If 2100 Hz tone without phase reversal is detected, the echo canceller shall remain enabled, and the NLP may optionally be disabled. The frequency characteristics of the tone detector are given in Figure 32. The tone disabler characteristics as specified in 7.4 through 7.9 also apply for this NLP disabling detector. Note that if the 2100 Hz tone contains phase reversals, then the echo canceller shall be disabled as defined elsewhere in this clause.

The term disabled in this clause refers to a condition in which the echo canceller is configured in such a way as to no longer modify the signals which pass through it in either direction. Under this condition, no echo estimate is subtracted from the send path, the non-linear processor is made transparent, and the delay through the echo canceller still meets the conditions specified in 6.4.1. However, no relationship between the circuit conditions before and after disabling should be assumed. The impulse response stored in the echo canceller prior to convergence (and prior to the disabling tone being sent) is arbitrary. This can lead to apparent additional echo paths which, in some echo canceller implementations, remain unchanged until the disabling tone is recognized. Also note that echo suppressors could be on the same circuit and there is no specified relationship between their delay in the enabled and disabled states. In spite of the above, it is possible, for example, to measure the round-trip delay of a circuit with the disabling tone but the trailing edge of the tone burst should be used and sufficient time for all devices to be disabled should be allotted before terminating the disabling tone and starting the timing.

It should be noted that the echo canceller should provide 64 kbit/s bit-sequence integrity when disabled.

7.2 Detector characteristics

The tone detector shall detect a tone in the frequency range of 2100 Hz \pm 21 Hz (see ITU-T Rec. V.21). The detection channel bandwidth should be chosen wide enough to encompass this tone (and possibly other disabling tones used within national networks). At the same time, the detection channel bandwidth should be such that, in conjunction with guard action and timing, adequate protection is provided against false operation of the detector by speech signals. The detector channel sensitivity (threshold level) should be such that the detector will operate on the lowest expected power of the disabling tone. The band characteristics shown in Figure 32 will permit disabling by the 2100 Hz disabling tone as well as others used in North America. The figure indicates that in the frequency band 2079 Hz to 2121 Hz detection **must** be possible whilst in the band 1900 Hz to 2350 Hz detection **may** be possible.

Providing that only the recommended 2100 Hz disabling tone is used internationally, interference with signalling equipment will be avoided.

The dynamic range of the detector should be consistent with the input levels as specified in ITU-T Rec. V.2 with allowances for variation introduced by the public switched telephone network.

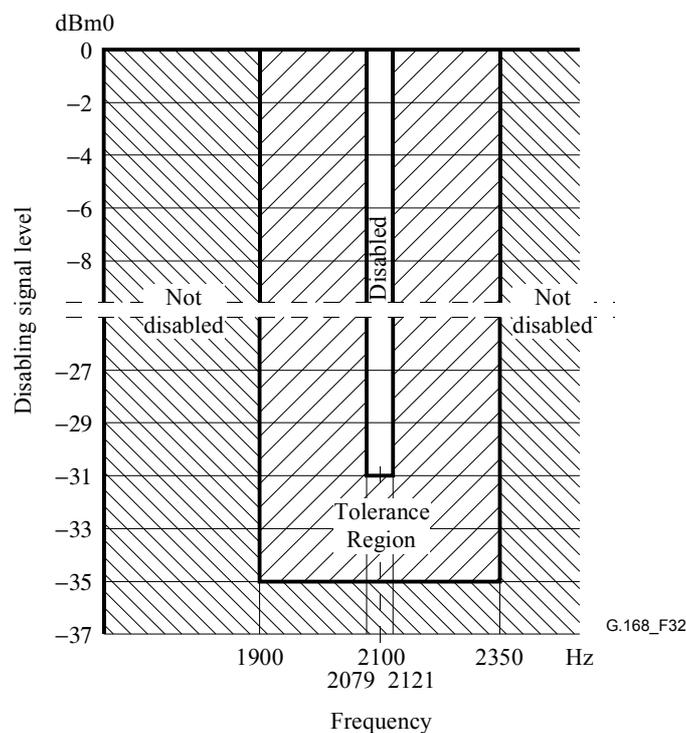


Figure 32/G.168 – Required disabling band characteristics

7.2.1 Phase reversal detection

The echo canceller tone disabler requires the detection of a 2100 Hz tone with periodic phase reversals which occur every 450 ± 25 ms. The characteristics of the transmitted signal are defined in ITU-T Recs V.25 and V.8. Phase variations in the range of $180^\circ \pm 25^\circ$ should be detected while those in the range of $0^\circ \pm 110^\circ$ should not be detected. This restriction is to minimize the probability of false disabling of the echo canceller due to speech currents and network-induced phase changes. The $\pm 110^\circ$ range represents the approximate phase shift caused by a single frame slip in a PCM system.

7.3 Guardband characteristics

Energy in the voice band, excluding the disable band, must be used to oppose disabling so that speech will not falsely operate the tone disabler. The guard band should be wide enough and with a sensitivity such that the speech energy outside the disabling band is utilized. The sensitivity and shape of the guard band must not be such that the maximum idle or busy circuit noise will prevent disabling. In the requirement, white noise is used to simulate speech and circuit noise. Thus, the requirement follows:

Given that white noise (in a band of approximately 300-3400 Hz) is applied to the tone disabler simultaneously with a 2100 Hz signal, the 2100 Hz signal is applied at a level 3 dB above the midband disabler threshold level. The white noise energy level required to inhibit disabling should be no greater than the level of the 2100 Hz signal and no less than a level 5 dB below the level of the 2100 Hz signal. As the level of the 2100 Hz signal is increased over the range of levels to 30 dB above the midband disabler threshold level, the white noise energy level required to inhibit disabling should always be less than the 2100 Hz signal level. These requirements, together with the noise tolerance requirements given in 7.3.1 are illustrated in Figure 33.

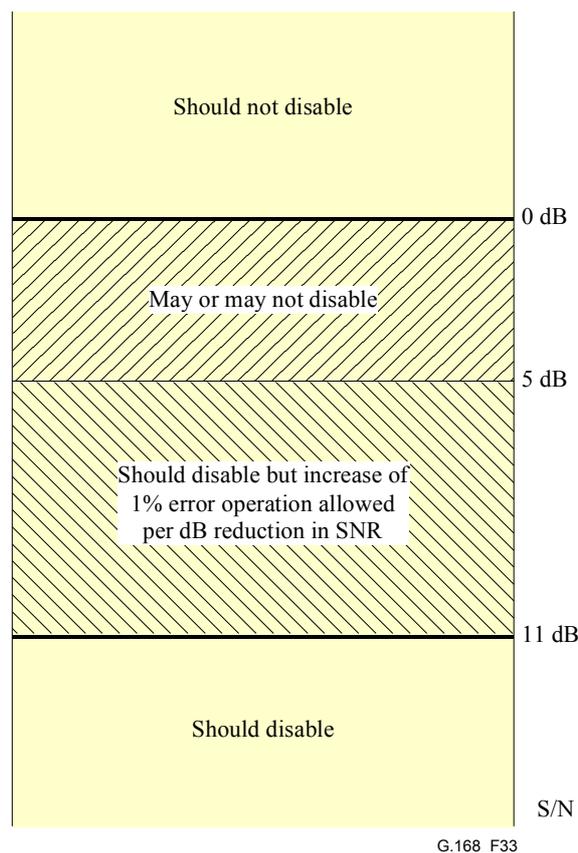


Figure 33/G.168 – Guardband and noise tolerance requirements

NOTE – The possibility of interference during the phase reversal detection period has been taken into account. One potential source of interference is the presence of calling tone as specified in ITU-T Rec. V.25. If the calling tone interferes with the detection of the phase reversal, the entire disabling detection sequence is restarted, but only one time. ITU-T Rec. V.25 ensures at least one second of quiet time between calling tone burst.

7.3.1 Noise tolerance

The detector should operate correctly with white noise less than or equal to 11 dB below the level of the 2100 Hz signal. No definitive guidelines can be given for the range between 5 and 11 dB because of the variations in the test equipment used. In particular, performance may vary with the peak-to-average ratio of the noise generator used. As a general guideline, however, the percentage of correct operation (detection of phase variations of $180^\circ \pm 25^\circ$ and non-detection of phase variations of $0^\circ \pm 110^\circ$) should fall by no more than 1% for each dB reduction in the signal-to-noise ratio below 11 dB. It is noted that it is possible to design a detector capable of operating correctly at 5 dB signal-to-noise ratio.

7.4 Holding-band characteristics

The tone detector, after disabling either the NLP or the echo canceller, should hold the NLP or echo canceller in the disabled state for tones in a range of frequencies specified below. The release sensitivity should be sufficient to maintain disabling for the lowest level data signals expected, but should be such that the detector will release for the maximum idle or busy circuit noise. Thus the requirement follows:

The tone detector should hold the NLP or echo canceller in the disabled state for any single-frequency sinusoid in the band from 390-700 Hz having a level of -27 dBm0 or greater, and from 700-3000 Hz having a level of -31 dBm0 or greater. The tone disabler should release for any signal in the band from 200-3400 Hz having a level of -36 dBm0 or less.

7.5 Operate time

The operate time should be sufficiently long to provide immunity from false operation due to voice signals, but not so long as to needlessly extend the time to disable. The tone disabler is required to operate within one second of the receipt of the disabling signal. The one second operate time permits the detection of the 2100 Hz tone and ensures that two phase reversals will occur.

7.6 False operation due to speech currents

It is desirable that the tone disabler should rarely operate falsely on speech. To this end, a reasonable objective is that, for an echo canceller installed on a working circuit, usual speech currents should not on the average cause more than 10 false operations during 100 hours of speech. In addition to the talk-off protection supplied by the disabling channel bandwidth, by guard band operation and by the operate time, talk-off protection can be supplied by recycling. That is, if speech which simulates the disabling signal is interrupted because of inter-syllabic periods, before disabling has taken place, the operate timing mechanism should reset. However, momentary absence or change of level in a true disabling signal should not reset the timing.

7.7 False operation due to data signals

It is desirable that the tone disabler should rarely operate falsely on data signals from data sets that would be adversely affected by disabling the echo canceller. To this end, a reasonable objective is that, for an echo canceller installed on a working circuit, usual data signals from such data sets should not, on the average, cause more than 10 false operations during 100 hours of data transmissions.

To this end, in the reference tone disabler described in Annex B/G.165, which meets the above requirements, the tone disabler circuitry becomes inoperative if one second of clear (i.e. no phase reversals or other interference) 2100 Hz tone is detected. The detector circuit remains inoperative during the data transmission and only becomes operative again 250 ± 150 ms after a signal in the holding band falls at least 3 dB below the maximum holding sensitivity. Thus the possibility of inadvertent disabling of the echo canceller during facsimile or low speed (< 9.6 kbit/s) voice-band data transmission is minimized.

7.8 Release time

The disabler should not release for signal drop-outs less than the ITU-T recommended value of 100 ms. To cause a minimum of impairment upon accidental speech disabling, it should release within 250 ± 150 ms after a signal in the holding band falls at least 3 dB below the maximum holding sensitivity in both directions of signal transmission.

7.9 Other considerations

Both the echo of the disabling tone and the echo of the calling tone may disturb the detection of the echo canceller disabling tone. As such, it is not recommended to add the receive and transmit signal inputs together to form an input to a single detector.

Careful attention should be given to the number of phase reversals required for detection of the disabling tone. Some Administrations favour relying on 1 to improve the probability of detection even in the presence of slips, impulse noise, and low signal-to-noise ratio. Other Administrations favour relying on 2 to improve the probability of correctly distinguishing between non-phase-reversed and phase-reversed 2100 Hz tones, and to reduce the likelihood of false triggering of the tone disabler by speech or data signals.

8 NLPs for use in echo cancellers

8.1 Scope

For the purpose of this Recommendation, the term "NLP" is intended to mean only those devices which fall within the definition given in 3.19 and which have been proven to be effective in echo cancellers. It is possible to implement such NLPs in a number of ways (center clippers being just one example), with fixed or adaptive operating features, but no recommendation is made for any particular implementation. General principles and guidelines are given in 8.2. More detailed and concrete information requires reference to specific implementations. This is done in Annex B for the particular case of a "reference NLP". The use of this term denotes an implementation given for guidance and illustration only. It does not exclude other implementations nor does it imply that the reference NLP is necessarily the most appropriate realization on any technical, operational or economic grounds.

8.2 General principles and guidelines

8.2.1 Function

8.2.1.1 General

The NLP is located in the send path between the output of the subtractor and the send-out port of the echo canceller. Conceptually, it is a device which blocks low level signals and passes high level signals. Its function is to further reduce the residual echo level (L_{RES} as defined in 3.22) which remains after imperfect cancellation of the circuit echo so that the necessary low returned echo level (L_{RET} as defined in 3.23) can be achieved.

8.2.1.2 Network performance

Imperfect cancellation can occur because echo cancellers which conform to this Recommendation may not be capable of adequately modelling echo paths which generate significant levels of non-linear distortion (see ITU-T Rec. G.161). Such distortion can occur, for example, in networks conforming to ITU-T Rec. G.113 in which up to five pairs of PCM codecs (conforming to ITU-T Rec. G.712) are permitted in an echo path. The accumulated quantization distortion from these codecs may prevent an echo canceller from achieving the necessary L_{RET} by using linear cancellation techniques alone. It is therefore recommended that all echo cancellers capable only of modelling the linear components of echo paths but intended for general network use should incorporate suitable NLPs. In specific network environments with low delay or high ERL, it may be possible to disable the NLP in an echo canceller with a sufficiently high ERLE. This may result in higher overall speech quality, as NLPs sometimes cause speech degradation.

8.2.1.3 Limitations

This use of NLPs represents a compromise in the circuit transparency which would be possible by an echo canceller which could achieve the necessary L_{RET} by using only modelling and cancellation techniques. Ideally, the non-linear processor should not cause distortion of cancelled end speech. In practical devices it may not be possible to sufficiently approach this ideal. In this case it is recommended that NLPs should not be active under double talk or cancelled end single speech conditions. From this it follows that excessive dependence should not be placed on the NLP and that L_{RES} should be low enough to prevent objectionable echo under double talk conditions.

8.2.1.4 Data transmission

NLPs may affect the transmission of data through an enabled echo canceller. This is under study.

8.2.2 Suppression threshold

8.2.2.1 General

The suppression threshold level (T_{SUP}) of a NLP is expressed in dBm0 and is equal to the highest level of a sine-wave signal at a given moment that is just suppressed. Either fixed or adaptive suppression threshold levels may be used.

8.2.2.2 Fixed suppression threshold

With a fixed suppression threshold level, the appropriate level to use will depend upon the cancellation achieved and the statistics of speech levels and line conditions found in the particular network in which the echo canceller is to be used. Values of fixed suppression threshold levels to be used are under study – see Notes 1 and 2.

NOTE 1 – As an interim guide, it is suggested that the suppression threshold level should be set a few decibels above the level that would result in the *peaks* of L_{RES} for a "2s-talker" and a "2s-ERL" being suppressed.

NOTE 2 – Results of a field trial reported by one Administration indicated that a fixed suppression threshold level of -36 dBm0 gave a satisfactory performance. A theoretical study, by another Administration, of an echo path containing five pairs of PCM codecs showed that for an L_{Rin} of -10 dBm0, the quantization noise could result in an L_{RES} of -38 dBm0.

8.2.2.3 Adaptive suppression threshold

A good compromise can be made between using a high T_{SUP} to prevent it being exceeded by loud talker residual echo and using a low T_{SUP} to reduce speech distortion on break-in by making T_{SUP} adaptive to the actual circuit conditions and speech levels. This may be achieved in a number of ways and no recommendation is made for any particular implementation. General guidelines applicable to the control algorithm and suppression threshold levels are under study.

8.2.3 Control of NLP activation

8.2.3.1 General

To conform to the recommendation made in 8.2.1.3, it is necessary to control the activation of the NLP so that it is not active when cancelled end speech is likely to be present. When "active", the NLP should function as intended to reduce L_{RES} . When "inactive", it should not perform any non-linear processing on any signal passing through the echo canceller.

8.2.3.2 Control guidelines

It is recommended that the following two guidelines should govern control of the activation of a NLP. First, because they are intended to further reduce L_{RES} , they should be active when L_{RES} is at a significant level. Second, because they should not distort cancelled end speech, they should be inactive when cancelled end speech is present. Where these two guidelines conflict the control function should favour the second.

8.2.3.3 Static characteristics

A conceptual diagram showing the two operational states of a NLP is shown in Figure 34. The L_{Sin} L_{Rin} plane is divided into two regions, W and Z by the threshold WZ (T_{WZ}). In the W region the NLP is inactive while in the Z region it is active. Proper control of the NLP to ensure operation in the appropriate region requires recognition of the double talk condition or the presence of cancelled end speech. Imperfect detection of double talk combined with a high suppression threshold level will result in distortion of cancelled end speech. The echo canceller then exhibits some of the characteristics of an echo suppressor. A low suppression level will permit easy double talking, even if a detection error is made because the cancelled end speech will suffer only a low level of non-linear distortion. If the suppression threshold level is too low then peaks of residual echo may be heard.

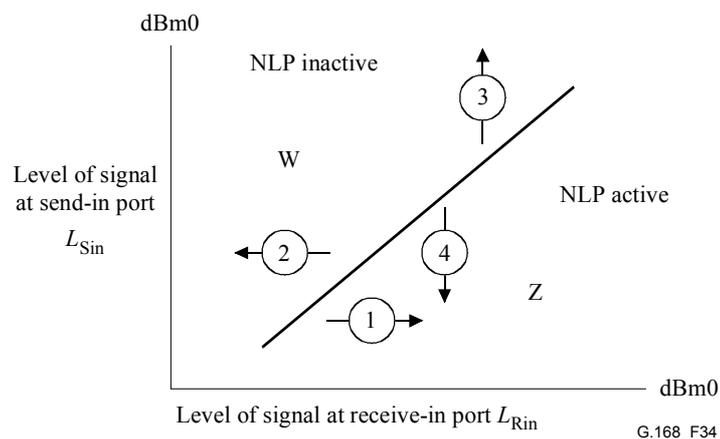


Figure 34/G.168 – NLP operating regions

8.2.3.4 Dynamic characteristics

The dynamic characteristics can be specified by stating the time that elapses when the signal conditions pass from a point in one area to a point in the other area before the state appropriate to the second area is established. Four such transitions are shown by arrows in Figure 34.

Transition No. 1 – W to Z, L_{Sin} constant, L_{Rin} increasing

In this case the L_{Sin} signal occurred first and the L_{Rin} is increasing to a sufficiently high level to override the L_{Sin} signal in the control path and cause the NLP to change from the inactive to the active state. Since this will cause distortion of the L_{Sin} signal (cancelled end talker speech in this case) the action should not be initiated too quickly.

Transition No. 2 – Z to W, L_{Sin} constant, L_{Rin} decreasing

In this case the L_{Rin} signal has overridden the L_{Sin} signal in the control path and the NLP is in the active state. The L_{Rin} signal is now decreasing. The NLP should remain in the active state sufficiently long to prevent echo, which is stored in the echo path, from being heard by the far talker.

Transition No. 3 – Z to W, L_{Rin} constant, L_{Sin} increasing

This transition is replicating the onset of double talk. As soon as possible after the L_{Sin} signal is detected, the NLP should be switched to the inactive state in order to minimize any distortion of the cancelled end talker speech.

Transition No. 4 – W to Z, L_{Rin} constant, L_{Sin} decreasing

In this case L_{Sin} has been recognized but is decreasing. Any action which is taken should favour continuing to permit the L_{Sin} signal to pass. This implies there should be some delay in switching the NLP back to the active state.

8.2.4 Frequency limits of control paths

Under study.

NOTE – Depending on the particular implementation of the NLP, the considerations and frequency response limits given in 3.2.4.2/G.164 for the suppression and break-in control paths of echo suppressors may also be applicable to similar control paths used in NLPs. These control paths may include the activation control and adaptive suppression threshold level control.

8.2.5 Signal attenuation below threshold level

The attenuation of signals having a level below that of the suppression threshold level of a NLP in the active state should be such that the requirements of 6.4.2.3.1 are met.

8.2.6 Testing of NLPs

The NLP may be considered as a special case of an echo suppressor which is limited to suppressing only low level signals. The types of test required to determine the NLP performance characteristics are very similar to the echo suppressor tests given in ITU-T Rec. G.164. However, depending on the specific implementation of a NLP, the transitions between areas W and Z of Figure 34 may not be as sharply defined as is the case for echo suppressors. Signals observed at the send-out port of the echo canceller may be distorted for short periods when transitions between the W and Z operating regions occur. Although ITU-T Rec. G.164 may be used as a guide to the testing of NLPs, it may be necessary to introduce unique test circuit modifications in order to make measurements on some specific NLP implementations. In particular, it is known that some echo cancellers employ a supplementary NLP technique independent of the NLP On/Off control. Those tests of this Recommendation which call for NLP disabled do not strictly apply to such cancellers unless some further interpretation of results is made. The following paragraph suggests a technique for identifying the presence of such supplementary NLP functions.

8.2.6.1 Testing for the presence of an NLP

Set-up Test 2B of this Recommendation (Convergence without NLP). However, modify the test by mixing uncorrelated noise at various known levels below the returned CSS echo in the Send path. The noise level establishes a floor below which noise plus residual echo due to cancellation should not fall. Observing residual echo levels below the noise floor, then, is an indication of NLP action.

Annex A

Description of an echo canceller reference tone disabler

*Former Annex A of 2000 edition has been deleted.
Any information or requirements have been transferred to clause 7
of this Recommendation*

Annex B

Description of a Reference NLP

B.1 General

This annex, which is for the purposes of illustration only and not intended as a detailed design (see 8.1), describes a reference NLP based upon concepts that are as simple as possible but having included in it a sufficient number of features to give guidance for a wide range of possible implementations. To this end two variants of the reference NLP are included. Both are based on a center clipper having either of the idealized transfer functions illustrated in Figure B.1. The suppression threshold level (determined, in this case by the clipping level) in the first variant is adaptive, adaptation being by reference to L_{Rin} . Activation control is by reference to the difference between L_{Rin} and L_{Sin} . In the second variant the suppression threshold is fixed. It is assumed that the reference NLP is used in an echo canceller which can achieve a cancellation of the linear components of any returned echo of at least N dB. The value of N is under study.

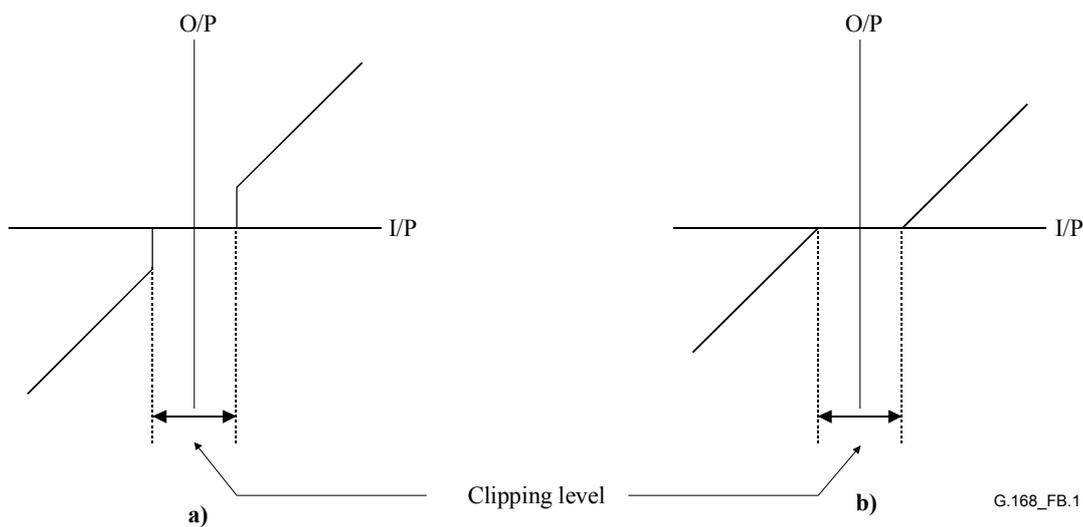


Figure B.1/G.168 – Two examples of idealized center clipper transfer function

B.2 Suppression threshold (T_{SUP})

Adaptive $T_{SUP} = (L_{Rin} - x \pm 3)$ dBm0 for $-30 \leq L_{Rin} \leq -10$ dBm0

Fixed $T_{SUP} = x'$ dBm0

NOTE – Values of x and x' are under study. Values of 18 for x and -36 for x' have been suggested but confirmation is required that these values are appropriate for use in all networks.

B.3 Static characteristics of activation control

$T_{WZ} = (L_{Rin} - y \pm 3)$ dBm0 for $-30 \leq L_{Rin} \leq -10$ dBm0

NOTE 1 – T_{WZ} is as defined in 8.2.3.3.

NOTE 2 – The value of y may be different for each variant, and this is under study. Values of x dB in the case of the adaptive T_{SUP} and ≥ 6 dB for y in the case of the fixed T_{SUP} seem reasonable.

B.4 Dynamic characteristics of activation control

Dynamic characteristics of the activation control are given in Tables B.1 and B.2. Also see Figure 34.

Table B.1/G.168 – NLP hangover times

Boundary		Initial signal		Final signal		Recommended value (ms)	Test No. (ITU-T G.164)	Excursion (see Figure 34)	Test circuit, Figure:	Oscilloscope trace
		Send L_{Sin} (dBm0)	Receive L_{Rin} (dBm0)	Send L_{Sin} (dBm0)	Receive L_{Rin} (dBm0)					
	Fixed	-25	-10	-25	-30	15-64				
Z/W	Adaptive	-55	-20	-55	-40	Δ	5	Transition 2	14/G.164	Trace 1 and trace 2 of Figure B.3 (β)
		-40	-15	-40	-40					
-30	-5	-30	-30							
	Fixed	-15	-25	-40	-25	16-120				
W/Z	Adaptive	-40	-50	-55	-50	30-50	6	Transition 4	17/G.164	Trace 1 and trace 2 of Figure B.2 (β)
		-40	-30	-55	-30					
		-25	-15	-40	-15					

Table B.2/G.168 – NLP operate times

Boundary		Initial signal		Final signal		Recommended value (ms)	Test No. (ITU-T G.164)	Excursion (see Figure 34)	Test circuit, Figure:	Oscilloscope trace
		Send L_{Sin} (dBm0)	Receive L_{Rin} (dBm0)	Send L_{Sin} (dBm0)	Receive L_{Rin} (dBm0)					
	Fixed	-25	-30	-25	-10	16-120				
W/Z	Adaptive	-55	-40	-55	-20	15-75	4	Transition 1	14/G.164	Trace 2 of Figure B.3 (α)
		-40	-40	-40	-15					
-30	-30	-30	-5							
	Fixed	-40	-25	-15	-25	≤ 1				
Z/W	Adaptive	-55	-50	-40	-50	≤ 5	6	Transition 3	17/G.164	Trace 2 of Figure B.2 (α)
		-55	-30	-40	-30					
		-40	-15	-25	-15					

B.5 Frequency limits of control paths

See 8.2.4.

B.6 Testing

Tables B.1 and B.2 indicate, by reference to ITU-T Rec. G.164, how the dynamic performance of NLP activation control may be checked using sine wave signals. Figures B.2 and B.3 show the traces obtained on an oscilloscope for these tests.


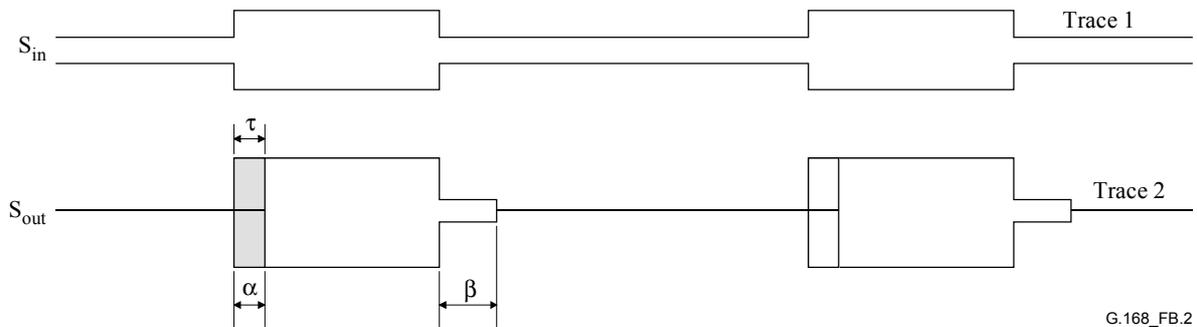


Figure B.2/G.168 – Traces for NLP operate and hangover time, L_{Rin} constant

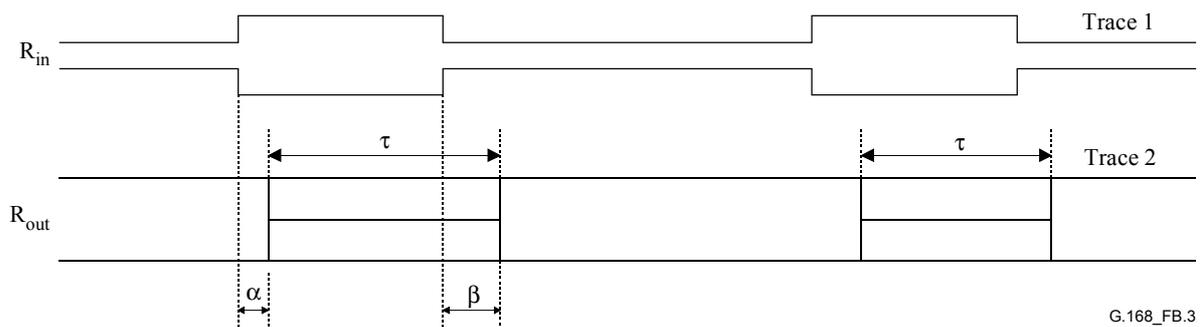

- α Operate time
- β Hangover time
- τ Time interval in which the distorted signal may be observed

Figure B.3/G.168 – Traces for NLP operate and hangover times, L_{Sin} constant

Annex C

Composite source signals for testing of speech echo cancellers – Signal, description and analysis

C.1 Introduction

This annex describes the subset of Composite Source Signals that are used for testing speech echo cancellers in the network under single and double talk conditions. The exact definition of these signals is part of ITU-T Rec. P.501 on Test Signals for Use in Telephony (see Bibliography [1] in I.9 for more details). First, a general description of Composite Source Signals is given. The following clauses give the exact definition of both signals for testing speech echo cancellers under single and double talk conditions. Moreover, kinds of analysis are considered and described to test the specific parameters of echo cancellers especially for the tests of this Recommendation.

C.2 Composite Source Signal – general considerations

C.2.1 General description of the different sequences

Composite Source Signals, in general, consists of different sequences including voiced and unvoiced sounds as well as pauses.

Voiced signal produced from the "artificial voice" signal according to ITU-T Rec. P.50

The voiced signal part of CSS is the conditioning signal intended to activate possible speech detectors in voice-controlled systems and to reproduce voiced sounds of real speech in general. As the duration, beginning and end of the voiced signal are known exactly, this signal can also be used to measure the switching time for the direction of transmission under test. By means of the signal shape in the time domain the switching time and delay time of the entire system can be determined. The duration of the signal amounts to 50 ms approximately.

Pseudo Noise Signal

The signal presented after the voiced artificial speech sound is the Pseudo Noise (PN) signal. This signal has certain noise like features. The magnitude of its Fourier transform is initially constant with frequency while the phase is changing. For tests usually only the magnitude of the transfer function is of interest, the phase is not that important but can be determined as well.

The signal is produced as follows:

First a complex spectrum is produced in the frequency domain according to the following equation:

$$H(k) = W(k)e^{j \cdot i_k \cdot \pi}; k = -\frac{M}{2}, \dots, \frac{M}{2} \text{ without } 0; i_k \in \{+1, 0\}, i_k = -i_{-k} \text{ random} \quad (\text{C.2-1})$$

The index M is adjusted to the chosen FFT size (e.g. 2048, 4096 or 8192 points). The equation shows that the amount of the produced complex spectrum is constant for all frequencies if W(k) is chosen equal to 1 for all frequencies, whereas the phase may be π or 0 for each frequency, corresponding to a random sequence. However, to produce a different weighting in the frequency domain, W(k) can easily be adjusted in order to produce different spectra for the duration of the PN-sequence. Then, this spectrum will be transformed into the time domain by means of the inverse Fourier transform producing the following signal:

$$S(n) = \frac{1}{M} \sum_{k=-M/2, k \neq 0}^{M/2} H(k) \cdot e^{j2\pi \cdot n \cdot k / M}, n = -\frac{M}{2}, \dots, \frac{M}{2} - 1 \quad (\text{C.2-2})$$

NOTE 1 – Thus, a signal is produced which is limited in time (corresponding to the chosen length of the Fourier transform) and which is adjusted to the chosen FFT size correctly. If a longer time sequence is wanted, the signal can be cycled. This method permits time sequences of any length. The duration of this measurement signal amounts to about 200 ms by appropriate choice of M, the sampling rate and numbers of repetitions.

The Pseudo Noise sequence of the Composite Source Signal for measurements of speech echo cancellers is calculated in that way that $W(k)$ is chosen constant and the corresponding signal $S(n)$ (calculated by inverse Fourier transform) is filtered with a transfer function which is given below in C.3.1.

NOTE 2 – Typically the length of the FFT should be short for systems with highly time variant parameters such as companding techniques in order to get a good short time estimation of the time variant transfer function. For systems incorporating adaptive techniques such as echo cancellers or noise cancellers a higher number of M (close to 200 ms signal duration) may be appropriate in order to have the autocorrelation function of the measurement signal not periodically within the processing window of the device under test.

Pause

The third part of the Composite Source Signal is a pause. Regarding the Composite Source Signal as a measurement signal that reproduces important characteristics of real running speech, the pause has the purpose to provide suitable amplitude modulation to the composite signal. Moreover it reproduces real speech pauses that occur in running speech signals as well. This also means a certain period without excitation signal, which gives the possibility to analyze noise or artifacts produced by the system under test. The length of the pause is chosen between 100 ms and 150 ms.

In order to achieve a long term offset free sequence the repeated CS-sequence should be inverted in amplitude (phase shift by 180°).

C.2.2 Calculation and analysis using a composite source signal

When using CSS for measurements the sequence of voiced sound, pseudo noise signal and pause can be cycled. This means that after the pause the sequence starts again beginning with a voiced sound. Using this procedure sequences of any length may be produced.

Having created a sequence as described above, this signal can be handled like a standard measurement signal, e.g. a white noise signal or a switched pink noise. The level calibration (acoustical and electrical) is done using the whole sequence including voiced sounds, PN-sequences and pauses. In principle a standard RMS meter with a bandwidth of 20 kHz operating with "fast" averaging can be used. Another method is to use a FFT analysis for level calculations. The parameters for the FFT based calculation are:


- sampling rate according to the one chosen for signal generation (preferred 44.1 kHz or 48 kHz);
- FFT length according to the one chosen for signal generation;
- rectangular windowing;
- no overlap;
- averaging over the **whole (cycled) sequence**, including voiced sounds, PN-sequences, pauses;
- calculation of the level from the power density spectrum derived by the FFT calculation (integration of the levels over all frequency components).

C.3 Bandlimited Composite Source Signal with speech like power density spectrum – practical realization for measurements of echo cancellers

Both Composite Source Signals described below in this annex have a speech-like power density spectrum. This means that the noise sequences of both signals (the measurement signal and the signal to simulate double talk) are shaped with a decrease of 5 dB/octave towards higher frequency. The convergence characteristics of speech echo cancellers largely depends on the power density spectrum of the input signal. Therefore these Composite Source Signal were adapted in this way to reproduce the power density spectrum of real speech.

C.3.1 Composite Source Signal for single talk

Figure C.1 shows the principle construction of the Composite Source Signal for single talk.

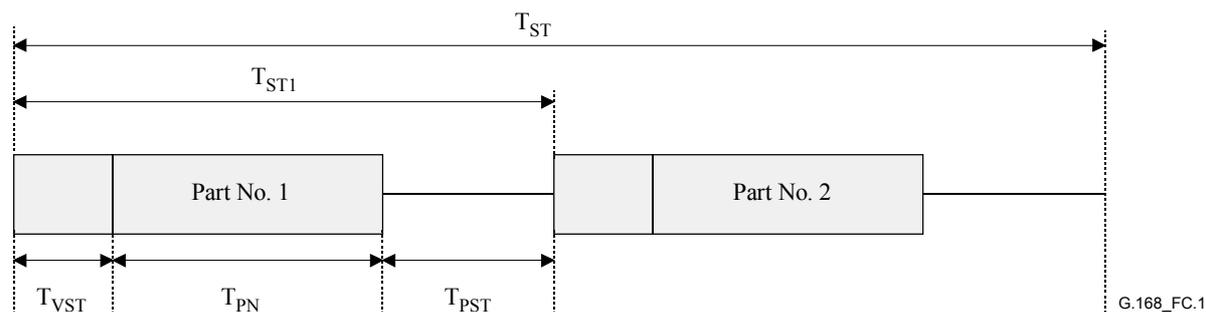

Duration:	T_{VST} (voiced sound):	48.62 ms	T_{ST1} (one period):	350.00 ms
	T_{PN} (pseudo noise):	200.00 ms	T_{ST} (whole period):	700.00 ms
	T_{PST} (pause):	101.38 ms		

Figure C.1/G.168 – Composite Source Signal for measuring echo cancellers (schematic)

Bandlimited voiced signal

In Table C.1 the 16-bit word values for the voiced signal, bandlimited between 200 Hz and 3.6 kHz can be found. According to a sampling rate of 44.1 kHz the 134 16-bit word values amount to 3.04 ms. The values are to be read in columns:

Table C.1/G.168 – 16-bit word values of the bandlimited voiced signal

-155	948	3224	4000	3129	1440	241	-888	-1853	-6137	-3474
276	1362	3370	4043	3043	1310	190	-957	-2121	-6560	-2508
517	1741	3500	4034	2914	1146	103	-1034	-2414	-6948	-1595
578	2043	3569	3974	2750	965	-9	-1103	-2707	-7301	-802
491	2276	3603	3862	2560	776	-138	-1146	-3017	-7568	
302	2422	3603	3724	2353	603	-267	-1181	-3319	-7732	
86	2500	3595	3577	2155	448	-388	-1190	-3612	-7758	
-103	2552	3586	3439	1991	345	-491	-1198	-3913	-7620	
-207	2595	3595	3336	1853	276	-569	-1215	-4224	-7310	
-198	2655	3638	3267	1750	250	-638	-1259	-4560	-6810	
-60	2758	3724	3224	1672	250	-698	-1327	-4922	-6155	
190	2896	3819	3198	1603	267	-759	-1457	-5301	-5344	
543	3060	3922	3172	1534	267	-813	-1629	-5715	-4439	

The values of the voiced signal in the frequency range 200 Hz-3.6 kHz again are calculated such that the RMS value of the voiced signal and the PN-sequence are equal. The sequence is repeated 16 times to achieve a length of 48.62 ms.

Pseudo noise signal generated using 2048 pt. FFT

The parameters for the PN-sequence are:

Sampling rate 44.1 kHz, 16-bit-word length, length of Fourier transform 2048 points.

$$H(k) = \begin{cases} W(k)e^{j \cdot i_k \cdot \pi}; k = -928, \dots, +928 \text{ except } 0, i_k \in \{+1, 0\}, \text{ random}, i_k = -i_{-k} \\ 0 \text{ else} \end{cases} \quad (\text{C.3-1})$$

According to the above described Formula (C.2-2) the time signal is calculated by inverse Fourier-Transformation. This sequence is repeated 4.307 times to achieve a length of 200 ms for the PN sequence. The crest factor of the PN-sequence is 11 dB ± 1 dB.

According to the frequency resolution of 21.5 Hz (44.1 kHz/2048) there are 928 FFT values in the frequency range between 0 and 20 kHz. Each value W(k) (before filtering) is 152 680. It is calculated such that levels within a bandwidth of 20 kHz are the same for the voiced signal and the PN sequence.

Pseudo noise signal generated using 8192 pt. FFT

According to the above described Formula (C.2-2) the time signal is calculated by inverse Fourier-Transformation. This sequence is repeated 1.077 times to achieve a length of 200 ms for the PN-sequence. The crest factor of the PN sequence is 11 dB ± 1 dB.

According to the frequency resolution of 5.4 Hz (44.1 kHz/8192) there are 3715 FFT values in the frequency range between 0 and 20 kHz. Each value W(k) before filtering is 305 360. It is calculated such that levels within a bandwidth of 20 kHz are the same for the voiced signal and the PN-sequence.

In order to achieve the same RMS value for the bandlimited PN-sequence the filter function shown in Figure C.2 should be applied. The filter is chosen such, that the levels of the filtered and the unfiltered PN-sequence are equal. The filter corner frequencies are shown in Table C.2.

NOTE – By appropriate up- or down-sampling other sampling rates for the described sequence can be achieved. The interpolation filter used for up- and down-sampling should be close to an ideal rectangular filter. The stopband attenuation should be > 60 dB, the passband ripple < ±0.2 dB.

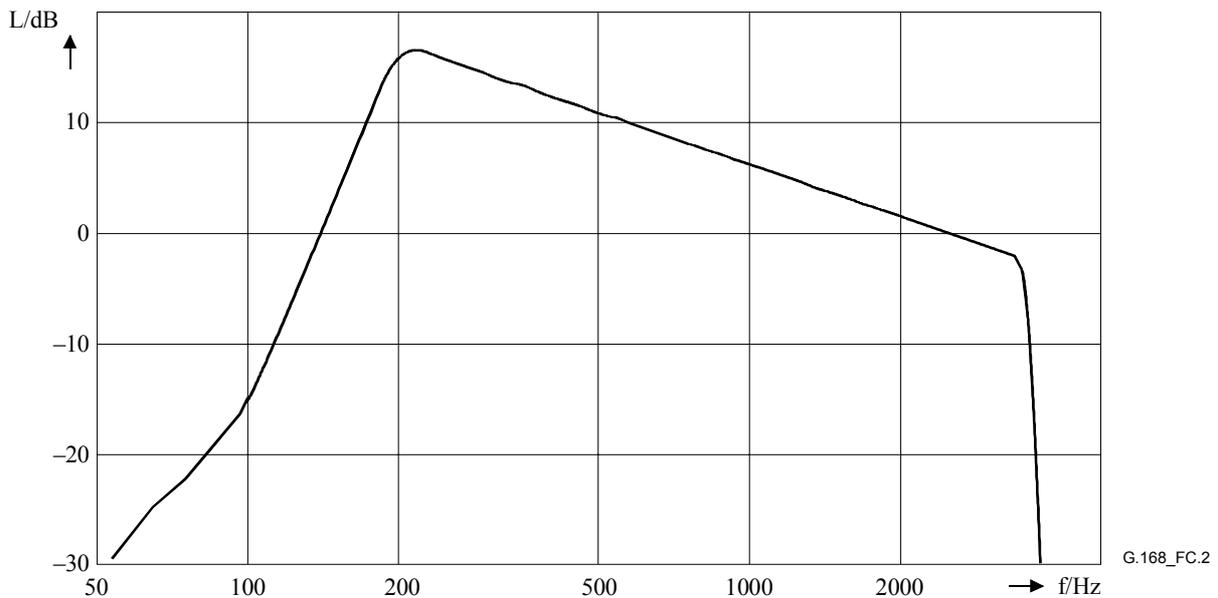


Figure C.2/G.168 – Transfer function of the filter for bandlimiting the PN-sequence

Table C.2/G.168 – Table of filter corner frequencies

50 Hz	100 Hz	200 Hz	215 Hz	500 Hz	1 kHz	2.85 kHz	3.6 kHz	3.66 kHz	3.68 kHz
-25.8 dB	-12.8 dB	17.4 dB	17.8 dB	12.2 dB	7.2 dB	0 dB	-2 dB	-20 dB	-30 dB

For adaptive systems such as echo cancellers a longer PN sequence may be preferable in order not to have correlated measurement signals within the adaptation window. For those systems the FFT length should be extended to 8192 points when using 44.1 kHz sampling rate as described above.

Pause

The length of the pause is chosen to 101.38 ms in order to achieve a complete length of 350 ms for the voiced sound, the Pseudo Noise sequence and the pause.

To achieve a long term offset free sequence this CS-sequence of 350 ms is repeated and inverted in amplitude (phase shift by 180°). The complete length amounts to 700 ms.

C.3.2 Bandlimited Composite Source Signal to simulate double talk

The double talk sequence is generated in the same way as the single talk signal. Figure C.7 shows the principle construction of the double talk signal. However the times of the voiced signal and the pause are slightly different in order to achieve a typical double talk condition with two signals applied the same time, signal present only in one channel, voiced signals present on both sides as well as voiced signals and unvoiced signals present the same time in the different channels. The correlation between single talk signal and double talk signal is low. This is achieved by choosing a different voiced signal with a different pitch frequency and a random noise signal instead of the PN sequence. The duration of the voiced signal is 72.69 ms, the duration of the random noise signal is 200 ms and the duration of the pause amounts to 127.31 ms.

Voiced signal

The voiced signal for double talk was chosen to have a different base frequency than the signal talk voiced signal. The values for the voiced signal for double talk can be found in Table C.3. The level of this sound again is the same as the one for single talk. Using a sampling rate of 44.1 kHz 229 16-bit word values represent 5.19 ms. The table is to be read in columns:

Table C.3/G.168 – 16 bit word values for the bandlimited double talk voiced signal

-198	1146	-8292	4827	5853	1422	-1293	-810	-690	-1052	-621
-112	871	-8715	5094	5715	1224	-1302	-793	-724	-1043	-560
-9	560	-9077	5344	5560	1026	-1293	-767	-767	-1043	-509
103	233	-9370	5594	5387	819	-1267	-741	-793	-1052	-457
233	-121	-9542	5827	5215	603	-1250	-698	-819	-1060	-397
388	-491	-9542	6043	5043	388	-1233	-672	-845	-1060	-345
543	-871	-9361	6215	4879	181	-1224	-638	-853	-1060	-276
724	-1250	-8956	6344	4732	9	-1224	-603	-871	-1052	-207
896	-1638	-8327	6413	4586	-181	-1224	-595	-879	-1034	-112
1060	-2043	-7465	6422	4439	-328	-1224	-586	-888	-1017	
1233	-2465	-6396	6379	4276	-448	-1215	-595	-896	-991	
1388	-2896	-5163	6310	4086	-543	-1198	-603	-922	-957	
1517	-3345	-3827	6215	3870	-629	-1172	-621	-948	-931	
1638	-3819	-2448	6120	3629	-707	-1129	-629	-974	-905	
1747	-4310	-1103	6051	3370	-784	-1077	-938	-1009	-888	
1810	-4810	155	6000	3086	-871	-1026	-638	-1026	-862	
1845	-5319	1293	5991	2801	-948	-974	-638	-1052	-845	
1845	-5836	2241	5991	2534	-1026	-922	-638	-1069	-819	
1802	-6353	3034	6000	2267	-1112	-888	-638	-1077	-793	
1707	-6853	3655	6008	2034	-1181	-871	-638	-1069	-767	
1569	-7353	4138	5991	1819	-1241	-845	-647	-1060	-724	
1379	-7836	4517	5939	1612	-1276	-828	-664	-1060	-672	

In order to achieve the required length of 72.69 ms, the values are to be repeated 14 times.

Random noise

The random noise is chosen as a white Gaussian noise bandlimited at 20 kHz. The crest factor of the signal is 12 ± 1 dB. The RMS value of the bandlimited random noise is chosen to be the same as the one for the voiced signal.

In order to bandlimit the random noise between 200 Hz and 3.6 kHz, the filter function shown in Figure C.2 is used. This ensures the same RMS value for the bandlimited random noise.

Pause

The pause is chosen to 127.31 ms in order to achieve a length of 400 ms for the voiced sound, the random noise sequence and the pause.

Again, in order to achieve a long-term signal which is free of offset, this sequence of 400 ms is repeated and inverted in amplitude (phase shift by 180°). Thus the resulting length of the double talk signal is 800 ms.

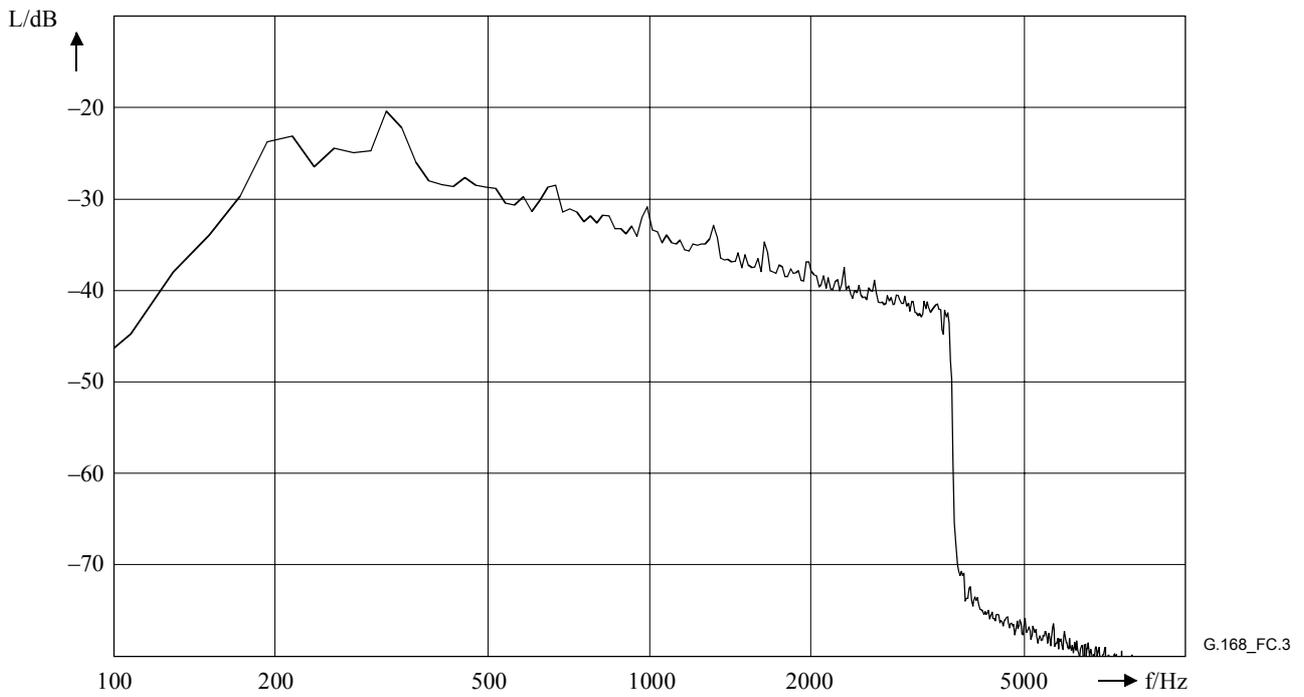


Figure C.3/G.168 – Power density spectrum of the bandlimited CSS (single talk signal, analysis window: Hanning)



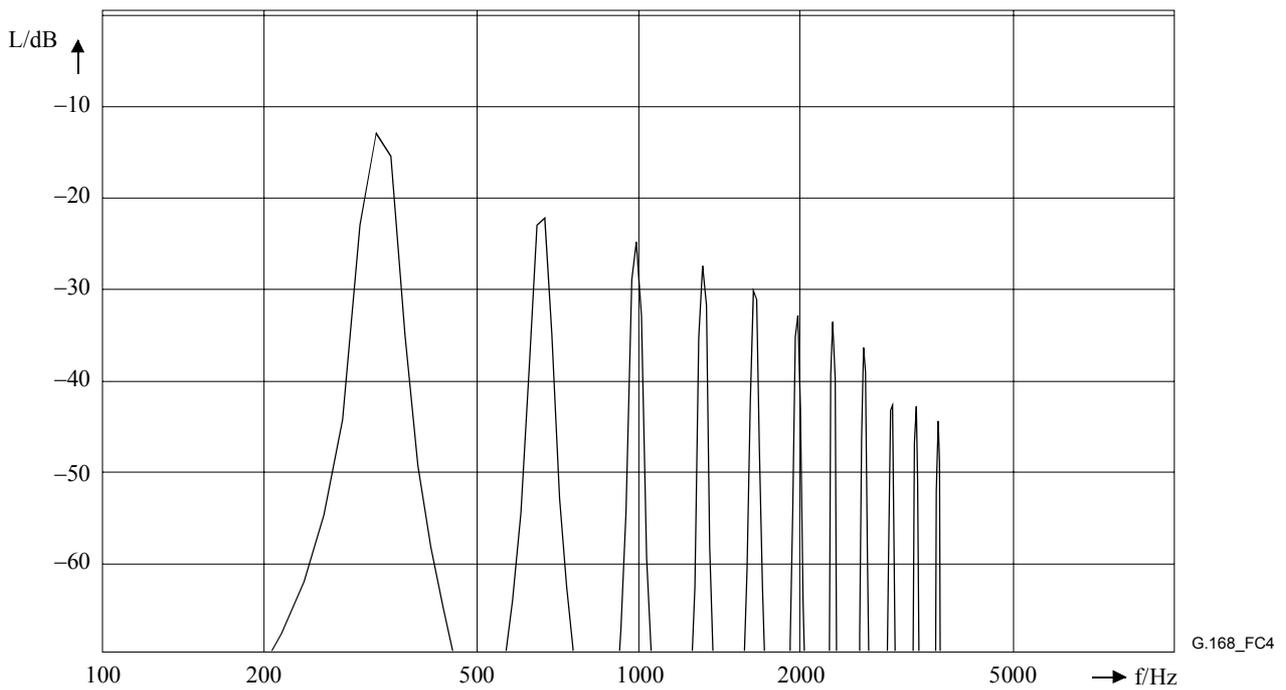


Figure C.4/G.168 – Power density spectrum of the bandlimited voiced signal (single talk signal, analysis window: Hanning)

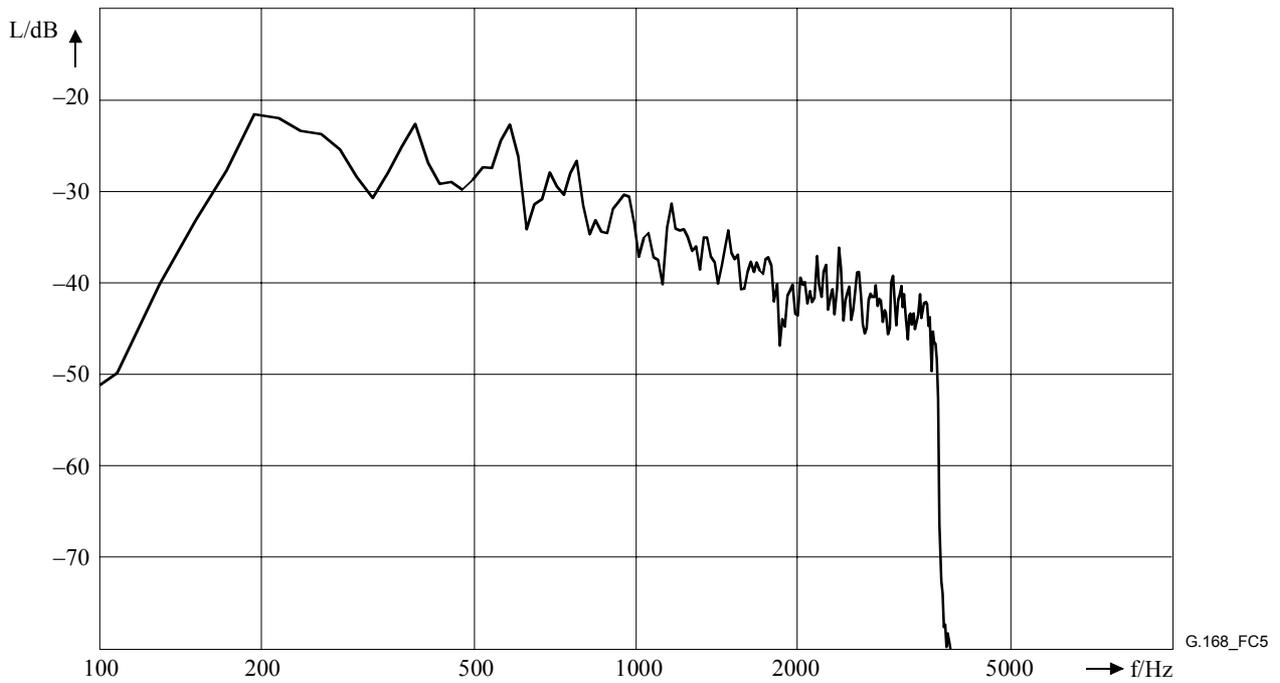

**Figure C.5/G.168 – Power density spectrum of the bandlimited double talk CSS
(analysis window: Hanning)**

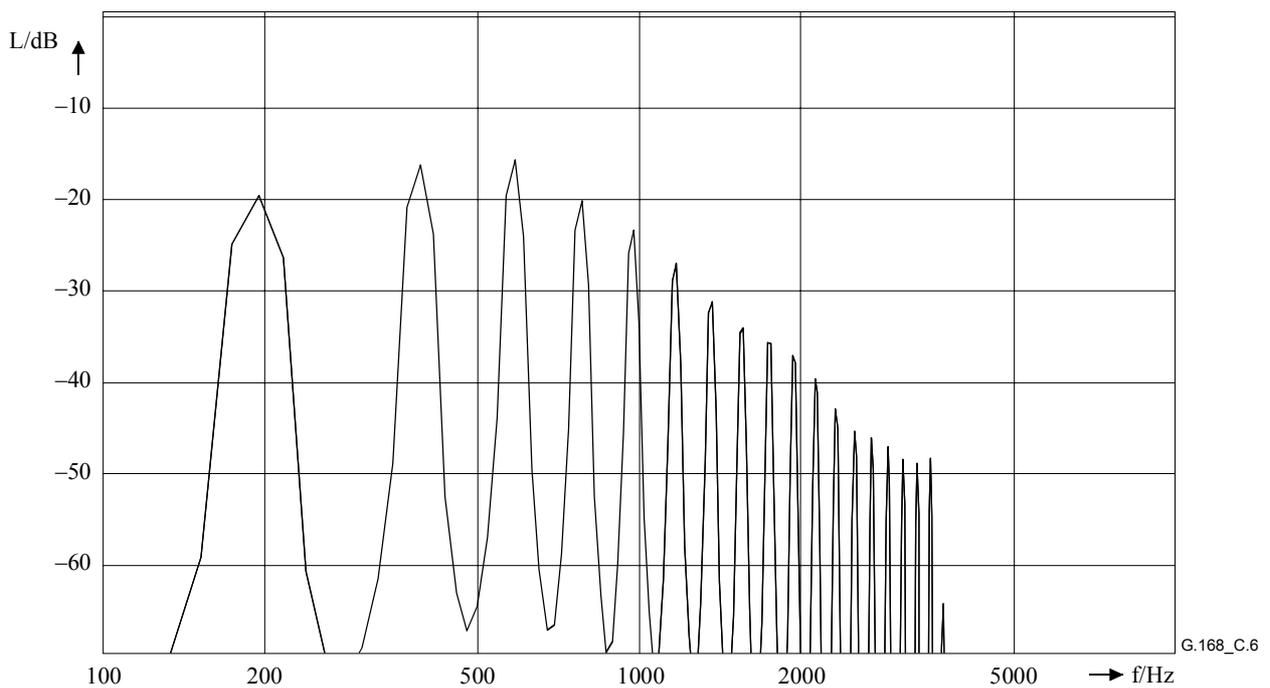

**Figure C.6/G.168 – Power density spectrum of the bandlimited double talk voiced signal
(analysis window: Hanning)**

NOTE – By appropriate up- or down-sampling other sampling rates for the described sequence can be achieved. The interpolation filter used for up- and down-sampling should be close to an ideal rectangular filter. The stopband attenuation should be > 60 dB, the passband ripple $< \pm 0.2$ dB.

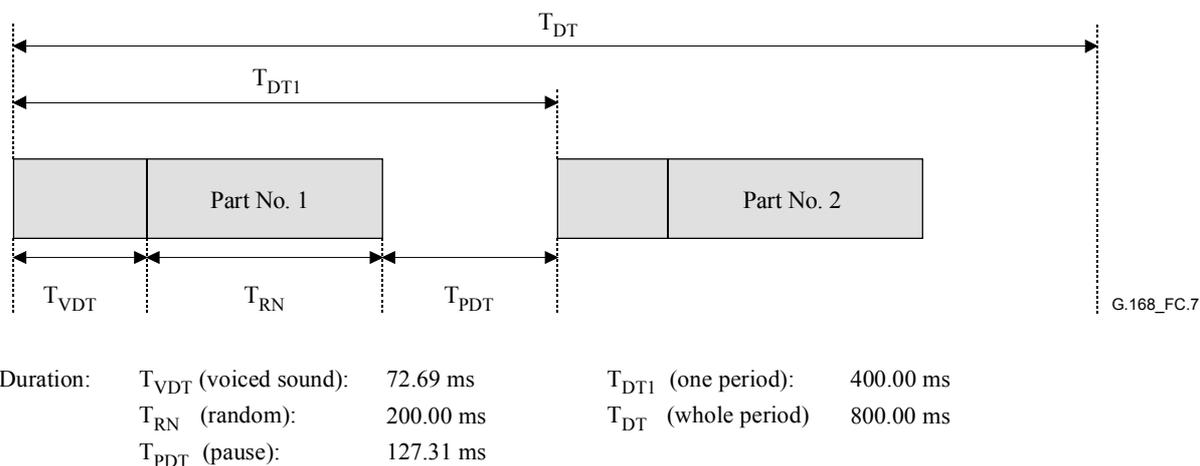


Figure C.7/G.168 – Composite Source Signals to simulate double talk (schematic)

Application

The application of the bandlimited Composite Source Signals for single talk as well as for double talk is for all testing where bandlimited systems need to be tested working non-linear and time variant and requiring the typical long-term power density spectrum of speech. The typical application is the testing of speech echo cancellers in the network. For all one directional tests the bandlimited CSS for single talk tests should be used. In case of tests in double talk conditions, the double talk signal should be used in double talk direction (S_{gen}), whereas the single talk signal is fed in the far-end direction (R_{in}).

C.4 Appropriate analyses to determine convergence characteristics of speech echo cancellers using the Composite Source Signal

The Composite Source Signal for testing speech echo cancellers and the second Composite Source Signal to simulate double talk are described above. If the echo signal level should be measured there are several possibilities of analysis technique. Calculations can be made in the time or frequency domain.

C.4.1 Calculation in the frequency domain

The signal level can be determined by calculations in the frequency domain, after the time sequence has been transformed by Fourier Transformation. This allows the level calculations in a certain frequency range, i.e. the telephone bandwidth of 300 Hz to 3.4 kHz. Another advantage is that the Fourier Transformation gives the possibility to analyze further characteristics of the echo signal in the frequency range, for example the echo attenuation versus frequency. For the Composite Source Signal, a rectangle window should be used before calculating the Fourier Transformation. The Pseudo Noise sequence is generated with a 8192 points FFT. The sampling rate should be 44.1 kHz as described above in C.3.1 and C.3.2 for generating the Composite Source Signals. The sequence length used for transformation should be the complete length of 700 ms including the voiced sound, the pseudo noise sequence and the pause. Various measurements showed that due to signal delay or noise produced by the circuit under test, additional artifacts may appear during the pauses (e.g. switched residual echo signal or modulated background noise). Therefore it is suitable to analyze the echo signal over a sequence length of 700 ms, i.e. one whole period of the Composite Source Signal. A disadvantage of level calculations from the frequency range is due to the fact that this gives only a limited time resolution of one Fourier Transformation length. The level calculation in the frequency domain should be used to determine signal levels and residual echo levels after full convergence of after inhibiting adaptation.

C.4.2 Calculation in the time domain

The echo signal level calculation from the time domain is necessary for analysis of echo attenuation versus time because of its high resolution in the time domain. A suitable method is given through IEC 60651, sound level meters. It describes the sound level measurement and recommends three different time constants, 'Slow' (1000 ms), 'Fast' (125 ms) and 'Impulse' (35 ms). If measurement results of different laboratories should be compared, an agreement about the measurement procedure is necessary. A short time constant has advantages because of the highest possible resolution in the time domain, whereas longer time constants have the advantage that the results obtained with this kind of calculation demonstrate more the average level of the time sequence that is analyzed. Especially if several measurements calculated for example as the level versus time are represented in the same picture, very short time constants may lead to confusing representations. This is due to the fact that using a very short time constant of for example 35 ms ('Impulse'), the calculation is more sensitive to even very small signal variations. For this reasons the use of the time constant 'Fast' (125 ms) according to IEC 60651 is more suitable for level calculations versus time.

This is a suitable method to analyze the convergence speed of speech echo cancellers at the beginning of adaptation. The echo signal level is calculated using the time constant 'Fast' according to IEC 60651. Level fluctuations due to input signal fluctuations can be eliminated if the echo signal level is referred to the input signal level. This represents the echo return loss enhancement (ERLE) versus time. A disadvantage is that no further analysis is possible in the frequency domain. When using the meters of IEC 60651, any peak detection or decay time constants referenced in IEC 60651 should not be incorporated for measurements in this Recommendation.

C.4.3 Level calculations according to the active speech level P.56

Level calculations can also be done according to the ITU-T Rec. P.56. This calculation is made from the time domain as well. It delivers one value and a percentage of speech activity. It may be suitable to calculate the residual echo level but there are more parameters that have to be defined to guarantee the same implementation of this algorithm. Difficulties may appear if echo signals with a very low level are analyzed. It may fall below the recognition level for active speech. Another disadvantage is, although this is a calculation in the time domain it delivers only one value. It is not possible to achieve the level variation versus time, as it is important for convergence measurements. Therefore it is more suitable to analyze residual echo signal level using the Fourier Transformation as described in C.4.1 or the level calculation in the time domain for time varying echo signals (e.g. the convergence of echo cancellers) based on IEC 60651 as described in C.4.2.

Annex D

Echo-path models for testing of speech echo cancellers

D.1 Introduction

The following echo path models can be used for the tests in this Recommendation. The echo path is simulated by a linear digital filter with the impulse response $g(k)$. To account for various delays, different ERLs and different dispersion characteristics and time widths, $g(k)$ is chosen as a delayed and attenuated version of any of the sequences $m_i(k)$, $i = 1, 2, \dots, 8$ that are given in Tables in D.2 and D.3.

$$g(k) = (10^{-ERL/20} K_i) m_i(k - \delta) \quad (D-1)$$

The sequences $m_i(k)$ represent echo paths with various dispersion characteristics and different time widths. The delay δ should be chosen such that the non-zero values of $g(k)$ can be captured by the H register of the echo canceller. The scaling factor K_i depends on the input signals used in the tests. The value of K_i in Table D.1a results in an ERL that is equivalent to the value used in equation (D-1) when measured with CSS. The value of K_i in Table D.1b is used to limit the maximum of the magnitude response to the chosen ERL value. The K_i factors for CSS or white noise input, and for tone input are given below. Caution should be used when using Table D.1a for white noise, as the measured ERL may not be equal to the ERL value used in equation (D-1). Only test 9 uses white noise as the input signal.

D.1.1 CSS or white noise input

For the tests that use CSS or white noise as the input signals, the values of K_i are given in the Table D.1a for the eight sequences $m_i(k)$:

Table D.1a/G.168 – Scaling factors K_i for the eight digital echo path models

Echo path model #(i)	Scaling factor K_i	Minimum ERL for CSS (dB) (Note)
1	1.39×10^{-5}	6
2	1.44×10^{-5}	6.55
3	1.52×10^{-5}	6
4	1.77×10^{-5}	6
5	9.33×10^{-6}	6
6	1.51×10^{-5}	6
7	2.33×10^{-5}	11.06
8	1.33×10^{-5}	9.27
NOTE – A minimum ERL value of 6 dB should be used in the tests for echo path models m_1 , m_3 , m_4 , m_5 and m_6 . For echo path models m_2 , m_7 and m_8 , the minimum ERL values used in the tests should be, respectively, 6.55 dB, 11.06 dB and 9.27 dB. This is to ensure that the magnitude response of the scaled echo-path $g(k)$ does not exceed 0 dB over the appropriate frequency range.		

D.1.2 Tone(s) input

For the tests that use tone(s) as input signals, the values of K_i should be computed using the formula

$$K_i = \frac{1}{\max_f |M_i(f)|} \quad (\text{D-2})$$

where:

$$M_i(f) = \sum_{k=0}^{L-1} m_i(k) \exp\left(-\frac{j2\pi fk}{8192}\right) \quad (\text{D-3})$$

with:

$$i = 1, 2, \dots, 8$$

$$f = 0, 1, \dots, 4095$$

$$L = \text{length of } m_i(k)$$

The values of K_i computed from equations (D-2) and (D-3) are given in Table D.1b for the eight sequences $m_i(k)$:

Table D.1b/G.168 – Scaling factors K_i for the eight digital echo path models for tones

Echo path model #(i)	Scaling factor K_i	Minimum ERL for Tones (dB) (Note)
1	1.22×10^{-5}	6
2	6.78×10^{-6}	6
3	9.66×10^{-6}	6
4	1.07×10^{-5}	6
5	7.05×10^{-6}	6
6	8.60×10^{-6}	6
7	6.58×10^{-6}	6
8	4.58×10^{-6}	6


NOTE – A minimum ERL value of 6 dB should be used in the tests for all 8 echo path models. Each scaling factor is used to limit the maximum of the magnitude response to the chosen ERL value.

D.2 Echo path models from network hybrid simulator

This clause contains four echo path models that are generated from a network hybrid simulator. Tables D.2, D.3, D.4 and D.5 show the values for $m_i(k)$ for $i = 1, 2, 3, 4$. They are to be read in columns. Echo path model $m_1(k)$ has short dispersion, $m_2(k)$ has median-short dispersion, $m_3(k)$ has median-long dispersion and $m_4(k)$ has long dispersion. The corresponding impulse responses and magnitude responses are shown in Figures D.1, D.2, D.3 and D.4. As an example, an ERL of 12 dB is chosen for the plots of magnitude responses.

Table D.2/G.168 – $m_1(k)$: impulse response of echo path model 1

-436	46150	390	-3948	-1098	745	1033	899	73	-512	-772
-829	34480	-8191	-2557	-618	716	1091	716	-119	-580	-820
-2797	-10427	-1751	-3372	-340	946	1053	390	-109	-704	-839
-4208	9049	-6051	-1808	-61	880	1042	313	-176	-618	-724
-17968	-1309	-3796	-2259	323	1014	794	304	-359	-685	
-11215	-6320	-4055	-1300	419	976	831	304	-407	-791	

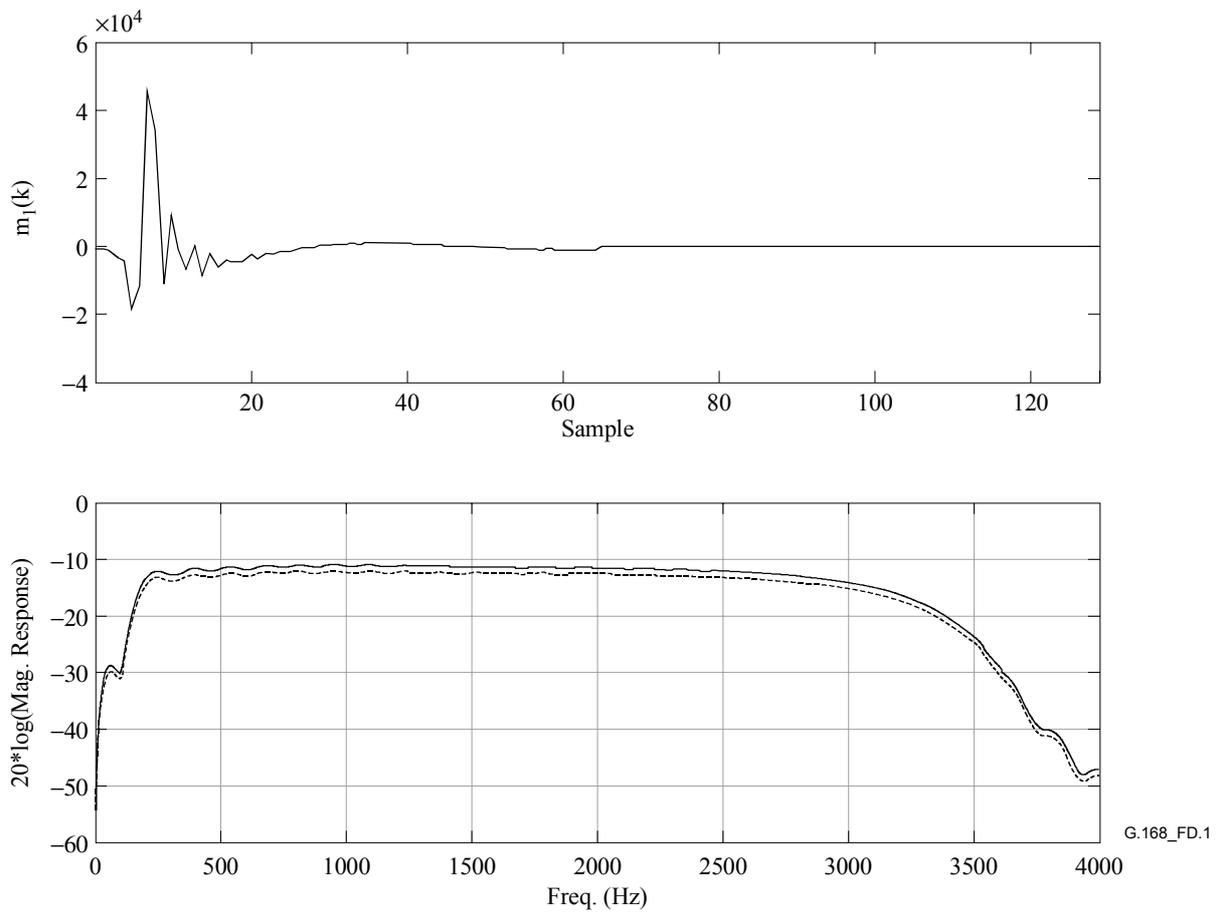


NOTE – 12 dB ERL, CSS input with scaling factor from Table D.1a (solid line), tones(s) input with scaling factor from Table D.1b (dashed line).

Figure D.1/G.168 – Impulse response and magnitude response of echo path model 1

Table D.3/G.168 – $m_2(k)$: impulse response of echo path model 2

-381	-21370	13509	-3858	1316	-1468	789	658	-331	-479	-249
658	-5307	17115	-1979	-693	-1221	954	476	-347	-479	-216
1730	23064	13952	6029	-759	-842	756	377	-430	-512	-249
-51	24020	13952	5616	-1517	-463	839	377	-314	-479	-265
-3511	1020	97	7214	-2176	-298	872	262	-430	-397	-166
-1418	-12374	-9326	6820	-2028	-68	1020	97	-463	-430	-232
7660	-16296	-9046	3935	-2654	64	789	-68	-463	-397	
8861	-19524	-15208	3919	-1814	493	822	-183	-414	-298	
-8106	-7480	-9853	921	-2077	723	558	-232	-381	-265	

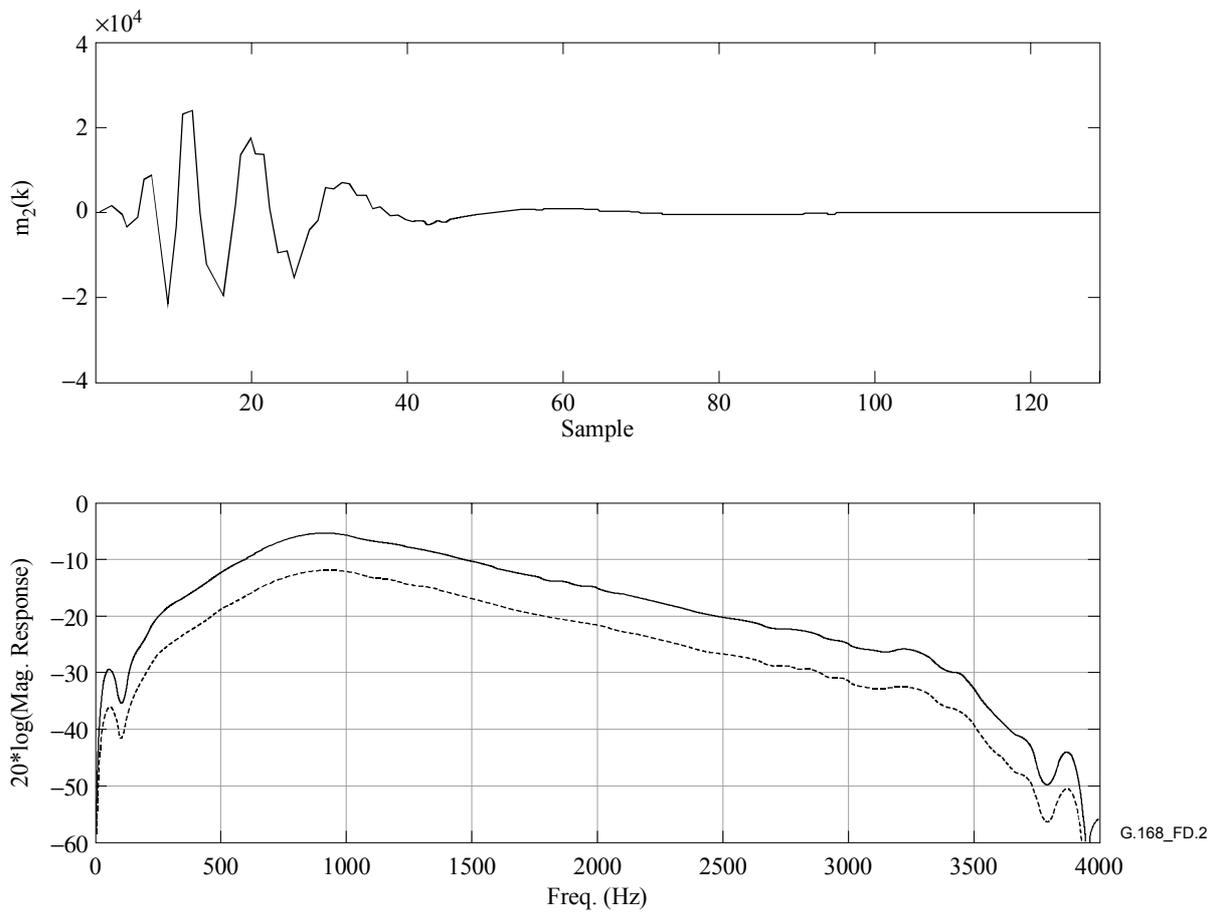


NOTE – 12 dB ERL, CSS input with scaling factor from Table D.1a (solid line), tones(s) input with scaling factor from Table D.1b (dashed line).

Figure D.2/G.168 – Impulse response and magnitude response of echo path model 2

Table D.4/G.168 – $m_3(k)$: impulse response of echo path model 3

-448	-26261	14164	3271	-3101	2172	-139	-1066	-814	-233	-390
-436	-16249	13467	6566	-9269	5387	-573	-1020	-871	-333	-482
2230	21637	4438	4277	-6146	4598	-1100	-1100	-734	-356	-459
2448	25649	8627	11131	-2553	3535	-1157	-1008	-642	-390	-482
-4178	-2267	456	7562	-6272	4004	-1180	-1077	-562	-310	-551
-7050	-10311	-11879	1475	811	2311	-1455	-1088	-356	-265	-573
5846	-4693	-6352	3728	124	2150	-1123	-917	-379	-368	
18581	-12690	-5104	-3525	788	1017	-1386	-917	-345	-310	
2322	-7428	-7496	-7301	5147	330	-1123	-963	-230	-310	

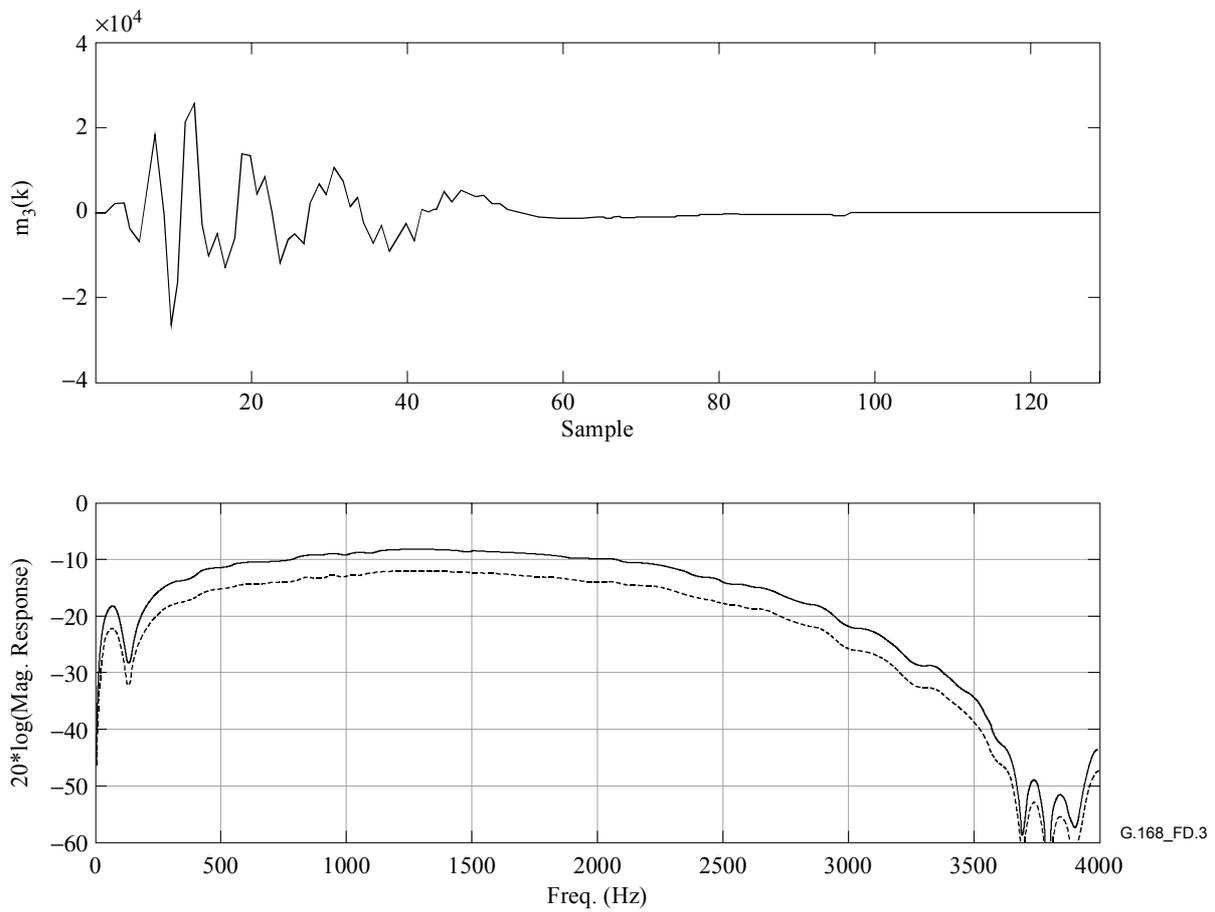


NOTE – 12 dB ERL, CSS input with scaling factor from Table D.1a (solid line), tones(s) input with scaling factor from Table D.1b (dashed line).

Figure D.3/G.168 – Impulse response and magnitude response of echo path model 3

Table D.5/G.168 – $m_4(k)$: impulse response of echo path model 4

160	4041	14624	6850	2393	1592	2654	4617	-220	203	-57
312	14484	-6975	3944	2784	-4752	-881	3576	-306	-111	-24
-241	-1477	-17156	6969	-892	-3646	-4113	2382	257	95	30
-415	-21739	-187	8694	-7366	-5207	-3244	2839	615	-79	-68
897	-4470	149	-4068	-3376	-5577	-7289	-404	225	30	84
908	25356	1515	-3852	-5847	-501	-3830	539	561	84	-155
-1326	11458	14907	-5793	-2399	-1174	-4600	-1803	8	-13	-68
-1499	-19696	4345	-9371	3011	4041	-2508	-1401	344	-68	19
2405	-11800	-7128	453	1537	5647	431	-1705	127	-241	
3347	5766	-2757	1060	6623	4628	-144	-2269	-57	-68	
-3624	789	-10185	3965	4205	7252	4184	-783	182	-24	
-7733	6633	-7083	9463	1602	2123	2372	-1608	41	19	

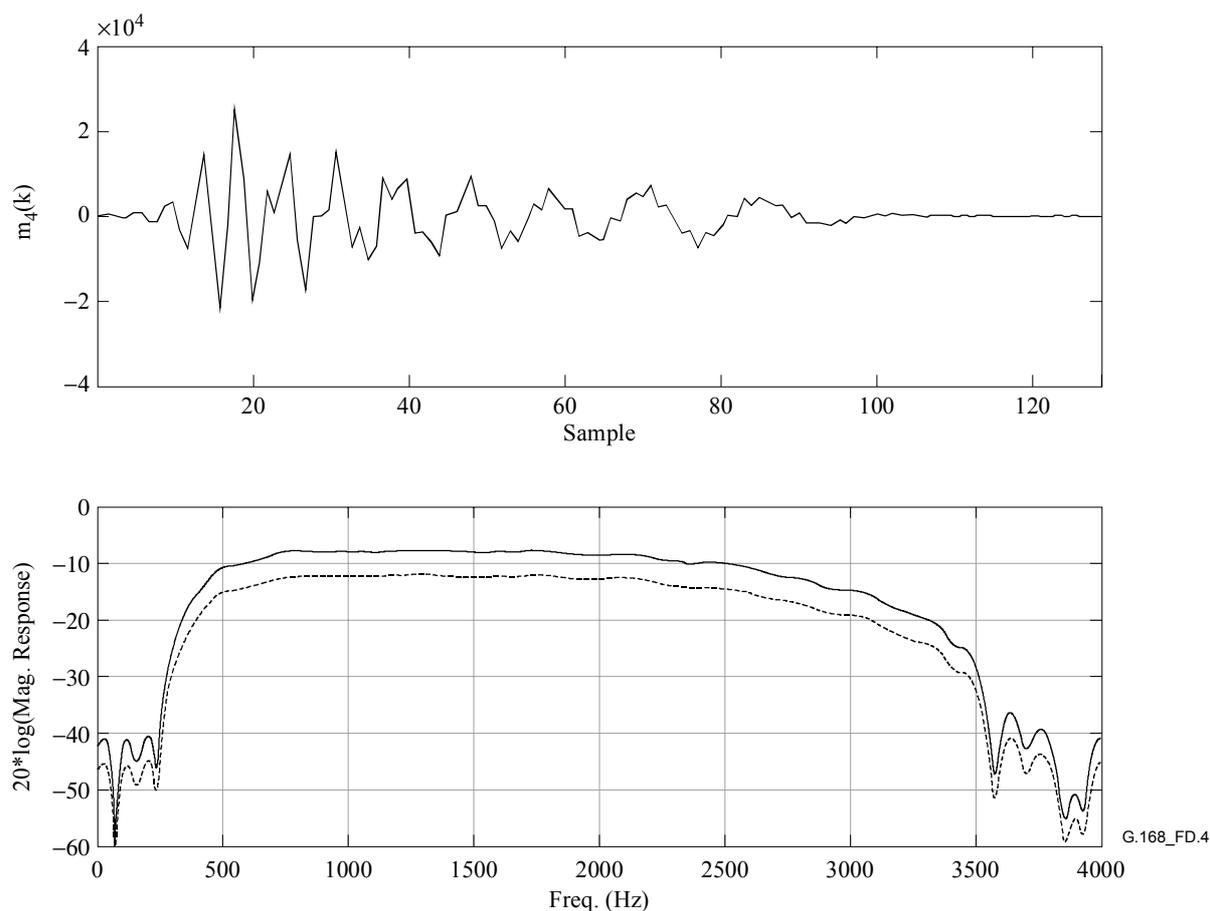

NOTE – 12 dB ERL, CSS input with scaling factor from Table D.1a (solid line), tones(s) input with scaling factor from Table D.1b (dashed line).

Figure D.4/G.168 – Impulse response and magnitude response of echo path model 4

D.3 Echo path models measured from telephone networks in North America

This clause presents four realistic digital echo path models measured from telephone networks in North America. The measurement method for the echo path models is described in II.2.2.1. Clause II.4 also includes the statistical characteristics (magnitude response, dispersion time width and the number of reflections) of echo paths measured in North America.

Tables D.6, D.7, D.8 and D.9 below tabulate the four echo path models. The numbers are read in columns. The impulse responses as well as the magnitude responses of the models are shown in Figures D.5, D.6, D.7 and D.8 respectively.

The echo path model shown in Table D.6 has a single reflection with a dispersion width of about 6 ms. This model has a frequency domain characteristic very close to the mean of the measured echo path magnitude responses. This kind of echo path occurs most often in the measurements.

The echo path model shown in Table D.7 has a single reflection. It has a longer dispersion width of about 9 ms. The long dispersion width is due to the spectral peak at about 250 Hz.


The echo path model shown in Table D.8 has double reflections. The impulse responses from the two reflectors are overlapped with each other. The dispersion width of this model is about 6 ms.

Note that due to the specific magnitude response of echo path model m_7 , it may not be an effective model for tests 10A and 10B when the NLP is disabled. This is, coincidentally, due to notches in the magnitude response at the frequencies used in the tests. Model m_8 in Table D.9 is an alternative double-reflection model that may be used for tests 10A and 10B, since it does not contain notches in the magnitude response at the frequencies used in these tests.

The impulse responses and magnitude responses of the four echo path models are shown in Figures D.5, D.6, D.7 and D.8. As an example, an ERL of 12 dB is chosen for the plots of magnitude responses.

Table D.6/G.168 – $m_5(k)$: impulse response of the echo path model 5

293	896	20	-22548	3889	-5022	-1608	1640	733	-513	-404
268	604	-938	-43424	7241	-4039	-645	1901	665	-473	-344
475	787	-523	2743	925	-4842	-495	1687	323	-588	-290
460	561	-1438	25897	2018	-4104	279	1803	221	-612	-202
517	538	-1134	7380	-821	-4089	471	1543	-14	-652	-180
704	440	-1887	21499	-2068	-3582	947	1566	-107	-616	-123
581	97	-1727	11983	-2236	-2978	1186	1342	-279	-566	
879	265	-1698	10400	-4283	-2734	1438	1163	-379	-515	
573	-385	-4266	11667	-3406	-1805	1669	963	-468	-485	

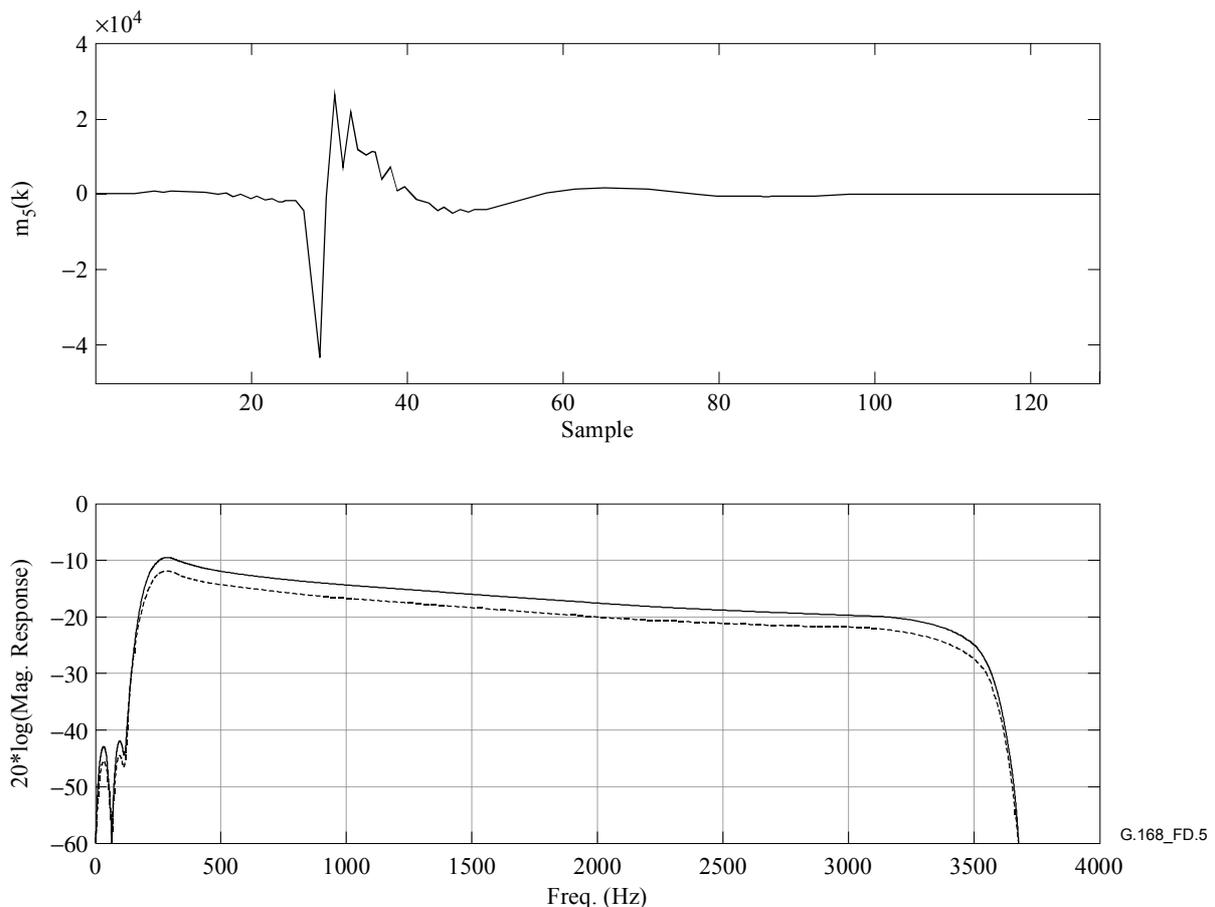


NOTE – 12 dB ERL, CSS input with scaling factor from Table D.1a (solid line), tones(s) input with scaling factor from Table D.1b (dashed line).

Figure D.5/G.168 – Impulse response and magnitude response of echo path model 5

Table D.7/G.168 – $m_6(k)$: impulse response of the echo path model 6

29	-450	158	19522	2469	5025	-1117	-1956	1724	482	-838
109	-105	1341	8421	-7994	3946	-2134	-1539	1871	289	-837
-83	-503	195	-50953	490	4414	-2547	-1239	1767	54	-834
198	145	1798	-9043	-3860	4026	-2589	-570	1802	-137	-740
-294	-490	344	18046	-837	3005	-3310	-377	1630	-321	-673
-135	267	1845	-13553	490	3380	-2778	251	1632	-490	-581
-415	-231	629	13336	-636	1616	-3427	331	1379	-638	-493
-202	340	1604	-3471	3682	2007	-2779	964	1271	-764	-436
-444	77	1182	-107	1141	158	-3116	1177	1063	-836	-327
-337	343	940	1788	5019	388	-2502	1449	856	-800	-201
-313	783	5163	-7409	2635	-1198	-2399	1564	711	-859	

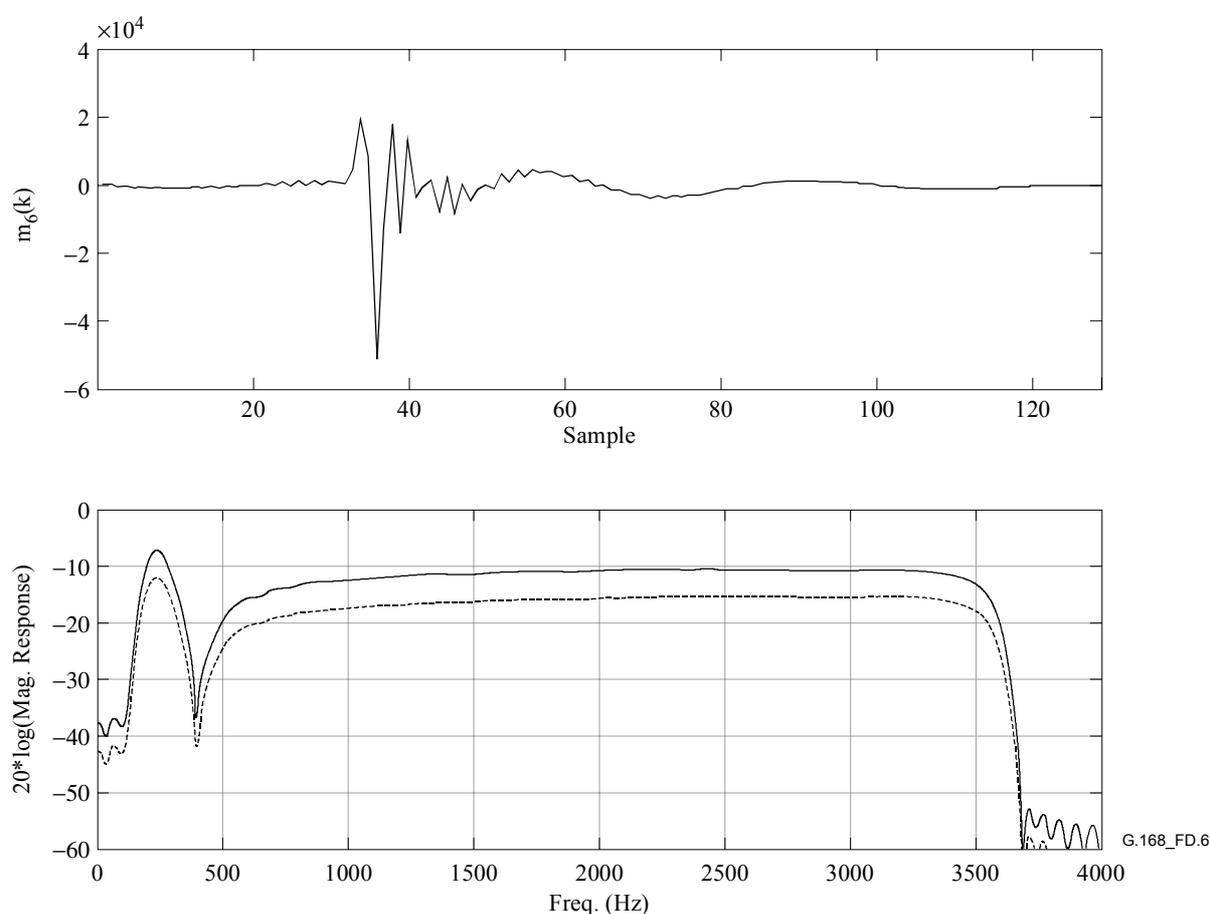


NOTE – 12 dB ERL, CSS input with scaling factor from Table D.1a (solid line), tones(s) input with scaling factor from Table D.1b (dashed line).

Figure D.6/G.168 – Impulse response and magnitude response of echo path model 6

Note that due to the specific magnitude response of echo path model m_7 , it may not be an effective model for tests 10A and 10B when the NLP is disabled. This is, coincidentally, due to notches in the magnitude response at the frequencies used in the tests.

Table D.8/G.168 – $m_7(k)$: impulse response of the echo path model 7

258	-343	-1601	8950	18072	-4342	6868	1239	-415	-325	365
-111	-596	-1389	-1574	-14410	-7415	-2195	2	-372	-245	303
337	-177	-13620	758	-7473	7929	3425	-427	-769	-255	251
-319	-1187	-720	3526	19836	-10726	1969	596	-183	-60	230
347	-52	33818	-3118	-16854	6239	-109	-1184	-785	35	209
-434	-1781	-10683	2421	-3115	-2526	3963	551	-270	218	179
192	-147	-6742	-8966	9483	-1317	-1275	-1244	-659	149	
-450	-1959	12489	-4901	-17799	5345	3087	141	-377	340	
-108	-326	-9862	11385	7399	-4565	-892	-743	-523	233	

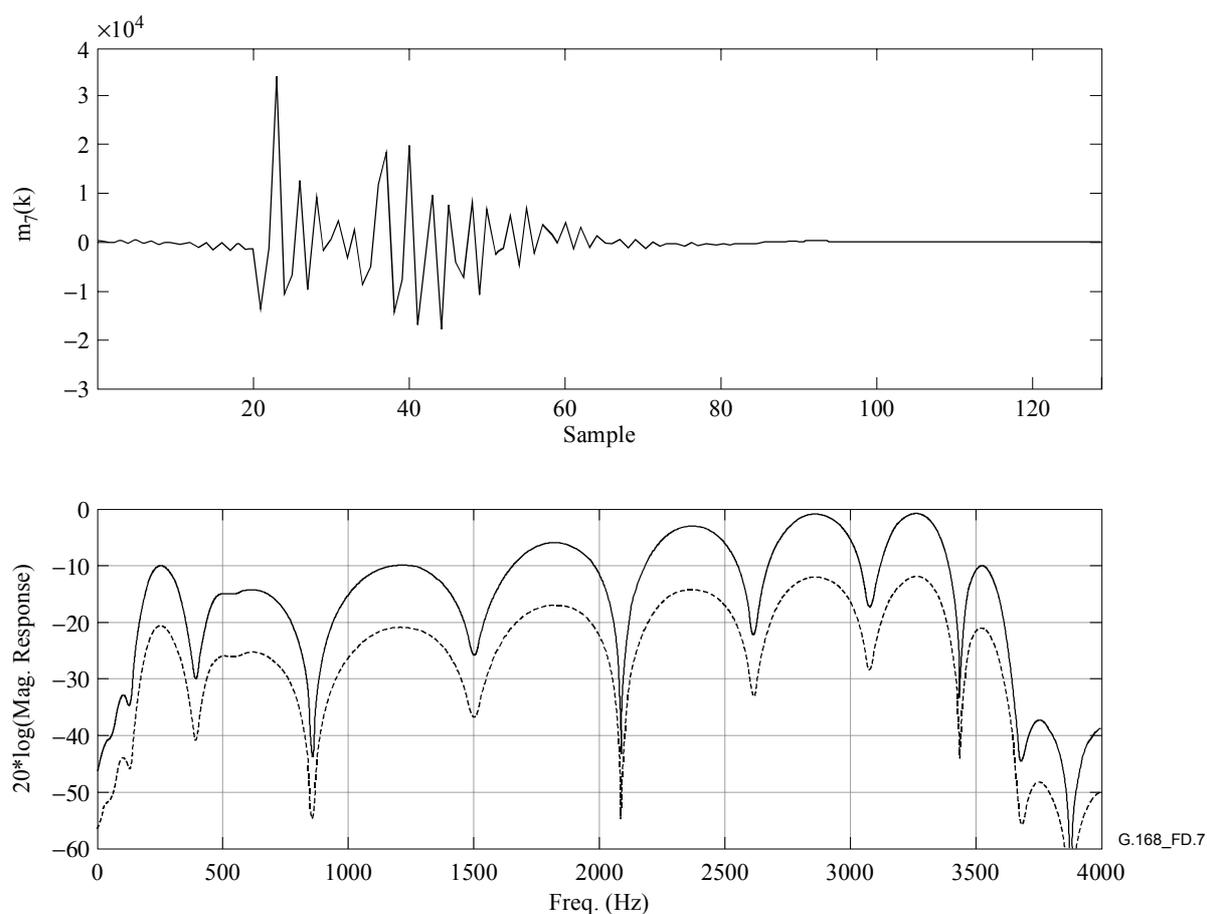


NOTE – 12 dB ERL, CSS input with scaling factor from Table D.1a (solid line), tones(s) input with scaling factor from Table D.1b (dashed line).

Figure D.7/G.168 – Impulse response and magnitude response of echo path model 7

Table D.9/G.168 – $m_8(k)$: impulse response of the echo path model 8

80	-102	-1457	33871	-5907	5553	3083	806	452	669	356
31	-26	-229	-176	-10257	-2596	1917	869	538	619	147
4	1002	15659	-16421	5336	3992	1756	471	717	500	107
42	-9250	-6786	18173	-12933	1255	2478	646	723	650	-50
42	-22562	16791	-9669	4348	1450	1027	438	850	615	-88
-61	39321	3860	-10163	-4802	4079	1871	449	756	516	-59
-81	35681	2239	9941	-1791	324	845	432	753	492	-238
-64	-35289	-28730	-19365	3035	4340	1284	473	899	427	-165
-121	25312	-11885	3592	-4433	1059	813	394	555	291	-183

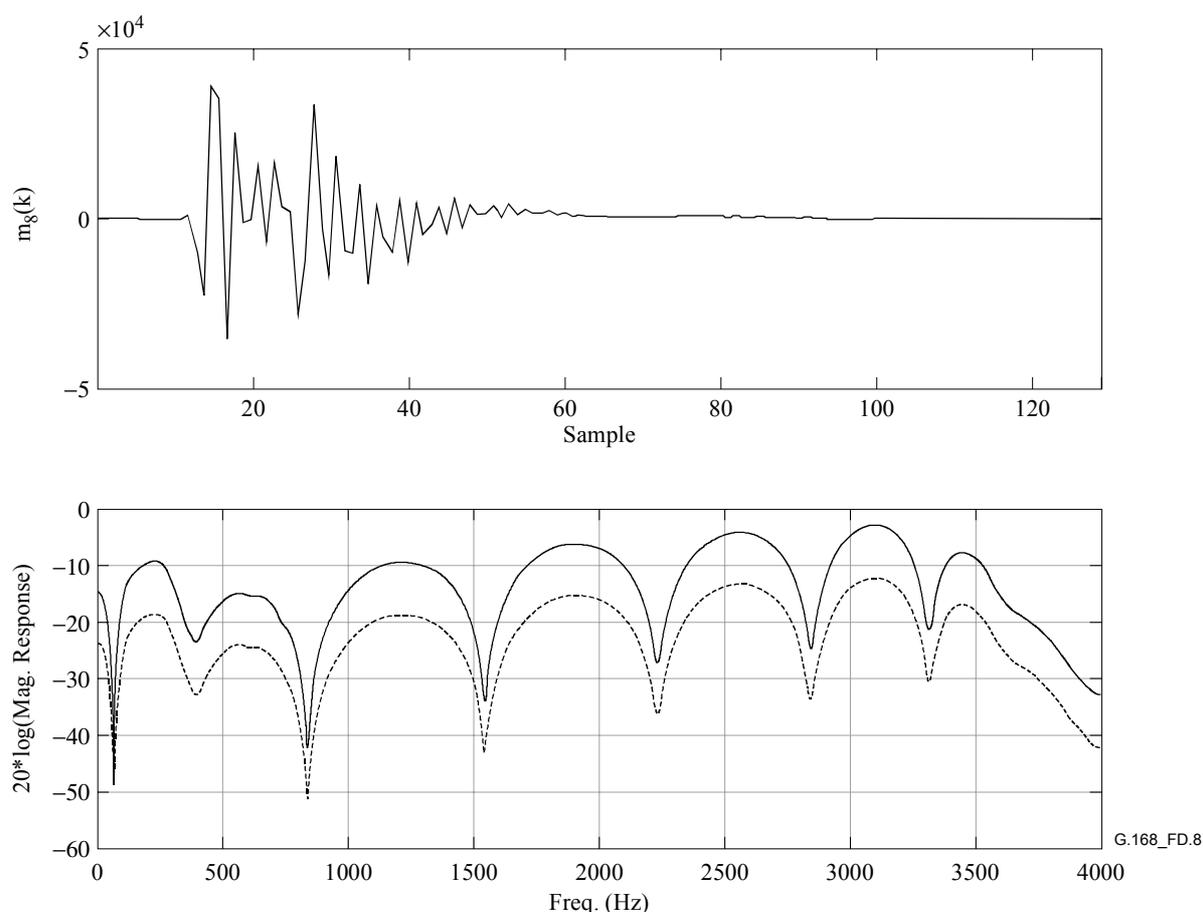

NOTE – 12 dB ERL, CSS input with scaling factor from Table D.1a (solid line), tones(s) input with scaling factor from Table D.1b (dashed line).

Figure D.8/G.168 – Impulse response and magnitude response of echo path model 8

D.4 Echo path models measured from telephone networks in Europe

Measurements were made in the telephone networks in France (see II.2.2.2 for measurement method and II.4.2 for typical impulse responses observed). Three different types of echo path impulse responses were observed and they have equivalent characteristics of echo path models $m_1(k)$, $m_5(k)$ and $m_6(k)$.

Appendix I

Guidance for application of echo cancellers

I.1 Scope

Echo cancellers are adaptive signal processors used to control echo; they are expected to replace echo suppressors in modern telecommunication networks. Echo cancellers are increasingly present on nearly every long distance connection and may be encountered singly or in tandem on a given connection. The purpose of this appendix is to:

- explain the general principles of operation of echo cancellers;
- identify a limited set of application rules and the constraints under which echo cancellers operate;
- identify how echo cancellers may affect the perceived quality of speech and the quality of voice-band data;
- explain the effects of high-level speech on echo cancellers;
- provide network and service evolutionary considerations;
- offer some considerations of echo canceller performance during double talk;
- provide some guidelines on the use of parameters for testing echo cancellers.

I.2 Echo control in the PSTN

In the past, echo suppressors were used to control echo in long distance networks. Today, however, the echo canceller is the device of choice. While PSTN planners and designers typically deploy the most current and modern technologies, it should be understood by modem designers, end users, and others, that for the foreseeable future the worldwide embedded plant may include some older echo control technologies on some connections. For example, connections through the PSTN may include some combinations of G.164 analog or digital echo suppressors, G.165 analog or digital echo cancellers equipped with G.164 tone disablers, and G.165 analog or digital echo cancellers and digital echo cancellers of this Recommendation equipped with G.165 or G.168 tone disablers. The following two clauses summarize the reasons for the use of echo cancellers instead of echo suppressors in modern telephone networks.

I.2.1 Echo suppressors

The principle of echo suppressors is well-known; it is summarized as follows: When speech is detected on the receive path, a very high attenuation is inserted in the send path. When double talk is detected, the send path is closed and a receive loss is inserted in the receive path. Thus, during double talk, there is no echo suppression in the send path, but the echo is more attenuated than the direct speech. Other refinements are possible, as indicated in ITU-T Rec. G.164.

Generally, echo suppressors do not provide the same level of performance for speech, voiceband data, or facsimile as echo cancellers. Many problems can occur in the operation of echo suppressors. First, low level double talk speech could be mutilated if the echo level is high. Second, the cascade of echo suppressors is not recommended. Third, echo suppressors may create problems for facsimile transmission. Clause 5.2/G.161 contains the detailed explanation about the disadvantages of echo suppressors.

I.2.2 Echo cancellers

Echo cancellers are devices that use adaptive signal processing to reduce or eliminate echoes. Echo cancellers are placed in the 4-wire portion of a circuit, and reduce (or cancel) the echo by subtracting an estimate of the echo from the returned echo signal. Echo cancellers may operate on a single circuit or on a multiplexed facility, e.g. echo cancellers operate on a 64 kbit/s speech facility that is multiplexed into a primary rate link.

Echo cancellers are designed to:

- cancel linear echo path signals;
- refrain from cancelling the echo when requested to do so by an in-band disabling signal;
- return to an operational mode after being disabled when the in-band signal power level drops below a specified level for a specified period of time. This design allows some networks to transport voice-band data on the same speech channels. It also allows the echo canceller to re-enable during a voice call after it has been turned off erroneously (talkoff).

Echo cancellers are characterized by whether the interface path is analogue or digital, and/or whether the subtraction of the echo is by analogue or digital means. This appendix is limited to echo cancellers that have a digital input and digital subtractors.

Echo cancellers have the following main advantages over echo suppressors:

- send path transparency is improved;
- NLP hangover introduces fewer impairments;
- there is no receive insertion loss;
- echo cancellation continues during double talk;
- cascading is possible (for well-designed echo cancellers).

Some echo cancellers are optioned to disable on the 2100 Hz tone specified in ITU-T Rec. G.164 for echo suppressors, and some are disabled with a 2100 Hz tone with periodic phase reversals of $180^\circ \pm 25^\circ$, as specified in ITU-T Rec. G.165 and in this Recommendation for echo cancellers. Use of G.165 or G.168 tone is intended to allow echo cancellers to be disabled independently of echo suppressors. Echo cancellers that respond to G.165 or G.168 disabling tone are not disabled by the 2100 Hz tone without phase reversal.

I.2.3 Responsibilities of modem manufacturers and end users

It is the responsibility of the modem manufacturers and end users to understand the characteristics of the network-based echo canceller fully and decide whether the echo cancellers should be enabled or disabled. If the modem manufacturers and end users decide that the network-based echo canceller functionality should be disabled, they should ensure that the terminal uses the appropriate approved methods, defined in Recommendations, to disable cancellers. Additionally, it is the end user's responsibility to ensure that terminals and private networks are designed to operate in a fashion compatible with the PSTN network-based echo cancellers. For example:

- Digital telephone sets are expected to control their own echoes, see ITU-T Recs G.122, G.131, P.340 and P.310 (the PSTN network is not responsible for cancelling acoustic echoes).
- Terminals and private networks should be designed to provide circuit extensions compatible with the design intent of the PSTN, e.g. echo paths outside the PSTN-network should be linear and time-invariant or the terminal should control its own echo.
- Either the delay of the terminal or private network should be within the operational limits of the network-based echo canceller, or the terminal/private network should control its own echo.

I.3 Application rules and operational constraints

The following items should be considered for application rules and operational constraints of echo cancellers:

- public network transmission planning;
- transmission delay and echo return loss;
- echo-path characteristics and echo-path capacity of an echo canceller;
- end user/manufacturer/private network transmission planning.

The detailed descriptions of these items can be found in the ITU-T Recommendations on Transmission Planning Aspects of Echo Cancellers.

I.4 Effect of cancellers on voice and data services

Network-based echo cancellers are present on connections that experience long delays. They should be designed to allow a speech channel to support voice-band data, including facsimile. This means that they should retain the capability of being disabled upon an appropriate request from customer terminal equipment. However, the modem manufacturer is responsible for determining if network-based echo cancellers should be enabled or disabled.

Full-duplex data transmission in the voice-band can occur, depending on the modem modulation scheme. New modulation schemes are being introduced, and manufacturers should determine the optimal state in which the echo canceller should be when the modem is operating, i.e. if the canceller should be enabled or disabled, or whether the call should be routed on a connection that never has an echo canceller functionality present.

The designers of facsimile terminals generated these terminals with the understanding that network providers were installing network-based echo control devices as per ITU-T Recs G.164, G.165 and G.168. Thus, PSTN network planners were expected to continue to evolve the network in such a way that it would not knowingly prevent the continued carriage of a permissive voice-band data/facsimile service.

V.32 modems, in contrast, use the same band of frequencies in both directions and achieve duplex operation through the use of an integrated echo canceller. The echo canceller integrated in this voice-band data modem is not to be confused with the network echo cancellers that conform to ITU-T Rec. G.165 and to this Recommendation because the performance requirements for each are very different.

Details of the interaction of echo control with voice-band data and facsimile transmission can be found in 5.2.1/G.161.

I.5 High-level speech

I.5.1 Introduction

A number of sources could produce high speech levels in the network. In hands-free telephones, for example, the microphone may allow high speech levels to be generated. With this perspective in mind, ITU-T Rec. G.165 was modified in 1992 to include an overload test (Test No. 8) at levels exceeding 0 dBm0 and to increase the maximum test levels from -10 dBm0 to 0 dBm0.

The presence of high speech levels may cause increased non-linearities that would degrade the performance of some echo cancellers, especially echo cancellers that have not been implemented in a fully digital manner. Another area in which high signal levels may cause difficulty is in the double talk detection and non-linear processor control circuits. These are discussed in the following two clauses.

I.5.2 Double talk detection and activity detection

The performance of echo cancellers is very dependent on the activity detection and double talk detection algorithms used. For example, if double talk is not recognized quickly, the cancelled end speech masks the residual echo that is used to update the impulse response model of the echo canceller.

The following items are for further study:

- the effect of activity detection algorithms for low bit rate coders;
- the effect of double talk detection in the presence of high signal levels.

New echo canceller requirements for echo canceller design may result.

I.5.3 Effects of low bit rate coders

For network planning purposes it is useful to know what degradation low-bit rate coders in the echo path of an echo canceller may cause. An echo canceller may provide a certain amount of echo return loss enhancement.

This topic is for further study.

I.5.4 Effects of a non-linear echo path

The theory of echo cancellation assumes that the echo path is linear and time-invariant. An echo canceller will have limited ability to cancel echo in the presence of a non-linear echo path resulting from clipping and non-linear distortion in the echo path between R_{out} and S_{in} . More information about the effects of non-linear echo path can be found in 5.2.5.1/G.161.

I.5.5 Guidelines for R_{out} usage in echo cancellers

The configuration in which the same signal feeds both R_{in} and the echo path may result in degraded performance if R_{out} is not digitally equivalent (bit for bit) to R_{in} under all signal conditions. The signal R_{rcv} used internally by the echo canceller after passing through the R_{in} port can be used as the source signal for the echo path. Therefore, it is recommended that R_{out} (which is used to drive the echo path) should be digitally equivalent to R_{rcv} .

I.6 Network and service evolutionary considerations

I.6.1 Bit transparency of echo cancellers

ITU-T Rec. G.165 was amended in 1992 to make it clear that a 2100 Hz disabling tone with phase reversals should cause the echo canceller to disable and provide an analogue clear-channel signal path. In other words, a tone between 300 Hz and 3400 Hz should pass with its power level and frequency unaltered through the echo canceller, but 64 kbit/s bit-transparency is not guaranteed (see 3.3/G.165, 1993 revision). It is noted that 64 kbit/s transparency is achievable and is implemented in some echo cancellers, but to remain in that state, the in-band power level should remain above a predefined power level.

If cancellers are to be applied to trunks and disabled by use of a "switch to echo canceller signalling channel", the canceller should support a 64 kbit/s clear channel capability, if such capability is to be provided.

I.6.2 Convergence speed

High speed of convergence is desirable to reduce echo during initial acquisition, and to minimize echo when the echo path is changing. Some echo cancellers generate noise in trying to continuously adapt to the echo path. This may be related to adaptation speed. The effect is very noticeable and annoying, especially during double talk, if the adaptation process is not suspended. For some echo canceller implementations, as the speed of adaptation is increased beyond the optimum speed, the accuracy of the transfer function after adaptation becomes poorer. High speed of convergence is

desirable for initial acquisition, while lower convergence may be needed for subsequent tracking, since the echo transfer function changes very slowly. The need of high convergence speed when time varying components are in the echo path is still under study.

I.6.3 Acoustic echo control and environments

Acoustic echo control is becoming an important issue due to the increase in hands-free telephone sets. Although there is some commonalty between issues encountered for acoustic echo cancellation and network echo cancellation, there are also many differences. The issues of level points, natural echo path loss (or gain), degree of loss-switching, as well as level and/or type of singing (howling) protection are all important to a study of acoustic echo cancellers. In addition, it is important that an acoustic echo canceller is capable of working in harmony with a network-based electric echo canceller.

I.6.3.1 References to acoustic echo control

The following materials are extracted from the Recommendations related to acoustic echo control.

Information about Acoustic echo controllers and speech enhancement devices can be found in clause 10/P.340 (05/2000).

I.6.3.1.1 Weighted terminal coupling loss (TCLw) (from 6.1/P.341 (02/1998))

The TCLw measured from the digital input to digital output shall be at least 35 dB when corrected to the nominal values of SLR and RLR as specified in 4.1 and 5.1/P.341, respectively. If a volume control is provided, the requirement applies at a setting as close as possible to the nominal value of RLR as specified in 5.1/P.341.

I.6.3.1.2 Terminal coupling loss (from 6.1/P.342 (05/2000))

The weighted Terminal Coupling Loss (TCLw) should be greater than 40 dB when measured under field conditions and with SLR normalized to $SLR = +13$ dB and $RLR = +2$ dB. For example, if the measured TCLw is 42 dB, the measured SLR is +16 dB and the measured RLR is 0 dB, then the normalized value of $TCLw = 42$ dB + (13 – 16) dB + (2 – 0) dB = 41 dB.

However, in order to meet G.131 talker echo objective requirements, a TCLw greater than 45 dB is desirable and should be striven for.

NOTE – The perceived echo impairment, by the person at the opposite end of the connection from a telephone set that has a TCLw of less than 45 dB, is a function of the magnitude of the talker echo signal as well as the talker echo path delay. A telephone set that has a TCLw of less than 45 dB will provide an echo signal that becomes more disturbing as the talker echo path delay increases. Thus, a telephone set that has a TCLw of less than 45 dB may provide satisfactory performance on low delay connections while the same may not be true for connections that have a long delay.

It is assumed that this requirement is met if TCL and TCLw, respectively, meet the values of Table I.1 (replacing Table 5/P.342) with the receive volume control in its maximum setting.

Table I.1/G.168

TCL (1/3-octave band)	TCLw
> 25 dB	> 35 dB
NOTE – These values assume no other echo control in the connection.	

If information is available in the terminal about the one-way transmission time of the connection, and if the terminal operates in double talk, then the limits defined in Table I.2 (replacing Table 6/P.342) may apply.

Table I.2/G.168

	One-way transmission time	TCLw
Single talk	≤ 10 ms	≥ 25 dB
Double talk	≤ 10 ms	≥ 19 dB ^{a)}
^{a)} To achieve MOS ≥ 4. Further information is found in ITU-T Rec. P.340.		

I.6.4 Comfort Noise

As the telephone network migrates to more digital connections, it becomes more likely that the echo path will be analogue while the long distance connections path will be digital. One consequence is that the long distance path has a low idle channel noise while the echo path has a higher idle channel noise. This in turn leads to a situation called "noise modulation". When the NLP operates, the talker "hears" the idle channel noise of the digital long distance path, but when the NLP releases, the talker "hears" the idle channel noise of the echo path and the far-end environmental noise. Thus, the talker hears intervals of speech with background noise followed by intervals of silence, which can be very annoying in some instances.

There are two known approaches for comfort noise. The first solution is to insert pseudo-random noise during the silent interval. The second solution is to allow some of the background or idle channel noise to pass through the NLP.

NOTE – Based on the input from ITU-T experts on "end-to-end transmission performance of networks and terminals":

- Artifacts due to comfort noise insertions should be minimized.
- The noise used should match the background noise, both in frequency content and level (discussions indicate that this may not be a good idea for high and low noise levels).
- Level of the inserted noise should match that of the background noise; appropriate level measurements and adjustments should be done using dBm0p.
- The time course of changes in the level of the inserted noise should match, as closely as possible, the level changes that are occurring in the background noise.

I.7 Considerations regarding echo canceller performance during double talk

I.7.1 Introduction

A double talk situation (as the name suggests) could occur when both signals present at the input of an echo canceller have characteristics of active speech.

The CSS, which simulates double talk, consists of a burst (of constant energy) and a real pause. However, it was shown that a better double talk signal could be achieved with a signal in which the two bursts with high signal energy are identical to the original one, while the pause is filled up with a shortened CSS consisting of a voiced sound, a noise sequence and a real pause. Figure I.1 shows the modified double talk signal with the sequence length of 800 ms.

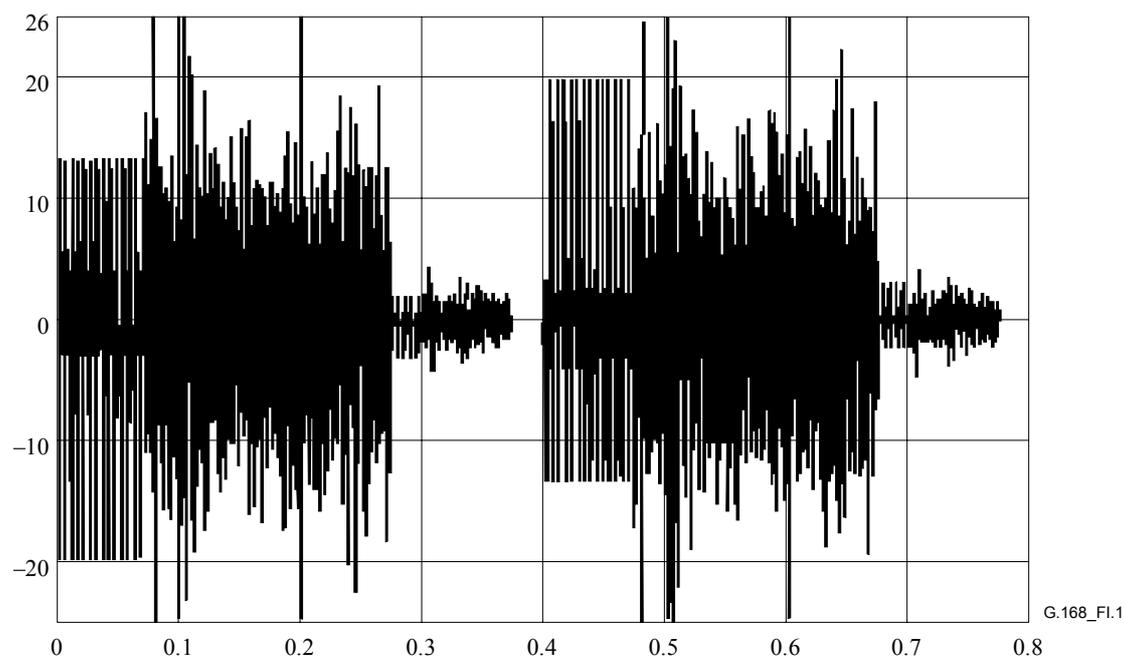


Figure I.1/G.168 – Modified double talk signal

I.7.2 Double talk parameters

The performance of echo cancellers under conditions of double talk is determined by many parameters. From recordings and listening tests, the following aspects can be derived:

- One of the most noticeable degradations when listening to the double talk signal is caused by the erroneous insertion of the NLP during continuous speech.
- Speech gaps caused by the NLP as mentioned above during continuous speech seem to be more annoying than clipping at the beginning of a double talk sequence (first word of the first sound).
- The detectability and annoyance of echo signals during double talk depend on the echo signal level and echo signal sound.
- Echo cancellers behave in a different way if double talk occurs at the beginning of adaptation or after full convergence.
- Based on the input from ITU-T experts on "end-to-end transmission performance of networks and terminals": Temporal clipping (i.e. syllable clipping or mutilation) introduced by the NLP should be less than 64 ms and less than 0.1% of active speech.

I.7.3 Analysis of technical parameters that influences performance under double talk conditions

The following parameters need to be taken into account when defining a test signal and the measurement procedure:

- signal levels at the R_{in} and S_{gen} port (receive signal and double talk signal);
- level ratio and time pattern of both signals at the R_{in} and the S_{gen} port;
- time of double talk (convergence status of echo canceller);
- duration of double talk.

The performance of the echo canceller itself is determined by technical parameters such as:

- 1) sensitivity of double talk detection;
- 2) threshold level of double talk detection (insertion of NLP, possible adaptive control);

- 3) reliability of double talk detection;
- 4) switching time of NLP;
- 5) double talk detection hangover time;
- 6) frequency characteristics of the residual echo signal loss measured between the R_{in} and S_{out} port (ERL versus frequency, 'sound' of echo signal);
- 7) divergence during double talk.

Again these influencing parameters can be separated into different groups:

- points 1-3 are determined by the performance of double talk detection (sensitivity, reliability);
- the switching characteristics of the NLP determine point 4 and 5;
- points 6 and 7 (frequency characteristics, i.e. ERL vs frequency and divergence) depend on the filter algorithm.

A suitable measurement procedure to evaluate double talk performance requires a suitable measurement sequence. A combination of two Composite Source Signals was derived to reproduce typical speech double talk sequences. Both signals are described in ITU-T Rec. P.501. The length of the measurement CSS is 700 ms, the second CSS, which simulates the double talk fed into the echo path, has a duration of 800 ms. Due to their different sequence length, the level relationships on both echo canceller inputs R_{in} and S_{gen} (or) S_{in} change, if both signals are periodically repeated. The same relationships can be observed if real speech signals are used. Various measurements on different echo cancellers demonstrate that this signal combination reproduces results under double talk conditions compared to speech.

I.7.4 Conducting the double talk Tests 3A and 3B without inhibiting the adaptation

I.7.4.1 Introduction

In tests 3A and 3B, the echo canceller is exposed to double talk for some time δt and the convergence C /divergence D is determined thereafter by removing the double talk and freezing the adaptation while the CSS remains active on the receive-in port. Thus, each experiment yields only one single point of the graph $C = C(\delta t)$ or $D = D(\delta t)$. Instead, one could measure the whole graph $C = C(\delta t)$ or $D = D(\delta t)$ in one experiment by subtracting the cancelled end double talk component $s_{gen}(k)$ from the signal $e(k)$ at the send-out port. The difference $e_r(k) = e(k) - s_{gen}(k)$ would be the residual echo, which directly leads to $C = C(\delta t)$ or $D = D(\delta t)$.

I.7.4.2 Test procedure


The test is performed using the test configuration of Figure I.2. For high levels of $s_{gen}(k)$, the magnitude of sum of $s_{gen}(k)$ and the echo, $g(k)*c(k)$, may exceed the linear range of the A/ μ -law coder. As a result, the echo canceller sees the saturated value of $s_{gen}(k)+g(k)*c(k)$. The double-talk component at the send-in port becomes:

$$s_{gen_sat}(k) = \text{codec}[s_{gen}(k) + g(k)*c(k)] - g(k)*c(k).$$

Thereby the function $\text{codec}(\cdot)$ is defined as a linear to A/ μ -law conversion followed by a A/ μ -law to linear conversion. The signal $s_{gen_sat}(k)$ is computed by the far left blocks of Figure I.2.

Some echo cancellers contain a high- or bandpass filter in the send-path. If that is the case, $s_{gen_sat}(k)$ must be passed through such a filter before it can be subtracted from the send-out signal. This can be achieved in various ways. If the filter is known, it appears simplest to pass $s_{gen_sat}(k)$ directly through the filter. If it is unknown, one can pass $s_{gen_sat}(k)$ through the echo canceller while there is silence on the receive-in port (see Figure I.2). The obtained signal $s_{gen_sat_filt}(k)$ represents the double talk component of the send-out signal, and can be subtracted to compute the residual echo $e_r(k)$.

The requirements on the power level of $e_r(k)$ should be the same as on L_{RES} . This procedure provides a continuous (rather than discrete) view of the echo canceller behaviour throughout the double-talk course. Hence, it does not require freezing the echo canceller adaptation, and it eliminates the possibility of a potential distortion of the echo canceller measured performance. Note that the S_{out} signal is measured during the application of the double talk signal, S_{gen} .

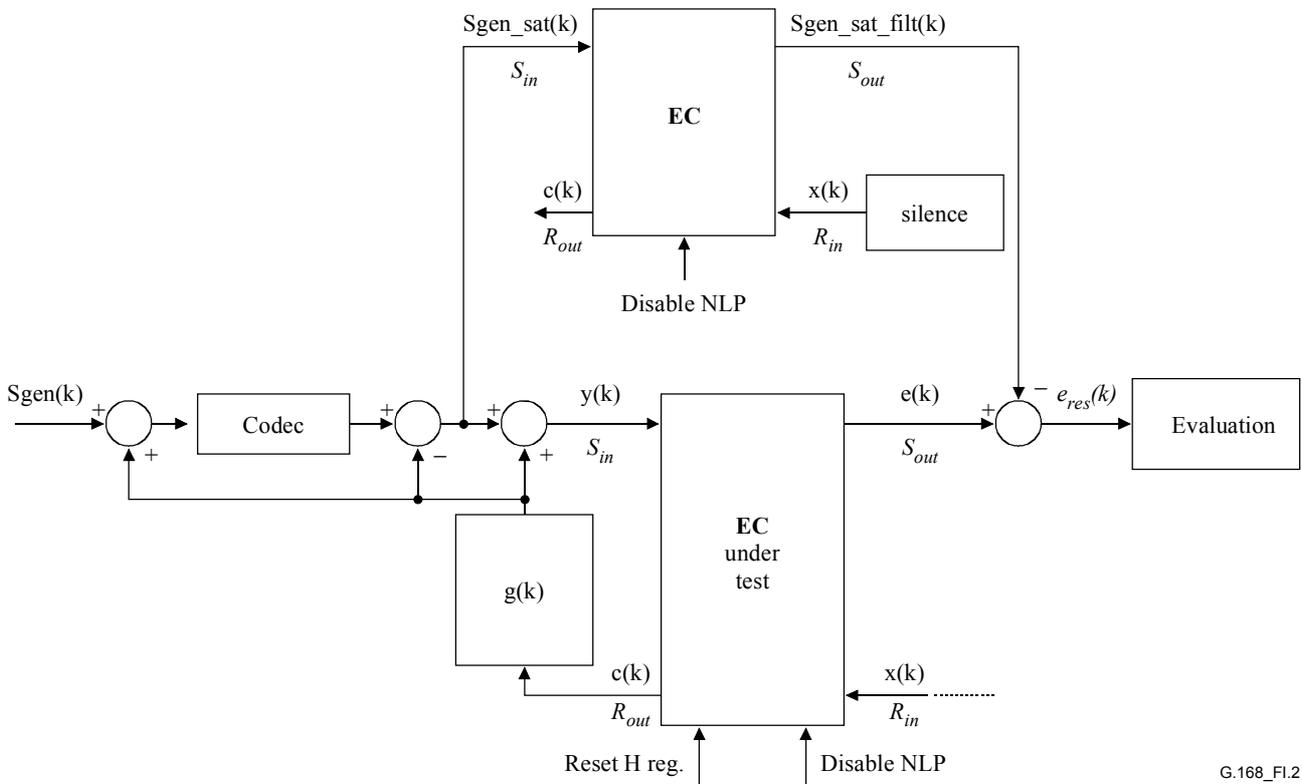

G.168_FI.2

Figure I.2/G.168 – Test to subtract the double talk component from the send-out signal

I.7.5 Subjective and objective echo canceller testing

I.7.5.1 Subjective and objective echo canceller testing – Fundamentals


One of the most important points in studying the performance of echo cancellers is to investigate how objective tests correlate with subjective tests.

The subjective test procedures (conversational test, talking and listening tests, listening-only tests) were suggested for standardization in ITU-T Rec. P.831. Based on the data from subjective tests parameters, determining the transmission quality for speech echo cancellers can be identified and in a second step conclusions can be drawn about important test procedures and requirements for laboratory tests.

The following paragraphs summarise how subjective tests results were used in order to develop objective tests.

I.7.5.1.1 Auditory test procedures

Figure I.3 demonstrates the structure and relation of the different subjective test procedures like *conversational tests*, *talking and listening tests* and *listening-only tests* together with parameters which can be assessed by these tests. The different procedures were developed as parts of the whole test set-up. The procedures were not performed in isolation but each test for a certain purpose.

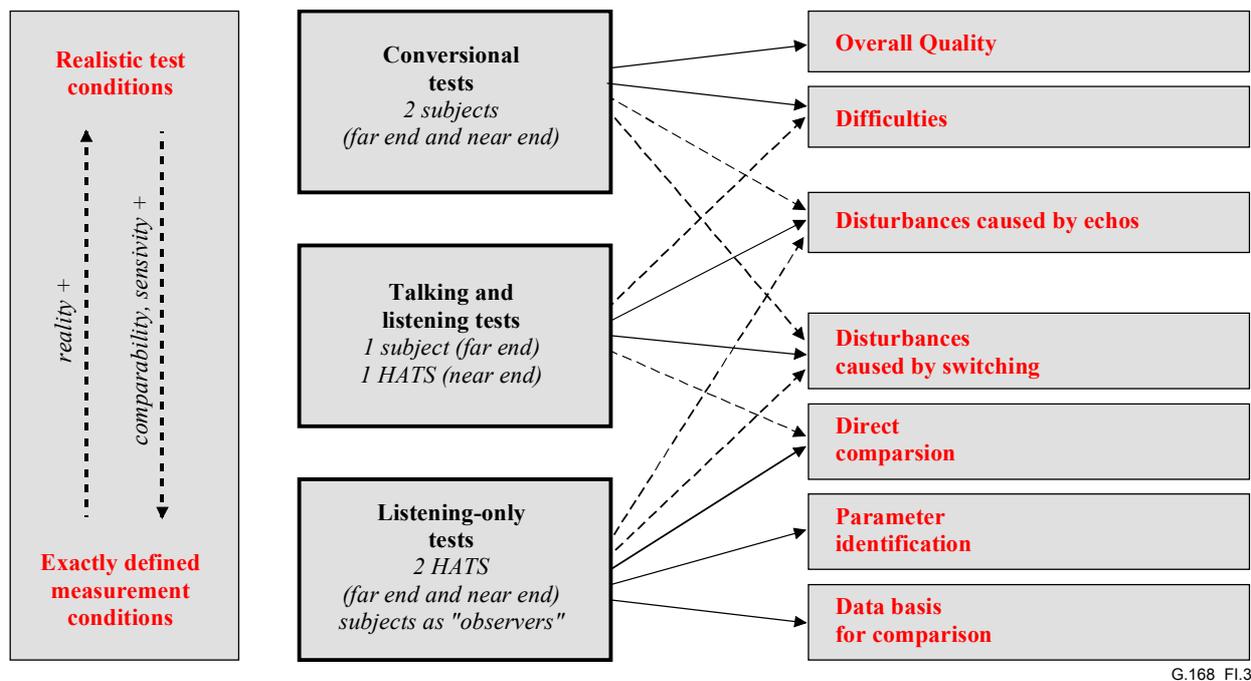

G.168_F1.3

Figure I.3/G.168 – Structure of subjective test procedures for speech echo cancellers and a selection of parameters

Conversational tests play an important role in the evaluation of speech echo cancellers, since the performance of the echo canceller influences the perceived quality of the overall telephone connection. During a conversational test, subjects give their rating of the quality of the *overall* connection after a *complete* conversation, thus taking into account all of the aforementioned performance factors. Conversational tests are therefore probably the most important tests designed to evaluate the influence of speech echo cancellers on overall transmission performance.

Furthermore the conversational tests are necessary to identify those parameters, which play an important role concerning the complex parameter '*overall quality*'. But on the other hand, such tests are not sensitive enough to evaluate specific transmission performance characteristics. If laboratory tests shall be developed and requirements for specific transmission parameters for echo cancellers shall be fixed (residual echo level, initial convergence, NLP behaviour, a.m.), other test procedures are necessary. For this purpose *talking and listening tests* and *listening-only tests* have been developed. If these tests are properly designed, they provide a powerful and effective method to investigate the effect which specific echo canceller parameters have on overall transmission performance. The results of these tests may therefore be directly correlated to the results of objective measurements.

I.7.5.1.2 Parameter identification by conversational tests

In 1996, conversational tests were carried out with 4 commercially available echo cancellers being at least G.165 compliant. After the test was finished, the operators who were present in the test rooms interviewed subjects about the *overall quality rating* and the *percentage difficulty in talking or listening over the connection (% D)*. The echo path characteristics and the corresponding test results are given in Figures I.4 and I.5.

In addition to these recommended questions, all subjects who answered the question about difficulties with "Yes" were additionally asked about *the kind of difficulties* they had. At the end of the interview each subject was asked about *the most annoying aspect* during the call they just had finished. The answers are of special interests for the operators not only for the subjective tests itself but also for the evaluation of those technical parameters which cause the problems for the

subscribers. This information gives an important idea about the relevance of instrumental parameters.

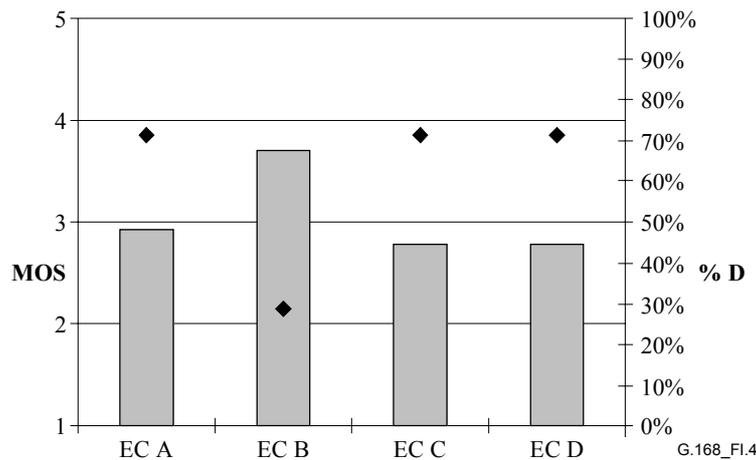


Figure I.4/G.168 – Results from *conversational tests*, overall quality MOS and % D (rhombus) for the 4 echo cancellers, ERL 7 dB, room noise level 40 dB(A), corresponding level –61 dBm0

A significant difference between echo canceller B and the other cancellers A, C and D could be analyzed in Figure I.4. The main focus of these tests was not to compare different echo cancellers but to identify the parameters that determine the subjectively perceived quality. If the comments about the difficulties during the conversation are analyzed, most of these quotations concern the following points:

- Audible speech clipping during double talk (implementation of the NLP). This is specially relevant for the design of Test 3C.

Instrumental measurements based on the Composite Source Signals demonstrate that echo canceller B in Figure I.4 shows a very good double talk performance. In connection with a high echo attenuation this leads to the best rating given through Figure I.4.

- Disturbances caused by echoes (initial convergence and residual echo). This is specially relevant for Tests 2A and 2B.

The echo signal of EC D itself was typically characterized as 'distorted' or '...like whispering'. This leads to significant worse MOS values compared to echo canceller B although the double talk performance was good.

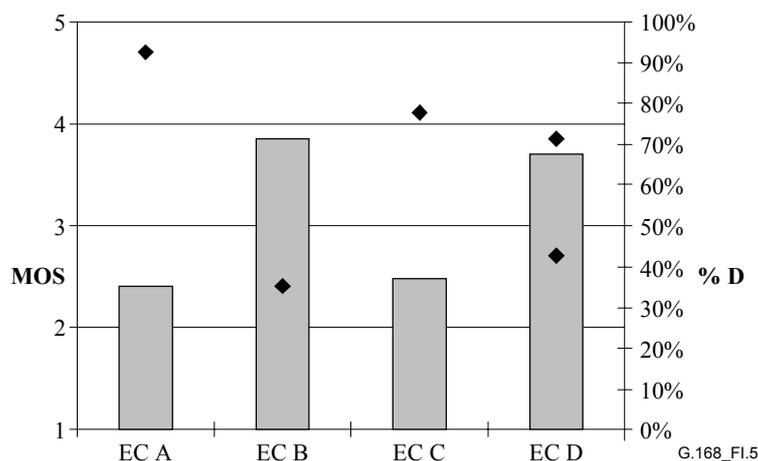


Figure I.5/G.168 – Results from *conversational tests*, overall quality MOS and % D (rhombus) for the 4 echo cancellers, 4-wire echo path, room noise level 50 dB(A), corresponding level –55 dBm0

The echo cancellers can be divided into two groups in Figure I.5. Both cancellers A and C are judged significantly worse than the cancellers B and D. Analyzing the comments of subjects after the tests expressing their rating of percentage difficulty, it clearly points out two important aspects:

- Clipping during double talk as the most annoying impairment. This is as specially relevant for the design of Test 3C.
Both echo cancellers B and D with good double talk performances in connection with this kind of echo path realization are judged significantly better.
- Quality of background noise transmission. There is currently no test to examine the quality of background noise transmission in this Recommendation.
The modulation of background noise is audible and annoying for subjects specially if the noise disappears when they start talking and the echo canceller attenuates the send path.

Conversational tests conducted by another Administration under different network conditions also pointed out the importance of the NLP performance. Significant differences between two of the echo cancellers under test appeared in these evaluation, when the signal levels were either above or below nominal. In one condition, it was concluded that the difference in performance was due to the clipping of speech in time, caused by operation of the non-linear processor and its associated control.

The results of conversational tests published by two Administrations and corresponding results of specific listening-only tests under double talk conditions indicate that the occurrence of clipping and gaps is very important to subjective performance. Objective measurements, concerning the switching characteristics of the NLP, give correlated parameters. The results of the different subjective test procedures clearly indicate that the control of the NLP and the associated switching characteristic under single and double talk conditions is one of the most important parameters. This influences the quality of background noise transmission and double talk performance. In addition, the echo attenuation during initial convergence and steady state conditions (under single and double talk conditions) is important.

I.7.5.1.3 Specific talking and listening tests

In the conversational tests, complaints were given concerning the echo disturbances for some of the echo cancellers under test. This indicates the need for a specific subjective test and corresponding objective test results to fix requirements for laboratory tests. For this purpose specific *talking and listening tests* were designed to evaluate talking related disturbances. Four echo cancellers were tested.

One part of this test considered the initial convergence of the echo cancellers, both with enabled and disabled NLP. The results of the subjective tests and correlating objective measurements are given in the following Figures:

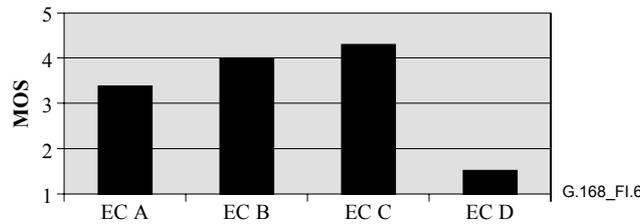


Figure I.6/G.168 – Results from *talking and listening tests*, MOS, disturbance caused by echoes, digital echo path, ERL 6 dB, no cancelled end background noise, NLP disabled

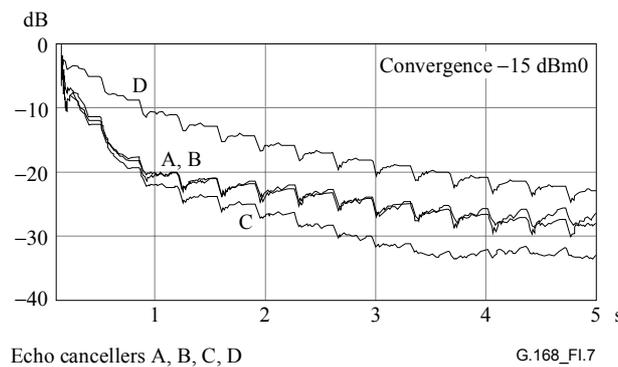


Figure I.7/G.168 – Convergence test versus time, digital echo path, ERL 6 dB, no cancelled end background noise, receive level -15 dBm0, NLP disabled

If the NLP is disabled, the results are given in Figure I.6. This test characterizes the convergence of the adaptive filters. The *talking and listening tests* are sensitive enough to point out differences between the tested echo cancellers. These differences could be expected from the test persons comments during the conversational tests but the conversational tests were not sensitive enough for a further comparison between the tested echo cancellers. The echo signal, which is produced by EC D causes the highest annoyance. These MOS values correlate to objective test results measured for the same echo cancellers as given in Figure I.7. This is relevant for Test 2B.

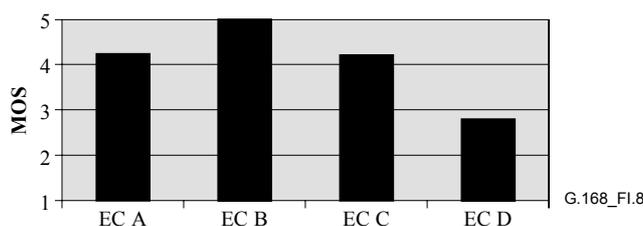


Figure I.8/G.168 – Results from *talking and listening tests*, MOS, disturbance caused by echoes, digital echo path, ERL 6 dB, background noise -55 dBm0, NLP enabled

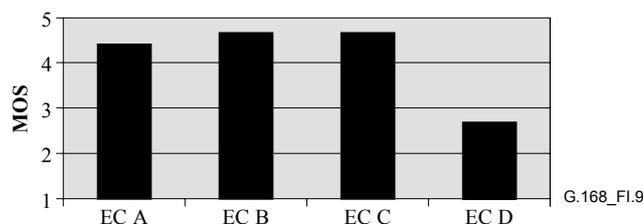


Figure I.9/G.168 – Results from *talking and listening tests*, MOS, disturbance caused by audible switching, digital echo path, ERL 6 dB, background noise –55 dBm0, NLP enabled

Figures I. 8 and I.9 give the results, if the NLP is enabled. Figure I.8 shows the ratings for the echo disturbances, if the NLP is enabled and Figure I.9 the corresponding results for audible clipping. EC D obtains the worse ratings with less than 3 points for both parameters. Echoes can be heard for a longer time until they are suppressed (Figure I.8). Audible switching causes a higher annoyance compared to the other three echo cancellers EC A, EC B and EC C (Figure I.9). The switching characteristic of EC D is more annoying compared to the other echo cancellers.

- Basically, several parameters cause the annoyance at the beginning of convergence: The initial convergence speed, determined as the echo attenuation vs time is one important aspect as given through the correlated subjective and objective test results in Figures I.6 and I.7. The switching characteristics of the NLP and the echo attenuation vs frequency influence the annoyance too. Correlated objective measurement results are given in Figures I.10 to I.13. The pictures show a spectral analysis of the echo signal versus time (x-axis) and frequency (y-axis) during initial convergence for the echo cancellers which were tested subjectively (Figures I.8 and I.9). High echo signal peaks are given in light colours, dark colours represent a better echo attenuation. These measurement results are again a very good example of how subjectively obtained test results can be correlated to objective analyses. The tests clearly point out that the echo cancellers A, B and C which were judged significantly better in the talking and listening tests (Figures I.8 and I.9) attenuate and suppress the residual echo faster than echo canceller D. This is relevant for Tests 2A and 2C. There is currently no test to examine the quality of background noise transmission in this Recommendation.


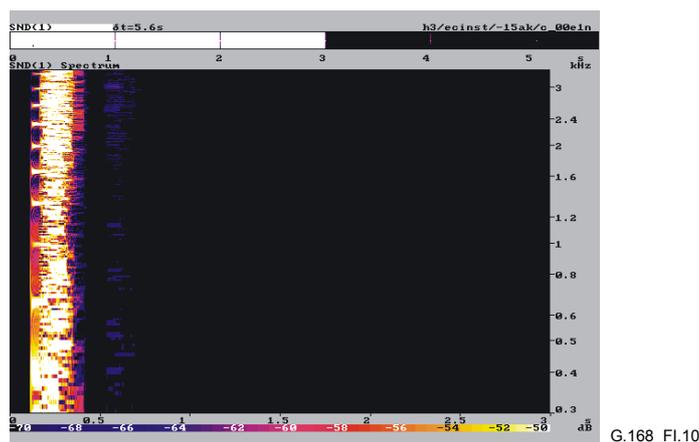


Figure I.10/G.168 – Echo cancellers A




G.168_Fl.11

Figure I.11/G.168 – Echo cancellers B

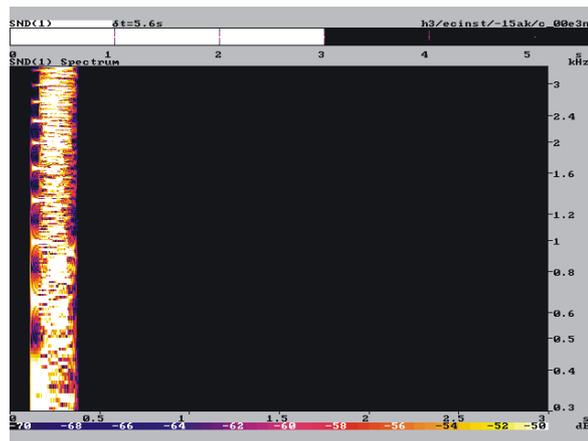

G.168_Fl.12

Figure I.12/G.168 – Echo cancellers C

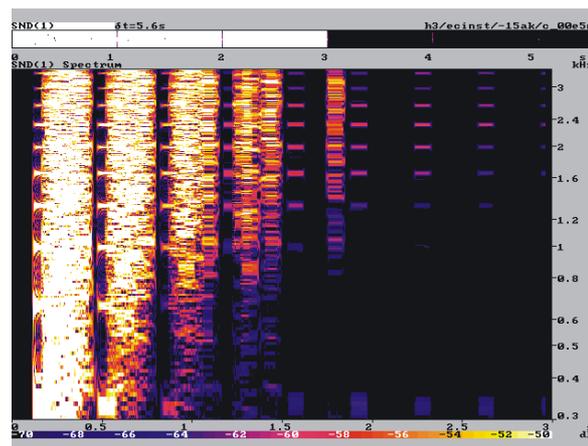

G.168_Fl.13

Figure I.13/G.168 – Echo cancellers D

Figures I.10, I.11, I.12 and I.13/G.168 – Spectral analysis of residual echo during initial convergence

Listening-only tests

A listening-only test is probably the most sensitive test method for the direct comparison of echo cancellers and for the evaluation of single transmission parameters. In addition to conversational tests and talking and listening tests, this test method was used for the evaluation of specific transmission parameters like residual echo levels, initial convergence or double talk performance.

Figures I.14 and I.15 show one example how the subjective test results were used to find values for laboratory tests. The double talk performance of six echo cancellers was accessed by a group of untrained subjects (Figure I.14) and experts (Figure I.15) for an ERL of 24 dB, a receive level of -15 dBm0 and a double talk level of -30 dBm0.

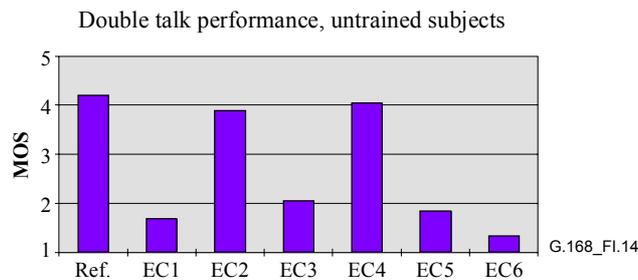


Figure I.14/G.168 – Results from listening-only tests, untrained subjects, double talk performance MOS, ERL 24 dB, receive level -15 dBm0, double talk level -30 dBm0

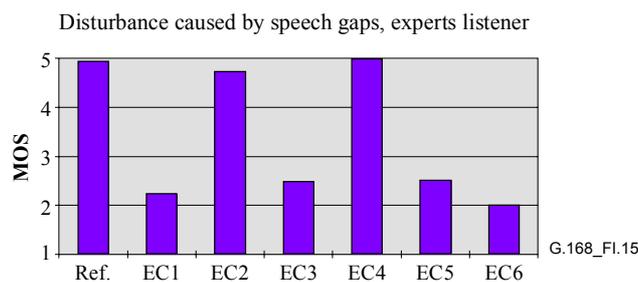


Figure I.15/G.168 – Results from listening-only tests, experts, disturbances during double talk caused by speech gaps MOS, ERL 24 dB, receive level -15 dBm0, double talk level -30 dBm0

Although the double talk signal level is very weak, the two echo cancellers EC2 and EC4 reach comparable MOS values like the undisturbed reference in Figure I.14. The untrained subjects assessed the parameter 'double talk performance'. This demonstrates the sensitivity of listening-only tests and indicates that even under these conditions a good transmission quality can be expected for echo cancellers. The other four speech echo cancellers are judged significantly worse. The ratings of the experts group for the disturbances caused by speech gaps (given in Figure I.15) show the same order of preference of the echo cancellers. This result again correlates to the conversational test result and the corresponding comments. It demonstrates that the annoyance caused by speech gaps seems to be the most important parameter.

Objective tests and test signals could be adapted to measure the correlated parameters. The tests pointed out that the degradation of a transmitted double talk signal is mainly determined by the insertion of the NLP during continuous speech. The correlated parameter is the switching characteristic of the NLP and its control during double talk. This is specially relevant for the design of Test 3C.

I.7.5.2 Subjective tests with the purpose of qualifying those effects of the echo cancellation process that cannot be captured by objective measurements

Subjective tests were performed with the purpose of qualifying those effects of the echo cancellation process that cannot be captured by objective measurements.

The results of the tests, judged by untrained and trained listeners, pointed out that one degradation of a transmitted double talk signal is mainly determined by the insertion of the NLP during continuous speech if the echo cancellers are fully converged. If CSS is used for the objective measurements, the switching characteristics can easily be determined after a burst of the double talk signal, because the time duration of all components is exactly defined for CSS. Subjective tests pointed out that a good double talk performance can be achieved even with double talk signal levels 15 dB lower than the receive input signal levels. If the bursts of the double talk CSS are not completely transmitted, the probability is high that longer speech gaps occur.

I.8 Guidelines on the use of parameters for testing echo cancellers

The tests in this Recommendation have many parameters which are specified as ranges. To provide some guidelines on a set of test conditions which should be considered at a minimum, the following is suggested. It is strongly cautioned that these values do not imply a sufficient set for compliance to this Recommendation, which is left for the discretion of the telecommunications providers. Also, it should be noted that all possible combinations of these parameters listed below would be time consuming.

- 1) *Echo path delay*
 - a) Δ – dispersion of $g(k) - 4$.
 - b) $\Delta/2 - 4$.
 - c) $\Delta/10$.
- 2) *Echo return loss*
 - a) 6 dB.
 - b) 15 dB.
 - c) 30 dB.
- 3) *Receive-in level (L_{Rin})*
 - a) Maximum specified input level for the particular test.
 - b) -10 dBm0.
 - c) -20 dBm0.
 - d) Minimum specified input level for the particular test.
- 4) *Initial condition of H Register*
 - a) H register reset.
 - b) H register converged to an open echo path.
 - c) H register converged to some $g(k)$.

I.9 Bibliography

- [1] COM 25–27-E (1993): The composite source signal as a measuring signal and a summary of various investigations on speech echo cancellers.

Appendix II

Measurement methods for characteristics of echo paths

II.1 Introduction

Knowledge of an echo path is necessary in order to control voice echo efficiently in telecommunication systems. Two of the main characteristics of an echo path are the dispersion time and frequency response. This appendix summarizes the measurement techniques used to obtain the echo-path impulse responses in telephone networks. It also provides analysis results for the echo paths measured in real networks.

The appendix is organized as follows. Clause II.2 gives details on the existing measurement procedures. The generation of echo-path characteristics is explained in II.3. Clause II.4 contains examples of the characteristics of echo paths measured in real networks. Finally, clause II.5 presents the conclusions.

This appendix does not include any reference to Echo Return Loss (ERL) measurements. This is because this Recommendation specifies that all echo cancellers should operate and meet the requirements of all the tests with an ERL ≥ 6 dB.

More information on the characteristics of echo paths may be found on the ITU-T Web site.

II.2 Measurement procedure

Figure II.1 shows a typical call configuration where $x(k)$ and $y(k)$ are, respectively, the signals to and from the cancelled end. Because of the impedance mismatch in the hybrid that connects the 2-wire and 4-wire circuits, part of the signal from the non-cancelled end will leak through the hybrid and propagate back to the talker to form an echo. If the user in the cancelled end is not talking, $y(k)$ will be the echo signal. Therefore measurement of the signals $x(k)$ and $y(k)$ is performed to obtain the echo-path characteristics.

NOTE – The existence of level control devices, e.g. ALC (automatic level control), HLC (high level compensation), amplifiers, or attenuators along the path from the hybrid to the measurement device can affect the measured ERL values.

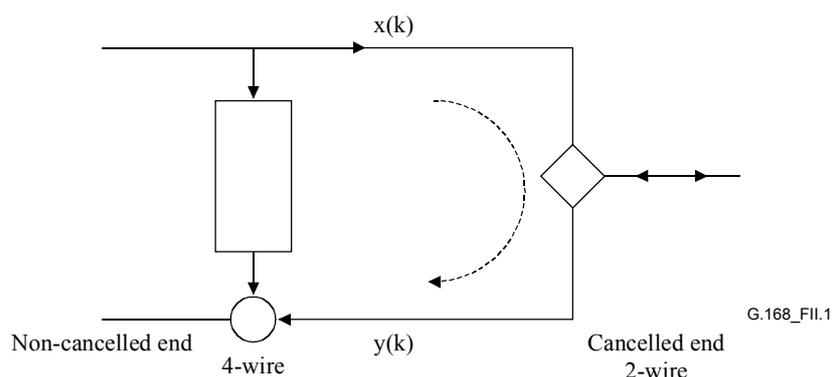


Figure II.1/G.168 – A typical call connection

II.2.1 Measurement set-up

II.2.1.1 Intrusive measurement set-up

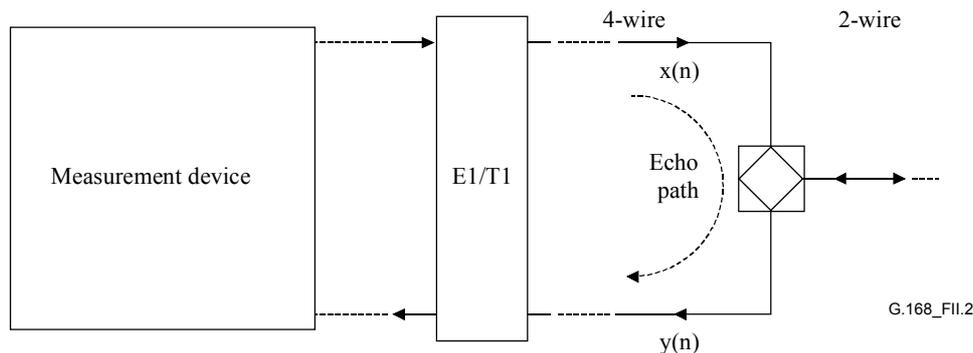


Figure II.2/G.168 – Block diagram of intrusive measurement set-up

Figure II.2 is the block diagram of the intrusive measurement set-up. The measurement device generates the test signal and performs the signal recording. The equipment uses a 4-wire connection for sending and receiving signals.

When a T1/E1 interface is not available, the test signal could be generated at a 2-wire point. In any case, the signals (transmit and receive) should be measured at the 4-wire digital point where the signals are well defined (in terms of level).

During measurement, the equipment first dials a telephone number. It then sends out the test signal after the call is established. The test signal goes through the T1/E1 interface, the central office (CO) and the PSTN to a distant user. Part of the transmitted signal is reflected back in the form of an echo. Both the transmitted signal and the returned echo are recorded in the equipment using a synchronous recorder. The two recorded signals are the R_{in} and S_{in} signals for an echo canceller.

NOTE – It must be ensured that no echo canceller nor echo suppressor is present in the connection.

II.2.1.2 Non-intrusive measurement set-up

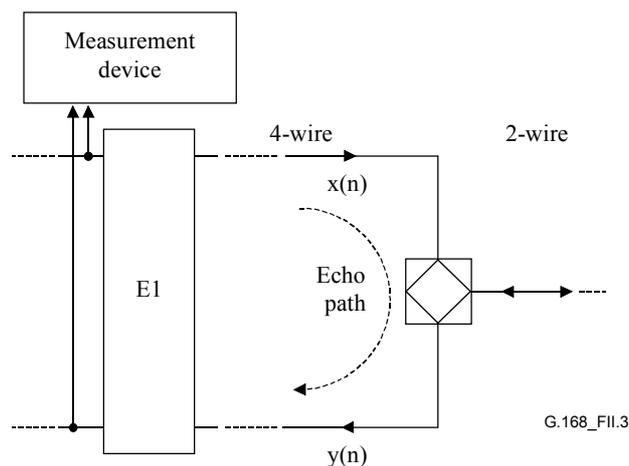


Figure II.3/G.168 – Block diagram of non-intrusive measurement set-up

Figure II.3 is the block diagram of the non intrusive measurement set-up based on the use of an "In-service Non-intrusive Measurement Device" (see ITU-T Rec. P.561 for complete information). Prior to any measurements, it must be ensured that no echo canceller or echo suppressor is present in the connection. The measurement device monitors the source signal $x(n)$ and echo signal $y(n)$ at the T1/E1 interface.

II.2.2 Computation of the echo path impulse response

Computation of the echo path impulse response requires the perfect knowledge of the transmit and receive test signals. Two methods based on two different test signals are described herein.

II.2.2.1 Method 1: LS/LMS algorithms based on white noise injection

The test signal used is shown in Figure II.4. It consists of three segments. The first segment is a 2100 Hz tone with phase reversal. The purpose of the tone is to disable all the echo cancellers and echo suppressors in the link during measurement. The duration of the tone is set to $T_1 = 1.35$ s. The amplitude of the tone is -12 dBm0. The second segment is a pause. Its purpose is to obtain the background noise characteristics in the returned echo signal. Since a tone-disabled echo canceller, as specified in clause 7 and ITU-T Recs G.164 and G.165, will enable itself within $250 \text{ ms} \pm 150 \text{ ms}$ when the signal level is below -39 dBm0, the duration of the pause is set to $T_2 = 80$ ms. The third segment is a Gaussian white noise signal which is used to identify the echo-path impulse response. The power level of the white noise signal is -18 dBm0 and its duration is $T_3 = 5$ s.

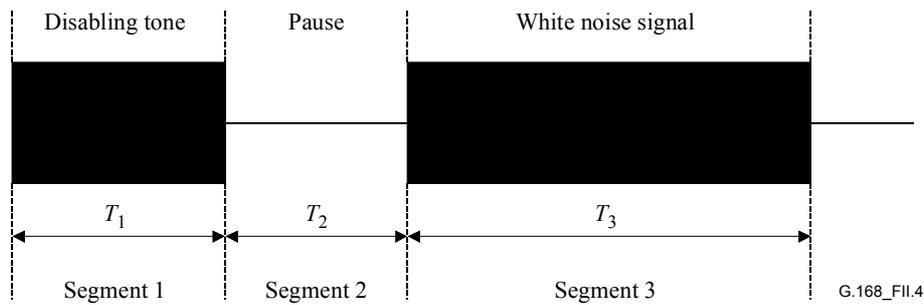


Figure II.4/G.168 – Test signal for echo-path measurement

Computation of impulse response

The echo signal can be modelled as:

$$y(n) = x(n) * h^o(n) + v(n) = \sum_{i=0}^{N-1} h^o(i) x(n-i) + v(n), \quad n = 0, 1, 2, \dots, L-1$$

where N is the length of the echo-path impulse response and L is the total number of data samples available. Define vectors:

$$\mathbf{h}^o = [h^o(0), h^o(1), \dots, h^o(N-1)]^T$$

and:

$$\mathbf{x}(n) = [x(n), x(n-1), \dots, x(n-N+1)]^T$$

In vector notation,

$$y(n) = \mathbf{x}(n)^T \mathbf{h}^o + v(n), \quad n = 0, 1, 2, \dots, L-1$$

The estimation problem can be stated as follows: Given L samples of $x(n)$ and $y(n)$, compute the echo-path impulse response \mathbf{h}° . This is a standard system identification problem which can be solved by two common approaches. One is the least-squares (LS) method and the other is the iterative method using the normalized least-mean square (NLMS) algorithm. The first method yields a good solution with short data record. However, it is more computationally intensive than the second method. In most cases, provided that the data length L is large enough, the final solutions from both methods are very close and the difference is insignificant.

LS method

Define error signal:

$$e(n) = y(n) - \mathbf{h}^T \mathbf{x}(n)$$

where \mathbf{h} is the echo-path impulse response estimate. The LS method minimizes:

$$J = \sum_{n=0}^{L-1} e(n)^2$$

to determine \mathbf{h} . The corresponding solution can be shown to be:

$$\mathbf{h} = \mathbf{R}^{-1} \mathbf{p}$$

where:

$$\mathbf{R} = \sum_{n=0}^{L-1} \mathbf{x}(n) \mathbf{x}(n)^T$$

$$\mathbf{p} = \sum_{n=0}^{L-1} y(n) \mathbf{x}(n)$$

NLMS method

The NLMS method finds \mathbf{h} iteratively using the following equations:

$$e(n) = y(n) - \mathbf{h}(n)^T \mathbf{x}(n)$$

$$\mathbf{h}(n+1) = \mathbf{h}(n) + \frac{\mu}{\delta + \mathbf{x}(n)^T \mathbf{x}(n)} e(n) \mathbf{x}(n)$$

where $\mathbf{h}(n)$ denotes the echo-path estimate at time n , δ is a small positive number and μ is a positive constant called step-size. The step-size must be less than 2 to allow convergence.

II.2.2.2 Method 2: Hadamard transform based on MLS sequence injection

The test signal consists in the use of MLS (Maximal Length Sequence) (binary sequence which instantaneous value is ± 1 , periodical of period L). The test signal is therefore a pseudo-random signal which has statistical properties close to white noise. Its autocorrelation function is circular and can be expressed as :

$$C_{xx}(n) = \frac{1}{L} \sum_{m=0}^{m=L-1-n} x(m-n)x(m) = \begin{cases} 1 & \text{if } n \equiv 0 \text{ modulo } L \\ -\frac{1}{L} & \text{otherwise} \end{cases}$$

Defining the function $\delta^L(n)$ by : $\delta^L(n) = \begin{cases} 1 & \text{if } n \equiv 0 \text{ modulo } L \\ 0 & \text{otherwise} \end{cases}$, the autocorrelation function can be rewritten as:

$$C_{xx}(n) = \left(1 + \frac{1}{L}\right) \delta^L(n) - \frac{1}{L}$$

Computation of impulse response

The echo signal can be modelled as : $y(n) = h * x(n)$ when the circuit noise is ignored. If we assume that the signal $x(n)$ is a white noise, the impulse response h is given by the crosscorrelation function of signals $y(n)$ and $x(n)$:

$$C_{xy}(n) = C_{xx}(n) * h$$

In case of a MLS sequence as described above, this equation is expressed equivalently as:

$$C_{xy}^L(n) = \frac{1}{L} \sum_{m=0}^{m=L-1} x(m-n)y(m) = \left(1 + \frac{1}{L}\right) \delta^L(n) * h - \frac{1}{L} \bar{h}$$

where \bar{h} is the DC offset. In fact, the term $\frac{1}{L} \bar{h}$ can be neglected for two reasons: the DC offset of the measured impulse response is in principle equal to zero and, in practice, the length of the sequence is chosen to be at least 2^{14} samples. Then, this equation shows that the crosscorrelation function $C_{xy}^L(n)$ exhibits a periodic property analogous to the measured impulse response multiplied by $(1 + 1/L)$. Since $x(n)$ is a pseudo-random noise, the computation of crosscorrelation function is easily performed by the Hadamard transform (see [1] of II.6).

II.3 Analysis of echo-path characteristics

This clause describes methods of echo-path impulse response analysis. The echo-path characteristics considered are dispersion width and magnitude response of echo paths.

Before the analysis of echo-path characteristics, the measured echo-path impulse responses should be post-processed by a bandpass filter which covers the same frequency region as a speech signal. The passband of the filter is from 200 Hz to 3600 Hz, the same frequency range as that of the CS signal specified in C.3.1.

II.3.1 Dispersion time


The echo-path impulse response is not a single impulse. It has a finite duration which we shall refer to as dispersion time. The dispersion time is a factor to determine the length of the H register in an echo canceller. A region where the echo reflection occurs is first located from an impulse response measurement. The duration for this region should be long enough to cover the entire echo reflection. For example, in the North American measurements, it was set to 30 ms. This corresponds to 240 samples at 8 kHz sampling rate. The impulse response in this range is denoted as $h(n)$, $n = 0, 1, \dots, M$, where $M = 239$. If we truncate $h(n)$ by keeping the impulse response values from $n = N_1$ to N_2 , then the relative square-error due to truncation is:

$$ERR = 1 - \frac{\sum_{n=N_1}^{N_2} h(n)^2}{\sum_{n=0}^M h(n)^2}$$

Figure II.5 shows such a possible truncation. According to Figure 11, we need the largest amount of echo reduction at 0 dBm0 L_{Rin} . With 6 dB ERL, this translates to $30 - 6 = 24$ dB ERLE provided by an echo canceller. Hence the dispersion time is considered to be the shortest length $N_2 - N_1 + 1$ such

that the *ERR* is less than -24 dB.

Note that the method suggested here to compute the dispersion time is for the worst case scenario. This is because a 6 dB ERL is assumed to compute the *ERR* threshold. In practice, the ERL is much higher. The dispersion time is shorter when ERL increases.

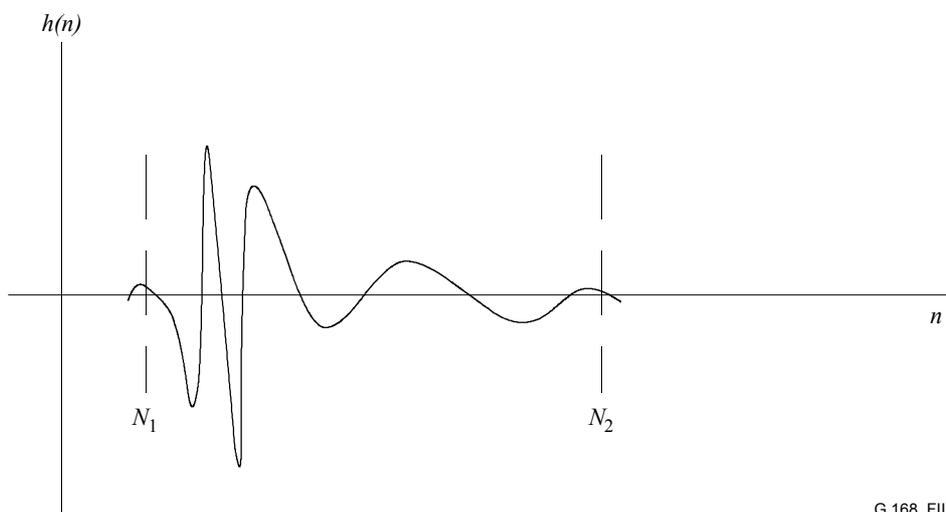

G.168_FII.5

Figure II.5/G.168 – Echo-path truncation for dispersion time estimate

II.3.2 Magnitude response of echo path

While the echo-path impulse responses can be quite different in shape, the frequency domain characteristics of the echo paths are expected to have some similarity. The magnitude response characteristics of echo path can be generated by taking the average of the magnitude of the Fourier transform of each echo-path measurement.


II.4 Examples of echo path measurements from real networks

II.4.1 Echo-path characteristics from measurements in North America

During the period from June 1998 to April 1999, 101 long-distance calls were made from Montreal to the following Provinces and States across North America: Arizona, British Columbia, California, Louisiana, Manitoba, Massachusetts, Michigan, Minnesota, Missouri, Nevada, New York, North Carolina, Ontario, Quebec, Saskatchewan, Texas and Wisconsin. The measurements were made using the set-up as shown in Figure II.2. The send-out and returned signals were recorded in each call and the echo-path impulse responses were computed using the method described in II.2.2.1. This clause reports the echo-path characteristics generated from the above echo-path measurements.

II.4.1.1 Dispersion time

Figure II.6 is the histogram of the echo-path dispersion time. The largest percentage of dispersion time was between 5-7 ms. Only two calls had dispersion time between 11-12 ms. There was no call with dispersion time over 12 ms.

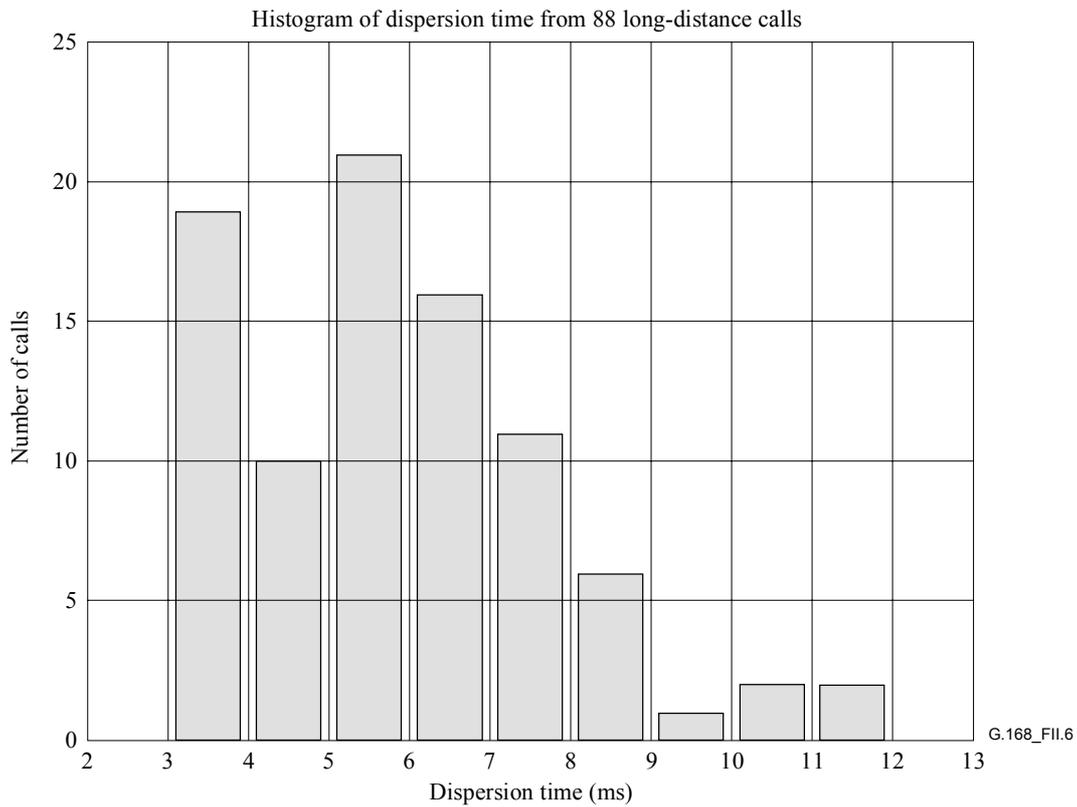

**Figure II.6/G.168 – Histogram of dispersion time for long-distance calls:
Mean = 6.02 ms, StD = 2.26 ms**

II.4.1.2 Magnitude response of echo path

Figure II.7 is the average of the magnitude spectra of the measured echo-path impulse responses. The impulse responses were normalized to have unit energy before the spectra were computed. The solid line is the mean and the two dotted lines represent the one standard deviation region. It appears that the variance of magnitude spectra is not large. This indicates that there is a high consistency among the magnitude responses in the echo-paths. The averaged magnitude spectrum has a small peak around 250 Hz. In addition, the magnitude responses are relatively flat.

The results are consistent with the study in the article "Echo Performance of Toll Telephone Connections in the United States," by F. P. Duffy, G. K. McNees, I. Nasell, and T. W. Thatcher, Jr., in Bell System Technical Journal, 1974.

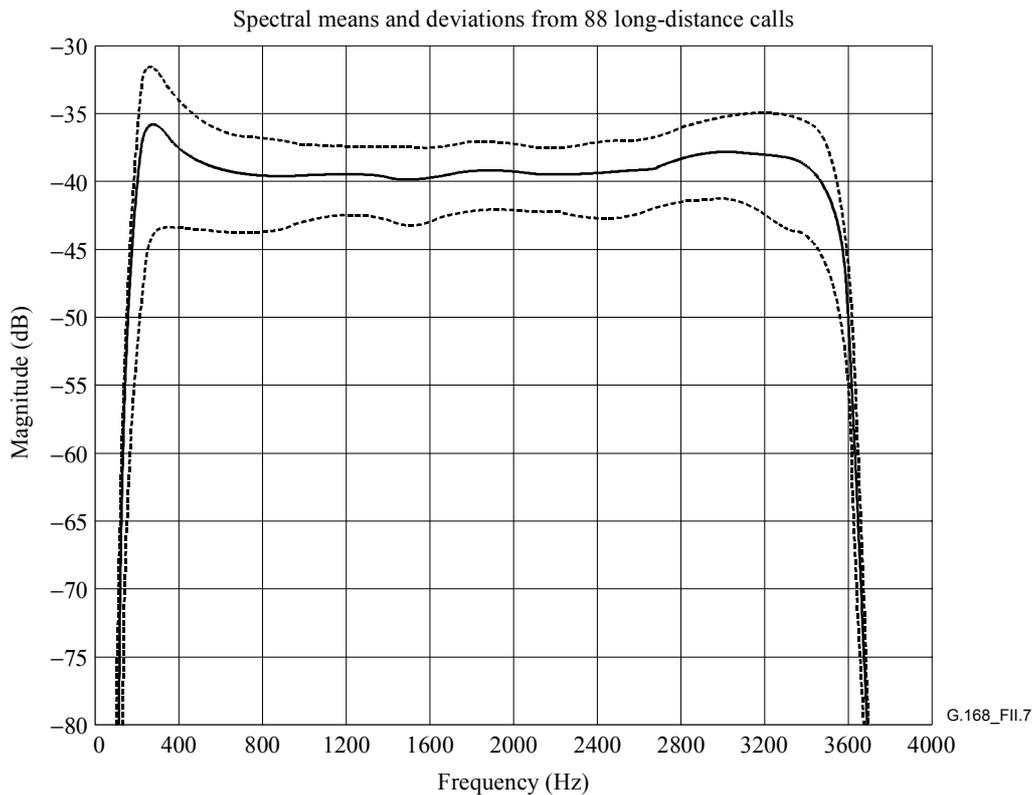


Figure II.7/G.168 – Magnitude spectra of echo paths for long-distance calls, echo paths normalized to have unity energy

II.4.1.3 Multiple reflections

We have observed 6 double reflections from the 101 long-distance calls. However, the total dispersion times of these double reflections were all limited to 10 ms. In other words, the two reflectors in each of these cases were closely located.

The number of reflections did not exceed two in the measurements.

II.4.2 Echo path characteristics from measurements in Europe

Measurements were made in the telephone networks in France using the set-up described in II.2.1. There are three types of echo path impulse responses. The impulse and frequency responses of these three types of echo paths are shown in Figures II.8 to II.10. They have equivalent characteristics of echo path models $m_1(k)$, $m_5(k)$ and $m_6(k)$ of Annex D.

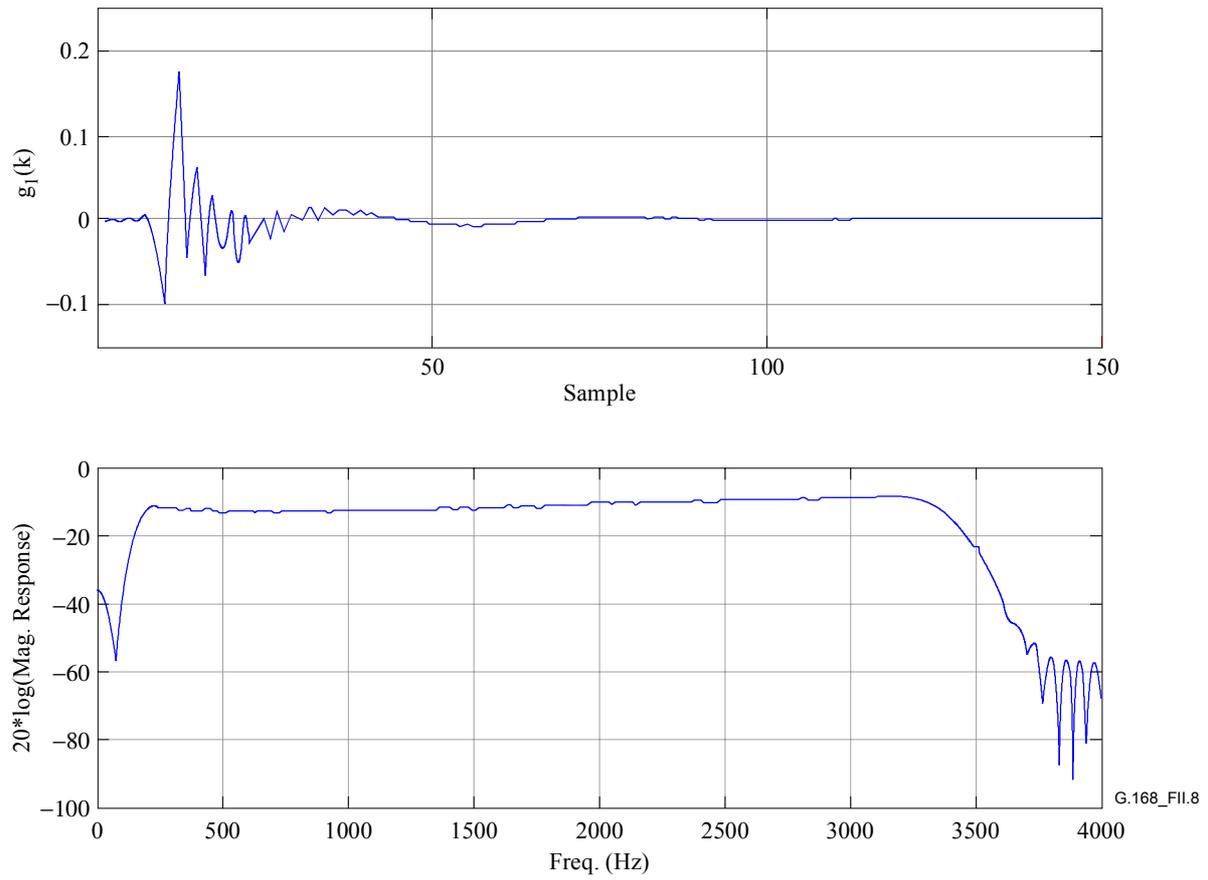


Figure II.8/G.168 – Echo path impulse response g_1 , an ERL of 12 dB was used in the magnitude response plot

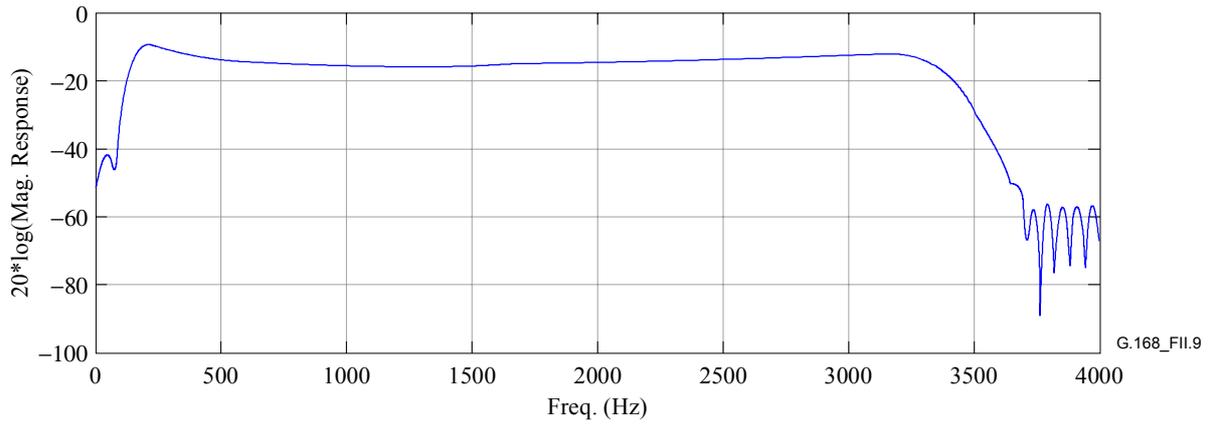
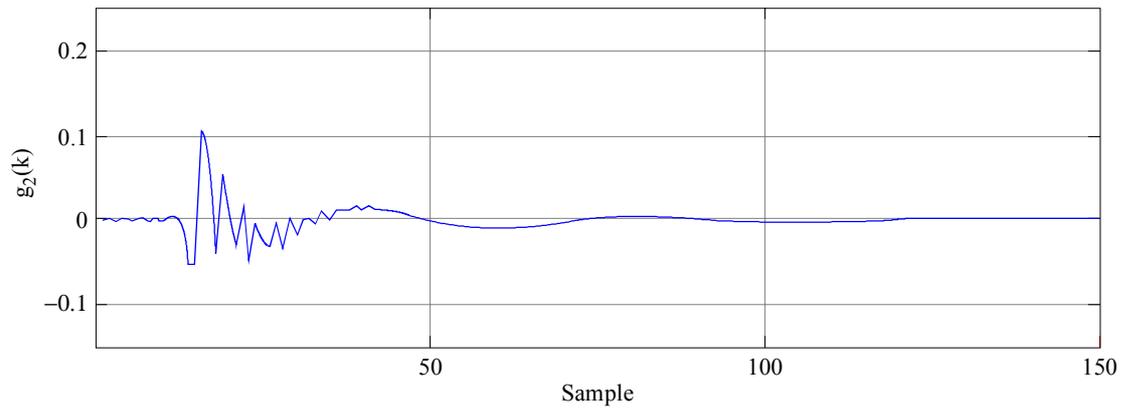


Figure II.9/G.168 – Echo path impulse response g_2 , an ERL of 12 dB was used in the magnitude response plot

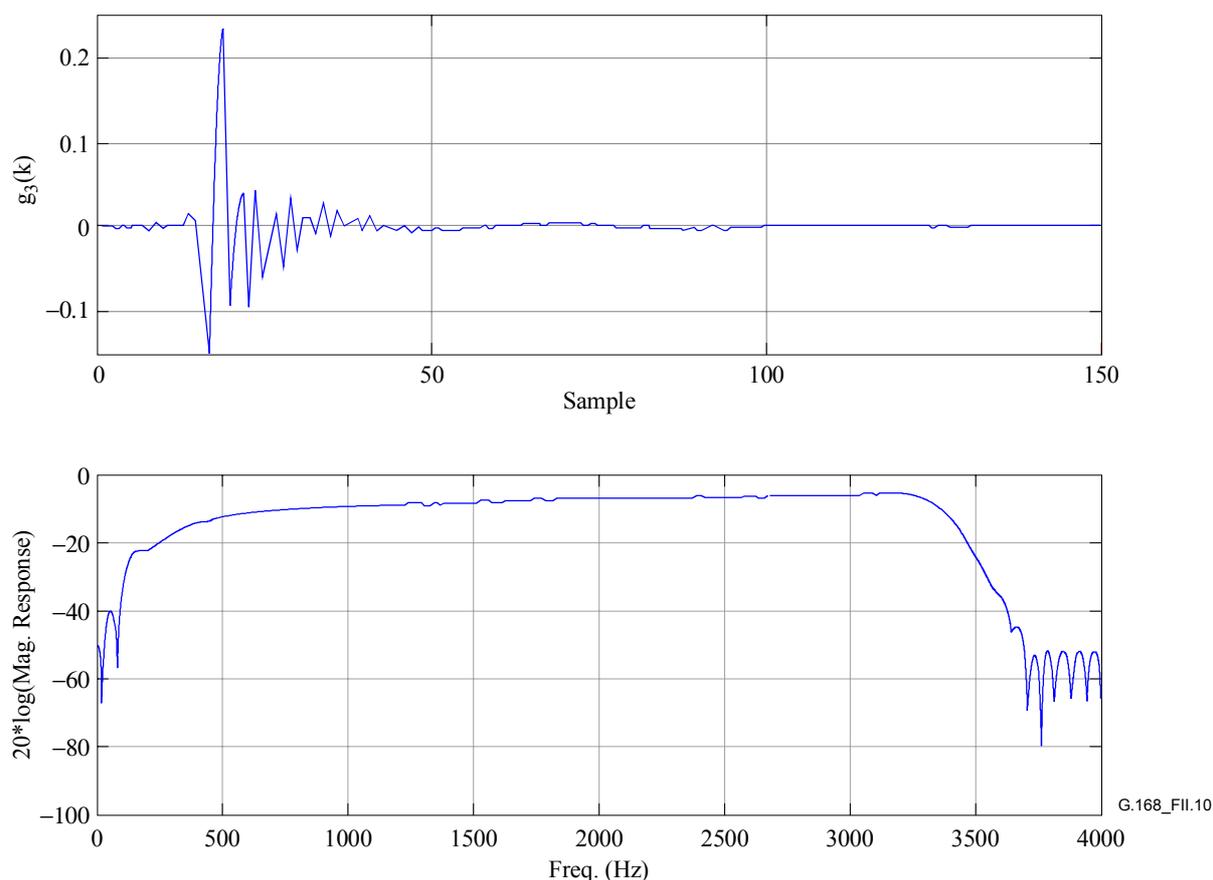


Figure II.10/G.168 – Echo path impulse response g_3 , an ERL of 12 dB was used in the magnitude response plot

II.5 Conclusions

This appendix summarized the measurement procedures together with the computation of echo-path impulse response and its characteristics. Also included are the results from a number of echo paths measured in North America and Europe. The results can serve as references in designing a digital echo path for the testing of echo cancellers in this Recommendation. Specifically, the following important properties of echo paths are observed:

- The dispersion time of an echo path is within 12 ms.
- The magnitude response of most echo paths is relatively flat, with a small peak around 250 Hz.
- On some occasions double reflections may occur. Three or more reflections, however, rarely occur.

II.6 Bibliography

- [1] BORISH (J.), ANGEL (J. B.): An efficient algorithm for measuring the impulse response using pseudo-random noise, *Journal of the Audio Engineering Society*, Vol. 31, pp. 478-488, 1983.

Appendix III

Multiple tail circuits

In modern networks, it may be the case that a two-party call is modified after the call is initially set up, so that one or more additional parties can participate in the conversation, as illustrated in Figure III.1.

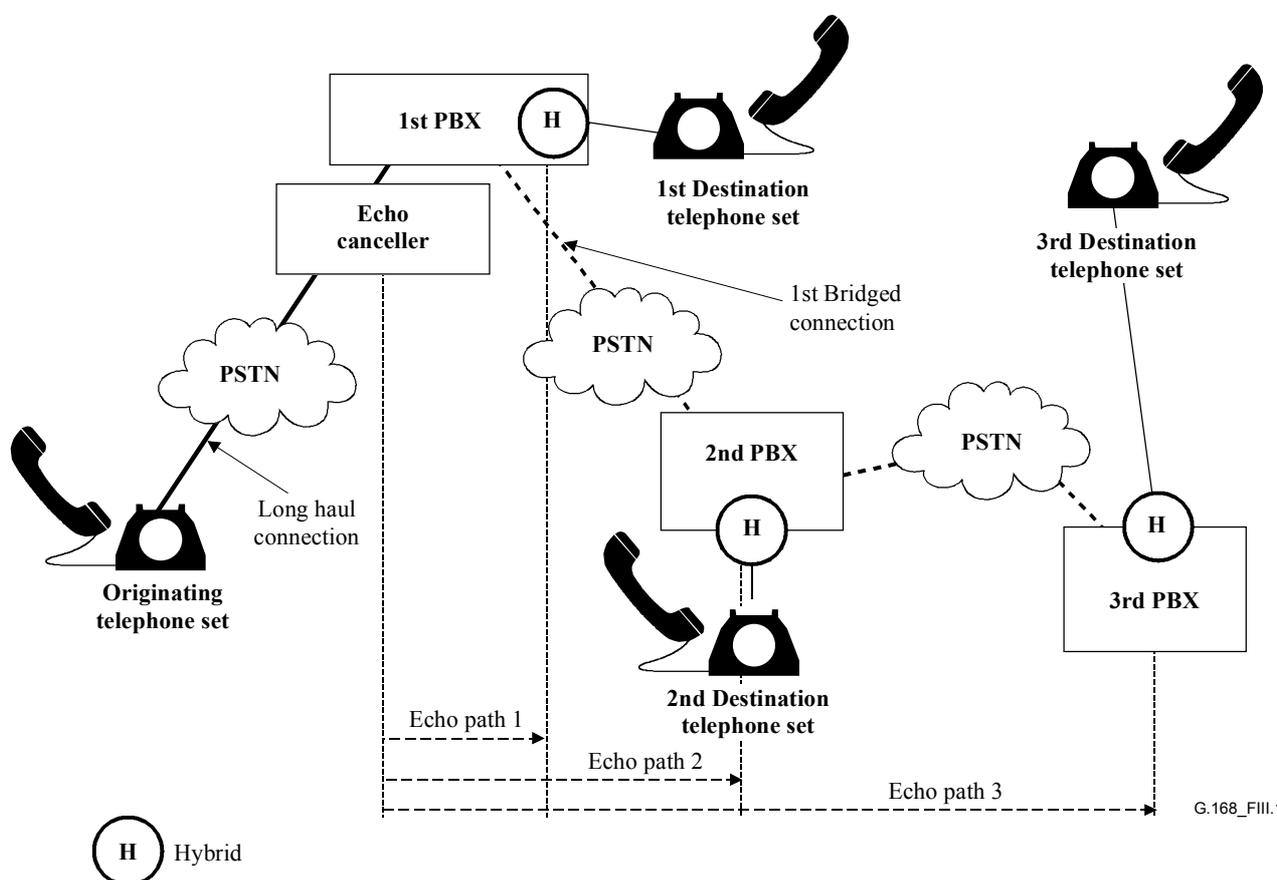


Figure III.1/G.168 – Multiple tails in a typical bridged telephone call

In Figure III.1, the originating telephone set initiates a call to the 1st destination set. The echo canceller sees the hybrid associated with the 1st PBX, illustrated as echo path 1. The recipient at the 1st PBX then bridges in a 2nd destination set by using the bridging function found on all modern PBXs. The echo canceller now sees the second hybrid, appended to the first, and delayed in time by the network delay between PBX 1 and 2. This is illustrated as echo path 2. The second destination may well bridge in a third destination, adding another hybrid tail associated with the hybrid in the 3rd PBX, and delayed by the sum of the network delay between PBX 1 and 2, and PBX 2 and 3. This is illustrated as echo path 3.

PBXs may not have any echo cancellation built into them, even though they perform this bridging function. This requires that the network echo canceller be able to support multiple tails up to the echo tail capacity of the canceller.

Network operators and administrators should take this into account when testing echo cancellers for use in their network.

SERIES OF ITU-T RECOMMENDATIONS

Series A	Organization of the work of ITU-T
Series B	Means of expression: definitions, symbols, classification
Series C	General telecommunication statistics
Series D	General tariff principles
Series E	Overall network operation, telephone service, service operation and human factors
Series F	Non-telephone telecommunication services
Series G	Transmission systems and media, digital systems and networks
Series H	Audiovisual and multimedia systems
Series I	Integrated services digital network
Series J	Cable networks and transmission of television, sound programme and other multimedia signals
Series K	Protection against interference
Series L	Construction, installation and protection of cables and other elements of outside plant
Series M	TMN and network maintenance: international transmission systems, telephone circuits, telegraphy, facsimile and leased circuits
Series N	Maintenance: international sound programme and television transmission circuits
Series O	Specifications of measuring equipment
Series P	Telephone transmission quality, telephone installations, local line networks
Series Q	Switching and signalling
Series R	Telegraph transmission
Series S	Telegraph services terminal equipment
Series T	Terminals for telematic services
Series U	Telegraph switching
Series V	Data communication over the telephone network
Series X	Data networks and open system communications
Series Y	Global information infrastructure and Internet protocol aspects
Series Z	Languages and general software aspects for telecommunication systems

23300