

International Telecommunication Union

ITU-R
Radiocommunication Sector of ITU

Report ITU-R BT.2344-2
(04/2018)

**Information on technical parameters,
operational characteristics and
deployment scenarios of SAB/SAP
as utilized in broadcasting**

BT Series
Broadcasting service
(television)



International
Telecommunication
Union

Foreword

The role of the Radiocommunication Sector is to ensure the rational, equitable, efficient and economical use of the radio-frequency spectrum by all radiocommunication services, including satellite services, and carry out studies without limit of frequency range on the basis of which Recommendations are adopted.

The regulatory and policy functions of the Radiocommunication Sector are performed by World and Regional Radiocommunication Conferences and Radiocommunication Assemblies supported by Study Groups.

Policy on Intellectual Property Right (IPR)

ITU-R policy on IPR is described in the Common Patent Policy for ITU-T/ITU-R/ISO/IEC referenced in Annex 1 of Resolution ITU-R 1. Forms to be used for the submission of patent statements and licensing declarations by patent holders are available from <http://www.itu.int/ITU-R/go/patents/en> where the Guidelines for Implementation of the Common Patent Policy for ITU-T/ITU-R/ISO/IEC and the ITU-R patent information database can also be found.

Series of ITU-R Reports

(Also available online at <http://www.itu.int/publ/R-REP/en>)

Series	Title
BO	Satellite delivery
BR	Recording for production, archival and play-out; film for television
BS	Broadcasting service (sound)
BT	Broadcasting service (television)
F	Fixed service
M	Mobile, radiodetermination, amateur and related satellite services
P	Radiowave propagation
RA	Radio astronomy
RS	Remote sensing systems
S	Fixed-satellite service
SA	Space applications and meteorology
SF	Frequency sharing and coordination between fixed-satellite and fixed service systems
SM	Spectrum management

Note: This ITU-R Report was approved in English by the Study Group under the procedure detailed in Resolution ITU-R 1.

Electronic Publication
Geneva, 2018

© ITU 2018

All rights reserved. No part of this publication may be reproduced, by any means whatsoever, without written permission of ITU.

REPORT ITU-R BT.2344-2

Information on technical parameters, operational characteristics and deployment scenarios of SAB/SAP as utilized in broadcasting

(2015-2016-2018)

TABLE OF CONTENTS

Page

Annex 1	Definition of SAP/SAB, ENG/OB, SNG and further terminology.....	4
Annex 2	Audio Applications.....	6
1	Overview	6
2	Introduction	6
3	Technical aspects.....	7
3.1	General requirements and operating principles for audio links including radio microphones and in ear monitor systems.....	7
3.2	Definitions: analogue, digital and cognitive audio SAB/SAP.....	11
3.3	Current state of play.....	14
4	Spectrum use of audio SAB/SAP applications for broadcasting.....	14
4.1	Studio production.....	14
4.2	News gathering for TV/radio/ internet.....	15
4.3	Sound broadcasters	16
4.4	Regular (sport) events and similar outside broadcasts	16
5	Frequency bands for audio SAB/SAP applications in CEPT	16
6	Spectrum and operation of radio microphones and planning for digital radio microphones in Japan	18
6.1	Spectrum and operation of radio microphones	18
7	Frequency bands for audio SAB/SAP applications in the United States	21
8	Future developments related to audio SAB/SAP applications	21
8.1	Considerations on future perspectives for audio SAB/SAP applications.....	21
8.2	Future challenges	22
8.3	New RF channel bandwidth.....	22

8.4	Future technologies.....	22
Attachment 1 to Annex 2	Supplementary information on technical SAB/SAP characteristics	23
Attachment 2 to Annex 2	A method to measure the radio microphone receiver <i>C/I</i>	40
Attachment 3 to Annex 2	Deployment of Audio SAB/SAP applications depending on the category	42
Annex 3	Deployment examples of video applications.....	43
1	Introduction	43
2	Cordless video cameras and video links.....	43
2.1	Rationale for cordless use	43
2.2	Changes in use of video links	43
3	Description of video SAB/SAP applications.....	45
3.1	Applications versus spectrum limitations.....	52
3.2	Other applications	52
3.3	Current usage of certain frequency bands for wireless camera and video links in CEPT countries.....	53
3.4	HDTV/UHDTV digital terrestrial electronic news gathering (ENG) in Japan ..	54
Annex 4	References	69

Introduction

Radiocommunication Assembly (RA-15) established Resolution ITU-R 59 – Studies on availability of frequency bands and/or tuning ranges for worldwide and/or regional harmonization and conditions for their use by terrestrial electronic news gathering systems, which:

quote

resolves

1 to carry out studies regarding possible solutions for global/regional harmonization of frequency bands and tuning ranges for ENG use focused on bands already allocated on a primary or secondary basis, to the fixed, mobile or broadcasting services, taking into account:

- available technologies to maximize efficient and flexible use of spectrum;
- system characteristics and operational practices which facilitate the implementation of these solutions;

2 to develop ITU-R Recommendations and/or ITU-R Reports based on the aforementioned studies, as appropriate,

further resolves

1 to encourage administrations to develop relevant information concerning their national ENG use (e.g. a list of frequency bands or tuning ranges available for ENG, spectrum management practices, technical and operational requirements, and spectrum authorization points of contact, as appropriate ...) for use by foreign entities during worldwide newsworthy events;

2 to encourage administrations to consider, for harmonization purposes, frequency bands/tuning ranges used for ENG by other administrations.

unquote

ITU-R has established the following to provide guidance to its studies:

- Question 89-1/6 – User requirements for electronic news gathering
- Question 93/6 – Frequency requirements for electronic news gathering
- Question 121/6 – Spectrum usage and user requirements for wireless microphones.

Study Group 6 has been encouraged to undertake studies based on user and frequency bandwidth requirements of the broadcasting communities contributions to Study Group 6. This Report reflects these studies.

Overview

Since the publication of Report ITU-R BT.2069, technology used for SAB/SAP has made significant technical progress. This has led to the use of new technologies for SAB/SAP:

- the introduction of digital video links, for both point-to-point and mobile links;
- the introduction of digital radio microphones;
- the possibility to use in programme contribution public networks, like TETRA, GSM, UMTS;
- the introduction of the development of SAB/SAP for UHD TV, etc.

The main body of the Report contains four Annexes that address the major SAB/SAP use in broadcasting:

- Annex 1: Definitions
- Annex 2: Audio applications

- Annex 3: Video applications
- Annex 4: References

Annex 1

Definition of SAP/SAB, ENG/OB, SNG and further terminology

In order to provide an overview of the various terms used the following definitions are provided.

The definitions of SAP/SAB and ENG/OB are set out as follows:

SAP: Services ancillary to programme making (SAP) support the activities carried out in the making of “programs”, such as film making, advertisements, corporate videos, concerts, theatre and similar activities not initially meant for broadcasting to general public.

SAB: Services ancillary to broadcasting (SAB) support the activities of broadcasting industry carried out in the production of their program material.

The definitions of SAP and SAB are not necessarily mutually exclusive. Therefore they are often used together as “SAP/SAB” to refer generally to the whole variety of services to transmit sound and video material over the radio links.

ENG: Electronic news gathering (ENG) is the collection of video and/or sound material by means of small, often hand-held wireless cameras and/or microphones with radio links to the news room and/or to the portable tape or other recorders.

OB: Outside broadcasting (OB) is the temporary provision of program making facilities at the location of on-going news, sport or other events, lasting from a few hours to several weeks. Mobile and/or portable radio links are required for wireless cameras or microphones at the OB location. Additionally, radio links may be required for temporary point to point connections between the OB vehicle, additional locations around it, and the studio.

The definitions of ENG and OB are not mutually exclusive and certain operations could equally well reside in either or both categories. Therefore, it has been a long practice within the CEPT to consider all types of such operations under the combined term “ENG/OB”. It is also understood that ENG/OB refers to terrestrial radio communication services, as opposed to SNG/OB term, which refers to similar applications but over the satellite radiocommunication channels [1].

The SAP/SAB applications include both ENG/OB and SNG/OB applications and also the communication links that may be used in the production of programmes, such as talk-back or personal monitoring of sound-track, telecommand, telecontrol and similar applications.

Quality requirements of SAP/SAB applications can vary depending on the task in hand. The bandwidth of the signal to be transmitted i.e. audio or video has a direct impact on the spectral bandwidth required.

The perceived quality of the signals is going to be dependent on their potential final use. The uses can vary from SNG links into a news programme through to a high quality HD TV production.

The reliability of service again can vary according to the task in hand. Typically within the events for large numbers of people and for broadcast applications there is frequently a need for a high degree of

protection for the SAB/SAP signals. This required protection inherently puts constraints on the amount of spectrum required to guarantee this quality of service.

For the purpose of this Report, other terminology is also used and defined as follows:

Radio microphone	Handheld or body worn microphone with integrated or body worn transmitter.
In-ear monitor (IEM)	Body-worn miniature receiver with earpieces for personal monitoring of single or dual channel sound track.
Portable audio link	Body worn transmitter used with one or more microphones, with a longer operating range capabilities than that of radio microphones.
Mobile audio link	Audio transmission system employing radio transmitter mounted in/on motorcycles, pedal cycles, cars, racing cars, boats, etc. One or both link terminals may be used while moving.
Temporary point-to-point audio link	Temporary link between two points (e.g. part of a link between an OB site and a studio), used for carrying broadcast quality audio or for carrying service (voice) signals. Link terminals are mounted on tripods, temporary platforms, purpose built vehicles or hydraulic hoists. Two-way links are often required.
Wireless camera	Handheld or otherwise mounted camera with integrated transmitter, power pack and antenna for carrying broadcast-quality video together with sound signals over short-ranges.
Portable video link	Handheld camera with separate body-worn transmitter, power pack and antenna.
Mobile airborne video link	Video transmission system employing radio transmitter mounted on helicopters or other airships.
Mobile vehicular video link	Video transmission system employing radio transmitter mounted in/on motorcycles, pedal cycles, cars, racing cars or boats. One or both link terminals may be used while moving.
Temporary point-to-point video links	Temporary link between two points (e.g. part of a link between an OB site and a studio), used for carrying broadcast quality video/audio signals. Link terminals are mounted on tripods, temporary platforms, purpose built vehicles or hydraulic hoists. Two-way links are often required.
Talk-back	For communicating the instructions of the director instantly to all those concerned in making the program; these include presenters, interviewers, cameramen, sound operators, lighting operators and engineers. A number of talk-back channels may be in simultaneous use to cover those different activities. Talk-back usually employs constant transmission.
Telecomm and/remote control	Radio links for the remote control of cameras and other program making equipment and for signaling

Annex 2

Audio Applications

1 Overview

- Audio SAB/SAP applications, such as radio microphones, in ear monitoring systems are used in a broad number of applications. The operating requirements as well as the number of deployed systems vary significantly. This Report provides information and guidance on the technical requirements for audio SAB/SAP systems.
- Semi-cognitive analogue systems have been commercially available since 2011. These systems are able to sense the RF environment they are operating in, and decide on which channels to operate depending on the information they have available. These systems either work on as stand-alone platform, or are dependent on external PC. Some current licensing systems which restrict use of radio microphones to only specific channels in a frequency block will not gain spectrum efficiency benefits from these systems.
- SAB/SAP systems using digital modulation schemes are commercially available. As digital modulation involves some specific operating conditions, these systems currently cannot replace analogue systems in all fields and applications.
- Whilst digital equipment is now available in the market and will bring benefits for users, the use of digital technology alone does not eliminate the need for SAB/SAP to have access to spectrum enabling an operation with the required quality of service (QoS). Furthermore, the likely switchover from analogue to digital equipment will take a number of years.

2 Introduction

This Annex focuses on audio SAB/SAP applications such as radio microphones and in-ear-monitors (IEM). It provides:

- information on the technical and operating conditions;
- an indication of their use within the current multimedia and multiple platforms which provide content for public and private use.

In the last decade, significant changes have occurred in the available spectrum in ITU-R Region 1:

- the implementation of the GE06 broadcast agreement on DTV;
- the WRC-07 decision to allocate the frequency range 790-862 MHz to the Mobile Service on a co-primary basis and to identify it for IMT;
- the WRC-12 decision to allocate the frequency range 694-790 MHz to the Mobile Service on a co-primary basis and to identify it for IMT [2];
- TV channels have been compacted in the frequency range 470-790 MHz resulting in less spectrum for SAB/SAP and will further be compacted below 694 MHz in the foreseeable future.

In 2011 the first semi-cognitive analogue radio microphone system was introduced into the market. These systems are able to sense the RF environment they are operating in, and decide on which channels to operate depending on the information they have available. These systems either work as a stand-alone platform, or are dependent on software running on external computers.

Interference mitigation in SAB/SAP by cognitive behaviour has been studied both in ETSI STF386 and in a German research project funded by BMWI (German Federal Ministry of Economics and Technology) called C-PMSE. Both activities are aligned as some of the experts have been working

in both activities. On 29th of May 2013 a practical demo on cognitive behaviour was given at the Messe Berlin (Berlin Trade Fair center). Initial frequency assignments to SAB/SAP links are calculated, frequency handovers due to raising interference and power control to accommodate a varying link quality were shown to the public. Furthermore it was shown that link quality supervision can be done on analogue FM links as well as digital systems [3].

Digital radio microphone systems have been commercially available for some years. However, due to the fact that digital systems exhibit a certain amount of latency, they are not currently suitable for use in all applications. It is anticipated that future advances in digital wireless technology will bring improvements in latency, intermodulation, and robustness to interference. Evaluation of these systems show, that they can be deployed in certain application scenarios where the limitations of these systems can be accepted. At the current time (2015) they cannot be considered as a common solution to questions of spectrum efficiency.

In Japan, the band 710-806 MHz which had been assigned to the ENG systems and the radio microphones was reassigned to commercial mobile phone and other applications in 2011. In consequence, the 1.2 GHz band and 2.3 GHz band were newly assigned to the ENG system, and the 470-710 MHz, 1 240-1 260 MHz (except 1 252-1 253 MHz) were newly assigned to the radio microphones.

3 Technical aspects

3.1 General requirements and operating principles for audio links including radio microphones and in ear monitor systems

These factors are not independent from each other and cannot be treated or adjusted independently.

3.1.1 Quality of service requirements

No degradation in the quality in the audio signal should be perceived during the transmission period. Use of SAB/SAP will vary from a few hours for a news conference to many weeks for a large event such as the G8 conference and permanently for use at studios and theatres. Details on SAB/SAP operation and the technical requirements for SAB/SAP use are given in Attachment 1.

The radio microphone equipment is the first link in a transmission chain which may end in a broadcast, recording or an amplified output. As such any perceived interference of any form will impact the whole transmission chain. Irrespective if the chain is recorded or broadcast live, interference is likely to mean that the performance will be abandoned and in many cases will be unrepeatable. Therefore interference should not affect the QoS during the transmission. General requirements regarding radio microphone and IEM systems operation.

Radio microphone and IEM systems must fulfil the highest demands for audio quality on a consistent and repeatable basis. Audio SAB/SAP applications include radio microphones, IEM which share some requirements. However, some requirements may also differ from application to application. Additional details are given in the table provided in Attachment 2.

The following focuses on the requirements of high quality SAB/SAP.

The key requirements for a state of the art wireless system are:

- Providing an audio quality similar to an equivalent wired system;
- Low latency; in order to achieve an acceptable latency in the complete audio chain, the latency in the radio microphone has to be as low as possible (typically below 3-4 ms, see Report ITU-R BS.2161 [4]) especially for IEM applications or lip sync is observable. For certain applications, delay is permissible for example, where the speaker is not seen by the audience or “on the spot news”;
- No interruptions: all radio microphones and IEM have a 100% audio duty cycle. In all applications users do not tolerate any corruption or interruptions in audio output. Where radio microphones are connected to large amplifiers (theatres rock concerts etc.) any interference may generate peaks of sound which can hurt or damage audience hearing. In the case of IEM (whose audio output is received in the ear canal of the user, damage to the user’s hearing can occur if interference is generated to the transmission;
- Avoid handing over microphones: Individual adjustment of the microphones sensitivity is an obstacle of handing a microphone over to other users. If the voice of the other user is louder, the limiter will start operating as mentioned above and downgrade the quality. If the voice of the other user is weaker, then it will sound less loud – at the mixing desk more gain needs to be added which will lead to a reduced signal-to-noise performance – a downgrade in audio quality;
- Depending on the application an operation time of 6 to 10 hours without recharging or changing the power supply is required whereas the small form factor of the transmitter limits the size of the power supply.

3.1.2 Factors that affect the performance of radio microphones and in-ear-monitors

The following factors may affect the performance of radio microphones and IEM:

- Interference from other users:
 - Interference from other services that fall into the receiving frequency range of radio microphones and IEM;
 - Adjacent channel interference from other systems or services operating in the channel adjacent to the operating channel itself;
 - Intermodulation products that are generated either by radio microphones, and tour guide or by other services that fall into the wanted receiving channel.
- Other factors:
 - Size of the venue, deployment density;
 - Properties of the venue regarding screening and antenna positioning;
 - Propagation aspects like multipath and fading.

3.1.3 Factors that determine the number of channels that can be deployed in a TV channel

For audio SAB/SAP, the spectrum efficiency can be described as the number of audio channels that can be supported in parallel in a given bandwidth or a TV 6MHz or 8 MHz channel. When carrying this analysis, a number of other parameters should be taken into account in order to conduct fair analysis, such as the quality of the audio signal transmitted and the technology requirements in terms of interference and operational range.

This matter is further considered in Attachment 1 to this Annex.

Intermodulation

The spectrum efficiency of analogue audio SAB/SAP is not limited so much by the spectrum efficiency of a single link, but of multiple links in a given bandwidth due to the phenomenon called intermodulation. Intermodulation is a physical phenomenon that occurs when multiple transmitters work simultaneously in close vicinity. It corresponds to the situation where one transmitter re-amplifies the signal that it picked up from another transmitter, either at the same frequency or shifted in frequency. Intermodulation can occur anywhere in the radio system:

- in the transmitter;
- in the receiver;
- in ancillary RF equipment or in the environment.

The term reverse intermodulation describes the situation that occurs when RF enters the output of an RF amplifier such as the output stage of a transmitter when other unwanted signals are received via the transmitting antenna.

The number of intermodulation products present rises exponentially as the number of carriers' increases. Consequently the number of clean frequencies available within a given bandwidth declines rapidly as the number of carriers increases.

A more detailed description of the technical requirements is given in Attachment 1.

Intermodulation mitigation techniques

Intermodulation mitigation can be achieved by a number of techniques:

- Frequency planning, in order to avoid intermodulation products which create interference on useful signals;
- Integration of output filters and/or ferrite isolators;
- Control of microphones transmitted power;
- Adoption of transmission technologies that support operation in higher interference environment.

Analogue systems support the first two mitigation techniques. Cognitive systems support the first three mitigation techniques. Digital systems support all four mitigation techniques.

3.1.4 Propagation characteristics of frequency bands

The propagation characteristics for Audio SAB/SAP are shown in Table 1 depending on the frequency range.

TABLE 1

Propagation characteristics depending on the frequency range


Frequency band	Propagation characteristics
29.7 to 47.0 MHz	<p>Good propagation, minimum wall absorption, no reflection or diffraction. Shielding from metal structures is low.</p> <p>Only very low or lowest body absorption in this frequency range.</p> <p>This band may not be practicable for all types of Audio SAB/SAP applications due to the high ambient noise levels.</p> <p>It requires the implementation of very large antennas, it is not suitable for body-worn equipment.</p> <p>Not suitable for large multi-channel systems due to the limited bandwidth.</p>
VHF band above 174 MHz	<p>Good propagation, minimum wall absorption, low reflection or diffraction. Shielding from metal structures is low.</p> <p>Body absorption in this frequency range is low.</p> <p>Low frequencies require large antennas. The RF noise floor and clock frequencies in electronic equipment may create interference to audio SAB/SAP applications.</p>
UHF band below 1 GHz	<p>Good propagation, some wall absorption, depending on the surrounding structures reflection or diffraction can occur.</p> <p>Shielding from metal structures occurs.</p> <p>Significant body absorption.</p> <p>Wall absorption and shielding effects of metal structures can be beneficial in reusing available frequencies in larger system setups.</p> <p>Small antennas possible.</p> <p>System performance can be optimized by the use of directional antennas.</p>
UHF 1 to 1.7 GHz	<p>Acceptable propagation, wall absorption, depending on the surrounding structures reflection or diffraction occurs.</p> <p>Shielding from metal structures occurs.</p> <p>Significant increased body absorption.</p> <p>Wall absorption and shielding effects of metal structures can be beneficial in reusing available frequencies in larger system setups.</p> <p>Small antennas possible.</p> <p>System performance can be optimized by the use of directional antennas.</p>
UHF 1.7 to 2.5 GHz	<p>Acceptable propagation, wall absorption, depending on the surrounding structures reflection or diffraction occurs.</p> <p>Shielding from metal structures occurs.</p> <p>Critical body absorption.</p> <p>Wall absorption and shielding effects of metal structures can be beneficial in reusing available frequencies in larger system setups.</p> <p>Small antennas possible.</p> <p>System performance can be optimized by the use of directional antennas.</p>

The UHF band below 1 GHz is the best band for Audio SAB/SAP due to the combination of antenna size, propagation, low body loss absorption and ambient noise floor, especially for body worn equipment.


3.2 Definitions: analogue, digital and cognitive audio SAB/SAP

3.2.1 Analogue

Most current audio SAB/SAP products are based on analogue modulation, e.g. FM modulation. An analogue transmission chain involves the conversion of the acoustic signal into an electric signal which directly drives the radiofrequency signal transmitted over the air (see Fig. 1).

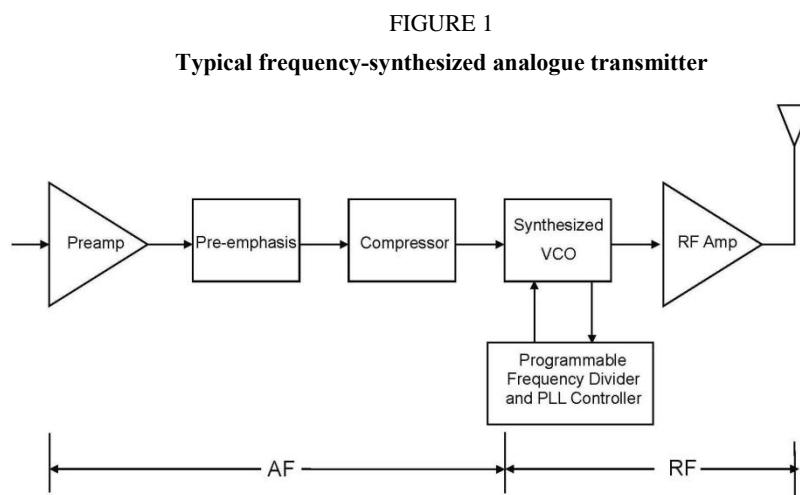

At the receiver end, the received radiofrequency signal is directly converted to an electric signal which is then assumed to be representative of the input audio signal. Such analogue transmission chain introduces minimum latency for the end-to-end transmission of the signal (see Fig. 2). However, as the signal is not encoded, any radiofrequency interference or loss of the radiofrequency signal directly degrades the transmitted audio signal. In such a case, no interference is acceptable.

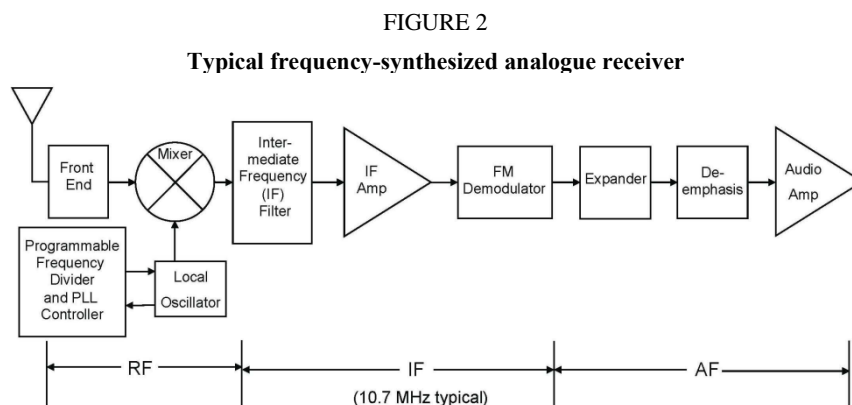

3.2.2 Digital

Digital transmission chains are used in many applications, including SAB/SAP video links. In a digital transmission chain, the acoustic signal is converted into an electric signal which is then transformed through an analogue to digital converter. Typically, the conversion into the digital domain and subsequent source encoding will be selected to obtain the desired trade-off between the transmitted signal quality and the amount of information to be transmitted. Once the signal has been digitized, it can be transmitted as any digital information through a transmission chain that potentially includes channel/forward error coding, mapping of the channel encoded information to a modulation scheme, digital to analogue conversion of the modulated signal, transmission of the radio-frequency

signal, analogue to digital conversion of the received signal followed by demodulation and finally decoding of the channel/forward error correcting code.

Such a digital transmission chain may or may not involve a retransmission mechanism in case the packet is not error free at reception.

Typical transmission and reception chains are illustrated in Figs 3 and 4 below.

FIGURE 3
Typical frequency-synthesized digital transmitter


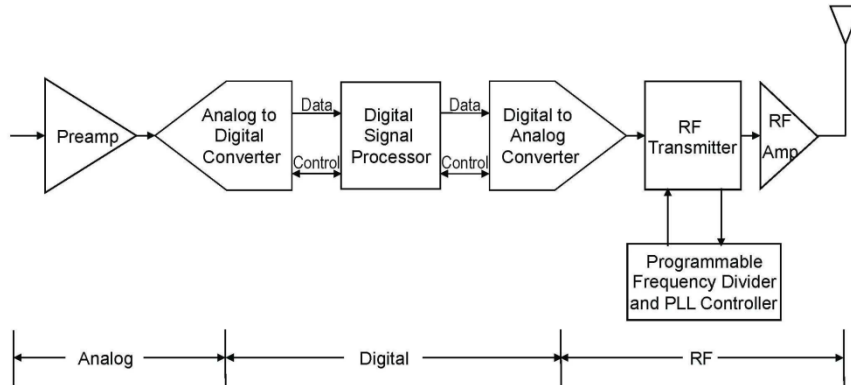


FIGURE 4
Typical frequency-synthesized digital receiver

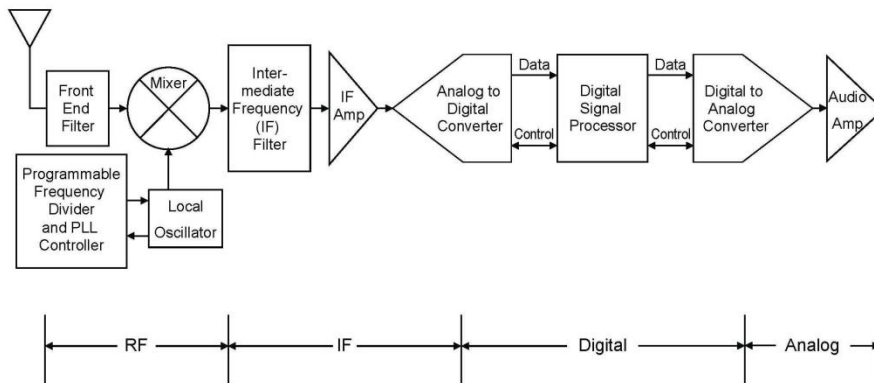


3.2.3 Cognitive systems

Interference mitigation in SAB/SAP by cognitive behaviour has been studied both in ETSI STF386 and in a German research project funded by BMWi (German Federal Ministry of Economics and Technology) called C-PMSE. Both activities are aligned as some of the experts are working in both activities.

On 29th of May 2013 a practical demo on cognitive behaviour was given at the Messe Berlin (Berlin Trade Fair center). Initial frequency assignments to SAB/SAP links are calculated, frequency handovers due to raising interference and power control to accommodate a varying link quality were shown to the public. Furthermore it was shown that link quality supervision can be done on analogue FM links in addition to digital systems.

FIGURE 5

Overview of a SAB/SAP cognitive system as considered by the C-PMSE project

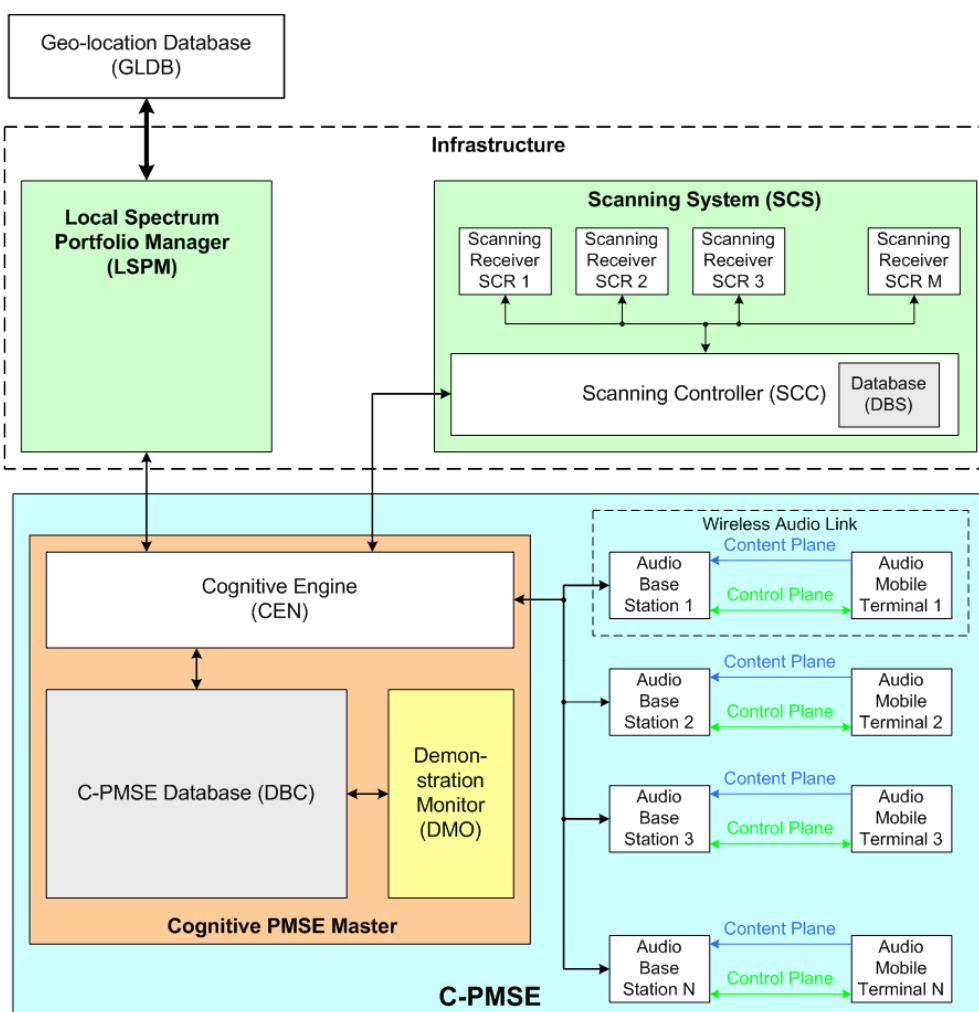

The system demonstrated in Berlin and laid out in the output documents of ETSI STF386 is composed of three large subsystems: The Local Spectrum Portfolio Manager, the Scanning system, together reflecting the infrastructure, which may be permanently installed at an event location. Then there is the entire C-PMSE, which is composed out of the two subsystems plus the cognitive engine, which is the intelligence in the system, comprising of a database and the wireless audio links (see Fig. 5).

Signaling with the demo was mapped onto existing short range device air interface standards, which operated in unlicensed bands. This is not an option for real SAB/SAP use as protection is not only needed on the content plane but also on the signaling plane. It also became clear that signaling requires additional spectrum in addition to the spectrum needed for the content plane.

At the Messe Berlin (Berlin Trade Fair center) five halls are equipped with, a total of 30 scanning receivers forming a large scanning grid. The scanning grid is permanently installed and is still in use thus gaining more experience with operating it. It can be accessed remotely by the project partners. For this and other purpose the German research project was extended till end of 2013. Further findings and research results were incorporated in phase C of ETSI STF386 activity.

3.3 Current state of play

3.3.1 Currently available radio microphones technologies

The vast majority of wireless systems deployed and available in the market are analogue. Frequency modulation has proven to be a very suitable modulation scheme for this application as it allows transmission with minimal latency and is readily implemented. Other desirable characteristics include the fact that FM is a constant envelope modulation scheme and that analogue systems tend to die gracefully in the presence of interference. In addition the “capture ratio” allows reuse of spectrum in adjacent buildings.

While digital microphones have been available for a number of years, they tend to introduce latency which is incompatible with some applications, specifically live performances including IEM. Just recent, since 2013 there have been professional digital microphones systems available. They fulfill the latency criterion and have linear channel spacing.

3.3.2 Factors of the presently available radio microphone and in ear monitor equipment

The significant part of wireless systems deployed and available in the market are still analogue.

- Since the introduction of radio microphones (1912) and IEM equipment into the market, up to today (2015), frequency modulation has proven to be the most suitable modulation scheme for this application as it serves the following requirements:
- A constant envelope modulation scheme allows for long battery life time of the transmitters;
- Due to the evolved technology, the transmitters in the market have a very small form factor, high battery life and a low weight;
- With the demand for more wireless systems to be deployed in a given bandwidth, the spectrum efficiency of analogue radio microphones and IEM has greatly improved;
- The FM “capture ratio” facilitates spectrum reuse even between adjacent venues;
- FM systems normally decrease their performance in the presence of interference before they mute (die gracefully). Most digital systems switch off the link without warning under the same conditions.

Radio microphones have demanding requirements, as they must deliver consistently high audio quality combined with extended constant carrier operation lasting for many hours. In addition a production may have more than 100 radio microphones operating simultaneously in close proximity (less than 2 cm in some cases).

4 Spectrum use of audio SAB/SAP applications for broadcasting

Broadcasting involves into a broad range of applications where all forms of SAB/SAP equipment are used.

4.1 Studio production

Studios use audio SAB/SAP for talkback, microphones and IEM for presenters. The reason for using SAB/SAP equipment with radio links is to give freedom of movement within the studio.

The nature of traditional studio use has changed. In some countries studios that were managed by public broadcasters have now sold off their studio complexes to private organizations. This has resulted in not only the public broadcaster using this studio but intensive use from other programme making companies. This has led to the development of Studio Villages or Media Cities with a concentration of facilities in a relatively small physical area. For example 358 audio wireless systems per 1 km² are being used in Media Park, Hilversum.

The complex frequency environment of these sites requires detailed frequency planning to ensure that no interference is generated between the devices on site.

4.2 News gathering for TV/radio/ internet

Whilst this sector is dealt with in the video section of this Report (see Annex 3), it should be borne in mind that both radio microphones and equipment integral to cameras, including talkback systems will be present at any site. TV news providers use radio links in order to provide rapid response coverage of developing news stories. Therefore video links as well as talkback and radio microphones are used in the production of live and recorded news reports ‘from the scene.

Terrestrial radio links, known under the term of ENG, consist of one or more microwave links that feed video and audio signals directly from the news location to a broadcaster’s network or studio. ENG links are only one of a number of options used to transfer live or recorded material from location to the studio or network, others including:

- SNG (satellite news gathering) refers to the use of satellite links to achieve the same thing;
- Fibre optic links can be used where a location has a fibre termination;
- Store-and-forward over public telecommunications lines can be used for non-live inserts;
- Similarly non-live inserts can be recorded digitally and carried by motorbike or otherwise to the studio.

Each ENG operator (news provider) requires its own exclusive spectrum, for which it requires round-the-clock access over the designated area; there is no scope for event by event co-ordination as the time taken to respond to a news event is too small.

ENG operators normally operate a number of trucks, which can be quickly dispatched to a location where a news event is taking place. The truck contains all the facilities required to cover the story and transmit the signal back to the studio or network for (where necessary or appropriate) further production, editing and/or transmission.

It is estimated that altogether, ENG operators providing news coverage in major conurbations with a high density of news events (typically capital and other big cities, like London, Paris etc.) may require allocation on a city wide basis of up to:

- 25-50 talkback narrowband channels;
- 15-30 channels for radio microphones;
- The video links are further described in Annex 3 on video applications.

Indicative numbers for events are given in Table 2.

TABLE 2
Examples of links deployment for news gathering

Event type		Number of crews	Radio microphone	IEM
Local		1	2	1
Main		6	12	6
Large		15	30	20

4.3 Sound broadcasters

Local and national sound broadcast stations use audio SAB/SAP equipment for newsgathering, traffic reporting (including airborne use), sports reporting, and other applications. Talkback, radio microphones and audio links are the key services used. However not all stations make significant use of SAB/SAP; in many cases news provision is bought in from specialist news agencies or similar providers.

Therefore SAB/SAP demand for sound broadcast stations is quite modest, e.g. even for such major conurbation as London area, the total demand is some 10 audio links, 5 channels for radio microphones and 5 narrow band channels for talk-back communications, some of which may be airborne.

TABLE 3

Examples of sound broadcast deployment (indicative numbers)

Event type	Number of Crews	Radio Microphone	IEM	Audio Links
Local	1	2	1	1
Main	3	6	3	3

Prediction of demand over the next 10 years indicate that the number of channels for audio links and for radio microphones may double, totalling to 15-20 audio link channels and 5-10 radio microphone channels. These are prediction from the broadcaster community [5].

4.4 Regular (sport) events and similar outside broadcasts

All forms of audio SAB/SAP applications are used heavily for sports and other outside broadcasts. Such events have been divided into two sectors. This section covers routine outside broadcasts; the sort of events that occur week in, week out up and down the country. Although co-ordination is needed, difficulties rarely arise and no special planning of frequencies is required. Spectrum does not have to be ‘borrowed’ from other uses to cover events in this section.

Exceptional events such as the Olympic Games occurring each two years¹ require detailed and specialized planning, sometimes on-the-ground co-ordination, and ‘borrowing’ of spectrum from other uses.

The distinction should be emphasized that there are many more regular events than major events. Therefore it would not be desirable to have to expend the same planning effort that goes into the large events on the events in this section, unless there were clear rewards in terms of spectral efficiency.

However it should be obvious that if there is more than one broadcaster covering an event or if several events occur in the same geographical area, then the above estimates should be multiplied by the number of broadcasters. Demand may also increase if it becomes necessary to duplicate some of the links, or use repeaters, etc. for topography or other reasons.

5 Frequency bands for audio SAB/SAP applications in CEPT

During the development of a Report on SAB/SAP in CEPT countries a questionnaire was sent to administrations on the regulatory procedures used by administrations in granting access to spectrum for audio SAB/SAP applications [2].

¹ Considering both the summer and winter Olympic Games.

The questionnaire covered all frequency bands that are available for audio SAB/SAP applications. Table 4 summarizes the results – based on the replies of 34 CEPT administrations – relevant for audio SAB/SAP applications regarding availability and use.

TABLE 4
**Results of CEPT questionnaire on the availability of spectrum
for audio SAB/SAP applications**

Frequency band	Preliminary Analysis/Results
29.7-47.0 MHz	The summary shows that this band, fully or part of it, is widely available for audio SAB/SAP applications across CEPT (25 from the 30 providing a response to this band). This is mostly for radio microphones, sometimes with the extension to other low power audio applications
174-216 MHz	From the 30 administrations providing a response on this band, 28 reports about the availability of the band or parts of it for audio SAB/SAP applications. Predominant use is for radio microphones (including hearing aids); the band is also used for other audio SAB/SAP applications such as wireless audio links and talkbacks with technical conditions based in most cases on ERC/REC 70-03 [6]. However, some countries apply more stringent conditions (lower e.r.p. or requirement on the bandwidth or channel spacing)
470-786 MHz	From the 31 countries providing a response on this band, 29 reports about the availability of the band or parts of it for audio SAB/SAP applications. Predominant use is for radio microphones (and also IEM) with technical conditions based in most cases on ERC/REC 70-03
786-789 MHz	From the 31 countries providing a response on this band, 27 of them report about the availability of the band for audio SAB/SAP applications. The predominant use is for radio microphones (and also IEM) with technical conditions based in most cases on ERC/REC 70-03 and ECC/DEC/(09)03. However, some countries apply slightly different conditions (presumably based on previous versions of ERC/REC 70-03)
823-826 MHz	From the 31 countries providing a response on this band, 24 of them report about the current availability of the band for audio SAB/SAP applications. The availability of the band is also under consideration in 3 other countries. The predominant use is for radio microphones (and also IEM) with technical conditions based in most cases on ERC/REC 70-03 and ECC/DEC/(09)03. However, some countries apply slightly different conditions (presumably based on previous versions of ERC/REC 70-03)
826-832 MHz	From the 31 countries providing a response to this band, 24 of them report about the availability of the band or parts of it for audio SAB/SAP applications. The availability of the band is also under consideration in 3 other countries. The predominant use is for radio microphones (and also IEM) with technical conditions based in most cases on ERC/REC 70-03 and ECC/DEC/(09)03. In some countries, the regulation is expected to be amended to be in line with the latest version of ERC/REC 70-03

TABLE 4 (*end*)

Frequency band	Preliminary Analysis/Results
863-865 MHz	<p>The 30 countries providing a response on this band, report about the availability of the band for audio SAB/SAP applications.</p> <p>In 29 of these countries, the band is used or planned to be used by radio microphones and also in-ear-monitoring and wireless audio applications with technical conditions based in most cases on ERC/REC 70-03 (Annex 10, 13)</p>
1785-1800 MHz	<p>From the 30 countries providing a response on this band, 23 of them report about the availability of the band or parts of it for audio SAB/SAP applications.</p> <p>In addition, 3 countries intend to make the band available in the near future.</p> <p>The band is used or planned to be used by radio microphones and also IEM and wireless audio applications with technical conditions based in most cases on ERC/REC 70-03 (Annex 10, 13)</p>

From the analysis and results of the responses to the audio SAB/SAP questionnaire, it can be concluded that there are 8 tuning ranges currently available for SAB/SAP audio applications in the majority of the countries from which responses were received. The actual availability of certain frequencies at a given geographical location depends also on the use of other (primary) services.

Operating and/or usage restrictions in a given tuning range may result from other services working in the same or adjacent band as the audio SAB/SAP applications. In addition the propagation conditions discussed in § 3.1.4 play a large part on the usability of the band and on the type of Audio SAB/SAP applications which could be used in a given band.

6 Spectrum and operation of radio microphones and planning for digital radio microphones in Japan

6.1 Spectrum and operation of radio microphones

In Japan, the 70 MHz band (74.58-74.76 MHz), the 300 MHz band (322.025-322.400 MHz), and the 800 MHz band (806.125-809.750 MHz) were assigned to radio microphones for low power radio station, for which a license is not required. Also, 779.125-787.875 MHz and 797.125-805.875 MHz were assigned to radio microphones for professional use, for which a license is required.

In 2011, the band 710-806 MHz was reassigned to commercial mobile phone and other applications. In consequence, 470-714 MHz, 1 240-1 260 MHz (except 1 252-1 253 MHz) were newly assigned to radio microphones. In the band 470-710 MHz radio microphone applications are shared with digital terrestrial-broadcasting as a second basis. The frequency reassignment should be completed by March 2019. System parameters for radio microphones are shown in Table 5.

TABLE 5

Spectrum and operation of radio microphones in Japan

Standard	RCR ⁽¹⁾ STD-15 V 5.0 (2007-09) [7]	RCR STD-22 V 3.0 (2009-03)	ARIB STD-T112 V 1.3 (2014-07) [8]	
	Radio microphone for specified low power radio station	Specified radio microphone for land mobile radio station	Specified radio microphone for land mobile radio station	
Frequency assignment	806.125-809.750 MHz	770.250-805.750 MHz	470-714MHz 1 240-1 260 MHz (except 1 252-1 253 MHz)	
Communication system	One-way or multicast communication	One-way or multicast communication		
Type of emission	F1D, F2D, F7D, F7E, F7W, G1D, G1E, G7D, G7E, D7W, D1D, D1E, D7D, D7E, D7W, N0N	F1D, F2D, F7D, F7E, F7W, G1D, G1E, G7D, G7E, D7W, D1D, D1E, D7D, D7E, D7W, N0N	F1D, F2D, F7D, F7E, F7W, G1D, G1E, G7D, G7E, D7W, D1D, D1E, D7D, D7E, D7W, N0N	
Antenna power	10 mW	50 mW	50 mW	
Tolerance of antenna power	-50% to +50%	-50% to +50%	470-714 MHz	-50% to +20%
			1.2 GHz band	-50% to +50%
Frequency tolerance	20×10^{-6} (0.002%)	20×10^{-6} (0.002%)	$\pm 20 \times 10^{-6}$ (0.002%)	
Maximum deviation	Defined by occupied bandwidth (OBW)	Defined by occupied bandwidth (OBW)	Defined by occupied bandwidth (OBW)	
Occupied bandwidth	192 kHz	288 kHz (99% of total power)	1.24 GHz < Freq \leq 1.26 GHz (288 kHz < Occupied bandwidth)	600 kHz
			Other than above	288 kHz
Adjacent channel power ratio 10 log(Pc/Pac) Pc: carrier power Pac: Adjacent channel power	40 dB (at $f_c \pm 375$ kHz)	40 dB (channel spacing = 500 kHz)	OBW \leq 288kHz	40 dB (channel spacing = 500 kHz)
			288kHz < OBW	40 dB (channel spacing = 800 kHz)
Spurious emissions	< 2.5 μ W	< 2.5 μ W	< 2.5 μ W	
License	Not required	Required	Required	
Collision avoidance between users	Not coordinated	Coordinated	Coordinated	

TABLE 6

Further information regarding the spectrum and operation of radio microphones in Japan

Frequency band	470-714 MHz	770.250-805.750 MHz	806.125-809.750 MHz	1 240-1 260 MHz (except 1 252-1 253 MHz)
Antenna type and gain	Non-directional (2 dBi)			
Modulation	QPSK 8PSK QPSK-OFDM 16QAM-OFDM	QPSK 8PSK	QPSK 8PSK	QPSK 8PSK QPSK-OFDM 16QAM-OFDM
Maximum capacity (kbit/s)	576	128	128	1248
Channel spacing (kHz)	25	125	250	25
Feeder/multiplexer loss (typical) (dB)	Tx 0 Rx 1	Tx 0 Rx 1	Tx 0 Rx 1	Tx 0 Rx 1
Maximum antenna input power (dBW)	-13	-13	-20	-13
e.i.r.p. (maximum) (dBW)	-11	-11	-18	-11
Occupied bandwidth (kHz)	192, 288	288	192	192, 288 192, 288, 600 (OFDM)
Receiver noise figure (dB)	6	6	6	6
Receiver thermal noise (dBW)*	-145 (OBW=192 kHz)	-145.3 (QPSK, 8PSK)	-147.0 (QPSK, 8PSK)	-145 (OBW=192 kHz) -140 (OBW=600 kHz)
Minimum Rx input level (dBW)	-113 or less	-125.6 (QPSK) -120.3 (8PSK)	-127.3 (QPSK) -122.0 (8PSK)	-113 or less
Nominal long term interference (dBW)*	-155 (OBW=192 kHz)	-155.3 (PSK)	-157.0 (PSK)	-155 (OBW=192 kHz) -150 (OBW=600 kHz)
Spectral density (dB(W/kHz))*	-177.8 (OBW=192 kHz)	-179.9	-179.9	-177.8 (OBW=192 kHz) -177.8 (OBW=600 kHz)

* Only dominant values are shown.

7 Frequency bands for audio SAB/SAP applications in the United States of America

The United States of America is a leader in content creation, thus demand for SAB/SAP applications is robust and growing. Wireless microphones (and similar devices) have traditionally operated in the UHF band. However, in 2010, the 700 MHz band was re-purposed and wireless microphone operations were consolidated below 698 MHz. The FCC incentive auction will further reduce the spectrum in UHF that is available to wireless microphones. In 2015, in order to meet the current and future demands for SAB/SAP applications the FCC made available additional ranges appropriate for wireless microphone operations. The following is an updated Table that reflects these developments.

TABLE 7
Frequency bands for SAB/SAP audio in the United States

Frequency band	Licensed/unlicensed	Rule Part
26.1-26.48 MHz (VHF)	Licensed	Part 74
161.625-161.775 MHz (VHF)	Licensed	Part 74
Portions of 169-172 MHz band (VHF)	Licensed	Part 90
88-108 MHz (FM)	Unlicensed	Part 15
450-451, 455-456 MHz (UHF)	Licensed	Part 74
54-72, 76-88, 174-216, 470-608, 614-616, 653-663 MHz (VHF and UHF)	Licensed and Unlicensed	Part 74 Part 15
941.500-952.000, 952.850-956.250, 956.45-959.85 MHz (UHF)	Licensed	Part 74
1 435-1 525 MHz *	Licensed	Part 87 & Part 74
6 875.000-6 900.000, 7 100.000-7 125.000 MHz	Licensed	Part 74
902-928 MHz, 2.4 GHz, 5 GHz (ISM bands)	Unlicensed	Part 15
1 920-1 930 MHz (unlicensed PCS)	Unlicensed	Part 15
Ultra-wideband (3.1-10.6 GHz)	Unlicensed	Part 15

* On a secondary basis with prior coordination with The Aerospace and Flight Test Radio Coordinating Council (AFTRCC).

8 Future developments related to audio SAB/SAP applications

8.1 Considerations on future perspectives for audio SAB/SAP applications

Developments in the film, TV and theatre world are requiring ever increasing sound quality and density of radio microphones this is coupled with increased usage of both radio microphones and IEM in all forms of multimedia platforms resulting in a conundrum of reducing spectrum availability and higher performance.

Higher contribution quality on the production side is required for the new 24 bit, 96 kHz “Pure Audio on Blue Ray” Audio Format set by production companies such as DECCA, Deutsche Grammophon and others. These “Pure Audio Blue Ray” Discs are already in the market place and the music industry has set this as future standard. This process is implemented first in classical music – classic live is

one branch in the audio industry that is growing and demands higher audio quality – and other genres will follow.

The higher audio resolution that is given by the “Pure Audio Blue Ray” gains the audio resolution especially in the mid and higher frequencies. This will give more detailed facets of the instruments used and enhances the listener’s experience.

8.2 Future challenges

8.2.1 Highest quality

Compression in any form, including dynamic compression, is not desirable during the contribution phase as compression always means losses for the subsequent reproduction.

For highest quality applications it is required to produce loss-less audio, without compression – with full dynamic range. This production material will be available in highest quality for the distribution via, TV SD/HD, CD, DVD; Blue Ray, etc. and future formats can use this recording as the high quality of the original production can be transferred to any future format.

This is the real challenge for wireless vocal, instrument and atmosphere/environment microphones. This leads to higher channel audio SAB/SAP bandwidth and increases spectrum demand in order to increase quality to adapt to industry needs and expand the listening experience.

8.2.2 Increased dynamic range

Many of the current Audio SAB/SAP equipment are limited in their dynamic range. Because of this, adjustments have to be made individually for each audio SAB/SAP link in a setup to secure the highest possible audio quality. Usually during rehearsal the sensitivity of the microphone connected to the transmitter will be manually adjusted. The settings are done in a way that headroom of about 10 dB is given before the internal limiter of the transmitter cuts the signal. If the user of the radio microphone exceeds this headroom of 10 dB internal limiter starts working: this will be audible and reduces the perceived quality. This may happen depending on the kind of performance and the engagement of the user. The problem is the limitation in the available dynamic range that current systems are able to handle. This would need to be increased in order to give the sound engineer the full dynamic range of the of the microphone capsule to his mixing console: at the mixing console the sound engineer will adjust the dynamics in a way that it fits to the rest of the production.

For wired operations, studios have already 24 to 48 bit audio resolution. Present wireless audio equipment in 200 kHz channel bandwidth cannot support these requirements.

8.3 New RF channel bandwidth

ETSI EN 300 422 [9] standard has different RF bandwidths of 200, 400 and 600 kHz. Today, most of the Audio SAB/SAP equipment uses a 200 kHz bandwidth, however, the introduction of systems using larger bandwidths is necessary for certain applications in order to accommodate an increase in the audio quality to meet the requirements this may result in an increase in terms of spectrum demand.

8.4 Future technologies

A number of attempts have been made to harness the new mobile technologies and other systems for radio microphone use; however all have so far failed primarily on the latency issues. Networks latencies which were achieved during those attempts far exceeds the 3-4 ms (see ITU-R Report BS.2161 [4]) required to ensure lip synchronization at the front end of a production chain based on the current technology of Audio SAB/SAP.

Reviewing the information available when developing this Report (September 2014) on future technologies and modulation schemes from CEPT, ETSI and ITU none appear to offer any practical alternatives to the current radio microphone technologies being developed by manufacturers.

Currently semi cognitive analogue and digital systems are available. Dependent on the outcome of the C-PMSE project fully cognitive systems will be developed but given the complexity of both hardware and software the timescales for initial deployment and then significant market penetration are several years in the future.

8.4.1 The use of new technology and/or software for preventing co-channel interference to primary users in the 1.4 GHz band

In Region 2 the United States of America has made 1 435-1 525 MHz available for licensed microphone operations on a secondary basis but will require equipment to follow procedures based on new technology and/or software control integrated into the equipment (e.g. an electronic key or related technology/software), together with a coordination process, before operation occurs for each production (where a production can be a single programme or a prescheduled series of programmes at a specified location). The technology/software will limit transmission of microphone signals to previously coordinated and authorized location(s), dates, and time periods. Microphone transmitters must automatically shut down if operation is attempted beyond these parameters. Wireless microphone license eligibility is limited to professional users, and use of the range 1 435-1 525 MHz is intended for major events in a fixed location at large venues, such as those requiring 100-plus wireless microphones (includes monitors and intercom channels). Power limits are 250 mW per transmitter during major, pre-scheduled programmes.

The primary user in the band is aeronautical mobile telemetry (AMT), the operations of which in the United States of America involve safety of life. See also RR No. **5.343**. AMT operations are often scheduled in advance, as are broadcast operations, facilitating coordination. Together with the technological advances and regulatory restrictions mentioned above, the conditions for wireless microphones to share with AMT operations on a non-interference basis are maximized.

Attachment 1

to Annex 2

Supplementary information on technical SAB/SAP characteristics

Radio microphones normally use wide band frequency modulation to achieve the necessary audio performance for professional use. For the majority of applications the transmitted signal requires a channel bandwidth of up to 200 kHz, but may be up to 600 kHz to support HD sound. IEM equipment is used by stage and studio performers to receive personal fold back (monitoring) of the performance. This can be just the own voice or a complex mix of sources. The bandwidth requirement of professional IEM equipment is 200 kHz.

The comparison of different specifications and operational requirements of radio microphones, IEM and audio links is given in Table 8 below.

TABLE 8

Comparison of Radio microphones in-ear-monitors and Audio Links

Characteristics	Radio microphones	IEM	Audio links
Application	Voice (speech, song), Music instruments	Voice or mixed feedback to stage	ENG/OB , voice
Transmitter			
Placement of a transmitter	Body worn or handheld	Fixed base	Body worn/vehicle mounted
Power source	Battery	AC mains	Battery
Transmitter RF- Output power	Below 50 mW	Below 50 mW	Above 50 mW up to below 25W
Transmitter audio input	Microphone or line level	Line level	Microphone or line level
Receiver			
Placement of a receiver	Fixed/Camera mounted	Body worn	Fixed/vehicle mounted
Power Source	AC mains/Battery	Battery	AC mains/Battery
Receiver audio output	Line level	Earphone	Line level/Earphone
Receiver type	Single or diversity	Single or diversity	Single or diversity
General			
Link scheme	Unidirectional	Unidirectional	Bidirectional Plus talk back channel
Battery/power pack operation time	6-10 h	6-10 h	6-10 h

TABLE 8 (end)


Characteristics	Radio microphones	IEM	Audio links
Typical Audio frequency response	≤ 20 to ≥ 20.000 Hz	≤ 80 to ≥ 15.000 Hz	Link to base: ≤ 20 to ≥ 20.000 Hz Fold back to mobile unit: 12.5 kHz
Audio mode	Mono	MPX-Stereo	2 way Mono
RF frequency ranges	TV bands III/IV/V, 1.8 GHz (Note)	TV bands III/IV/V, 1.8 GHz (Note)	TV Bands I/III/IV/V, 1.8 GHz
Dynamic range of the RF link	117 dB	Typical 90 dB	115 dB Talk back link: lower
Typical minimum sensitivity	-90 dBm	-85 dBm	
Modulation	FM wideband as well proprietary digital modulation	FM wideband as well proprietary digital modulation	FM wideband as well proprietary digital modulation Talkback link: FM narrow
RF peak deviation (AF = 1 kHz)	± 50 kHz	± 50 kHz	± 50 kHz Talkback link: voice quality
RF bandwidth	≤ 200 kHz standard quality ≤ 600 kHz HD sound quality	≤ 300 kHz legacy equipment ≤ 200 kHz modern equipment	2 times < 200 kHz plus 12.5 kHz
Useable equipment/channel (Δ RF = 8 MHz)	> 12	6...8	Not applicable
Audio dynamic (currently/required for HD sound)	$> 100 / >> 119$ dB (20 bit) to 145 (24 bit)	$> 60 / 110$ dB	$> 100 / >> 119$ dB (20 bit) Talk back link: lower

NOTE – Radio microphones and IEM may be also used in 863-865 MHz if complying with either EN 301 357 [10] or EN 300 422 [9] (10 mW).

Spectrum mask

This gives the following spectrum masks for analogue systems or for digital systems.


FIGURE 6
Spectrum mask for analogue systems

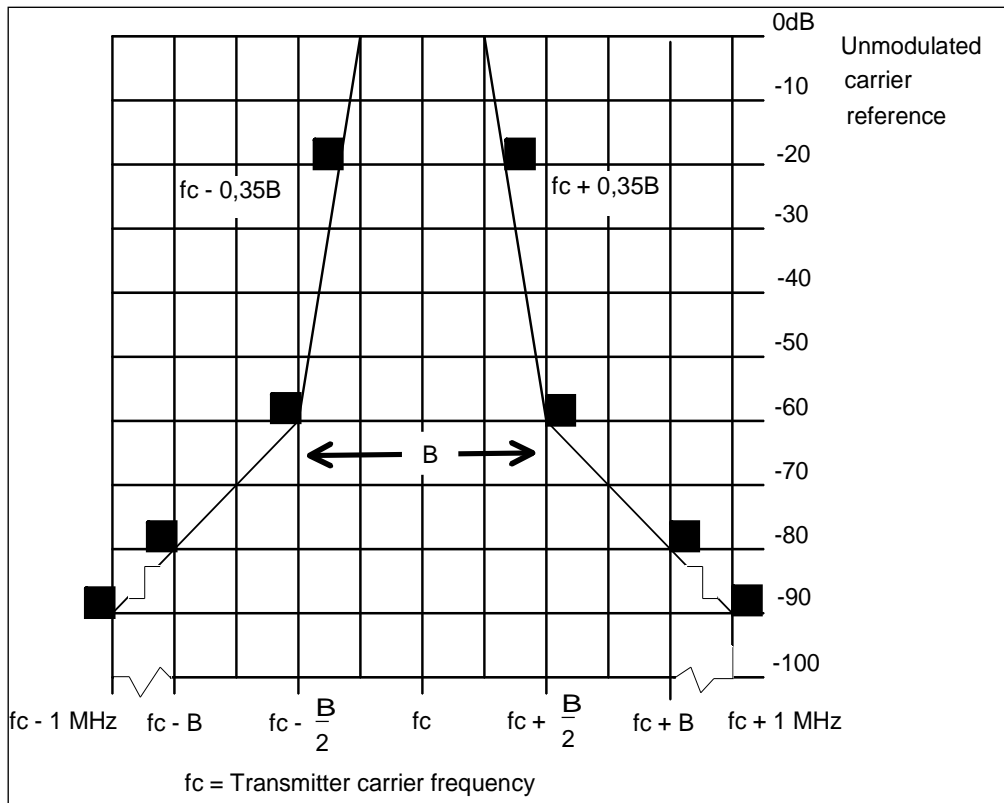

NOTES:

- The Reference power is to be measured at the unmodulated carrier centre frequency (f_c).
- The -90 dBc point shall be at $\pm 1\text{ MHz}$ from f_c measured with an average detector. To comply, a measured value must fall below the mask limit as shown above.

FIGURE 7
Spectrum mask for digital systems

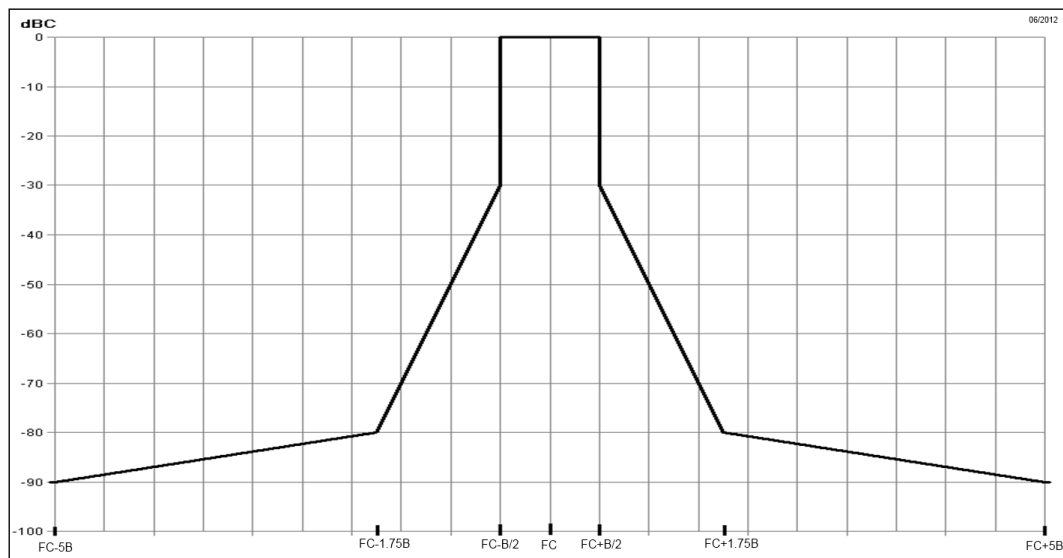

NOTE – The -90 dBc point shall be $\pm 5 \cdot B$ from f_c measured with an average detector (example 1 MHz if $B=200$ kHz).

Frequency error

The frequency error shall not exceed 20 parts per million for frequencies below 1 GHz, 15 parts per million between 1 GHz and 2 GHz and 10 ppm above 2 GHz.

Spurious emissions limits at transceiver antenna port

TABLE 9
Spurious emission limits at transceiver antenna port

State	Frequency		
	47 MHz to 74 MHz 87.5 MHz to 137 MHz 174 MHz to 230 MHz 470 MHz to 862 MHz	Other Frequencies below 1 000 MHz	Frequencies above 1 000 MHz
Operation	4 nW	250 nW	1 μ W
Standby	2 nW	2 nW	20 nW

Measured values for equipment in each frequency band must be below the values given in Table 9 above.


Minimum required audio quality

The minimum required audio quality for a radio microphone link as the unwanted signal level which degrades the microphone receiver output audio $S+N/N$ to 80 dB(A) or a SINAD of 30 dB.

Propagation issues

This section presents some information to the typical transmission path from the transmitter to receiver units.

FIGURE 8
Measurements of an antenna radiation patterns

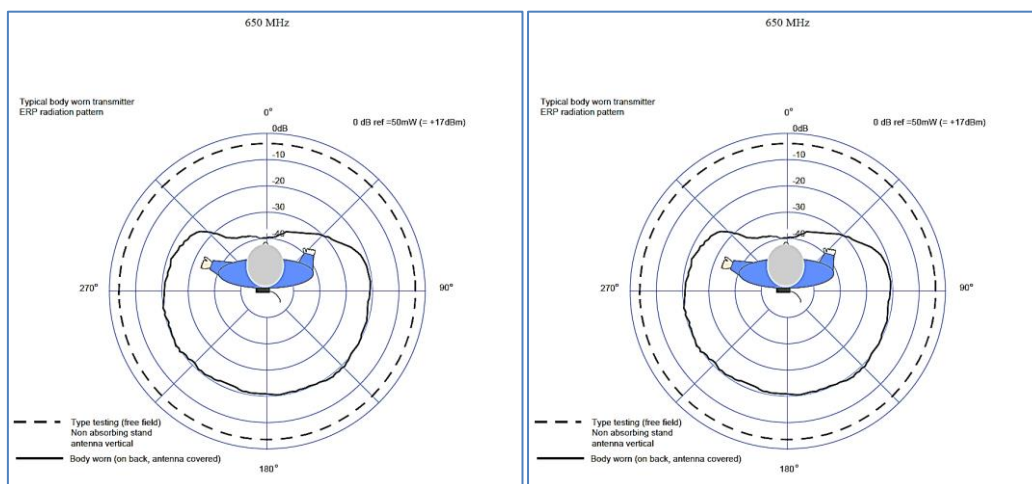

Transmission path loss: worst case scenario

Path loss for a radio microphone transmission is often interpreted as a simple line of sight scenario; however this is rarely the case as the figures below show:

Components of microphone transmission path can be described as:

- Microphone output power (ERP) 17 dBm
- PL_{FS} – Free space path loss $32.44+20*\log_{10}(D/1000)+20*\log_{10}(F)$
- PL_{ALD} – Microphone antenna loss & detuning effect up to 15 dB
- PL_B – Loss effected while carrying antenna on human body (average) up to 25 dB²
- PL_N – Additional loss in the transmission path notches (non-diversity) up to 30 dB
- PG_{DV} – Gain by using antenna diversity techniques up to 7 dB
- PG_A – Gain through receiver antenna typical 7 dB

The worst case in a typical non-diversity installation can be described as:

$$\text{Total Loss Worst Case ND (dB)} = PL_{FS} + PL_{ALD} + PL_B + PL_N - PG_A$$

Change in path loss using a diversity antenna system

Typical SAB/SAP antenna diversity systems use two antennae with the same characteristics that are physical separated (Spatial diversity). In some configuration, the SAB/SAP combines pairs of antennas with orthogonal or circular polarizations. Because of the linear microphone polarization this should not be misinterpreted as polarization diversity.


The worst case in a typical installation by using diversity receiver antennas can be described as:

$$\text{Total loss worst case D (dB)} = PL_{FS} + PL_{ALD} + PL_B + PL_N - PG_{DV} - PG_A$$

Diversity receivers using two antennas and a signal switching system vary in their effectiveness depending on the spacing and type of antenna in use.

Figure 9 shows the complex situation on the transmission path if all parameter considered.

FIGURE 9

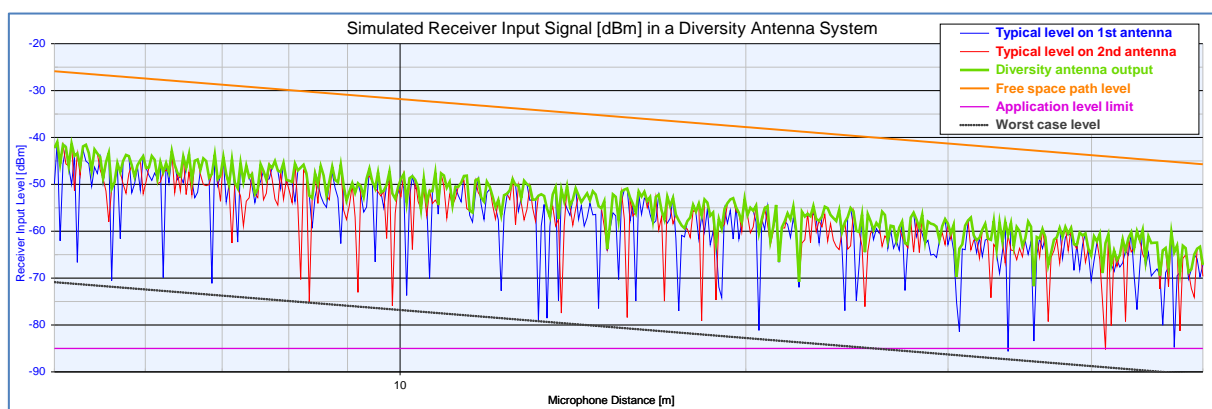

NOTES:

- The red and blue lines represent the reception level at the antennas.

² The value varies between 20 and 40 dB.

- The green line is the best-case signal provides by the diversity algorithm. The diversity cannot eliminate all path notches but can reduce their effect.

Link budget

In addition to the path loss there are additional interference problems on a microphone path, which affects the system performance (e.g. Interference, Man Made Noise, antennas placed in actor costume or stage installations). For any production there may be a range of link budgets dependant on the relative locations of the radio microphone user and the receive antenna. Fading, where the actor moves behind scenery is a constant problem and can be up to 40 dB.

Typical link budget calculation using a diversity antenna system.

Input Parameter

D – Distance	20	m
F – Frequency	700	MHz
RX_{CH} – Microphone receiver channel bandwidth	1.40E+05	Hz
P_{out} – Microphone output power (ERP)	17	dBm
PL_{ALD} – Microphone antenna loss & detuning effect	15.0	dB
PL_B – Loss effected while carrying antenna on human body	25.0	dB
PL_N – Additional loss in the transmission path notches	30.0	dB
PG_{DV} – Gain by using antenna diversity techniques	7.0	dB
PG_A – Gain through receiver antenna	7.0	dB
R_{NF} – Receiver noise figure	8.0	dB
R_{MINSNR} – Receiver minimum SNR	20.0	dB

Constant Parameter

TNF – Thermal noise floor	1 Hz bandwidth at 20 °C	-174.0	dBm
---------------------------	-------------------------	--------	-----

Calculation

PL_{FS} – Free space path loss using 0 dB dipole antennas	$32.44 + 20 * \log_{10}(D/1000) + 20 * \log_{10}(F)$	55.4	dB
T_{PF} – Total path los	$PL_{FS} + PL_{ALD} + PL_B + PL_N - PG_{DV} - PG_A$	111.4	dB
R_{TNF} – Thermal noise floor at receiver channel bandwidth	at 20°C	-122.5	dBm
T_{RF} – Total receiver noise power	$R_{TNF} + R_{NF}$	-114.5	dBm
$R_{MINRINP}$ – Minimal needed receiver input signal	$T_{RF} + R_{MINSNR}$	-94.5	dBm
R_{INPS} – Receiver input signal	$P_{OUT} - T_{PF}$	-94.4	dBm
Link budget	$R_{MINRIN} - R_{INP}$	0.2	dB

NOTE:

- A link budget grater than 0 shows the physical link feasibility in absence of interference.
- Any additional interference leads to a reduction in the practical link distance.

Short form presentation of signal level and path losses

P_{out} – Microphone output power (ERP)	17.0 dBm
PL_{ALD} – Microphone antenna loss & detuning effect	–15.0 dB
PL_B – Loss effected while carrying antenna on human body	–25.0 dB
PL_N – Additional loss in the transmission path notches	–30.0 dB
PG_{DV} – Gain by using antenna diversity techniques	7.0 dB
PG_A – Gain through receiver antenna	7.0 dB
R_{NF} – Receiver noise figure	–8.0 dB
R_{MINSNR} – Receiver minimum SNR	–20.0 dB
PL_{FS} – Free space path loss using 0 dB dipole antennas	–55.4 dB
R_{TNF} – Thermal noise floor at receiver channel bandwidth	–122.4 dBm


Illustrative example of interference in to the audio receiver unit of a SAB/SAP system and compatibility figures

Minimal required C/I for microphone links in the presence of a wideband interferer

This lab test example shows a test LTE signal (2) and an audio SAB/SAP measuring signal (1) at a measurement bandwidth of 100 kHz. To ensure the minimum necessary production quality, the useful carrier to interference ratio (C/I) can be determined from the difference between the LTE (2) and audio SAB/SAP (1) signal strengths. Monitoring and control was achieved by means of a headset.

Figure 10 shows the test scenario RF spectrum.

FIGURE 10
Test scenario RF spectrum

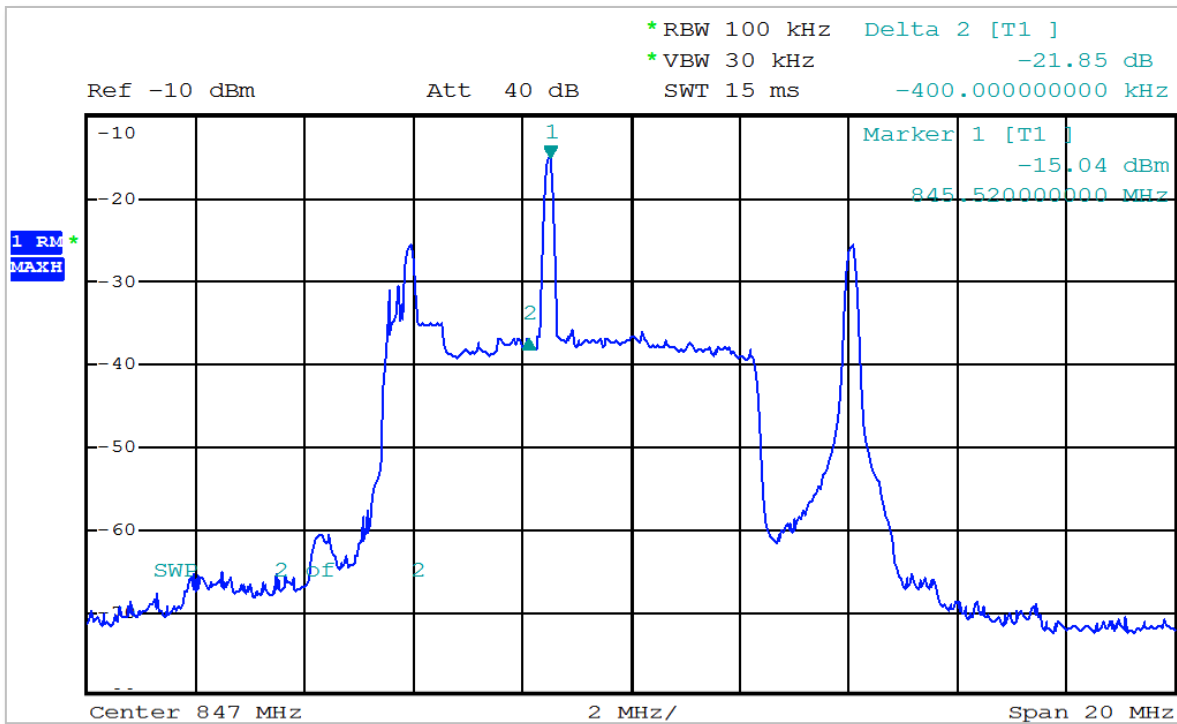


As shown in Fig. 10 the 1 kHz audio test signal was interference free with a C/I value of ~ 22 dB. This confirms the initial hypothesis that a minimal C/I of 20 dB is needed for analogue microphone use.

Wideband transmitter in adjacent spectrum


Figure 11 shows the signals of six radio microphones.

FIGURE 11
Six Microphone Signals (Illustration)

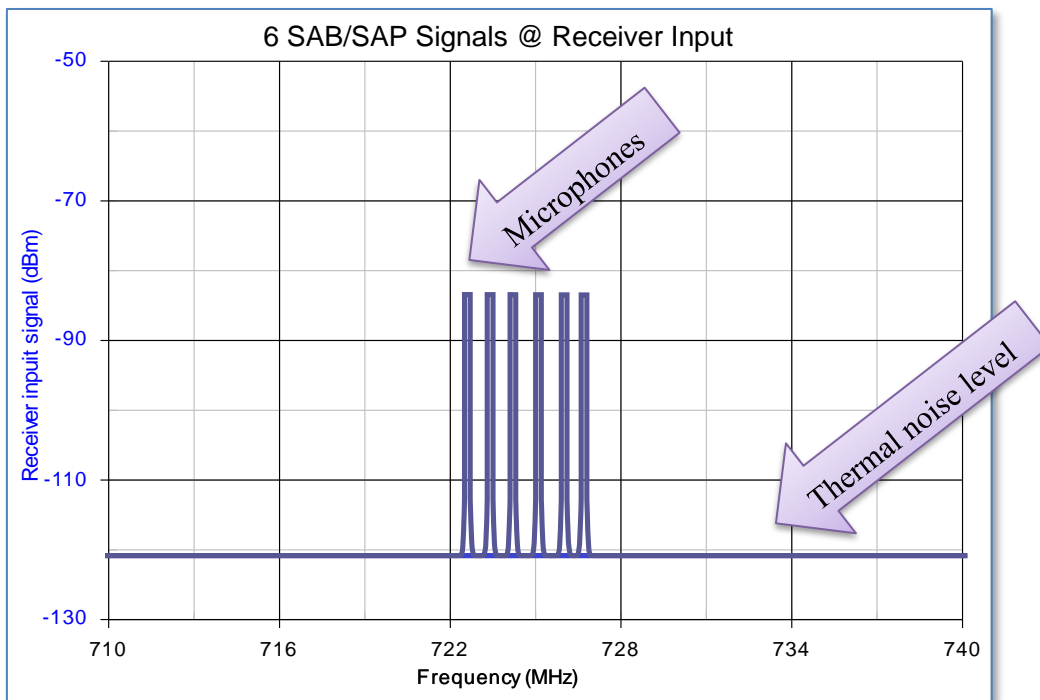

The SNR at receiver input is set according to the result of the link budget calculation. Figure 12 shows a wideband interferer adjacent to the microphone channel.


FIGURE 12
Wideband interferer adjacent to the microphone channel (Illustration)

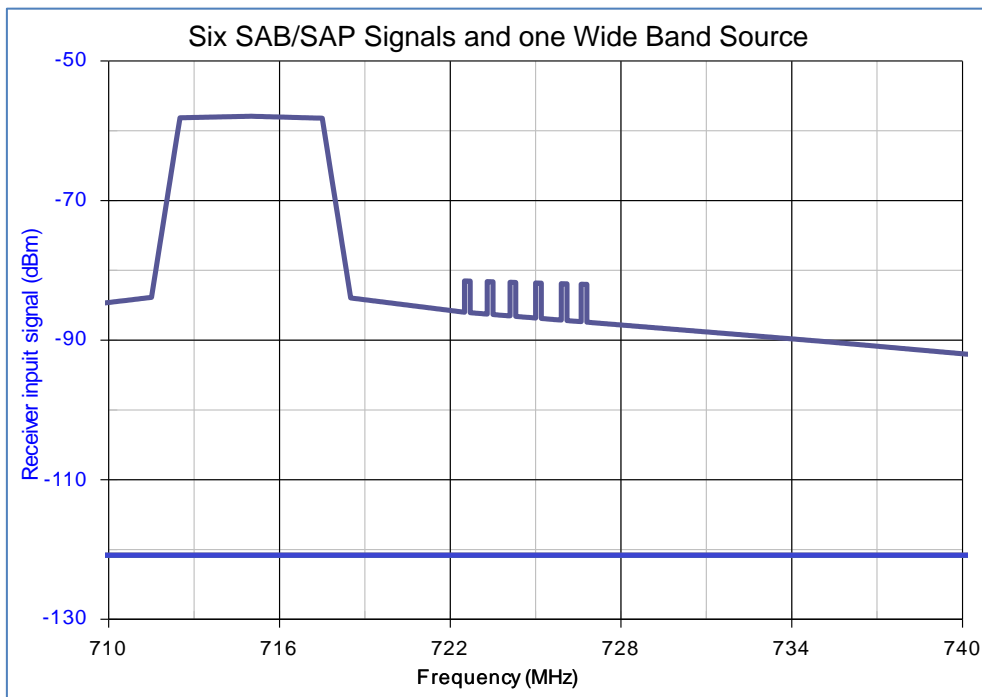

The adjacent channel transmitter noise will block all microphone links completely. Figure 13 shows the microphone channel in middle of wideband interferers.

FIGURE 13

Microphone channel in middle of wideband interferers (Illustration)

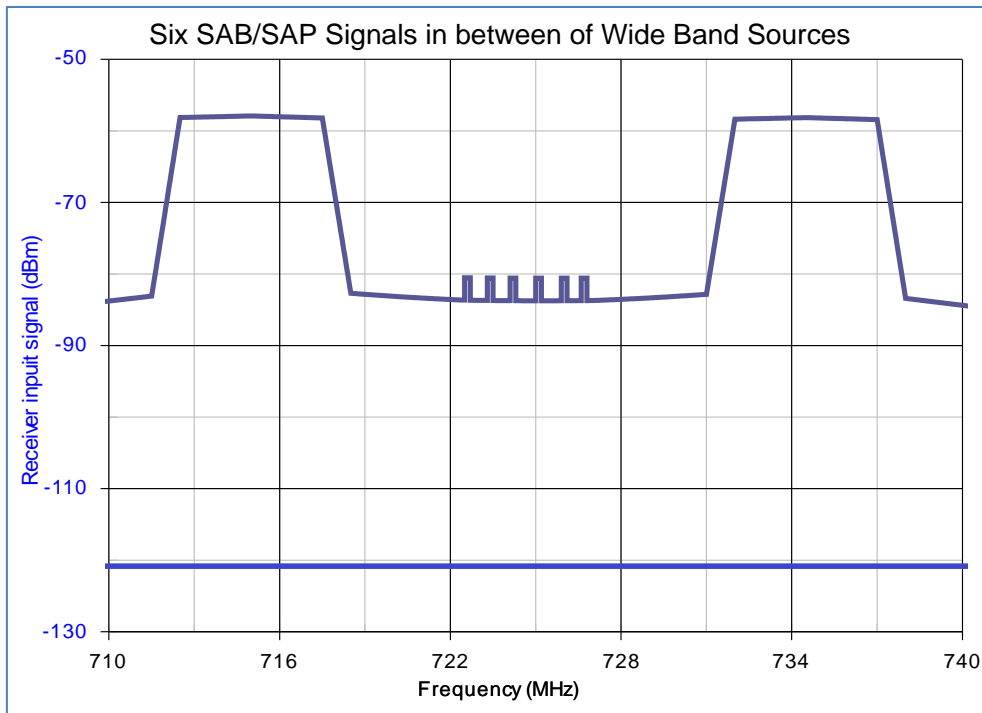


All microphone channels are completely blocked.

NOTE:

- The signal quality of adjacent wideband transmitter defines the neighbouring risk to SAB/SAP.
- Possible blocking effects are not considered.

Figure 14 shows the signal scenario on a different way.

FIGURE 14

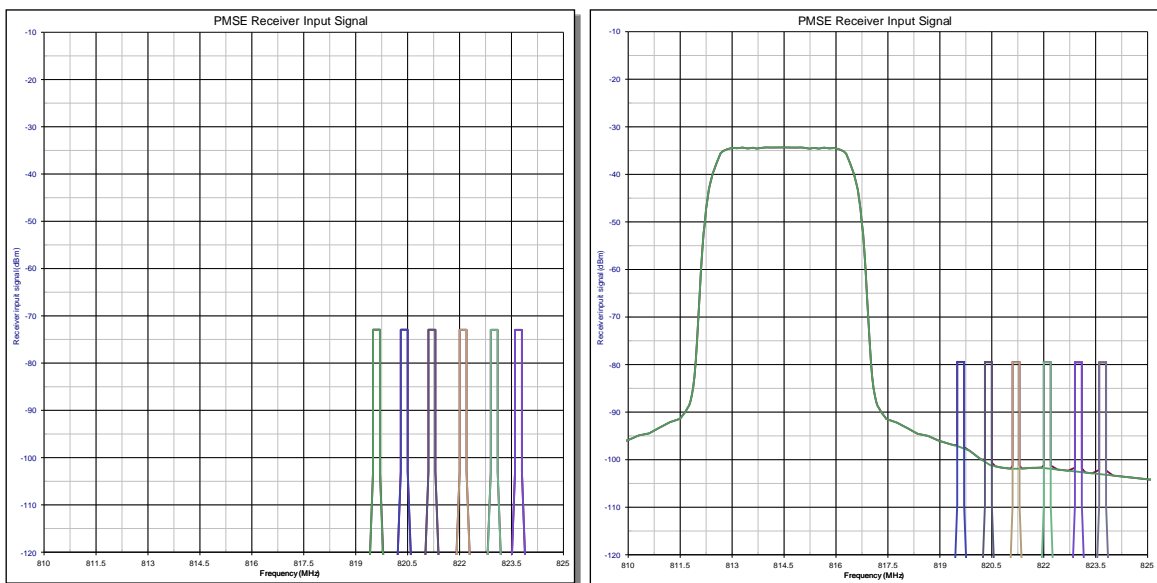

Interference free microphone scenario

Interfered microphone links

NOTE – Each colour presents a different signal

Active antenna distribution systems

Many use scenarios will require additional components in the path from transmitter output to receiver input that affect the interference scenario.

Receiver distribution system


In a simple environment, each receiver has its own antenna. A large production would therefore require 50 or more antennas, which is impractical. Therefore, the professional event uses antenna distribution systems. The signal of a single receiving antenna are split into many receiver paths, this unamplified antenna power division results in additional losses from antenna to receiver port. An antenna amplifier can compensate for this signal loss but the antenna amplifier is a nonlinear and broadband device. Nonlinearity in combination with high-bandwidth (e.g. 24 to 100 MHz) degrades the desired receiver performance. The receiver is affected by interference from the intermodulation generated within the amplifier.

Additional filters are used to provide protection from other radio signals.

Non linearity of an antenna distribution amplifier

A typical antenna amplifier was measured for its linear transfer function (Fig. 15).

FIGURE 15

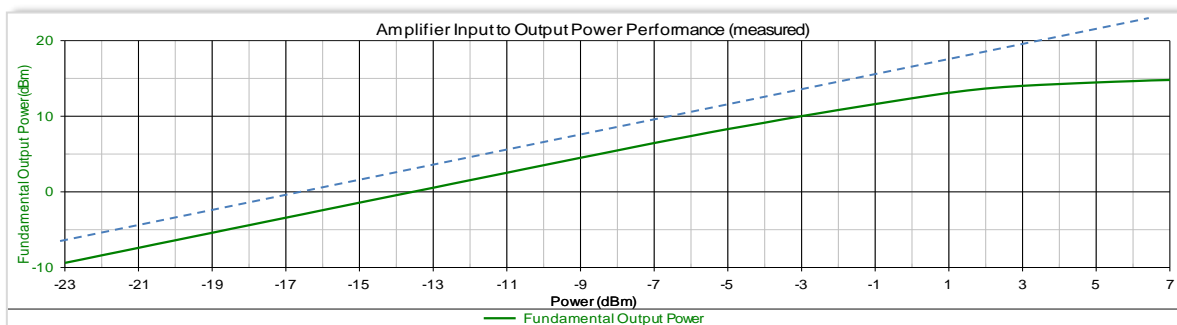

NOTE – The dotted blue line shows the linear admittance function.

Transmitter distribution system

IEMs use a fixed transmitter mounted in “19” racks, and it is impractical to use individual antenna in a large system. Therefore transmitter outputs are combined to a common antenna path. Once again, the power losses are compensated by use of an amplifier. Nonlinearity in combination with high-bandwidth degrades the desired transceiver performance. The combined transmitter spectrum on antenna output is filled with IM products.

Additional filters are used to provide protection to other radio application outside the microphone band.

Intermodulation and reverse intermodulation

Radio microphones and IEM are unusual in the radio world in that large numbers of transmitters (in excess of 80 at a large show); operate simultaneously for a number of hours and in very close proximity, in many cases within centimetres of each other.

It should be borne in mind that all radio microphones and IEMs will be switched on prior to the start of a performance and not switched off until the audio or recording system is shut down to prevent clicks and bangs being sent to the audio amplification or recording system.

Intermodulation

Intermodulation occurs when two or more radio signals combine together. In radio microphone and In Ear Monitor applications this is a critical consideration.

Radio microphones and IEMs are typically wideband FM systems, although radio microphone systems using digital technology do exist. Contrary to popular belief the digital systems are not completely immune to problems with intermodulation but the way in which they are affected is different from their analogue counterparts. For the most part we will deal with analogue systems here since they represent both the majority in current usage and the bulk of the equipment currently available on the market.

Intermodulation can occur anywhere in the radio system:

- in the transmitter;
- in the receiver;
- in ancillary RF equipment or in the environment.

Manufacturers can control the contribution that each element of their equipment makes to a large extent and significant differences in performance exist between different brands and models of SAB/SAP equipment in respect of the levels of intermodulation produced and the levels of tolerance they have to intermodulation interference. However, since intermodulation can also occur elsewhere than within the radio microphone equipment it cannot be completely eliminated and therefore the best possible mitigation is to avoid the consequences of interference from any possible intermodulation wherever possible. Once an intermodulation product exists in the environment, regardless of how it originates, it is just another interference source and the effect that it will have on a receiver can be predicted to a large extent by reference to the *C/I* performance of the receiver.

The number of intermodulation products present rises exponentially as the number of carriers' increases. Consequently the number of clean frequencies available within a given bandwidth declines rapidly as the number of carriers increases. The strength of the received signal from a radio microphone at the receiving antenna(s) varies widely as the transmitter moves around. Frequently the strength of the 'wanted' signal at the receiver will be less than that of one or more unwanted signals on adjacent frequencies, be they signals from other radio microphone transmitters which are in more favourable locations than the source of the 'wanted' signal, or intermodulation products.

In practice it is frequently the case that the wanted radio mix signal is one of the weakest at the receiving antennas since during many types of event at various times a single performer or group of performers may be on stage and therefore at a distance from the receiving antennas when the remainder of a shows cast are off stage and therefore their transmitters are closer to the receiving antennas.

Since intermodulation must exist at some point in all radio communications systems where there are multiple simultaneous transmissions many RF practitioners are often puzzled as to why it is such a major preoccupation for those involved in SAB/SAP. To understand this one needs an appreciation of the circumstances in which intermodulation becomes the problem. In the majority of communications systems either only voice quality (300-3 400 Hz) or data with check algorithms are in use. For SAB/SAP two major contributors are the wide audio bandwidth and wide audio dynamic range (or audio signal to noise ratio) of radio microphones and IEMs. Radio microphones typically have audio frequency responses ranging from 20 Hz up to 20 kHz and signal to noise ratios exceeding 100 dB. Consequently a low level heterodyne that might present no problem and even go completely unnoticed in other types of radio communications will be considered harmful interference in SAB/SAP applications (e.g. a 12.5 kHz heterodyne which demodulates as a whistle at -40 dB will not be apparent in a PMR system since it will be outside the audio frequency range and also close to the audio noise floor but it will be very obvious in a radio microphone system). Since radio

microphones are at the start of the audio production chain any interference at this point affects the entire downstream audience. Since in practice the likely sources of the signals which have combined to produce a particular intermodulation product will themselves be carrying modulation the intermodulation product will also carry a combination of the contributors modulation, more often than not this makes it even more audibly obtrusive. The ultimate audio output of an event, whether broadcast, recorded or live will frequently also be a combination of the audio output from more than one radio microphone summed together and so will contain the sum of any interference experienced by those radio microphones.

The problems can be exacerbated in IEM systems by a number of factors. When operated in Stereo mode – the default for Live Music performers – the demodulated bandwidth of the IEM receiver is necessarily considerably larger than for a mono radio microphone (or an IEM receiver operating in Mono mode). The operation of the multiplex stereo system using a 38 kHz sub carrier to carry the L-R difference information means that the receiver is susceptible to disturbance by interference that demodulates as baseband frequencies up to at least 53 kHz which are then rendered audible by the multiplex decoding process. In live music use the IEM receiver feeds high performance audio transducers inserted in to the ear canal of the artist's ears, consequently the smallest disturbance is conducted directly to the performer's ears which at the very least can be distracting for them and far more serious in the case of severe interference. Additionally IEM receivers are necessarily small battery powered devices and consequently are restricted in terms of antenna, space and energy resources which in turn can restrict their RF performance in comparison with what can be achieved by a top-of-the-range mains powered rack mounted radio mic receiver. Until quite recently IEM receivers did not feature diversity reception, although newer models do now benefit from this technology.

Reverse intermodulation

The term reverse intermodulation describes the situation that occurs when RF enters the output of an RF amplifier such as the output stage of a transmitter where other signals in the 'ether' are received via the transmitting antenna. Since the output is not designed to deal with signals being presented in this way mixing occurs between the 'received' signals and also the signal that the amplifier is amplifying. In general the more linear the amplifier the less reverse intermodulation will occur, up to a point. If the 'received' signals are sufficiently large then overload will occur. In a small battery powered device designed to output only a few tens of milliwatts this is quite a realistic proposition in the presence of higher powered transmitting devices particularly if they are operating in or near the same frequency band.

Mitigation techniques

In permanent base station installations there are a number of standard practice techniques that are commonly used which reduce intermodulation between multiple co-sited transmitters. A transmitter which is going to operate long term on a single frequency can have output filters, either internally or applied separately as part of the installation, these filters may be multi pole and have a high Q and these can contribute considerably to the reverse intermodulation performance. Ferrite isolators or circulators commonly used to combine transmitter outputs or to protect transmitters against antenna damage also produce dramatic improvements in reverse intermodulation performance at base station sites. Even antenna feeder cable loss has a beneficial effect in reducing the generation of reverse intermodulation products since it attenuates both the 'received' contributors travelling from the antenna to the transmitter output and also the resulting intermodulation products on their way back to the antenna.

Unfortunately most of these techniques are not suitable for small portable battery powered devices with a wide tuning range such as radio microphones. Each contributes weight, size, reduced efficiency or a combination of all three. Highly selective filters band pass filters in radio microphone transmitter

output stages were once common in high end professional devices when they operated on a single crystal controlled frequency (>20 years ago). The need for more frequency agile devices with wider tuning ranges means that modern equipment has to take a different approach with wider pass band filtering and linear output amplifiers instead. Miniature ferrite isolators do exist but have limited bandwidth thus limiting the tuning range of any equipment in to which they are incorporated and they also add size and weight which are both undesirable. A simple attenuator between the transmitter output and the antenna can deliver reverse intermodulation performance improvements without imposing significant weight or size penalties, but the effect on efficiency and therefore battery life are readily apparent and therefore not necessarily desirable.

Frequency planning

Since ultimately intermodulation cannot be completely prevented or controlled, the solution adopted by the SAB/SAP industry is to plan frequency usage so as to avoid the predictable consequences of interference which would result from intermodulation as far as is reasonably possible.


If a number of carriers are evenly spaced in frequency then mutual interference due to intermodulation can be predicted. If just three carriers are each spaced evenly then two of the three carriers will be vulnerable to interference from 3rd order two tone intermodulation products.

For ten, evenly spaced, carriers the number of two tone 3rd order products which will occur directly on the carrier frequencies is forty, evenly distributed at four per carrier frequency. If we start to look at higher order intermodulation products and higher numbers of tones, although the products will individually be predictably smaller in signal strength, they will be more numerous in quantity and the cumulative effect cannot be ignored in systems with multiple transmitters. So far we have only considered the carrier frequency and assumed zero bandwidth. Once we enter the real world then we have to consider the situation where any intermodulation products which occur within the receiver channel bandwidth can also be a source of interference. How far in frequency from the carrier frequency an intermodulation product can be before it can be ignored is a major differentiator between different brands and models of SAB/SAP equipment. For many events and locations where SAB/SAP equipment is present there may be a mixture of makes and models of equipment in use which further complicates the frequency planning. In a multiple channel system using frequency spacing which is equal to the channel spacing plus a fraction of channel spacing will still result in intermodulation products which are within the channel bandwidth. As a simple rule of thumb the spacing between any two frequencies in a system must be different to that between any other pair of frequencies.

Intermodulation products vs required bandwidth


If the TX frequencies of the transmitters are equally spaced within a given bandwidth, virtually the required bandwidth for the transmitter setup is low, but the RF noise generated through the intermodulation products in the vicinity of the carriers increases significantly and makes the RF channels adjacent to the TX carriers unusable.

FIGURE 16
Generated intermodulation products for 8 equally spaced transmitter carriers

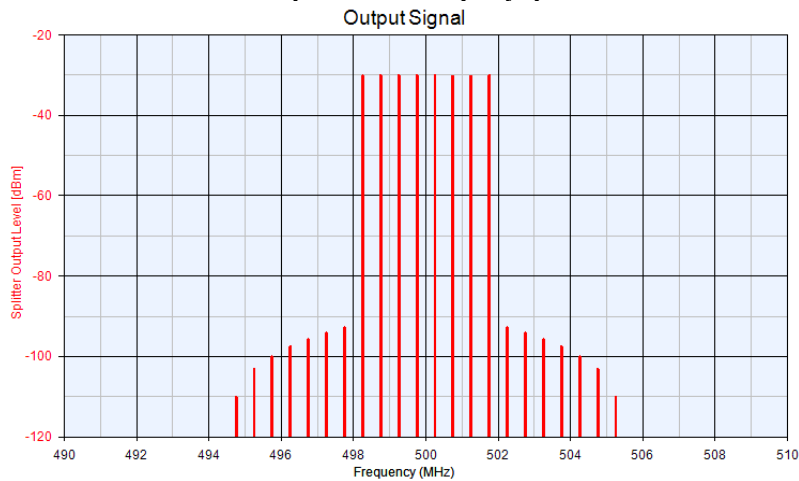

In real world situations, the maximum number of IM free channels will depend on the quality of the links as well as the equipment use. The following figure illustrates the behaviour of a typical system. The slope of the curve heavily depends on the linearity of the employed hardware and is therefore different for different systems.

FIGURE 17
Required spectrum vs number of channels in intermodulation free operation for a typical system

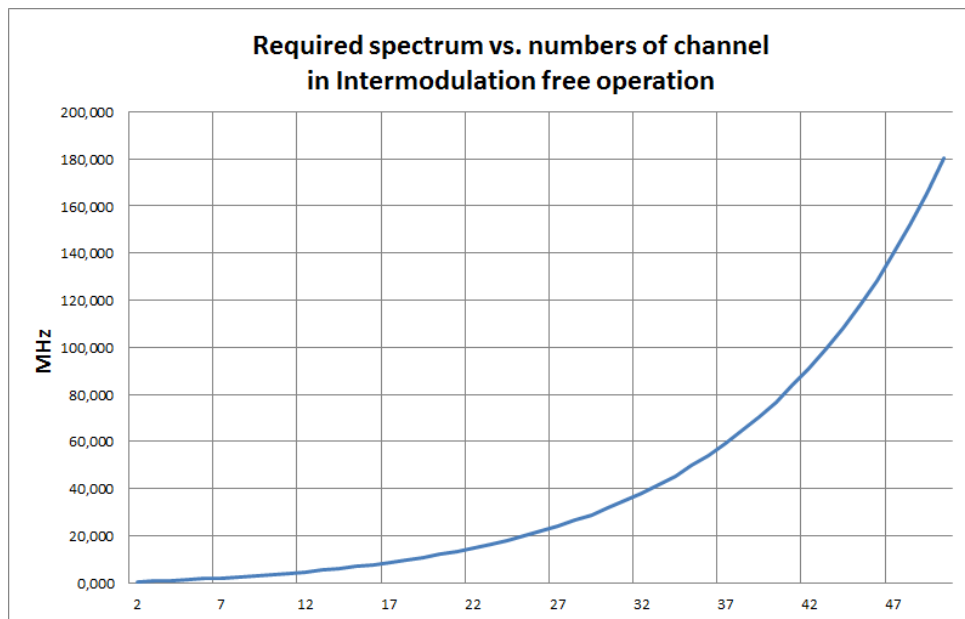

For co-located and coordinated typical systems, it will be possible to increase the number of links as shown in the following Table 10.

TABLE 10

Total number of channels	Radio microphones	IEM	TV channels needs to be interference free	TV channels × 8 MHz needs to be interference free
12	12	–	1	8 MHz
12	10	2	2	16 MHz
32	32	–	5	40 MHz
42	42	–	7	56 MHz
42	32	10	9	72 MHz
53	53	–	9	72 MHz
62	62	–	11	88 MHz
62	52	10	13	104 MHz
85	85	–	15	120 MHz
98	98	–	18	144 MHz

1) Frequency spectrum is one package, e.g. 11 channels = 470-558 MHz.

Multi-venue sites

At sites where multiple venues are clustered together such as TV studio complexes, conference centres, and theatre complexes, we also have to consider the effect that events in one area of the complex may have on another. Radio microphones are portable transmitters which may travel around a venue (or beyond) outside the coverage of their receivers such as when an actor returns to the dressing room between scenes or a conference speaker leaves the room between presentations. The dressing room or the route to it may be adjacent to another studio, the conference centre bar maybe adjacent to another conference room. Taking the frequency planning for each venue on site solely in isolation exposes the receivers in each venue to the danger of intermodulation created by the proximity of a transmitter (or transmitters) from another area coming within range of the receivers. Careful planning can and does eliminate these risks allowing unhindered mobility of event participants and their radio microphones. Similar risks exist where IEMs are used in multiple adjacent venues, but since in this case the transmitters are usually fixed in their location the situation is more controlled.

In all of the above however the common factor is that the distribution and use of SAB/SAP radio frequencies in and around a site is known and the ‘worst case’ scenario of everything being in use at once can be assessed, calculated and allowed for.

Digital SAB/SAP

Whereas the effects of intermodulation or any form of interference may become apparent and a nuisance to analogue SAB/SAP services at even relatively low levels the onset may be gradual and the noticeable degradation in performance as levels of interference increases gives some warning of impending problems. Low levels of interference under certain circumstances (where the protection criteria are not respected) such as in location news gathering may be deemed acceptable even when noticed if the alternative is no sound at all.

By comparison low levels of radio interference may not be evident in the audio output of current digital radio microphone until the *C/I* ratio degrades up to or very near the point at which the audio output is suddenly lost or corrupted beyond recognition. Far from being completely immune to intermodulation issues, the choice is between managing the quantifiable audible intrusion of

increasing interference or total loss of audio connection with little or no warning. Both will suffer interference as a result of intermodulation in some way. How analogue and digital systems behave in terms of interference is difficult to compare. It is expected that digital SAB/SAP will be less subject to intermodulation issues resulting in better frequency efficiency in some cases.

Attachment 2

to Annex 2

A method to measure the radio microphone receiver C/I


Hardware test procedure

The test procedure is described in order to place in context the following sections on co-channel interference levels.

Definition

The microphone protection level can be described as the unwanted signal level which degrades the microphone receiver output audio $S+N/N$ to 80 dB(A).

FIGURE 18
Test setup

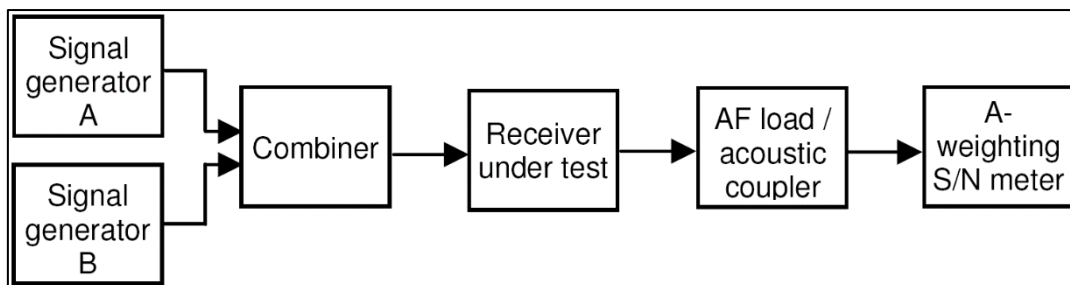

Test procedure:

- Set signal generator A to receiver frequency (f_c).
- Set wanted signal generator A to the necessary modulation parameters (e.g. FM, Deviation ± 24 kHz, AF 1 000 Hz).
- Set signal generator A RF output level measured at microphone receiver input to -85 dBm.
- Set unwanted signal generator B on receiver frequency (f_c).
- Set signal generator B RF on smallest output level (e.g. -130 dBm).
- Set signal generator B to Modulation FM, Deviation ± 24 kHz, AF 400 Hz.
- Modify signal generator B RF output level until receiver $S+N/N$ degrades to 80 dB(A).

NOTE – For some SAB/SAP equipment it leads to inconclusive results when measuring the $S+N/N$ criterion. In such a case an audio quality limit of 30 dB SINAD can be used.

For some SAB/SAP equipment it leads to inconclusive results when measuring the $S+N/N$ criterion,

- Record the generator B RF level measured at receiver input.

- Repeat the measuring on other interfering frequencies and record the generator B RF level measured at receiver input.

Results using the test procedure

Analogue microphones

Depending on the receiver construction a co-channel interference level of some -110 to -115 dBm will be measured.

Digital microphones

At present, systems which are available on the market differ in their behaviour substantially (also with respect to their designed behaviour), and it seems to be too early to make a definitive statement. From the few tested using spectrum efficient modulation an unwanted interferer level of -115 dBm has been found to be typical.

Derivation of interference level

Two interference scenarios are considered.


- At -85 dBm:
The minimal receiver RF input level for required production quality in a fading notch
At a 30 dB C/I (RF) a quality degradation of 1 dB (SINAD) can be measured.
- At -95 dBm:
Typical receiver sensitivity
At a 20 dB C/I (RF) a quality degradation of 3 dB (SINAD) can be measured.

Both examples calculate a maximum interference level of -115 dBm in 200 kHz channel. This can be transferred into a relative interference level of -168 dBm/Hz.

Estimation of the interference level

Figure 19 shows the maximum interference level to microphone receiver at a signal input level of -85 dBm.

FIGURE 19

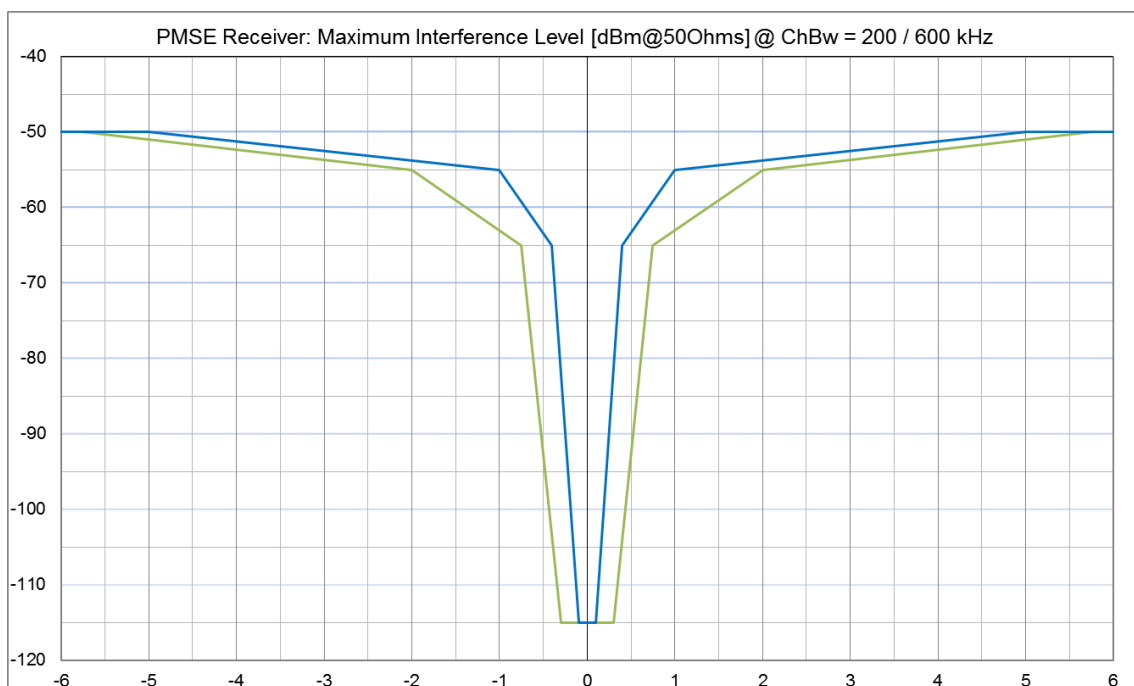

Attachment 3**to Annex 2****Deployment of Audio SAB/SAP applications depending on the category**

Sector	Deployment/Location of use	Deployment/Area of use
Demand for theatres and rock and pop and touring shows	Everywhere	Indoor and outdoor
Studio production	Dedicated fixed site	Predominantly indoor
Demand for news gathering for TV/radio/ internet	Everywhere, airborne	Predominantly outdoor
Demand for sound broadcasters	Everywhere, airborne	Indoor and outdoor
Demand for casual (sport) events and similar outside broadcasts	Everywhere, dedicated locations, airborne	Predominantly outdoor
Demand for large outside broadcasting	Everywhere, airborne	Indoor and outdoor
Demand of coverage of major events	Everywhere, airborne	Indoor and outdoor
Demand for film and advert production	Everywhere, dedicated locations, airborne	Indoor and outdoor
Conference/political events	Everywhere, dedicated locations	Predominantly indoor but also outdoor

Annex 3

Deployment examples of video applications

1 Introduction

This Report provides information on SAB/SAP, its technical details, use and spectrum issues. This Annex focuses on the Video aspects of SAB/SAP. However, any and all forms of SAB/SAP equipment are liable to be present at any event or use of Video links.

2 Cordless video cameras and video links

2.1 Rationale for cordless use

The question is often asked “why not use wired Cameras and reduce the spectrum demand?”, Analysys Mason, commissioned by Ofcom UK, investigated the use of cameras for the London Olympics and Paralympics and produced two reports [11] “for spectrum planning for the 2012 Olympic and Paralympic Games” and a part 2 which went into greater depth on a London wide hybrid system.

This report states that a reduction in level of usages of wireless camera less than that used in the Beijing Olympics is not a viable option for the London Olympics.

In addition to those reports, a range of other factors need to be taken into account, one major consideration is the Health and Safety aspects of any wired³ SAB/SAP at a site or venue, others are:

- Producers and directors have found greater artistic freedom in camera shots with increasingly smaller high definition units;
- Scenes can be shot anywhere indoor or out at short notice;
- With the miniaturization of camera units a number of cameras can be spread around a stage or studio providing the producer with multiple views to choose from:
 - Use in sport includes referees in football and bail cameras in cricket;
 - There is no other practical way to transfer images from sportsman’s helmets and cars without the use of radio spectrum;
- Instant news stories in their varied forms do not allow for the time taken to “wire up” a site.

Thus the answer to the question “why not use wired Cameras and reduce the spectrum demand?” are many and varied.

2.2 Changes in use of video links

With the spread of fibre optic cables and switching within the Telecommunications networks providing high quality definition and low latency it became practical to expand the number of network insertion points for regular sporting and cultural events and in many cases for regular news venues thus allowing the output from wireless cameras to be transferred to the studio without the use of high-power video links which previously where the only practical way to achieve the high “contribution” quality connection required between the site and a suitable Network Terminating Point.

³ Many venues will not allow the use of multiple wired cameras or radio microphones due to the volume of cabling from even a small musical group for safety reasons.

2.2.1 Contribution and distribution quality

A contribution link is required to be of the highest practical quality and lowest latency to allow for losses encountered in the editing process and subsequent distribution process.

Traditionally wireless cameras used analogue modulation techniques to carry the video stream from camera to the reception point and onto the production centre. These analogue techniques typically used around 30 MHz of spectrum per camera, and provided essentially real-time delivery of the video. More recently, the use of digital modulation based on widely deployed distribution standards, such as DVB-T and ISDB-T, have reduced the bandwidth requirements to typically 10 MHz per camera. Although these digital standards provide modes which allow greater data compression for distribution links, these are not used for wireless camera links due to the requirements for high picture quality, low coding delay and high robustness to transmission errors.

However, there is also a trend in video production embracing many new techniques including widescreen, high definition (HD), 3-D, and, looking forward: to ultra-high definition (UHD) and higher frame-rates, the latter especially for sports coverage to provide smoother motion. All these trends require higher capacity links, since higher resolution and higher frame-rates both demand additional data to be coded. There are some new techniques currently in development which aim to provide higher capacity within existing channel bandwidths.

2.2.2 Other platforms for wireless cameras

For a range of subjects such as instant news or internet use, viewers will accept lower quality pictures but not for other content such as sport or conventional TV and Film.

Mobile phones

With the increase in quality of mobile phone cameras and the mobile phone networks it is common and acceptable to see content from them incorporated into instant news stories especially accidents, or into internet content of social media sites such as YouTube or Facebook. However the use of mobile phone networks introduces latency which becomes evident in a two way interaction between studio and interviewer which can be subject to delay in both video and audio.

Multiple Mobile phone channels: (channel bonding)

A number of units are available on the market combining a number of mobile phone Sims to increase the bandwidth and thus the quality of a transmission. These still suffer from the network latency issues and are mainly used for “first to site” to gain a time advantage for conventional ENG crews.

In addition the capacity of Mobile phone channel bonding is very variable, usually badly congested at major events and sites of particular interest, and often only 100 kHz or 200 kHz capacity at best, or not available at all because of cell congestion.

Satellite phones

Extremely successful in providing content from war zones or other difficult to access arrears, primarily used for news stories.

Wi-Fi

A number of low quality wireless cameras are available using the 2.4 GHz and 5 GHz. bands, however these tend to be for non-professional domestic or security use. High quality very short range links are possible i.e. to an adjacent plasma screen.

IP Links using dedicated spectrum

Although ASI over IP is not the most efficient way (bits per Hertz) of transporting the data there are a number of advantages using these point to point links in outside broadcasts:

- One system carries all the video and communication bidirectional;
- Low delay (must have a dedicated network);
- High bitrates (amount of data);
- Cost (practically off the shelf customer products);
- Easy to connect to other IP based systems.

These systems will only work when it is a dedicated private network, such as a point to point fibre.

2.2.3 Next generation wireless cameras

The BBC's Research and Development department, which has contributed much to the current wireless camera link technology, has been developing new techniques making use of more recent modulation and coding standards, as found for instance in DVB-T2 and DVB-NGH, to allow a 'next generation' wireless camera which would approximately double the spectrum efficiency compared to those based on the DVB-T standard. A key ingredient is the inclusion of 'Multiple Input Multiple Output' (MIMO) technologies in conjunction with COFDM in order to provide a foundation for the increased throughput sought. This is supported by an LDPC-based error-correction chain based on those used in DVB-T2 and DVB-NGH. The current state of development offers 40 Mb/s in 10 MHz, but it is envisaged that a variant offering 30 Mb/s in the same bandwidth is feasible, as well as 'scaled' systems providing up to 120 Mb/s in 20 MHz, a bit-rate intended to support lightly-compressed studio quality video.

As the name implies, MIMO operation requires the use of multiple transmission and receiving antennas. The BBC technique is based on system dimension of 4×4 (i.e. four receive and four transmit antenna elements), in order to allow effective operation in environments characterized by a high degree of signal reflection and scattering (typically indoors) and those where a strong line-of-sight component is dominant (typically outdoors). Although based on a 4×4 dimension, typically two physical antennas will be used for transmission and two for reception, permitted by the use of sophisticated signal processing.

2.2.4 Other transport platforms

Trials have taken place with Direct Air to Ground (DA2G) using a modified LTE signal standard adapted to overcome Doppler shift to a dedicated network. The system is designed for inflight entertainment and internet access; it is only suitable for these applications and not as a transport mechanism for contribution quality video [12].

3 Description of video SAB/SAP applications

SAB/SAP covers a wide range of equipment and applications. This Annex addresses wireless cameras and associated video links. These links will often also carry the associated radio microphone audio, service links and telemetry.

Video SAB/SAP is the process of capturing the image and taking it from the camera to the production centre.

Table 11 provides the definitions of video SAB/SAP links.

TABLE 11

Definition of video SAB/SAP links (subset of Annex 1 of ERC/REC 25-10)

Type of link	Definition
Wireless camera (line-of-sight)	Handheld or otherwise mounted camera with integrated or Clip-on transmitter, power pack and antenna for carrying broadcast-quality video together with sound signals over short-ranges line-of-sight
Wireless cameras (non-line-of-sight)	Handheld or otherwise mounted camera with integrated or Clip-on transmitter, power pack and antenna for carrying broadcast-quality video together with sound signals over short-ranges non-line-of-sight
Miniature camera/links	Very small transmitter and miniature camera for specialist action shots, e.g. helmet cam, covert assignments, UAV, etc. Can be body worn or covert assignments.
Portable video link	Small transmitter, for deployment over greater ranges, typically up to 2 km
Mobile air-to-ground video link	Video transmission system employing radio transmitter and receivers mounted on helicopters, airships or other aircraft.(includes repeaters and relays)
Mobile vehicular video link (including ground-to-air)	Video transmission system employing radio transmitter mounted in/on motorcycles, racing motorbikes, pedal cycles, cars, racing cars or boats. One or both link terminals may be used while moving.
Temporary point-to-point video links	Temporary link between two points (e.g. part of a link between an OB site and a studio or network terminating point), used for carrying broadcast quality video/audio signals. Link terminals are mounted on tripods, temporary platforms, purpose built vehicles or hydraulic hoists. Two-way links are often required.

Any and all of the SAB/SAP elements described above plus audio SAB/SAP and service links may be present in a production as illustrated in Fig. 20.

FIGURE 20

Actual Example of ENG/OB demand for audio and service link channels in a European event

Mobile Broadcast Systems



Frequency set-up layout ©

EUROPEAN MOBILE EVENTS (VIDEO LINKS)

From plane to receive site	2060,0 Mc.	DVB-S2	20Mhz.	15 Watt	16APSK
From helicopter 1 to base-station	2035,0 Mc.	DVB-S2	20Mhz.	15 Watt	16APSK
From helicopter 2 to base-station	2085,0 Mc.	DVB-S2	20Mhz.	15 Watt	16APSK
From cineflex 1 to base-station	2308,0 Mc.	ISDB-T	7Mhz	5 Watt	16QAM
From cineflex 2 to base-station	2335,0 Mc.	ISDB-T	7Mhz	5 Watt	16QAM
From Motor 1 to heli 1 and plane	2200,0 Mc.	ISDB-T	7Mhz	5 Watt	16QAM
From Motor 2 to heli 1 and plane	2220,0 Mc.	ISDB-T	7Mhz	5 Watt	16QAM
From Motor 3 to heli 1, heli 2 and plane	2240,0 Mc.	ISDB-T	7Mhz	5 Watt	16QAM
From Motor 4 to heli 2 and plane	2260,0 Mc.	ISDB-T	7Mhz	5 Watt	16QAM
From Motor 5 to heli 2 and plane	2280,0 Mc.	ISDB-T	7Mhz	5 Watt	16QAM
From receive site to base-station	10300,0 Mc.	DVB-T	8Mhz	.15 Watt	16QAM
From receive site to base-station	10400,0 Mc.	DVB-T	8Mhz	.15 Watt	16QAM
From receive site to base-station	10450,0 Mc.	DVB-T	8Mhz	.15 Watt	16QAM

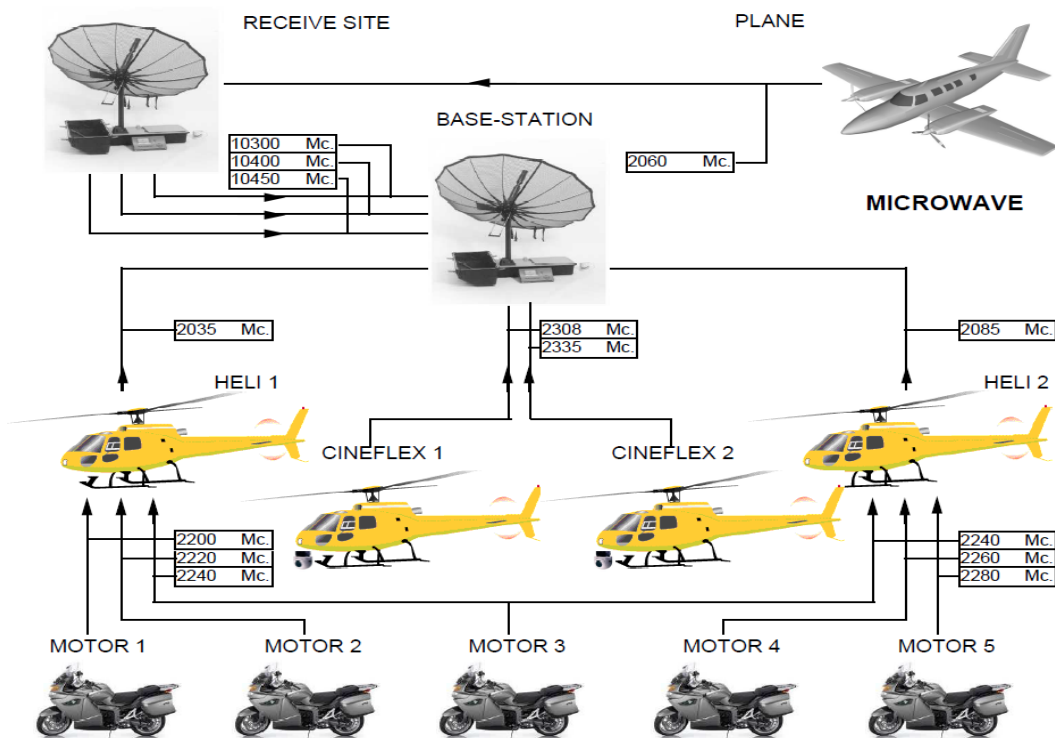


FIGURE 21
Wireless camera



As shown in Fig. 21, conventional wireless camera transmitter docks on the back of a traditional camera. Audio is incorporated with the pictures on the wireless camera link either from an on-board microphone or else there may be a separate radio microphone receiver mounted on the camera. Remote control of the camera for colour balance, iris and tally light can also be by radio telemetry via a separate wireless channel received on the camera.

FIGURE 22
Cordless on board camera



Often to bring pictures from close to the action, miniaturized cameras and transmitters are mounted on participants in cycling and motorsport (see Fig. 22), utilizing low profile antennas, such as patch antennas, to minimize the impact on performance. These can then be received on the ground via a network of switched receivers placed along the route, or received via an airborne platform.

To give a reliable link over a greater range a Portable Camera Transmitter is used along with a directional antenna. In the example in Fig. 23 below, being moved to a new location, the transmitter, its only portable power supply, test equipment and the directional antenna are carried on a trolley. Once in place the camera is connected to it by cable. Typical applications would be motorsport or a golf course where the camera location is determined by the action. The equipment may also be mounted on a vehicle such as a golf buggy.

FIGURE 23
Portable camera transmitter



Mobile links can be mounted on a variety of vehicles including cars, buggies and motorcycles. In the example depicted in Fig. 24 below the cameraman sits on the rear of the motorcycle connected by cable to the video link, its components in the rear panniers and above the rear wheel. A low gain, typically a patch antenna, is mounted high, for safety and a clear view of the sky. RF power is limited by the EMF human exposure limits.

FIGURE 24
Mobile vehicular video link



FIGURE 25
Airborne video link



On the above Fig. 25, the gyroscopically stabilized camera can be seen on the front of the helicopter with receive and transmit antennas mounted on the landing skids. Other airborne vehicles such as airships and tethered blimps can also carry airborne video links.

As well as relaying pictures directly from the on-board camera the airborne platform can additionally receive multiple links from the ground, then transpose and transmit them down to another point on

the ground. In Fig. 26 below is an example of the on-board equipment required, perhaps for coverage of a marathon or cycle race.

FIGURE 26
Airborne video link equipment



FIGURE 27
Temporary point-to-point video links



In the left picture there are two auto tracking units installed in a hydraulic lift. These units will track by means of GPS information from the helicopter- or aircraft downlinks.

Point-to-point video links are used to relay pictures, sound and data from remote locations to a central production location. Programme makers need their own high quality, low delay links to be able to seamlessly combine the elements of a production. These may be relatively short distances for an individual camera at a horse racing meeting or many kilometres from a remote outside broadcast part way along a cycle race, to the finish line.

3.1 Applications versus spectrum limitations

3.1.1 Airborne use

Whilst the majority of airborne use is from helicopter's there are also a range of other airborne use from airships to parachuting and the recent sub space height record.

Please note: Relay plane use high altitude (20.000 ft., ca. 6 100 m) often giving the need for harmonization for SAB/SAP frequencies and a quick coordination scheme between Administrations

All of these applications have one thing in common: a requirement for the transmitter and receiver antenna to "see" each other whilst the subject is moving.

Whilst auto tracking systems are a vital part of the link budget the physical factors and beam width determine the success of such a system.

Currently the 2-3 GHz band proved the best and in some cases the only spectrum available for airborne use.

3.1.2 Car and motorcycle use

This varies from rally cars to hill climbs and track racing, in each application the speed and terrain stretch the limits of the link budget with added complications of propagation in forests and pit arrears. Antenna size and coverage on both the transmitter and receiver have physical and technical limitations.

Once again the best and in many cases the only practical combinations can be achieved in the 2-3 GHz band

3.1.3 Cycle racing both road and track

Wireless cameras have a number of formats when covering these applications, the prime one being the helmet camera of the cyclist which is physically small and limited in its antenna size and its output power (by both power source and EMF limits).

In addition vehicle, motor bike and airborne use will be used to cover an event.

Once again the best and in many cases the only practical combinations due to the obstructed propagation path can be achieved in the 2-3 GHz band

In many cases a low power head camera will be relayed to an aircraft or helicopter via a motorcycle, once again the EMF safety issue need careful consideration for the motorcycle personal.

3.2 Other applications

A range of activities such as yachting and powerboat racing will suffer from similar issues to those above plus the propagation losses from operating over water. In many cases a relay helicopter will be used to provide the link back to the Outside Broadcasting venue

FIGURE 28
Relay helicopter



Golf in particular suffers from obstructed line of sight propagation even when using golf buggies as repeaters.

3.3 Current usage of certain frequency bands for wireless camera and video links in CEPT countries

During the development of this Report [2], the ECC developed a questionnaire to CEPT administrations on the regulatory procedures used by administrations in granting access to spectrum for SAB/SAP. It covers many frequency ranges and SAB/SAP usages.

Band 2 025-2 110 MHz (ERC/REC 25-10) [13]: From the 32 countries providing a response on this band, 19 of them report about the availability of the band or parts of it for SAB/SAP applications, namely temporary video links (portable, mobile with some allowance for airborne use) and wireless cameras as referred to in ERC/REC 25-10. This use is under an individual licensing regime. No change is expected for this band in relation to SAB/SAP.

Band 2 200-2 500 MHz (ERC/REC 25-10): From the 32 countries providing a response on this band, 29 of them report about the availability of the band or parts of it for SAB/SAP applications.

The main type (28 countries) is related to temporary video links (portable, mobile with some allowance for airborne use) and wireless cameras as referred to in ERC/REC 25-10. In most cases, this use is under an individual licensing regime, although low power wireless cameras can in a few countries operate under a general license. It is noted that, in addition or as an alternative, two countries mention specifically the use of the 2 400-2 483.5 MHz band for wideband data transmissions or non-specific SRD as per REC 70-03 for SAB/SAP purpose. Five countries mentioned that current considerations on the potential introduction of Broadband Wireless systems either as a single block or via Licensed Shared Access (LSA)⁴ in the band 2 300-2 400 MHz will have an impact on the availability of the band for SAB/SAP.

⁴ An LSA system comprises one or more incumbents, one or more LSA licensees, and the means to enable coordination between incumbents and LSA licensees, such that the latter may deploy their networks without harmful interference.

Band 2 500-2 690 MHz (ERC/REC 25-10): From the 32 countries providing a response on this band, 5 of them report about the availability of the band or parts of it for SAB/SAP application, namely SAB/SAP, video links. Amongst those, 3 countries expect that the use of SAB/SAP will cease because of the introduction of terrestrial Electronic Communications Networks in the 2 500-2 690 MHz band. On this basis, the relevance of maintaining this band in the ERC/REC 25-10 may be considered.

Band 3 400-3 600 MHz (ERC/REC 25-10): From the 32 countries providing a response on this band, 9 of them report about the availability of the band or parts of it for SAB/SAP applications, which tends to confirm a decrease of the availability of this band for SAB/SAP. SAB/SAP applications in this band cover temporary video links (portable, mobile with some allowance for airborne use) and wireless cameras as referred to in ERC/REC 25-10 [13]. This use is under an individual licensing regime. The development of IMT in this band may have an impact on the spectrum available for SAB/SAP in this band.

Band 4 400-5 000 MHz: From the 32 countries providing a response on this band, 7 of them report about the availability of the band or parts of it for SAB/SAP applications. SAB/SAP applications in this band cover SAB/SAP links for temporary use deployed in a coordinated way to protect other use (mainly military applications). This SAB/SAP use is in most cases under an individual licensing regime.

Band 10.0-10.68 GHz (ERC/REC 25-10): From the 32 countries providing a response on this band, 26 of them report about the availability of the band or parts of it for SAB/SAP applications. The amount of available spectrum and the frequency bands within the overall tuning range vary significantly depending upon the country. The main SAB/SAP applications covered in this range are wireless cameras, portable video links and point-to-point video links for temporary use as referred to in ERC/REC 25-10. This use is in most cases under an individual licensing regime. No major change is generally expected for this band in relation to SAB/SAP.

Band 21.20-24.50 GHz (ERC/REC 25-10): From the 32 countries providing a response on this band, 25 of them report about the availability of the band or parts of it for SAB/SAP applications. The amount of available spectrum and the frequency bands within the overall tuning range vary significantly depending upon the country. The main SAB/SAP applications covered in this range are wireless cameras, portable video links and point-to-point video links for temporary use as referred to in ERC/REC 25-10. This use is in most cases under an individual licensing regime. A few changes are expected, which may slightly increase the availability of spectrum for SAB/SAP.

Band 47.20-50.20 GHz (ERC/REC 25-10): From the 32 countries providing a response on this band, 16 of them report about the availability of the band or parts of it for SAB/SAP applications. The main SAB/SAP applications covered in this range are wireless cameras and portable video links as referred to in ERC/REC 25-10. This use is in most cases under an individual licensing regime. No change is expected with regard to SAB/SAP in this band.

Other bands: The availability of frequency bands within the 6/8 GHz range is mentioned by eight countries for fixed and/or mobile ENG/OB.

3.4 HDTV/UHDTV digital terrestrial electronic news gathering (ENG) in Japan

Digital terrestrial ENG systems have been indispensable for broadcasters in Japan for transmitting video materials from the site of on-going news, sport or other events to studios at broadcasting stations. It is very much to a broadcaster's advantage to have its own private transmitting landlines to initiate live broadcasts on established temporary point-to-point connections during a major natural disaster or accident.

This section describes the frequency bands, characteristics, use cases and developments of ENG systems in Japan.

3.4.1 Frequencies and use cases

1.2 GHz / 2.3 GHz bands

The 1.2 GHz and 2.3 GHz bands (1 240-1 300 and 2 330-2 370 MHz) are mainly used for mobile transmitting of live streaming of events such as marathons and road bicycle racings.

The 770-806 MHz bands were originally assigned for such purposes, however, they were reassigned to commercial mobile phones and other applications in 2012. The 1.2 GHz and 2.3 GHz bands were consequently assigned to the incumbent ENG systems. This frequency migration was completed in 2017.

ENG is normally utilized between two line-of-sight points, but non line-of-sight transmission is also required for mobile portable links. The 1.2 GHz and 2.3 GHz bands are relatively low for ENG frequencies, so they have broad coverage. Besides that, adopting COFDM, which is resistant to multipath fading, gives ENG systems on these bands non line-of-sight transmission capability.

Since these bands are not exclusively assigned to SAB/SAP in Japan, the frequencies need to be shared with other radiocommunication services. Users are required to submit applications some months in advance before they use the bands, which means broadcasters can operate on the 1.2 GHz and 2.3 GHz bands only if a schedule and the site of live streaming event have been specified.

Microwave bands (6-7 GHz, 10 GHz, and 13 GHz bands)

The 5 850-5 925 MHz, 6 425-6 570 MHz, 6 870-7 125 MHz, 10.25-10.45 GHz, 10.55-10.68 GHz and 12.95-13.25 GHz bands are most generally used for ENG in Japan, as they are suitable for transmitting video stably between two distant points.

HDTV has been used so far, and the technical standard of transmission system for UHDTV programme using these microwave bands was published in January 2018.

Millimetre-wave bands (42 GHz/55 GHz bands)

41.0-42.0 GHz and 54.27-55.27 GHz are susceptible to rain attenuation and the transmission distance is short (usually less than 10 km). On the other hand, transmitting capacity is good enough to carry high quality UHDTV video.

A transmission experiment on 42 GHz band is described in § 3.4.3.2.

Millimetre-wave bands (120 GHz band)

116-134 GHz are used, and its broad bandwidth can transmit uncompressed 8K signal. ENG systems on this band will be used when transmitting over large obstacles such as roads.

8K UHDTV public viewing trial on 120 GHz band is described in § 3.4.3.1.

3.4.2 Technical parameters

Tables 12 and 13 show technical parameters for the transmission of digital TV signals over portable microwave links.

TABLE 12

Example of user requirements and technical parameters for transmission of digital HD/SDTV signals over fixed/airborne (line-of-sight) portable microwave links

Frequency		1.2 GHz band (HDTV) (The parameters are extracts of ARIB ⁵ STD-B57.)	
Modulation		32QAM(3/4)-OFDM	
Channel spacing		18 MHz	
Transmission power		25 W	
Fixed	Tx antenna	Yagi	
	Rx antenna	Yagi	
Transmission capacity (TS rate)		45 Mbit/s	
Frequency		2.3 GHz band (HDTV) (The parameters are extracts of ARIB STD-B57.)	
Modulation		32QAM(3/4)-OFDM	
Channel spacing		18 MHz	
Transmission power		40 W	
Fixed	Tx antenna	Yagi	
	Rx antenna	Yagi	
Transmission capacity (TS rate)		45 Mbit/s	
Frequency		6-7 GHz, 10 GHz, and 13 GHz bands (HDTV)	
Modulation		64QAM(3/4)	
Channel spacing		18 MHz	
Transmission power		1.5 W	
		Nyquist bandwidth: 13.5 MHz Roll off: 30% Transmission bit rate: 81 Mbit/s Information bit rate: 60 Mbit/s Modulation: 64-QAM	
Fixed	Tx antenna	0.6 m dish	
	Rx antenna	0.6 m dish	
		Transmission distance: 6-7 GHz: 50-100 km (depending on necessary margin) 10 GHz: 7 km (with necessary rain margin) 13 GHz: 5 km (with necessary rain margin)	
Airborne	Tx antenna	0.2 m dish	
	Rx antenna	1.2 m dish	
		Transmission distance: 6-7 GHz: 50-65 km (depending on necessary margin) 10 GHz: 7 km (with necessary rain margin) 13 GHz: 5 km (with necessary rain margin)	
Frequency		6-7 GHz, 10 GHz, and 13 GHz bands (HDTV/UHDTV) (The Parameters are extracts of ARIB STD-B71.)	

⁵ ARIB: Association of Radio Industries and Businesses.

Modulation		1024QAM-OFDM	Transmission distance: 6-7 GHz: 50 km 10 GHz: 7 km 13 GHz: 5 km
Channel spacing		18 MHz	
Transmission power		2.5 W	
Fixed	Tx antenna	0.6 m dish	
	Rx antenna	0.6 m dish	
Transmission capacity (TS rate)		104 Mbit/s	
Frequency		42 GHz / 55 GHz (HDTV/UHDTV) (The parameters are extracts of ARIB STD-B43.)	
Modulation		16QAM(3/4)-OFDM	Transmission distance: 42 GHz: 4 km 55 GHz: 3 km
Channel spacing		125 MHz	
Transmission power		0.5 W	
Fixed	Tx antenna	Dish (40 dBi)	
	Rx antenna	Dish (40 dBi)	
Transmission capacity (TS rate)		240 Mbit/s	
Frequency		120 GHz (UHDTV) (The parameters are extracts of ARIB STD-B65.)	
Modulation		ASK	Transmission distance: 4km
Channel spacing		18 GHz	
Transmission power		1.0 W	
Fixed	Tx antenna	Dish (51dBi)	
	Rx antenna	Dish (51dBi)	
Transmission capacity (TS rate)		12 Gbit/s	

NOTE 1 – User requirements and technical parameters in terms of basic video and audio quality for transmission of digital UHDTV/HDTV/SDTV signals in ENG applications are provided in Recommendation ITU-R BT.1872-1 – User requirements for broadcast auxiliary services including digital television outside broadcast, electronic/satellite news gathering and electronic field production.

NOTE 2 – Parameters of BAS video link systems operated in the mobile service are provided in Table 1 of Annex 1 to Recommendation ITU-R M.1824-1 – System characteristics of television outside broadcast, electronic news gathering and electronic field production in the mobile service for use in sharing studies.

NOTE 3 – Digital FS system parameters for BAS Video Systems are provided in Table 1 of Annex 2 to Recommendation ITU-R F.1777-2 – System characteristic of television outside broadcast, electronic news gathering and electronic field production in the fixed service for use in sharing studies”.

3.4.3 Development of SAB/SAP for UHDTV in Japan

Ultra-high definition television (UHDTV) is certain to be one of the major applications of next-generation digital terrestrial broadcasting. Recommendation ITU-R BT.2020 – Parameter values for ultra-high definition television systems for production and international programme exchange, was published for this purpose in 2012.

Since 2012, studies on the transmission of UHDTV on DTT networks were started in several countries, and the results were summarized in Report ITU-R BT.2343. Additionally, ITU-R developed Recommendation ITU-R BO.2098 in 2016.

With ever more programs being produced for UHDTV, SAB/SAP for UHDTV has become an urgent requirement.

This section addresses the latest developments in SAB/SAP for UHDTV.

3.4.3.1 120 GHz band transmission system for 8K UHDTV

The transmission of uncompressed video and audio signals (baseband signals) from a camera is an essential requirement of live production in the field, and UHDTV will be no exception. Taking the high bit rate of uncompressed UHDTV signals into account, a huge amount of additional capacity will be needed. The frequency bands now being used for temporary HDTV video links are used heavily by existing services and have no potential for future expansion.

A UHDTV temporary video link using the 120 GHz band has therefore been developed in Japan to make use of the wider bandwidth and higher capacity of the millimetre band. This 120 GHz video link will carry uncompressed Dual Green 8K signals (formatted with the Bayer colour filter array, which has very similar quality to full 8K) with a data rate of 24 Gbit/s.

Example uses

Temporary video links can be used when it is difficult or unfeasible to use a cable, such as in a stadium, on a golf course, or in the case of some huge obstacle.

Figure 29 shows an example of usage in a stadium, where the transmission distance is estimated at 250 m.

Figure 30 shows an example of usage on a golf course, where the transmission distance is estimated at 1 km.

Figure 31 shows an example of usage in case of transmitting over obstacles (ex. road, river) where the transmission distance is estimated at 4 km.

FIGURE 29
Stadium

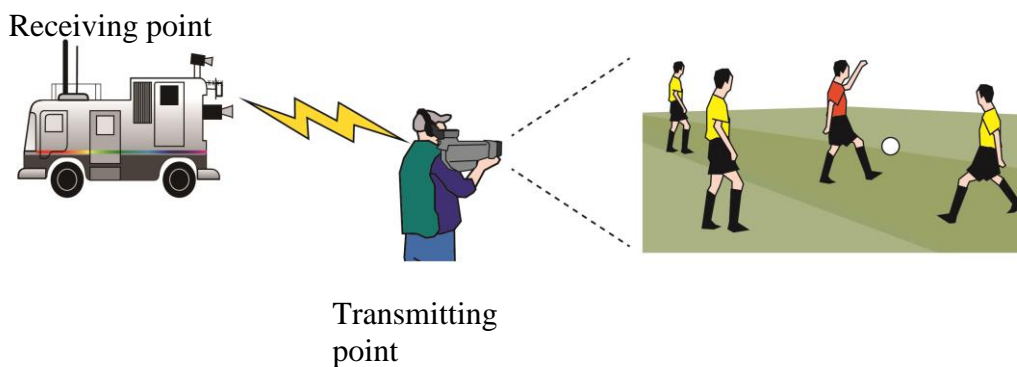


FIGURE 30
Golf Course


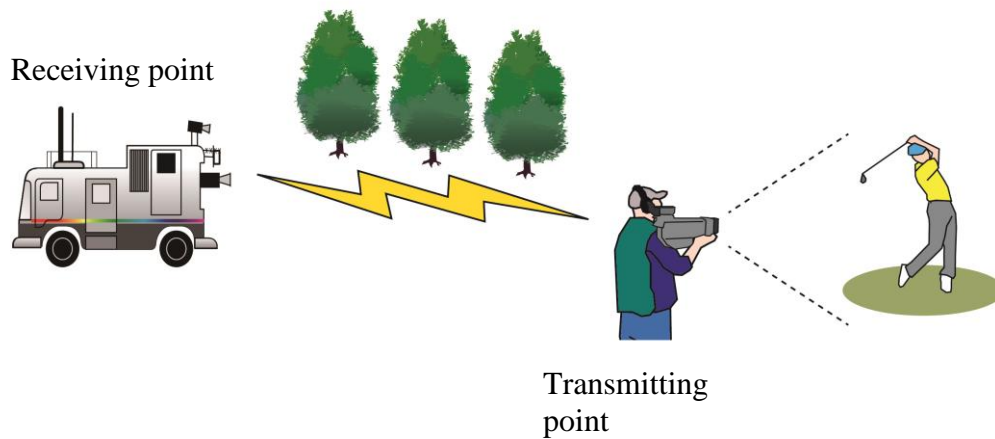


FIGURE 31
Transmission over obstacles

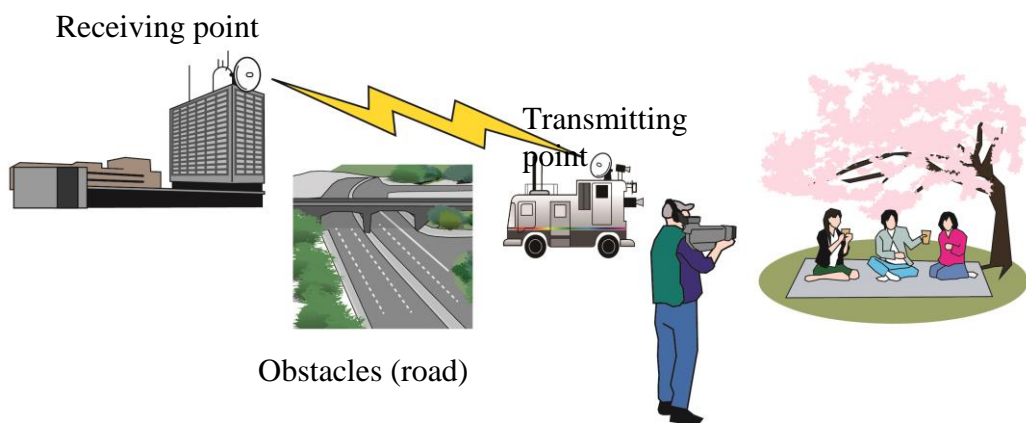


Technical specifications

As shown in Fig. 32, 16 HD-SDI signals consisting of the Dual Green 8K signal are multiplexed into two groups. Each group containing 8 HD-SDI signals is transmitted by either vertical or horizontal polarization of the 120 GHz band video links.

The major advantage of the 120 GHz band video link is its high transmission capacity. The uncompressed 8K signal is all contained in the 17 GHz bandwidth. The use of uncompressed transmission maintains the full video and audio quality of 8K, as well as minimizing the transmission latency.

FIGURE 32

Overview of the temporary 120 GHz band video link for 8K

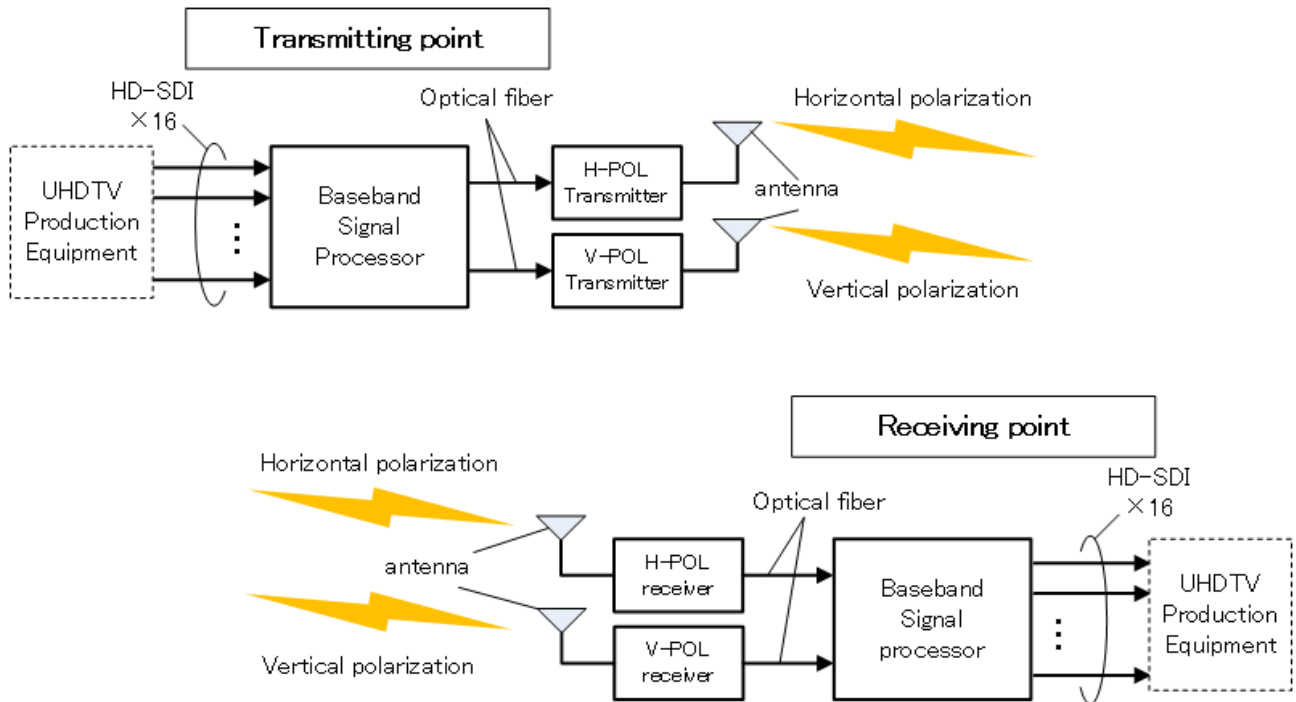

Reed-Solomon Code (986, 966) for error correction is implemented when the baseband processor multiplexes the 8 HD-SDI signals into a single serial data stream (at the receiving end, this serial data stream is de-multiplexed into the original 8 HD-SDI signals and errors which arose during propagation are corrected up to $BER = 1 \times 10^{-4}$). This improves the required C/N by approximately 4 dB compared with when no error correction is implemented.

The technical parameters of the temporary video link are shown in Table 13.

TABLE 13

Technical parameters of the 120 GHz band temporary video link [14]

Centre frequency (GHz)	125		
Bandwidth (GHz)	18 (116 – 134)		
Polarization	Horizontal, vertical, circular		
Maximum Tx power (W)	1.0		
Modulation	ASK	BPSK	QPSK
Maximum bit rate (Gbit/s)	12.0	12.0	24.0
Required Rx input level (dBm)	-30.4	-36.4	-31.5
Required C/N^* (dB)	25.0	19.0	23.9

* In case without error correction.

Example link models

Table 14 shows examples of link models in three different situations. Please note that “Required margin” is set to 6 dB as a target for these situations.

TABLE 14
Examples of link models

Situation	Stadium	Golf course	Transmission over obstacles
Weather*	Sunny		
Required transmission distance (km)	0.25	1.0	4.0
Possible transmission distance (km)	0.29	1.1	4.4
Modulation type	ASK		
Antenna size (m)	0.20	0.14	0.48
Antenna gain (dBi)	43.0	40.0	51.0
Transmission power (mW)	10.0	1 000.0	
Transmission power (dBm)	10.0	30.0	
Feeder loss (dB)	1.0		
e.i.r.p. (dBm)	52.0	69.0	80.0
Attenuation by atmospheric gases (dB) 3.0 dB/km	0.9	3.3	13.2
Free space propagation loss (dB)	123.5	135.1	147.2
Reception power (dBm)	−30.4		
Receiver noise figure (dB)	10.0		
Boltzmann constant (dBm/(Hz · K))	−198.6		
Standard temperature (dBK)	24.8		
Bandwidth (dBHz)	102.4		
Noise power (dBm)	−61.4		
Receive C/N (dB)	31.0		
Required margin (dB)	6		


* In case of rain (assuming 60 mm/h intensity) 23dB/km attenuation needs to be considered.

Trial 8K public viewing

8K public viewing of the 66th Sapporo Snow Festival was staged in February 2015. The site survey revealed that no optical cable was available between the festival site and public viewing venue, and the use of a temporary cable was unfeasible due to heavy traffic on roads around the site.

The use of a temporary 120 GHz band video link was therefore selected for this public viewing and the system was configured in the same manner as for the live broadcast. The system diagram is shown in Fig. 33.

FIGURE 33
System diagram for 8K public viewing

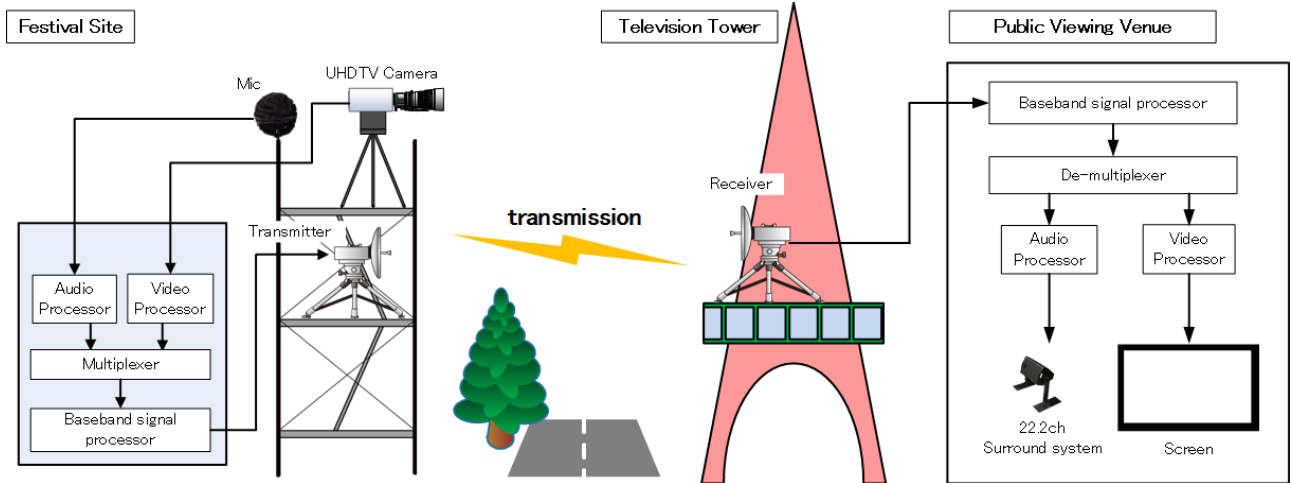

The 8K UHDTV signals were multiplexed in the production booth near the festival site, and sent to the transmitters using optical fiber. The temporary 120 GHz band video link then transmitted the signals to the other side of the road across a distance of approximately 160 m. Once received at the television tower, the signals were then sent on to the public viewing venue over an existing optical fiber link (see Fig. 34).

FIGURE 34
Transmitter and receiver



Rainy weather was experienced during this 120 GHz band video link trial. Millimeter waves are very susceptible to influence from rainfall due to their short wave length and attenuation of approximately 4 dB was recorded for both polarizations. This trial, however, was designed with a 17 dB C/N margin and this was sufficient to transmit the 8K signals without uncorrectable errors. In addition, heavy snowfall was experienced during the event, but with no evident impact on the reception power. This trial confirmed that the 120 GHz band video link for 8K UHDTV does have the potential for use even in difficult weather conditions.

FIGURE 35
Public viewing venue



3.4.3.2 42 GHz band transmission system for 8K UHDTV


A 42 GHz band transmission system for 8K signals was developed in Japan in 2016. This system transmits high quality 8K video and audio signals from the field (event venue, interview location etc.) to the broadcast station. This system uses Multiple-Input and Multiple-Output (MIMO) with dual polarization and can transmit up to 600 Mbit/s.

Technical specifications

The block diagram of the 42 GHz transmission system is shown in Fig. 36.

On the transmitting side, 8K signals are encoded at the HEVC encoder and the error correction code and OFDM modulation are applied at the modulator for each polarization. Frequency conversion and power amplification are next performed at the radio frequency transmitter and, finally, the vertical and horizontal polarization waves are transmitted from the dual polarization antenna.

At the receiving end, both polarization waves are received by the dual polarization antenna and the frequency is converted from RF to IF by the radio frequency receiver. OFDM demodulation and error correction decoding follow at the demodulator and, finally, the signal is decoded by the HEVC decoder.

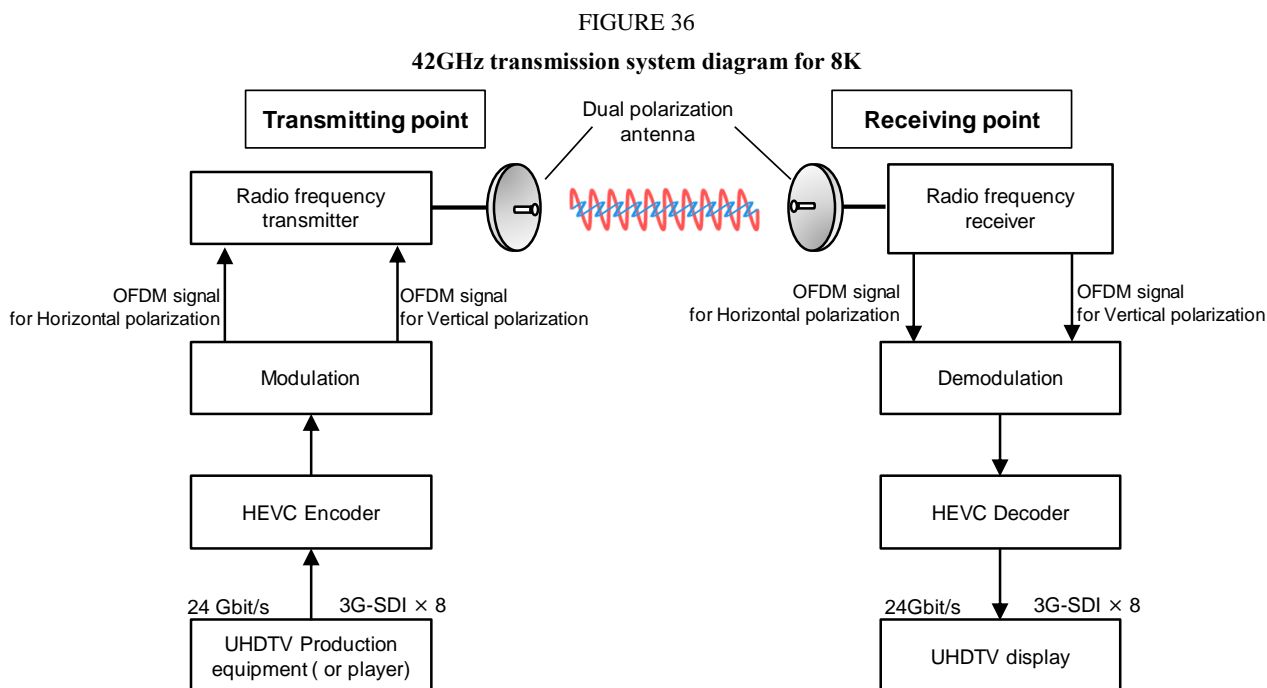


Field experiment

An overview of a field experiment involving transmission between the NHK Broadcasting Center and NHK Science and Technology Research Laboratories (STRL) is shown in Fig. 37. The NHK Broadcasting Center in Shibuya, Tokyo is the transmission point and NHK STRL in Setagaya, Tokyo the reception point. The distance is approximately 8 km.

FIGURE 37

Overview of field experiment

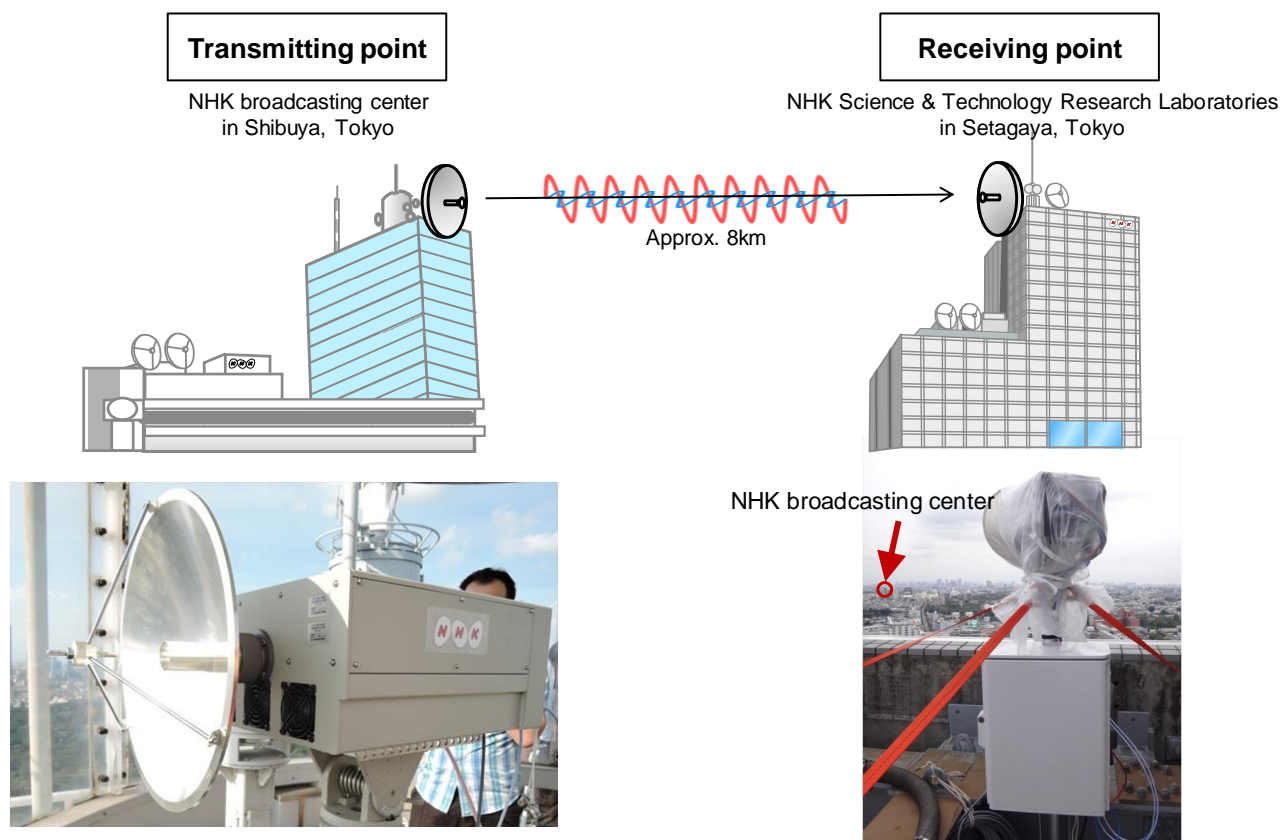

Transmission parameters used in this field experiment are shown in Table 15. The transmission bit rate was set at 600 Mbit/s.

TABLE 15


Transmission parameters in this field experiment on the 42 GHz band

Transmission system	2 × 2 dual polarization MIMO – OFDM
Radio frequency band	41.0 ~ 42.0 GHz
Channel spacing	125 MHz
Modulation	32 QAM
Outer code	Reed Solomon code (204, 188)
Inner code	Convolutional code (code rate: 3/4)
Transmission power	250 mW / per polarization
Bit rate	600 Mbit/s

The HEVC decoder and 8K display used in this experiment are shown in Fig. 38.

FIGURE 38

Overview of field experiment

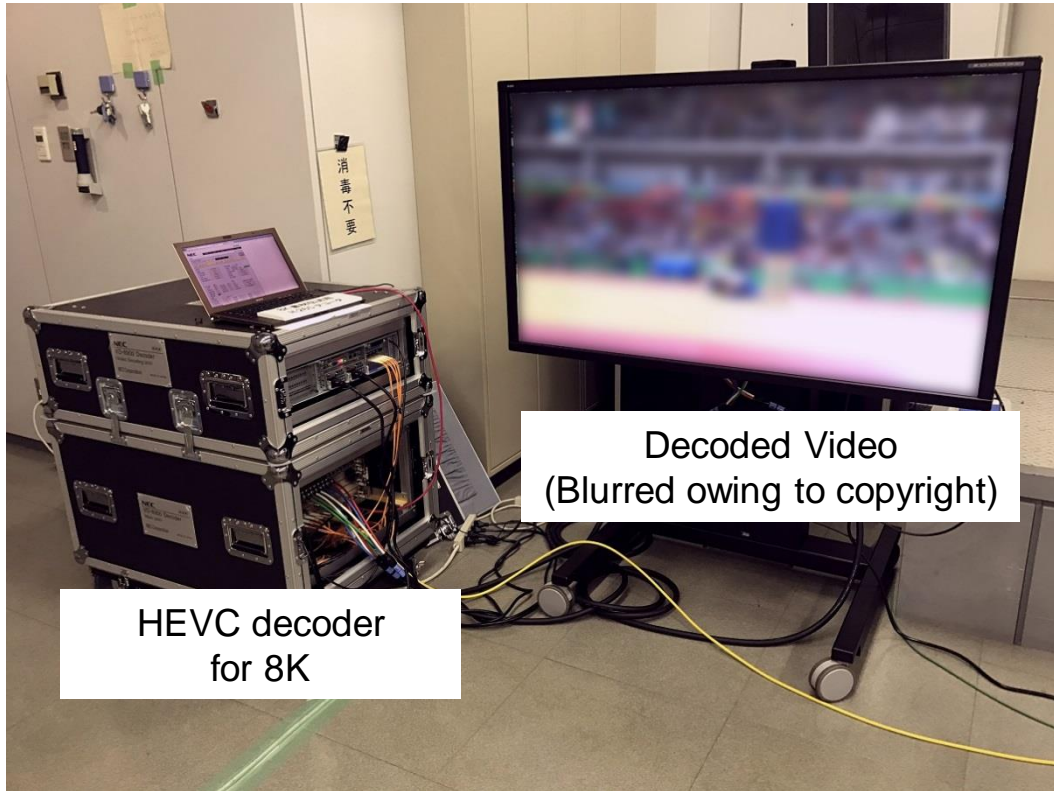

The results were error free when the outer code was confirmed by BER measurement, and long term stability was confirmed by 8 hours of continuous video transmission.

3.4.3.3 SNG system for 8K UHDTV transmissions

The SNG system supports the transmission of video and/or sound from the location of on-going news, sport games or other events to the broadcasting station or studio.

ENG and OB need to establish terrestrial radio communication link, but the SNG system can transmit the programme from any location as long as it has access to a communication satellite. This makes the SNG system effective for live sport events and the coverage of breaking news. Although the satellite link is easily affected by rainfall attenuation, it is still a powerful and essential transmitting tool.

An SNG system for 8K UHDTV has therefore been developed in Japan for the production and transmission via satellite of 8K signals to broadcasting stations.

FIGURE 39
An SNG system for 8K UHDTV



Technical characteristics

The SNG system has been developed to transmit 8K UHDTV video and multichannel audio. For 8K live productions, the SNG system needs to be connected to an 8K OB van equipped with 8K cameras, video switchers and other production tools.

FIGURE 40
System diagram for 8K UHDTV productions




The SNG system can deliver a single stream of 8K signals or two simultaneous streams of 4K signals via satellite. An outline of the transmitting equipment and a diagram of the video system are provided below.

TABLE 16
Outline of the transmitting equipment

Antenna	1.5 m Φ Offset Parabola
HPA	Two SSPAs (350 W)
Modulator	Two DVB-S2X modulators
Encoder	Two HEVC H.265 encoders

FIGURE 41
Diagram of the video system

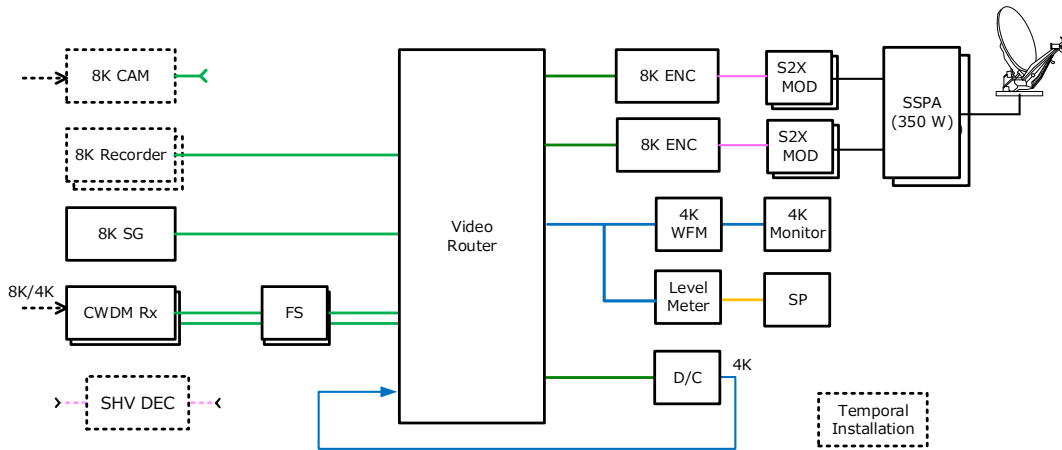


Channel bonding

The SNG system for 8K UHDTV utilises the “channel bonding” of DVB-S2X. Channel bonding is a method to carry a single input stream over two transponders. In the case of the SNG system, a compressed signal stream is split and transmitted over two transponders. On the receiving side, the two encoded signal streams coming from the transponders are decompressed and merged into a single signal stream.

The two transponders ensure sufficient bandwidth to deliver the 8K signals. This enables the available slots of the transponders to be used more efficiently and flexibly. (The two transponders should have the same polarisation.)

FIGURE 42
Channel bonding

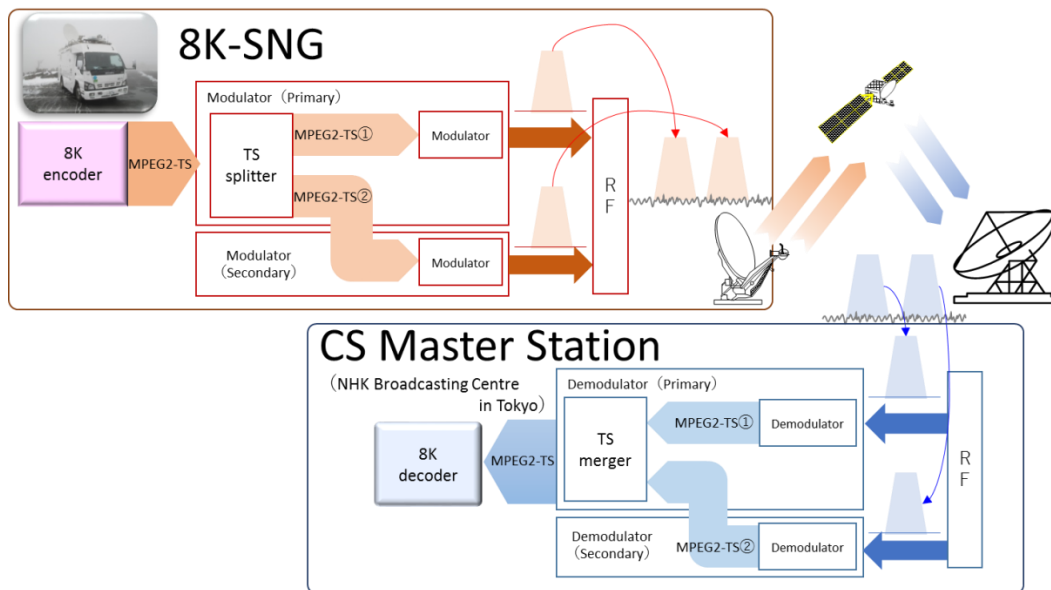

Trial 8K signal delivery

In July 2017, a trial 8K signal delivery was conducted with the Grand Sumo Tournament in Nagoya. By bonding 45 MHz over two transponders, a TS stream (approximately 150 Mbit/s) of 8K video and 22.2 multichannel audio was transmitted from the venue in Nagoya to the CS master station in Tokyo.

Live transmissions were provided for 12 hours in total over a period of three days. They were sufficient in terms of quality and reliability for live broadcasting. During the tournament, the reception point in Tokyo experienced some heavy rain. This caused attenuation of approximately 5 dB, but without any noticeable effect on the picture quality in the receiving video.

TABLE 17

Transmission parameters used in the trial

Channel spacing	45 MHz (bonding of 27 MHz and 18 MHz)
Modulation	32 APSK
Roll off rate	5%
TS bit rate	Approximately 150 Mbit/s
Video codec	HEVC/H.265
Audio codec	MPEG-4 AAC (22.2 multichannel audio tracks)

3.4.3.4 Summary

The studies on UHDTV transmission over DTT networks have already begun and the future development of SAB/SAP for UHDTV has, therefore, become an urgent task for broadcasting services. This annex introduced developments in the field of SAB/SAP for UHDTV which utilize the 120 GHz (8K uncompressed signal) 42 GHz (8K compressed signal) bands and SNG for 8K transmission (8K compressed signal) in Japan.

Annex 4**References**

- [1] ECC Report 002: SAP/SAB (Incl. ENG/OB) spectrum use and future requirements.
- [2] Resolution 232 (WRC-12) – Use of the frequency band 694-790 MHz by the mobile, except aeronautical mobile, service in Region 1 and related studies.
- [3] Presentations from C-PMSE workshop, 29 May 2013, <http://cpmse.research-project.de/index.php/en/project/82-cpmsenewsen/119-demonstration-workshop>
- [4] Report ITU-R BS.2161 – Low delay audio coding for broadcasting applications.
- [5] EBU Technical Report 001, Results of the EBU questionnaire on spectrum requirements for SAB/SAP & ENG/OB applications, <http://tech.ebu.ch/docs/techreports/tr001.pdf>
- [6] ERC Recommendation 70-03 – Relating to the use of Short Range Devices (SRD).
- [7] ARIB Standard STD-15 V 5.0 (2007-09) – Radio microphone for specified low power radio station.
- [8] ARIB STD-T112 – Specified radio microphone for land mobile radio station.
- [9] ETSI EN 300 422 – Harmonized European Standard for radio microphones in the 25 MHz to 3 GHz frequency range.

- [10] ETSI EN 301 357 – Electromagnetic compatibility and Radio spectrum Matters (ERM); Cordless audio devices in the range 25 MHz to 2 000 MHz; Part 2: Harmonized EN covering essential requirements of article 3.2 of the R&TTE Directive.
- [11] Report for OFCOM from Analysis Mason: spectrum Planning for the London 2012 Olympic and Paralympic Games [Link](#) [Link Part 2](#)
- [12] FM48#7-Info11-Direct-Air-to-Ground Demo Flight Event in October 2012.
- [13] ERC Recommendation 25-10 – Frequency ranges for the use of temporary terrestrial audio and video SAP/SAB links (incl. ENG/OB).
- [14] ARIB STD-B65 – Portable 120 GHz BAND digital transmission system for ultra-high definition television program contribution

Other references

- European competitiveness report 2010, <http://bookshop.europa.eu/en/european-competitiveness-report-2010-pbNBAK10001/>
- Creative Industries Economic Estimates, December 2011, Department for culture, media and sport, United Kingdom: https://www.gov.uk/government/uploads/system/uploads/attachment_data/file/77959/Creative-Industries-Economic-Estimates-Report-2011-update.pdf
- Decision 243/2012/EU of 14 March 2012 “on establishing a multiannual radio spectrum policy program”.
- Decision 2010/267/EU “on harmonized technical conditions of use in the 790-862 MHz frequency band for terrestrial systems capable of providing electronic communications services in the European Union”.
- Decision 128/1999/EC “on the coordinated introduction of a third-generation mobile and wireless communications system (UMTS) in the Community”.
- ECC Report 159: Technical and operational requirements for the possible operation of cognitive radio systems in the ‘white spaces’ of the frequency band 470-790 MHz.
- ECC Report 185: Complementary Report to ECC Report 159. Further definition of technical and operational requirements for the operation of white space devices in the band 470-790 MHz.
- ECC Report 186: Technical and operational requirements for the operation of white space devices under geo-location approach.
- EC Mandate to CEPT on technical conditions regarding spectrum harmonization options for wireless radio microphones and cordless video-cameras (PMSE equipment).
- CEPT Report 50: Technical conditions for the use of the bands 821-832 MHz and 1 785-1 805 MHz for wireless radio microphones in the EU.
- CEPT Report 51: Technical conditions for ensuring the sustainable operation of cordless video-cameras in the EU.
- ECC Report 191: Adjacent band compatibility between MFCN and PMSE audio applications in the 1 785-1 805 MHz frequency range.
- ECC Report 121: Compatibility studies between Professional Wireless Microphone Systems (PWMS) and other services/systems in the bands 1 452-1 492 MHz, 1 492-1 530 MHz, 1 533-1 559 MHz also considering the services/systems in the adjacent bands (below 1 452 MHz and above 1 559 MHz).
- ECC Report 44: Guidance for radio usage at special events.
- Ofcom and the London 2012 Olympic and Paralympic Games, <http://stakeholders.ofcom.org.uk/consultations/london2012/report-olympic-paralympic-2012/>

- CEPT Report 32: Recommendation on the best approach to ensure the continuation of existing Program Making and Special Events (PMSE) services operating in the UHF (470-862 MHz).
- The Wyndham report: the economic impact of London's West End theatre, 1998.
- UKEMTS 2011 Report on the development of the British event industry.
- Resolution 233 (WRC-12) – Studies on frequency-related matters on International Mobile Telecommunications and other terrestrial mobile broadband applications.
- ERC Report 42: Handbook on radio equipment and systems radio microphones and simple wide band audio links.
- European Commission Decision 2006/771/EC on harmonization of the radio spectrum for use by short-range devices.
- ERC Report 25: The European table of frequency allocations and applications in the frequency range 9 kHz to 3 000 GHz.
- Audio Engineering Society Standard 42.
- FM50(11)037 Appendix 2 from APWPT: Economic potential of PMSE applications.
- ARIB STD-B12 – Fixed microwave digital transmission system for television program contribution.
- ARIB STD-B13 – 800MHz-BAND OFDM transmission system for television program contribution.
- ARIB STD-B22 – Specified radio microphone for land mobile radio station.
- ARIB-STD-B43 – Portable MILLIMETER-WAVE digital transmission system for television program contribution.
- ARIB STD-B57 – 1.2 GHz/2.3 GHz-BAND portable OFDM digital transmission system for television program contribution.
- “Report of Mobile Communication Subcommittee, Information and Communications Council”
http://www.soumu.go.jp/main_content/000225030.pdf (in Japanese).
- Report ITU-R F.2107 – Characteristics and applications of fixed wireless systems operating in frequency range between 57 GHz and 134 GHz.
-