

International Telecommunication Union

ITU-T

TELECOMMUNICATION
STANDARDIZATION SECTOR
OF ITU

G.984.5
Amendment 2
(10/2020)

SERIES G: TRANSMISSION SYSTEMS AND MEDIA,
DIGITAL SYSTEMS AND NETWORKS

Digital sections and digital line system – Optical line
systems for local and access networks

Gigabit-capable passive optical networks (GPON):
Enhancement band

Amendment 2

Recommendation ITU-T G.984.5 (2014) –
Amendment 2

ITU-T



ITU-T G-SERIES RECOMMENDATIONS
TRANSMISSION SYSTEMS AND MEDIA, DIGITAL SYSTEMS AND NETWORKS

INTERNATIONAL TELEPHONE CONNECTIONS AND CIRCUITS	G.100–G.199
GENERAL CHARACTERISTICS COMMON TO ALL ANALOGUE CARRIER-TRANSMISSION SYSTEMS	G.200–G.299
INDIVIDUAL CHARACTERISTICS OF INTERNATIONAL CARRIER TELEPHONE SYSTEMS ON METALLIC LINES	G.300–G.399
GENERAL CHARACTERISTICS OF INTERNATIONAL CARRIER TELEPHONE SYSTEMS ON RADIO-RELAY OR SATELLITE LINKS AND INTERCONNECTION WITH METALLIC LINES	G.400–G.449
COORDINATION OF RADIOTELEPHONY AND LINE TELEPHONY	G.450–G.499
TRANSMISSION MEDIA AND OPTICAL SYSTEMS CHARACTERISTICS	G.600–G.699
DIGITAL TERMINAL EQUIPMENTS	G.700–G.799
DIGITAL NETWORKS	G.800–G.899
DIGITAL SECTIONS AND DIGITAL LINE SYSTEM	G.900–G.999
General	G.900–G.909
Parameters for optical fibre cable systems	G.910–G.919
Digital sections at hierarchical bit rates based on a bit rate of 2048 kbit/s	G.920–G.929
Digital line transmission systems on cable at non-hierarchical bit rates	G.930–G.939
Digital line systems provided by FDM transmission bearers	G.940–G.949
Digital line systems	G.950–G.959
Digital section and digital transmission systems for customer access to ISDN	G.960–G.969
Optical fibre submarine cable systems	G.970–G.979
Optical line systems for local and access networks	G.980–G.989
Metallic access networks	G.990–G.999
MULTIMEDIA QUALITY OF SERVICE AND PERFORMANCE – GENERIC AND USER-RELATED ASPECTS	G.1000–G.1999
TRANSMISSION MEDIA CHARACTERISTICS	G.6000–G.6999
DATA OVER TRANSPORT – GENERIC ASPECTS	G.7000–G.7999
PACKET OVER TRANSPORT ASPECTS	G.8000–G.8999
ACCESS NETWORKS	G.9000–G.9999

For further details, please refer to the list of ITU-T Recommendations.

Recommendation ITU-T G.984.5

Gigabit-capable passive optical networks (GPON): Enhancement band

Amendment 2

Summary

Recommendation ITU-T G.984.5 defines wavelength ranges reserved for additional service signals to be overlaid via wavelength division multiplexing (WDM) in future passive optical networks (PON) for maximizing the value of optical distribution networks (ODNs).

Amendment 1 presents three methods for the coexistence of multiple PON generations on a common ODN, which allow the reuse of already deployed fibre and splitters when evolving an operator's network to a higher capacity. Amendment 1 includes a new Appendix IV for a multi-PON module (MPM) with integrated WDM within the optical line termination (OLT). Appendix III provides a method for CEx isolation and directivity calculations in multi-interferer scenarios. Appendix I has been revised with new isolation values and directivity values derived using the method in Appendix III for a 4-port CEx with GPON, XG(S)-PON, NGPON2, and an OTDR. Appendix V provides a method to have PON coexistence using a 2:N splitter.

Amendment 2 includes updates of general reference diagram of coexistence element, isolation and directivity requirements for GPON and XG(S)-PON pairing of a generic 2-port coexistence CEx, updates of methods for calculating required isolation for WDM/CE/CEM devices, filter considerations for HSP and XG(S)-PON OLT, and optical interface parameters for GPON/XG(S)-PON MPM supporting Class D OPL.

History

Edition	Recommendation	Approval	Study Group	Unique ID*
1.0	ITU-T G.984.5	2007-09-22	15	11.1002/1000/9185
1.1	ITU-T G.984.5 (2007) Amd.1	2009-10-09	15	11.1002/1000/10543
2.0	ITU-T G.984.5	2014-05-14	15	11.1002/1000/12184
2.1	ITU-T G.984.5 (2014) Amd. 1	2018-05-07	15	11.1002/1000/13527
2.2	ITU-T G.984.5 (2014) Amd. 2	2020-10-29	15	11.1002/1000/14490

* To access the Recommendation, type the URL <http://handle.itu.int/> in the address field of your web browser, followed by the Recommendation's unique ID. For example, <http://handle.itu.int/11.1002/1000/1830-en>.

FOREWORD

The International Telecommunication Union (ITU) is the United Nations specialized agency in the field of telecommunications, information and communication technologies (ICTs). The ITU Telecommunication Standardization Sector (ITU-T) is a permanent organ of ITU. ITU-T is responsible for studying technical, operating and tariff questions and issuing Recommendations on them with a view to standardizing telecommunications on a worldwide basis.

The World Telecommunication Standardization Assembly (WTSA), which meets every four years, establishes the topics for study by the ITU-T study groups which, in turn, produce Recommendations on these topics.

The approval of ITU-T Recommendations is covered by the procedure laid down in WTSA Resolution 1.

In some areas of information technology which fall within ITU-T's purview, the necessary standards are prepared on a collaborative basis with ISO and IEC.

NOTE

In this Recommendation, the expression "Administration" is used for conciseness to indicate both a telecommunication administration and a recognized operating agency.

Compliance with this Recommendation is voluntary. However, the Recommendation may contain certain mandatory provisions (to ensure, e.g., interoperability or applicability) and compliance with the Recommendation is achieved when all of these mandatory provisions are met. The words "shall" or some other obligatory language such as "must" and the negative equivalents are used to express requirements. The use of such words does not suggest that compliance with the Recommendation is required of any party.

INTELLECTUAL PROPERTY RIGHTS

ITU draws attention to the possibility that the practice or implementation of this Recommendation may involve the use of a claimed Intellectual Property Right. ITU takes no position concerning the evidence, validity or applicability of claimed Intellectual Property Rights, whether asserted by ITU members or others outside of the Recommendation development process.

As of the date of approval of this Recommendation, ITU had not received notice of intellectual property, protected by patents, which may be required to implement this Recommendation. However, implementers are cautioned that this may not represent the latest information and are therefore strongly urged to consult the TSB patent database at <http://www.itu.int/ITU-T/ipr/>.

© ITU 2021

All rights reserved. No part of this publication may be reproduced, by any means whatsoever, without the prior written permission of ITU.

Table of Contents

	Page
1 Scope	1
2 References.....	1
3 Definitions	2
3.1 Terms defined elsewhere.....	2
3.2 Terms defined in this Recommendation.....	3
4 Abbreviations and acronyms	3
5 Conventions	4
6 Reference architecture	4
7 Operating wavelength.....	6
8 X/S tolerance of G-PON ONU	8
Appendix I – Example of WDM1, WDM1r, CEx and CEMx characteristics.....	10
Appendix II – Examples of wavelength allocation for NGA services and video distribution services	25
II.1 Introduction	25
II.2 Case 1: Integrated filter for video.....	25
II.3 Case 2: Discrete WDM filter for video	27
Appendix III – Methods for calculating required isolation for WDM/CE/CEM devices.....	29
Appendix IV – Multi-PON module with integrated WDM	37
Appendix V – Wavelength coexistence using M:N splitter.....	42
Appendix VI – Filter considerations for XG(S)-PON OLT and HSP OLT.....	44
Bibliography.....	46

Recommendation ITU-T G.984.5

Gigabit-capable passive optical networks (GPON): Enhancement band

Amendment 2

Editorial note: This is a complete-text publication. Modifications introduced by this amendment are shown in revision marks relative to Recommendation ITU-T G.984.5 (2014) plus its Amendment 1.

1 Scope

The purpose of this Recommendation is to define wavelength ranges reserved for additional service signals to be overlaid via wavelength division multiplexing (WDM) in future gigabit-capable passive optical networks (G-PON) for maximizing the value of optical distribution networks (ODNs). Other PON systems, such as B-PON, have wavelength plans based on [ITU-T G.983.3], which includes existing options for enhancement bands. This Recommendation also defines further wavelength ranges reserved for additional service signals to be overlaid via WDM in future PONs whose wavelength allocations are based on [ITU-T G.983.3].

For this purpose, this Recommendation defines and provides:

- wavelength ranges to be reserved; and
- X/S tolerance in PON optical network units (ONUs).

Appendices I, II, III, IV, V, and VI provide:

- general reference diagram of coexistence element, and sample parameters of a discrete WDM filter that combines and isolates ~~the G-PON~~ up/down signals and enhancement bands of PON systems, RF signal and OTDR signal at the OLT side;
- examples of wavelength allocation for NGA services and video distribution services;
- methods for calculating required isolation for WDM/CE/CEM devices;
- wavelength coexistence using M:N splitter;
- multi-PON module with integrated WDM;
- filter considerations for HSP and XG(S)-PON OLT.

The physical media dependent (PMD) layer specification for G-PON in the absence of an enhancement band is defined in [ITU-T G.984.2]. PMD layer specifications for G-PON in the presence of enhancement bands are defined by the combination of [ITU-T G.984.2] and this Recommendation. Whenever a parameter specified in [ITU-T G.984.2] is not explicitly mentioned in this Recommendation, its value given in [ITU-T G.984.2] remains valid. Whenever a parameter is specified in both this Recommendation and [ITU-T G.984.2], the specification in this Recommendation takes precedence.

2 References

The following ITU-T Recommendations and other references contain provisions which, through reference in this text, constitute provisions of this Recommendation. At the time of publication, the editions indicated were valid. All Recommendations and other references are subject to revision; users of this Recommendation are therefore encouraged to investigate the possibility of applying the most recent edition of the Recommendations and other references listed below. A list of the currently

valid ITU-T Recommendations is regularly published. The reference to a document within this Recommendation does not give it, as a stand-alone document, the status of a Recommendation.

- [ITU-T G.652] Recommendation ITU-T G.652 (2009), *Characteristics of a single-mode optical fibre and cable*.
- [ITU-T G.671] Recommendation ITU-T G.671 (2012), *Transmission characteristics of optical components and subsystems*.
- [ITU-T G.983.1] Recommendation ITU-T G.983.1 (2005), *Broadband optical access systems based on Passive Optical Networks (PON)*.
- [ITU-T G.983.3] Recommendation ITU-T G.983.3 (2001), *A broadband optical access system with increased service capability by wavelength allocation*.
- [ITU-T G.984.2] Recommendation ITU-T G.984.2 (2003-2019), *Gigabit-capable Passive Optical Networks (G-PON): Physical Media Dependent (PMD) layer specification*.
- ~~[ITU-T G.984.2 Amd.1] Recommendation ITU-T G.984.2 (2003) Amd.1, (2006), *Gigabit-capable Passive Optical Networks (G-PON): Physical Media Dependent (PMD) layer specification; Amendment 1: New Appendix III – Industry best practice for 2.488 Gbit/s downstream, 1.244 Gbit/s upstream G-PON*~~
- ~~[ITU-T G.984.2 Amd.2] Recommendation ITU-T G.984.2 (2003) Amd.2, (2008), *Gigabit-capable Passive Optical Networks (G-PON): Physical Media Dependent (PMD) layer specification; Amendment 2*~~
- [ITU-T G.987] Recommendation ITU-T G.987 (2012), *10-Gigabit-capable passive optical network (XG-PON) systems: Definitions, abbreviations and acronyms*.
- [ITU-T G.987.2] Recommendation ITU-T G.987.2 (2010), *10-Gigabit-capable passive optical networks (XG-PON): Physical media dependent (PMD) layer specification*.
- [ITU-T G.989] Recommendation ITU-T G.989 (2014), *40-Gigabit-capable passive optical network (NG-PON2) systems: Definitions, abbreviations and acronyms*.
- [ITU-T G.989.1] Recommendation ITU-T G.989.1 (2013), *40-Gigabit-capable passive optical networks (NG-PON2): General requirements*.
- [ITU-T G.9807.1] Recommendation ITU-T G.9807.1 (2016), *10-Gigabit-capable symmetric passive optical network (XGS-PON)*.
- [ITU-T L.66] Recommendation ITU-T L.66 (2007), *Optical fibre cable maintenance criteria for in-service fibre testing in access networks*.

3 Definitions

This Recommendation makes frequent use of the terms defined in [ITU-T G.983.1], [ITU-T G.983.3] and [ITU-T G.984.2]. For purposes of convenience, the main definitions related to the G-PON enhancement bands are reported in this clause.

3.1 Terms defined elsewhere

This Recommendation uses the following terms defined elsewhere:

3.1.1 optical distribution network (ODN): [ITU-T G.984.2].

3.1.2 optical line termination (OLT): [ITU-T G.984.2].

- 3.1.3 **optical network unit (ONU)**: [ITU-T G.984.2].
- 3.1.4 **wavelength division multiplexing (WDM)**: [ITU-T G.984.2].
- 3.1.5 **10-Gigabit-capable passive optical network (XG-PON)**: [ITU-T G.987].
- 3.1.6 **TWDM PON**: [ITU-T G.989].
- 3.1.7 **PtP WDM PON**: [ITU-T G.989].
- 3.1.8 **NG-PON2**: [ITU-T G.989].
- 3.1.9 **coexistence element (CE)**: [ITU-T G.989].
- 3.1.10 **wavelength multiplexer (WM)**: [ITU-T G.989].
- 3.1.11 **XGS-PON**: [ITU-T G.9807.1].

3.2 Terms defined in this Recommendation

This Recommendation defines the following terms:

- 3.2.1 **next generation access (NGA)**: A possible new optical access system that coexists with G-PON on the same ODN.
- 3.2.2 **wavelength blocking filter (WBF)**: An optical filter to prevent an optical receiver from receiving unwanted optical signals with different wavelengths.

4 Abbreviations and acronyms

This Recommendation uses the following abbreviations and acronyms:

APD	Avalanche Photo Diode
BER	Bit Error Rate
BM	Burst Mode
B-PON	Broadband Passive Optical Network
CDR	Clock Data Recovery
CE	Coexistence Element
CEM	Coexistence Element/Multiplexer
CNR	Carrier-to-Noise Ratio
DBA	Determined By Application
DFB	Distributed Feedback Laser
G-PON	Gigabit-capable Passive Optical Network
<u>HSP</u>	<u>Higher Speed Passive Optical Network</u>
LA	Limiting Amplifier
MPM	Multi-PON Module
NRZ	Non Return to Zero
NG-PON2	Next Generation Passive Optical Network phase 2
NGA	Next Generation Access
OAN	Optical Access Network
ODN	Optical Distribution Network


OLT	Optical Line Termination
ONU	Optical Network Unit
OSA	Optical Sub-Assembly
OTDR	Optical Time Domain Reflectometer
PMD	Physical Media Dependent
PON	Passive Optical Network
PtP WDM	Point-to-Point Wavelength Division Multiplexing
RF	Radio Frequency
TIA	Trans-Impedance Amplifier
<u>TDM</u>	<u>Time Division Multiplexing</u>
TWDM	Time and Wavelength Division Multiplexing
WBF	Wavelength Blocking Filter
WDM	Wavelength Division Multiplexing
WM	Wavelength Multiplexer
XG-PON	10-Gigabit-capable Passive Optical Network
<u>XG-PON</u>	<u>Asymmetric 10-Gigabit Passive Optical Network</u>
<u>XGS-PON</u>	<u>Symmetric 10-Gigabit Passive Optical Network</u>
<u>XG(S)-PON</u>	<u>XG-PON or XGS-PON</u>

5 Conventions


None.

6 Reference architecture

Figure 1 (reproduced for convenience from Figure 5 of [ITU-T G.983.1]) shows the generic physical configuration of an optical access network.

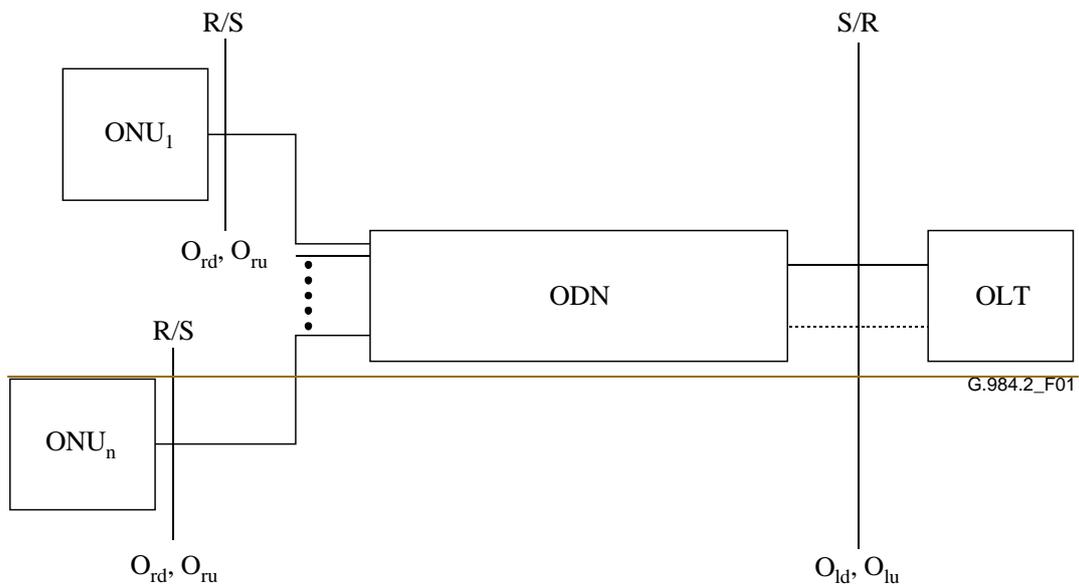

R and S Reference points
 $O_{rd}, O_{ru}, O_{ld}, O_{lu}$ Optical interfaces
 ————— Represent one or more fibre
 Represent optional protection fibres

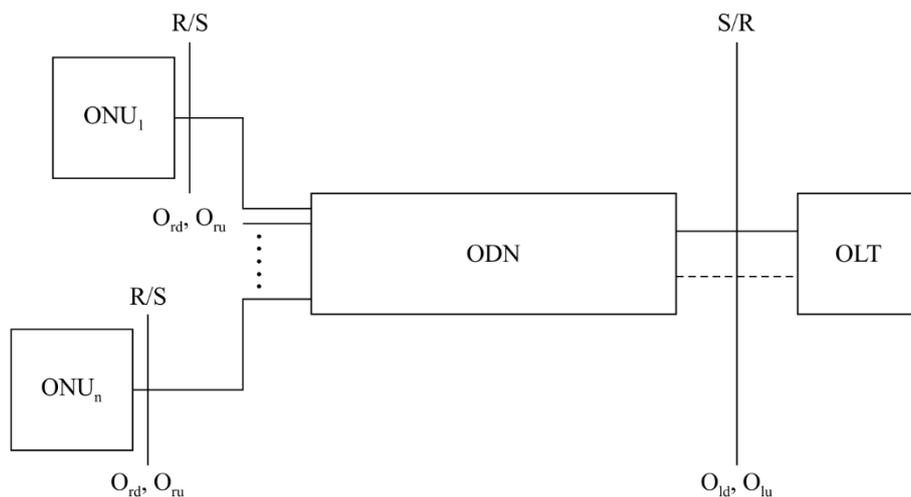

$O_{rd}, O_{ru}, O_{ld}, O_{lu}$ Optical interfaces
 R and S Reference points
 ————— Represent one or more fibres
 Represent optional protection fibres

G.984.5(14)-Amd.2(20)_F01

**Figure 1 – Generic physical configuration of the optical access network
 (Reproduced from Figure 5 of [ITU-T G.983.1])**


The two directions for optical transmission in the ODN are identified as follows:

- downstream direction for signals travelling from the OLT to the ONU(s);
- upstream direction for signals travelling from the ONU(s) to the OLT.

According to [ITU-T G.983.1], transmission in downstream and upstream directions can take place on the same fibre and components (duplex/diplex working) or on separate fibres and components (simplex working). This Recommendation covers only duplex working, i.e., bidirectional transmission using different wavelengths over a single fibre.


There can be several types of ODN architectures to achieve the coexistence of G-PON and additional services including next generation access (NGA) and video distribution services.

Figures 2 and 3 are reference diagrams of optical access network (OAN) architectures and assume that wavelength blocking filters (WBF) are used when G-PON, video and NGA share the same ODN. Note that these reference diagrams only provide reference configurations of the ODN and WBF and are not intended to limit future designs and implementations.

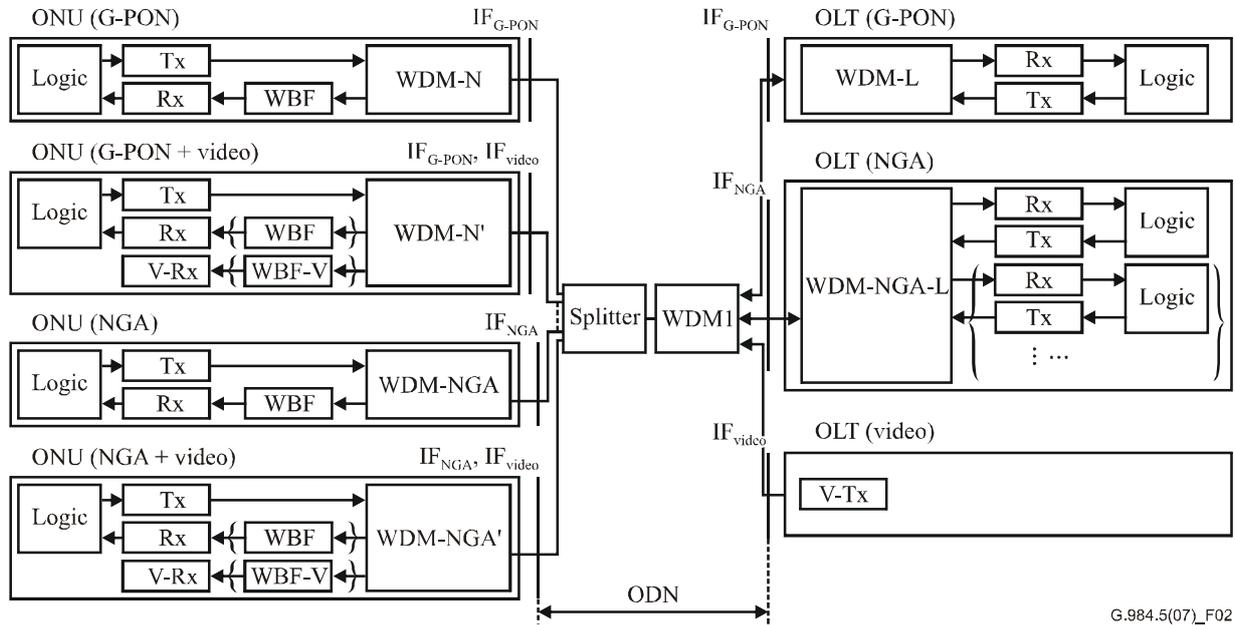

G.984.5(07)_F02

Figure 2 – Optical access network architecture reference diagram 1

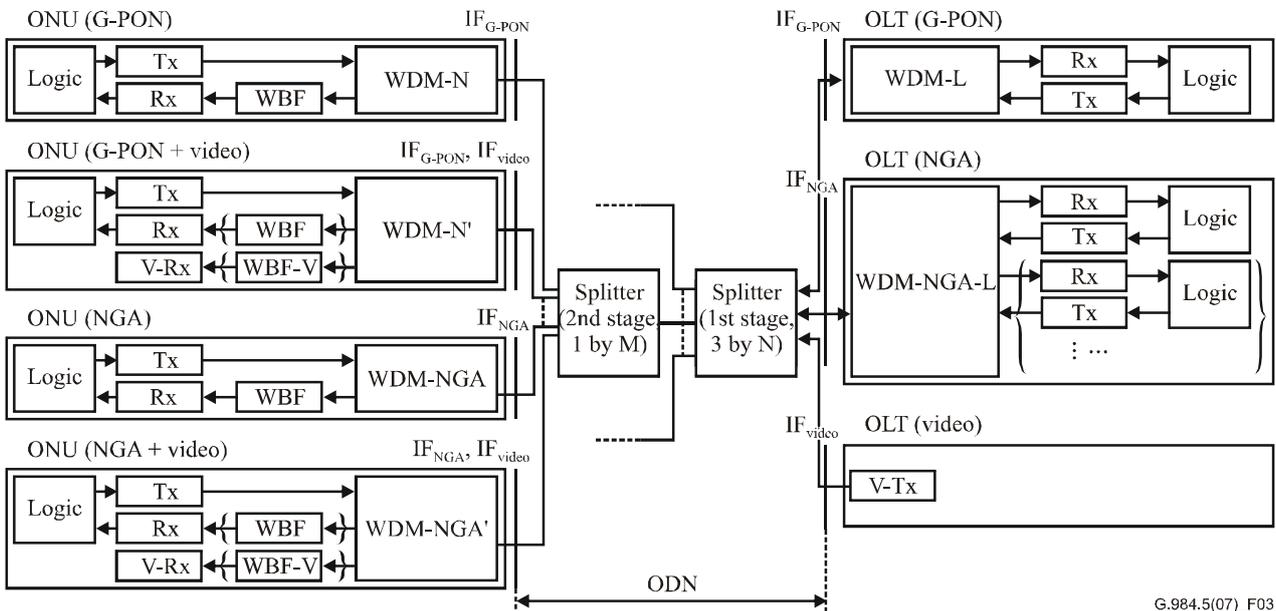

G.984.5(07)_F03

Figure 3 – Optical access network architecture reference diagram 2

The following abbreviations are used in Figures 2 and 3:

CE Coexistence element that may be located in the central office to combine/isolate the wavelengths of NG-PON2 and legacy PON signals and which occasionally combines the video signals and/or OTDR signals

CEM	Coexistence element that may be located in the central office to combine/isolate the wavelengths of TWDM PON, PtP WDM PON and legacy PON signals and which occasionally combines the video signals and/or OTDR signals
Rx	Optical receiver
Tx	Optical transmitter
V-Rx	Video receiver
V-Tx	Video transmitter
WBF	Wavelength blocking filter for blocking interference signals to Rx
WBF-V	Wavelength blocking filter for blocking interference signals to V-Rx
WDM-N	WDM filter in G-PON ONU to combine/isolate the wavelengths of G-PON upstream and downstream
WDM-N'	WDM filter in G-PON ONU to combine/isolate the wavelengths of G-PON upstream and downstream and isolate the video signal(s)
WDM-NGA	WDM filter in NGA ONU to combine/isolate the wavelengths of NGA upstream and downstream
WDM-NGA'	WDM filter in NGA ONU to combine/isolate the wavelengths of NGA upstream and downstream and isolate the video signal(s)
WDM-L	WDM filter in G-PON OLT to combine/isolate the wavelengths of G-PON upstream and downstream
WDM-NGA-L	WDM filter in NGA OLT to combine/isolate the wavelengths of NGA upstream and downstream of one or more channels
WDM1	WDM filter that may be located in the central office to combine/isolate the wavelengths of G-PON and NGA signals and which occasionally combines the video signals and/or OTDR signals
WDM1r	WDM filter that may be located in the central office to combine/isolate the wavelengths of G-PON and XG-PON signals and which occasionally combines the video signals and/or OTDR signals.

7 Operating wavelength

The wavelength range of the G-PON downstream signal (single fibre system) is specified in [ITU-T G.984.2] as 1480 nm to 1500 nm and that of the G-PON upstream signal as 1260 nm to 1360 nm. This Recommendation redefines the reserved wavelength range and specifies the tolerance for interference signals of G-PON ONUs to enable the coexistence of G-PON and additional services including NGA and video services.

Figure 4 and Table 1 define the wavelength allocation plan including the wavelength bands reserved for additional services. The wavelength range of the G-PON downstream signal is referred to as the "basic band". Reserved bands are referred to as the "enhancement band". Applications for the enhancement band include video services and NGA services. The wavelength range for video services remains as defined in [ITU-T G.983.3].


A guard band separates the G-PON upstream and/or basic band from the enhancement band. Interference between signals in these two bands causes signal degradation to each. This signal degradation must be kept to a negligible level. Wavelength blocking filters (WBFs) are used to obtain the required isolation outside the guard band. The wavelength values specified in Table 1 take into account guard bands that may be achievable by commercially available low-cost WBFs.

NOTE – Wavelengths in the enhancement band may be used not only for downstream but also for upstream signal transmission in the WDM scheme.


1.3 μm wavelength band (upstream)



Intermediate wavelength band (upstream and/or downstream)

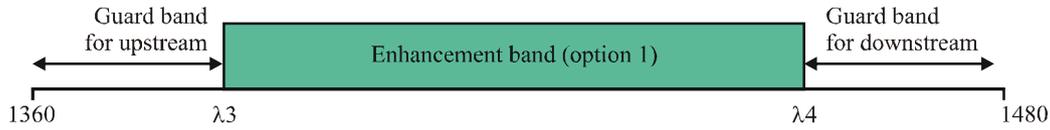

1.5 μm wavelength band (upstream and/or downstream)

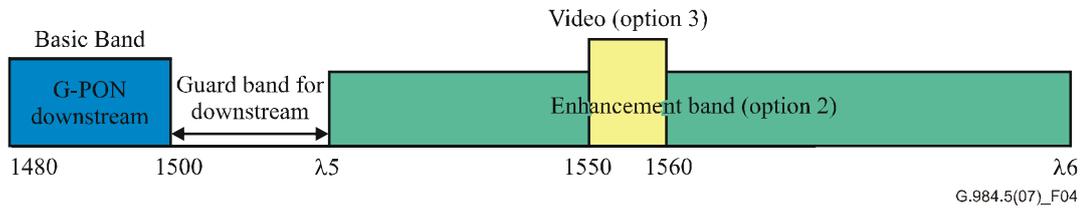

G.984.5(07)_F04

Figure 4 – Wavelength allocation

Table 1 – Parameters for wavelength allocation

Items	Notation	Unit	Nominal value	Application examples
1.3 μm wavelength band				For use in G-PON upstream.
– Regular wavelength band option				
Lower limit	λ_1	nm	1 260	e.g., ONUs based on Fabry-Perot lasers.
Upper limit	λ_2	nm	1 360	
– Reduced wavelength band option				
Lower limit	λ_1	nm	1 290	e.g., ONUs based on ordinary DFB lasers.
Upper limit	λ_2	nm	1 330	
– Narrow wavelength band option				
Lower limit	λ_1	nm	1 300	e.g., ONUs based on wavelength selected lasers.
Upper limit	λ_2	nm	1 320	
Enhancement band (option 1-1)				For next generation access (NGA). (See Note 2)
Lower limit	λ_3	nm	1 415 <i>(Informative)</i>	
Upper limit	λ_4	nm	1 450 <i>(Informative)</i>	
Enhancement band (option 1-2)				For next generation access (NGA). Applicable for low-water-peak fibre only. (See Note 3)
Lower limit	λ_3	nm	1 400 <i>(Informative)</i>	
Upper limit	λ_4	nm	1 450 <i>(Informative)</i>	

Table 1 – Parameters for wavelength allocation


Items	Notation	Unit	Nominal value	Application examples
Basic band				For use in G-PON downstream.
Lower limit	–	nm	1 480	
Upper limit	–	nm	1 500	
Enhancement band (option 2, see Note 1)				For next generation access (NGA). (See Note 4 and Note 5)
Lower limit	λ_5	nm	1 530	
Upper limit	λ_6	nm	1 580 to 1 625	
Enhancement band (option 3, see Note 1)				For video distribution service.
Lower limit	–	nm	1 550	
Upper limit	–	nm	1 560	
<p>NOTE 1 – Additional guard bands are needed in the case of the coexistence of option 2 and option 3 (see Appendix II).</p> <p>NOTE 2 – The values are informative. The loss in this band is not guaranteed in optical branching components for PON (i.e., power splitters) as specified in [ITU-T G.671] nor in optical fibres specified as G.652A and G.652B (non-low-water-peak fibres).</p> <p>NOTE 3 – The values are informative. The loss in this band is not guaranteed in optical branching components for PON (i.e., power splitters) as specified in [ITU-T G.671].</p> <p>NOTE 4 – The value of 1530 nm assumes use of the wavelength for downstream NGA transmission. If it is used for upstream transmission, the value can be smaller.</p> <p>NOTE 5 – The upper-limit value is determined as an operator choice from 1580 to 1625 nm taking into account the following factors:</p> <ul style="list-style-type: none"> – Bending loss of optical fibre that increases at longer wavelengths. – Loss of a filter that separates/combines a monitoring signal and NGA signal(s) (if an optical monitoring system is used). 				

8 X/S tolerance of G-PON ONU

The minimum optical sensitivity requirements of a G-PON ONU must be met in the presence of the interference signals caused by NGA and/or video signals in the enhancement bands specified in Table 1. To minimize the effect of interference signals, G-PON ONUs need to isolate interference signals using an appropriate WBF and WDM filter. This Recommendation does not specify the isolation characteristics of the WBF and WDM filters themselves, but does specify the X/S tolerance of the G-PON ONU.

In Figure 5, S is the optical power of the basic band signal and X is the optical power of the interference signal(s). Both S and X are measured at the point IF_{G-PON} on the optical network unit (ONU) side of the network shown in Figures 2 and 3. Figure 5 shows the X/S tolerance mask that should not cause the sensitivity of the basic band receiver to fail to meet the specified limit. Implementers need to specify the isolation characteristics of the WBF and WDM filter needed to obtain enough isolation of the interference signal(s) that will allow the sensitivity requirements to be respected in the presence of this level of interference. In the case of coexistence with G-PON, the wavelengths and total optical launch power of additional services including NGA and video services must be considered with reference to Figure 5.

The interference signal format for measuring X/S tolerance should be NRZ pseudo-random coded with the same bit rate as the G-PON downstream signal or with a lower bit rate within the bandwidth of the basic band receiver.

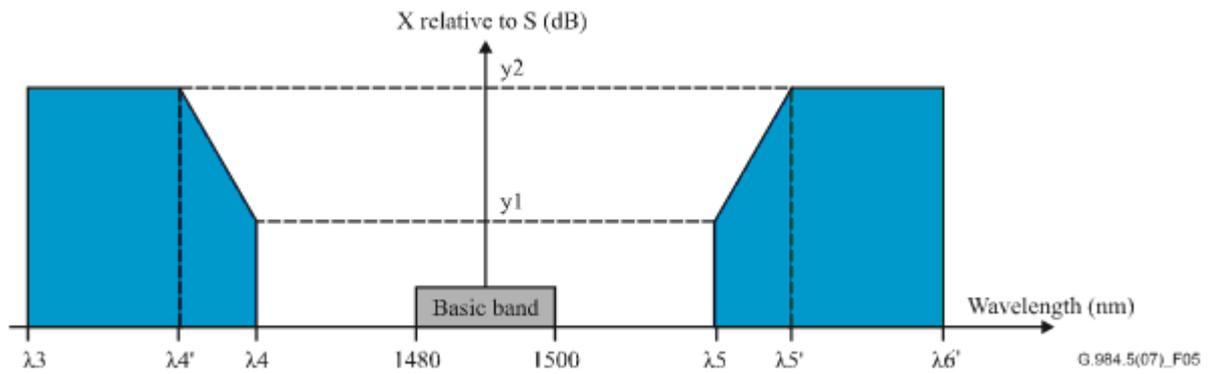

Wavelength (nm)	λ_3	$\lambda_{4'}$	λ_4	λ_5	$\lambda_{5'}$	$\lambda_{6'}$
	1415/1400 (Informative)	1441 (Informative)	1450 (Informative)	1530	1539	1675
X relative to S (dB)	y2	y2	y1	y1	y2	y2
	22 (Informative)	22 (Informative)	7 (Informative)	7	22	22

S Received power of basic band

X Maximum total power of NGA and video received in the blocking wavelength range

X/S Inside the mask (hatching area) should not cause the sensitivity of the basic band receiver to fail to meet the specified limit

NOTE – λ_3 value of 1400 (Informative) may be applicable for low-water-peak fibre only.

Figure 5 – X/S tolerance mask for ONU

Appendix I

Example of WDM1, WDM1r, CEx and CEMx characteristics

(This appendix does not form an integral part of this Recommendation.)

The WDM1, WDM1r, CEx and CEMx devices can have several different configurations depending on whether a video overlay service or an optical time-domain reflectometer (OTDR) is provided. This appendix presents several examples of device characteristics.

The first example given of a WDM1 filter was defined in the first approved version of this Recommendation (released in September 2007). This WDM1 filter is hereby obsoleted, as the wavelength plan for NGA systems has become incompatible with its definition. Its description is retained below for historical reference.

The subsequent examples of filters (from Table I.2 to Table I.6 and Figure I.2 to Figure I.7) are termed "WDM1r" to signify that they are revised specifications that reflect the approved newer wavelength plan for NGA systems. There are two examples of the NGA interface: a single-fibre NGA interface and a deprecated dual-fibre NGA interface. There are four examples of added wavelength service ports: none, video, OTDR and video+OTDR. There are two upstream wavelength plans for the G-PON interface that allow coexistence with NGA. The next examples of devices (from Table I.7 to Table I.10 and Figure I.8 to Figure I.11) are termed "CEx", and support the coexistence of NG-PON2 with legacy PON systems.

The final examples of devices (from Table I.11 to Table I.14 and Figure I.12 to Figure I.15) are termed "CEM" to signify that they include the functions of CEx and partial wavelength multiplexer (WM) which combine/isolate the TWDM PON and PtP WDM PON bands.

The isolation values in the following tables may be determined depending on the application and they can be calculated using the methods described in Appendix III.

In the following tables (except for Table I.3), G-PON with reduced upstream band is considered as an example. The values of insertion loss for G-PON with narrow upstream band are expected to be the same.

Table I.1 shows sample parameters of the deprecated WDM1 filter that combines (downstream) and isolates (upstream) the G-PON up/down signals and enhancement band. Figure I.1 shows the reference diagram of WDM1.

Table I.1 – Parameters for WDM1 (deprecated)

Specification	Value
Loss without connectors – G-PON wavelength span	< 0.7 dB (1260-1500 nm)
Loss without connectors for enhancement bands	< 1.0 dB (1524-1625 nm)
Isolation – COM – OLT (1524-1625 nm)	To be determined (> 30 dB (higher values may be required depending on the application))
Isolation – COM – UPGRADE (1480-1500 nm, 1260-1360 nm)	> 30 dB
Maximum optical power	+23 dBm

Table I.1 – Parameters for WDM1 (deprecated)

Specification	Value
Return loss	> 50 dB
Directivity	> 50 dB
NOTE 1 – The wavelength range of 1524-1530 nm should not be used by NGA downstream signals.	
NOTE 2 – The specification of WDM1 in the range of 1625-1660 nm for applications such as inserting an OTDR signal onto the PON is for future study.	

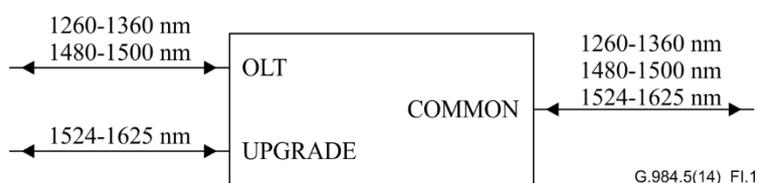


Figure I.1 – Reference diagram of WDM1 (deprecated)

Table I.2 shows sample parameters of the single-fibre WDM1r filter that combines (downstream) and isolates (upstream) the G-PON up/down signals and NGA bands. Figure I.2 shows the reference diagram of the single-fibre WDM1r.

Table I.2 – Parameters for a WDM1r with G-PON and NGA ports

Specification	Value
Loss without connectors for G-PON bands	< 0.8 dB (1290-1330 nm and 1480-1500 nm)
Loss without connectors for NGA bands	< 1.0 dB (1260-1280 nm and 1524-1625 nm)
Isolation – COM – G-PON OLT (1260-1280 nm and 1524-1625 nm)	DBA (see Appendix III)
Isolation – COM – NGA OLT (1290-1500 nm)	DBA (see Appendix III)
Maximum optical power	+23 dBm
Return loss	> 50 dB
Directivity	> 50 dB

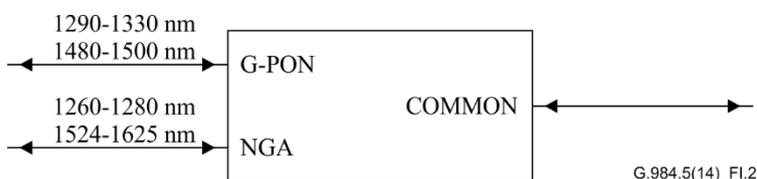


Figure I.2 – Reference diagram of a WDM1r with G-PON and NGA support

Table I.3 shows sample parameters of the single-fibre WDM1rn filter that combines (downstream) and isolates (upstream) the G-PON up/down signals and NGA bands. The WDM1rn can be used when all of the G-PON ONUs comply with the narrow upstream wavelength option. Figure I.3 shows a reference diagram of a single-fibre WDM1rn.

Table I.3 – Parameters for a WDM1rn with narrow upstream wavelength G-PON and NGA ports

Specification	Value
Loss without connectors for G-PON bands	< 0.8 dB (1300-1320 nm and 1480-1500 nm)
Loss without connectors for NGA bands	< 1.0 dB (1260-1280 nm and 1524-1625 nm)
Isolation – COM – G-PON OLT (1260-1280 and 1524-1625 nm)	DBA (see Appendix III)
Isolation – COM – NGA OLT (1300-1500 nm)	DBA (see Appendix III)
Max optical power	+23 dBm
Return loss	> 50 dB
Directivity	> 50 dB

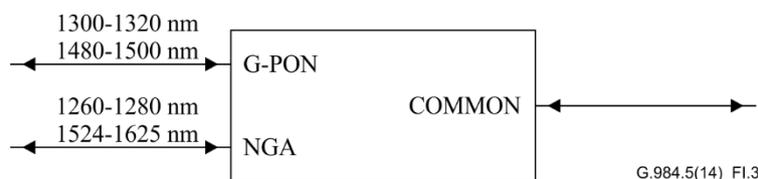


Figure I.3 – Reference diagram of a WDM1rn with narrow upstream wavelength G-PON and NGA support

Table I.4 shows sample parameters of the deprecated dual-fibre WDM1r filter that combines (downstream) and isolates (upstream) the G-PON up/down signals and NGA bands. Figure I.4 shows the reference diagram of the dual-fibre WDM1r.

Table I.4 – Parameters for a dual-fibre WDM1r with G-PON and NGA ports (deprecated)

Specification	Value
Loss without connectors for G-PON bands	< 0.8 dB (1290-1330 nm and 1480-1500 nm)
Loss without connectors for NGAd band	< 0.8 dB (1575-1581 nm)
Loss without connectors for NGAu band	< 0.8 dB (1260-1280 nm)
Isolation – COM – G-PON OLT (1260-1280 and 1524-1625 nm)	To be determined (> 30 dB (higher values may be required depending on the application))
Isolation – COM – NGAd OLT (1480-1500 nm, 1260-1360 nm)	N/A
Isolation – COM – NGAu OLT (1480-1625 nm, 1290-1360 nm)	To be determined (> 30 dB (higher values may be required depending on the application))
Maximum optical power	+23 dBm
Return loss	> 50 dB
Directivity	> 50 dB

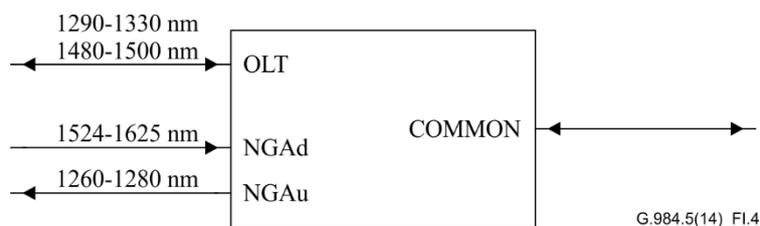


Figure I.4 – Reference diagram of a dual-fibre WDM1r with G-PON and NGA support (deprecated)

Table I.5 shows sample parameters of the single-fibre WDM1r filter supporting OTDR capability. The wavelength range assumed for the OTDR is referred from [ITU-T L.66]. Note that the wavelength range of the NGA port changes when these optional ports are present. Figure I.5 shows the reference diagram of this filter.

Table I.5 – Parameters for a WDM1r with G-PON, NGA and OTDR ports

Specification	Value
Loss without connectors for G-PON bands	≤ 1.0 dB (1290-1330 nm and 1480-1500 nm)
Loss without connectors for NGA bands	≤ 1.2 dB (1260-1280 nm and 1524-1581 nm)
Loss without connectors for OTDR band	≤ 1.1 dB (1625-1675 nm)
Isolation – COM – G-PON OLT (1260-1280 and 1524-1675 nm)	DBA (see Appendix III)
Isolation – COM – NGA OLT (1290-1500 nm and 1600-1675 nm)	DBA (see Appendix III)
Isolation – COM – OTDR (1260-1581 nm)	DBA (see Appendix III)
Maximum optical power for G-PON or NGA ports	+23 dBm
Maximum optical power for OTDR port	For further study
Return loss	> 50 dB
Directivity	> 50 dB

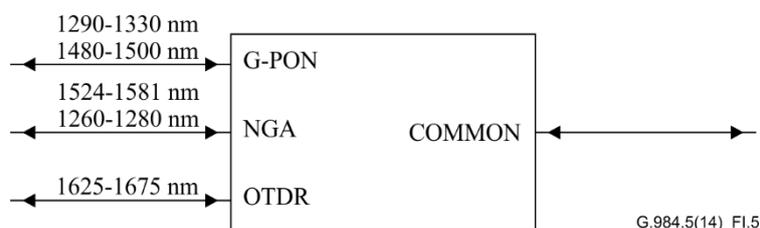


Figure I.5 – Reference diagram of a WDM1r with G-PON, NGA and OTDR support

Figure I.6 shows the reference diagram of the deprecated dual-fibre WDM1r with video support.

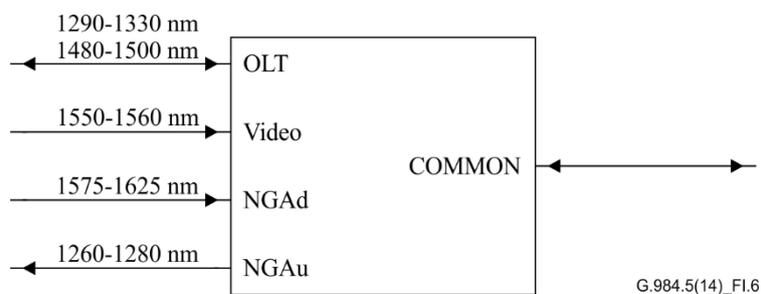


Figure I.6 – Reference diagram of a dual-fibre WDM1r with G-PON, video and NGA support (deprecated)

Table I.6 shows sample parameters of a single-fibre WDM1r filter supporting OTDR and video capability. Note that the wavelength range of the NGA port changes when these optional ports are present. Figure I.7 shows the reference diagram of this filter.

Table I.6 – Parameters for WDM1r with G-PON, RF video, NGA and OTDR ports

Specification	Value
Loss without connectors for G-PON bands	≤ 1.0 dB (1290-1330 nm and 1480-1500 nm)
Loss without connectors for NGA bands	≤ 1.5 dB (1260-1280 nm and 1575-1581 nm)
Loss without connectors for OTDR band	≤ 1.1 dB (1625-1675 nm)
Loss without connectors for RF video band	≤ 1.7 dB (1550-1560 nm)
Isolation – COM – G-PON OLT (1260-1280 and 1550-1675 nm)	DBA (See Appendix III)
Isolation – COM – NGA OLT (1290-1560 nm and 1625-1675 nm)	DBA (see Appendix III)
Isolation – COM – OTDR (1260-1581 nm)	DBA (see Appendix III)
Isolation – COM – RF video (1260-1500 nm, 1575-1675 nm)	NA (RF is downstream only)
Maximum optical power for G-PON or NGA ports	+23 dBm
Maximum optical power for OTDR port	For further study
Maximum optical power for RF video port	+23 dBm
Return loss	> 50 dB
Directivity	> 50 dB

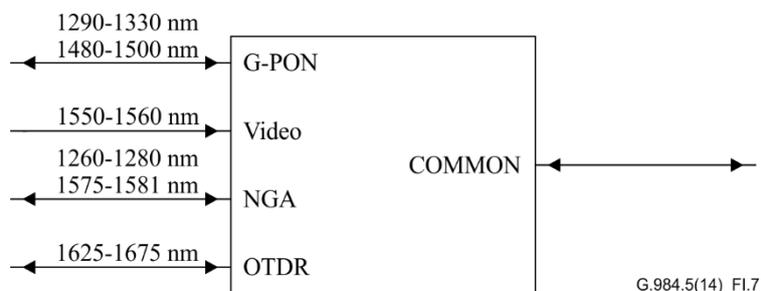


Figure I.7 – Reference diagram of a WDM1r with G-PON, RF video, NGA and OTDR support

Table I.7 shows sample parameters of a CEx supporting G-PON (reduced upstream band as an example), XG-PON1 and NG-PON2 (wide range TWDM PON upstream band and shared spectrum PtP WDM PON as an example). Figure I.8 shows the reference diagram of this device. (Note that as XG-PON1 is a deprecated name for the XG-PON system that operates at a nominal line rate of 10 Gbit/s downstream and 2.5 Gbit/s upstream, term XG-PON1 can be regarded as the term XG-PON hereafter in the following text in Appendix I).

Table I.7 – Parameters for a CEx with G-PON, XG-PON1 and NG-PON2 ports

Specification	Value
Loss without connectors for G-PON bands	≤ 0.8 dB (1290-1330 nm and 1480-1500 nm)
Loss without connectors for XG-PON1 bands	≤ 1.1 dB (1260-1280 nm and 1575-1581 nm)
Loss without connectors for NG-PON2 bands	≤ 1.0 dB (1524-1544 nm and 1596-1625 nm)
Isolation – COM – G-PON OLT (1260-1280 nm and 1524-1675 nm)	DBA (see Appendix III)
Isolation – COM – XG-PON1 OLT (1290-1560 nm and 1596-1675 nm)	DBA (see Appendix III)
Isolation – COM – NG-PON2 (1260-1500 nm, 1550-1581 nm and 1640-1675 nm)	DBA (see Appendix III)
Maximum optical power	+23 dBm
Return loss	> 50 dB
Directivity	> 50 dB

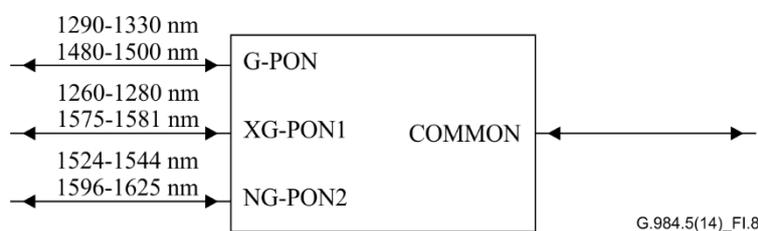


Figure I.8 – Reference diagram of a CEx with G-PON, XG-PON1 and NG-PON2 support

Table I.8 shows sample parameters of a CEx supporting G-PON (reduced upstream band as an example), XG-PON1 and NG-PON2 (wide range TWDM PON upstream band and shared spectrum PtP WDM PON as an example) and OTDR (with wavelength range of 1640-1660 nm as an example) capability. Figure I.9 shows the reference diagram of this device.

Table I.8 – Parameters for a CEx with G-PON, XG-PON1, NG-PON2 and OTDR ports

Specification	Value
Loss without connectors for G-PON bands	≤ 0.8 dB (1290-1330 nm and 1 480-1 500 nm)
Loss without connectors for XG-PON1 bands	≤ 1.1 dB (1260-1280 nm and 1575-1581 nm)
Loss without connectors for NG-PON2 bands	≤ 1.2 dB (1524-1 544 nm and 1596-1625 nm)
Loss without connectors for OTDR band	≤ 1.4 dB (1640-1660 nm)

Table I.8 – Parameters for a CEx with G-PON, XG-PON1, NG-PON2 and OTDR ports

Specification	Value
Isolation – COM – G-PON OLT (1260-1280 nm and 1524-1675 nm)	DBA (see Appendix III) or see application case below
Isolation – COM – XG-PON1 OLT (1290-1560 nm and 1596-1675 nm)	DBA (see Appendix III) or see application case below
Isolation – COM – NG-PON2 (1260-1500 nm, 1550-1581 nm and 1640-1675 nm)	DBA (see Appendix III) or see application case below
Isolation – COM – OTDR (1260-1625 nm)	DBA (see Appendix III) or see application case below
Maximum optical power for G-PON, XG-PON1 or NG-PON2 ports	+23 dBm
Maximum optical power for OTDR port	For further study
Return loss	> 50 dB
Directivity	> 50 dB or see application case below

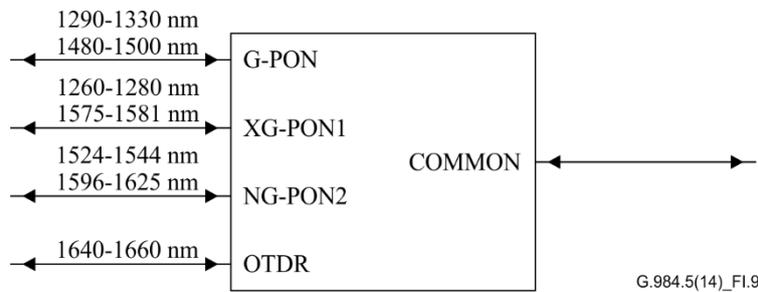


Figure I.9 – Reference diagram of a CEx with G-PON, XG-PON1, NG-PON2 and OTDR support

The assumptions for application case 1 are listed below. Isolation and directivity values are provided in Table I.8a.

Application case 1

- Total tolerated penalty (caused by finite isolation and directivity) = 0.5 dB.
- ODN maximum differential loss = 15 dB.
- ODN Class = C+.
- Number of NG-PON2 channels = 8 TWDM + 8 PTP WDM.
- $I_{BiDi} = 30$ dB for the case when the interferer is located in the blocking band of the diplexer; $I_{BiDi} = 0$ dB in all other cases.
- No isolation is assumed to be provided by the NG-PON2 WM.
- ρ (photodiode responsivity) = 0.8 A/W in O band, 0.9A/W in C band.
- NG-PON2 OPP values corresponding to the 8 ch, 20 km case.
- OTDR equipment is assumed to include an input filtering device providing 30 dB of isolation.
- OTDR pulse power = +23 dBm, ER=10 dB, Rate = 100 Mbit/s¹.

¹ For the purpose of these calculations, the fact that the OTDR signal is normally pulsed and unmodulated is neglected.

Table I.8a – Isolation and directivity for Application Case 1

Specification		Value [dB]
Isolation [dB]	COM – GPON (1260-1280 nm; 1524-1675 nm)	35
	COM – XG(S)-PON (1290-1560 nm; 1596-1675 nm)	35
	COM – NG-PON2 (1260-1500 nm; 1550-1581nm; 1640-1675 nm)	40 ²
	COM – OTDR (1260-1625 nm)	10
Directivity (to port) [dB]	GPON	40
	XG(S)-PON	45
	NG-PON2	55 ²
	OTDR	25
Directivity (port-to-port) [dB]	GPON / XG(S)-PON	45
	GPON / NG-PON2	55 ²
	GPON / OTDR	40
	XG(S)-PON / NG-PON2	55 ²
	XG(S)-PON / OTDR	45
	NG-PON2 / OTDR	55 ²
NOTE – directivity figures can be specified equivalently per port or between ports.		

Table I.9 shows sample parameters of a CEx supporting G-PON (reduced upstream band as an example), RF video and NG-PON2 (wide range TWDM PON upstream band and shared spectrum PtP WDM PON as an example). Figure I.10 shows the reference diagram of this device.

² This level is sufficient for a NG-PON2 TWDM system; if the NG-PON2 port is used (also) for a PTP WDM PON system, a much higher value (isolation >55 dB, directivity >70 dB) would be necessary or interference onto this system should be mitigated using additional means.

Table I.9 – Parameters for a CEx with G-PON, RF video and NG-PON2 ports

Specification	Value
Loss without connectors for G-PON bands	≤ 0.8 dB (1290-1330 nm and 1480-1500 nm)
Loss without connectors for RF video band	≤ 0.8 dB (1550-1560 nm)
Loss without connectors for NG-PON2 bands	≤ 1.0 dB (1524-1544 nm and 1596-1625 nm)
Isolation – COM – G-PON OLT (1260-1280 and 1524-1675 nm)	DBA (see Appendix III)
Isolation – COM – RF video (1260-1544 nm, 1575-1675 nm)	NA (RF is downstream only)
Isolation – COM – NG-PON2 OLT (1260-1500 nm, 1550-1581 nm and 1640-1675 nm)	DBA (see Appendix III)
Maximum optical power for G-PON or NG-PON2 ports	+23 dBm
Maximum optical power for RF video port	+23 dBm
Return loss	> 50 dB
Directivity	> 50 dB

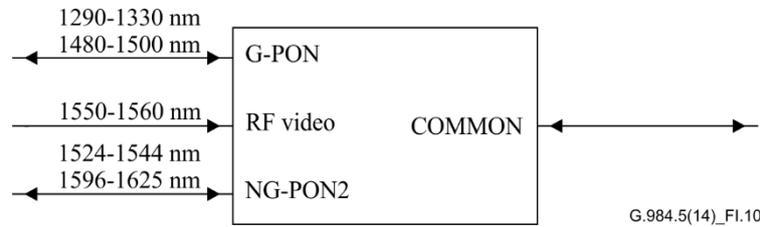


Figure I.10 – Reference diagram of a CEx with G-PON, RF video and NG-PON2 support

Table I.10 shows sample parameters of a CEx supporting G-PON (reduced upstream band as an example), RF video, NG-PON2 (wide range TWDM PON upstream band and shared spectrum PtP WDM PON as an example) and OTDR (with a wavelength range of 1640-1660 nm as an example) capability. Figure I.11 shows the reference diagram of this device.

Table I.10 – Parameters for a CEx with G-PON, RF video, NG-PON2 and OTDR ports

Specification	Value
Loss without connectors for G-PON bands	≤ 0.8 dB (1290-1330 nm and 1480-1500 nm)
Loss without connectors for RF video band	≤ 1.0 dB (1550-1560 nm)
Loss without connectors for NG-PON2 bands	≤ 1.1 dB (1524-1544 nm and 1596-1625 nm)
Loss without connectors for OTDR band	≤ 1.3 dB (1640-1660 nm)
Isolation – COM – G-PON OLT (1260-1280 nm and 1524-1675 nm)	DBA (see Appendix III)
Isolation – COM – RF video (1260-1544 nm, 1575-1675 nm)	NA (RF is downstream only)
Isolation – COM – NG-PON2 OLT (1260-1500 nm, 1550-1581 nm and 1640-1675 nm)	DBA (see Appendix III)
Isolation – COM – OTDR (1260-1625 nm)	DBA (see Appendix III)

Table I.10 – Parameters for a CEx with G-PON, RF video, NG-PON2 and OTDR ports

Specification	Value
Maximum optical power for G-PON or NG-PON2 ports	+23 dBm
Maximum optical power for RF video port	+23 dBm
Maximum optical power for OTDR port	For further study
Return loss	> 50 dB
Directivity	> 50 dB

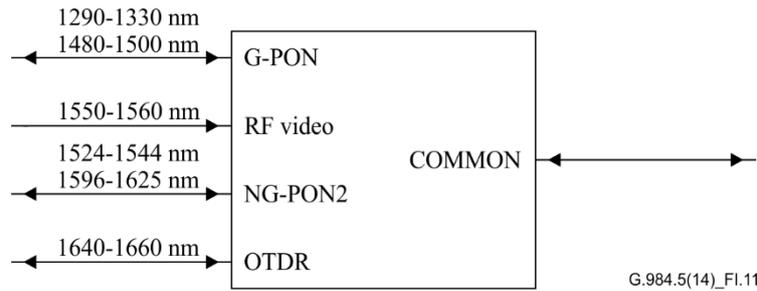


Figure I.11 – Reference diagram of a CEx with G-PON, RF video, NG-PON2 and OTDR support

Table I.11 shows sample parameters of a CEMx supporting G-PON (reduced upstream band as an example), XG-PON1, TWDM PON (wide range upstream band as an example) and PtP WDM PON (shared spectrum as an example) capability. Figure I.12 shows the reference diagram of this device.

Table I.11 – Parameters for a CEMx with G-PON, XG-PON1, TWDM PON and PtP WDM PON ports

Specification	Value
Loss without connectors for G-PON bands	≤ 0.8 dB (1 290-1 330 nm and 1 480-1 500 nm)
Loss without connectors for XG-PON1 bands	≤ 1.1 dB (1 260-1 280 nm and 1 575-1 581 nm)
Loss without connectors for TWDM PON bands	≤ 1.2 dB (1 524-1 544 nm and 1 596-1 603 nm)
Loss without connectors for PtP WDM PON band	≤ 1.3 dB (1 606-1 625 nm)
Isolation – COM – G-PON OLT (1 260-1 280 nm and 1 524-1 675 nm)	DBA (see Appendix III)
Isolation – COM – XG-PON1 OLT (1 290-1 560 nm and 1 596-1 675 nm)	DBA (see Appendix III)
Isolation – COM – TWDM PON OLT (1 260-1 500 nm, 1 550-1 581 nm and 1 606-1 675 nm)	DBA (see Appendix III)
Isolation – COM – PtP WDM PON OLT (1 260-1 603 nm and 1 640-1 675 nm)	DBA (see Appendix III)
Maximum optical power	+23 dBm
Return Loss	> 50 dB
Directivity	> 50 dB

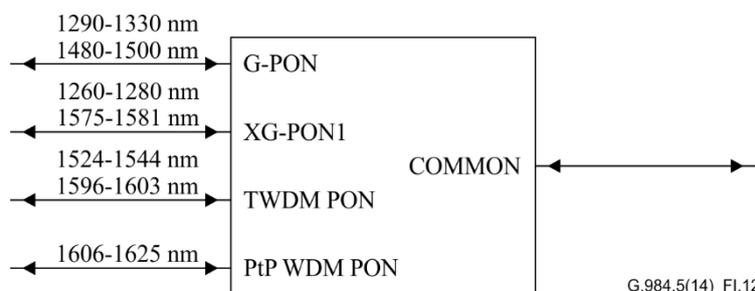


Figure I.12 – Reference diagram of a CEMx with G-PON, XG-PON, TWDM PON and PtP WDM PON support

Table I.12 shows sample parameters of a CEMx supporting G-PON (reduced upstream band as an example), XG-PON1, TWDM PON (wide range upstream band as an example), PtP WDM PON (shared spectrum as an example) and OTDR (with wavelength range of 1640-1660 nm as an example) capability. Figure I.13 shows the reference diagram of this device.

Table I.12 – Parameters for a CEMx with G-PON, XG-PON, TWDM PON, PtP WDM PON and OTDR ports

Specification	Value
Loss without connectors for G-PON bands	≤ 0.8 dB (1290-1330 nm and 1480-1500 nm)
Loss without connectors for XG-PON1 bands	≤ 1.1 dB (1260-1280 nm and 1575-1581 nm)
Loss without connectors for TWDM PON bands	≤ 1.4 dB (1524-1544 nm and 1596-1603 nm)
Loss without connectors for PtP WDM PON band	≤ 1.3 dB (1606-1625 nm)
Loss without connectors for OTDR band	≤ 1.6 dB (1640-1660 nm)
Isolation – COM – G-PON OLT (1260-1280 nm and 1524-1675 nm)	DBA (see Appendix III)
Isolation – COM – XG-PON1 OLT (1290-1560 nm and 1596-1675 nm)	DBA (see Appendix III)
Isolation – COM – TWDM PON OLT (1260-1500 nm, 1550-1581 nm and 1606-1675 nm)	DBA (see Appendix III)
Isolation – COM – PtP WDM PON OLT (1260-1603 nm and 1640-1675 nm)	DBA (see Appendix III)
Isolation – COM – OTDR (1260-1625 nm)	DBA (see Appendix III)
Maximum optical power for G-PON, XG-PON, TDM PON or PtP WDM PON ports	+23 dBm
Maximum optical power for OTDR port	For further study
Return loss	> 50 dB
Directivity	> 50 dB

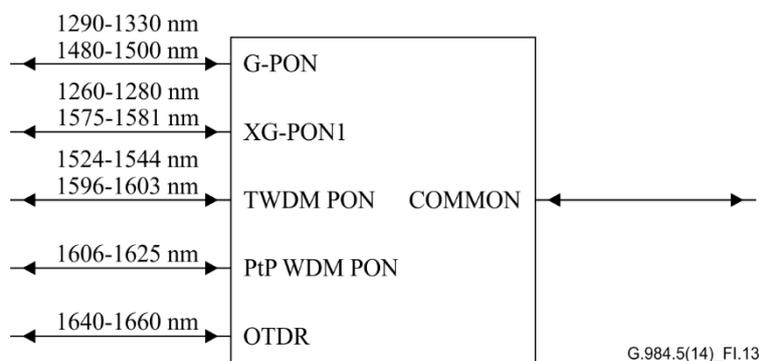


Figure I.13 – Reference diagram of a CEMx with G-PON, XG-PON, TWDM PON, PtP WDM PON and OTDR support

Table I.13 shows sample parameters of a CEMx supporting G-PON (reduced upstream band as an example), RF video, TWDM PON (wide range upstream band as an example) and PtP WDM PON (shared spectrum as an example) capability. Figure I.14 shows the reference diagram of this device.

Table I.13 – Parameters for a CEMx with G-PON, RF video, TWDM PON and PtP WDM PON ports

Specification	Value
Loss without connectors for G-PON bands	≤ 0.8 dB (1290-1330 nm and 1480-1500 nm)
Loss without connectors for RF video band	≤ 1.2 dB (1550-1560 nm)
Loss without connectors for TWDM PON bands	≤ 1.1 dB (1524-1544 nm and 1596-1603 nm)
Loss without connectors for PtP WDM PON band	≤ 0.9 dB (1606-1625 nm)
Isolation – COM – G-PON OLT (1260-1280 nm and 1524-1675 nm)	DBA (see Appendix III)
Isolation – COM – RF video (1260-1544 nm and 1575-1675 nm)	NA (RF is downstream only)
Isolation – COM – TWDM PON OLT (1260-1500 nm, 1550-1581 nm and 1606-1675 nm)	DBA (see Appendix III)
Isolation – COM – PtP WDM PON OLT (1260-1603 nm and 1640-1675 nm)	DBA (see Appendix III)
Maximum optical power for G-PON, TWDM PON or PtP WDM PON ports	+23 dBm
Maximum optical power for RF video port	+23 dBm
Return loss	> 50 dB
Directivity	> 50 dB

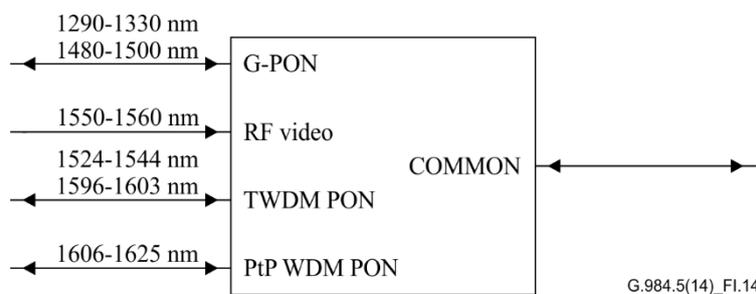


Figure I.14 – Reference diagram of a CEMx with G-PON, RF video, TWDM PON and PtP WDM PON support

Table I.14 shows sample parameters of a CEMx supporting G-PON (reduced upstream band as an example), RF video, TWDM PON (wide range upstream band as an example), PtP WDM PON (shared spectrum as an example) and OTDR (with a wavelength range of 1640-1660 nm as an example) capability. Figure I.15 shows the reference diagram of this device.

Table I.14 – Parameters for a CEMx with G-PON, RF video, TWDM PON, PtP WDM PON and OTDR ports

Specification	Value
Loss without connectors for G-PON bands	≤ 0.8 dB (1290-1330 nm and 1480-1500 nm)
Loss without connectors for RF video band	≤ 1.2 dB (1550-1560 nm)
Loss without connectors for TWDM PON bands	≤ 1.3 dB (1524-1544 nm and 1596-1603 nm)
Loss without connectors for PtP WDM PON band	≤ 0.9 dB (1606-1625 nm)
Loss without connectors for OTDR band	≤ 1.5 dB (1640-1660 nm)
Isolation – COM – G-PON OLT (1260-1280 nm and 1524-1675 nm)	DBA (see Appendix III)
Isolation – COM – RF video (1260-1544 nm, 1575-1675 nm)	NA (RF is downstream only)
Isolation – COM – TWDM PON OLT (1260-1500 nm, 1550-1581 nm and 1606-1675 nm)	DBA (see Appendix III)
Isolation – COM – PtP WDM PON OLT (1260-1603 nm and 1640-1675 nm)	DBA (see Appendix III)
Isolation – COM – OTDR (1260-1625 nm)	DBA (see Appendix III)
Maximum optical power for G-PON, TWDM PON or PtP WDM PON ports	+23 dBm
Maximum optical power for RF video port	+23 dBm
Maximum optical power for OTDR port	For further study
Return loss	> 50 dB
Directivity	> 50 dB

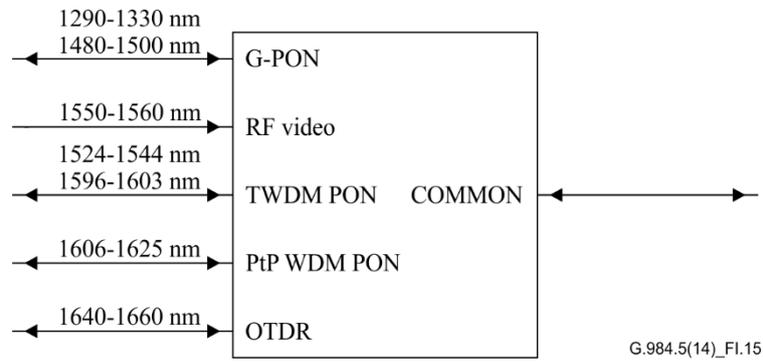


Figure I.15 – Reference diagram of a CEMx with G-PON, RF video, TWDM PON, PtP WDM PON and OTDR support

The reference diagram of a generic 2-port coexistence CEx is shown in Figure I.16. Table I.15 shows parameter specifications for the 2-port CEx with OLT1 and OLT2 ports. Table I.16 and Table I.17 show sample parameters for port isolation requirements and port directivity requirements of the 2-port CEx with OLT1 and OLT2 ports.

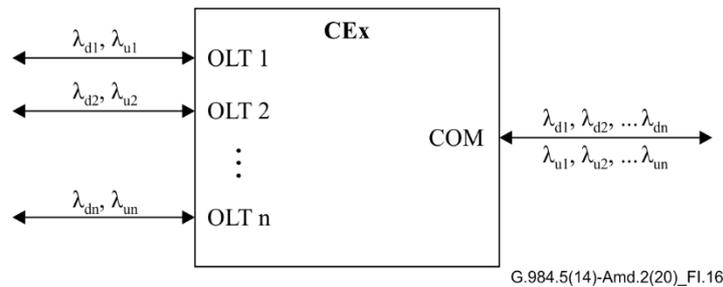


Figure I.16 – Reference diagram of a generic 2-port coexistence CEx

Table I.15 – Parameter specifications for a 2-port CEx with OLT1 and OLT2 ports

<u>Specification</u>	<u>Value</u>
<u>Loss w/o connectors for OLT1 band</u>	<u>< 0.8 dB (1290 – 1500 nm)</u>
<u>Loss w/o connectors for OLT2 bands</u>	<u>< 1.0 dB (1260 – 1280 nm and 1524 – 1625 nm)</u>
<u>Isolation COM – OLT1 port (1260-1280nm and 1524-1625nm)</u>	<u>See Table I.16</u>
<u>Isolation COM – OLT2 port (1290-1500nm)</u>	<u>See Table I.16</u>
<u>Maximum optical power</u>	<u>+23 dBm</u>
<u>Return loss</u>	<u>≥ 50 dB</u>
<u>Directivity</u>	<u>See Table I.17</u>

Table I.16 – Isolation requirements for different PON pairings of a generic 2-port coexistence CEx

<u>OLT1</u>		<u>OLT2</u>		<u>Isolation [dB] (Note 1)</u>	
<u>System</u>	<u>OPL Class</u>	<u>System</u>	<u>OPL Class</u>	<u>[COM to OLT1]</u>	<u>[COM to OLT2]</u>
<u>GPON</u>	<u>C+</u>	<u>XG-PON</u>	<u>E1</u>	<u>36.29</u>	<u>36.45</u>
<u>GPON</u>	<u>C+</u>	<u>XGS-PON</u>	<u>E1</u>	<u>32.27</u>	<u>35.86</u>
<u>50G TDM PON (50G 10G)</u>	<u>FFS</u>	<u>XG-PON</u>	<u>FFS</u>	<u>FFS</u>	<u>FFS</u>
<u>50G TDM PON (50G 25G)</u>	<u>FFS</u>	<u>XGS-PON</u>	<u>FFS</u>	<u>FFS</u>	<u>FFS</u>
<u>50G TDM PON (50G 10G)</u>	<u>FFS</u>	<u>XG-PON</u>	<u>FFS</u>	<u>FFS</u>	<u>FFS</u>
<u>50G TDM PON (50G 25G)</u>	<u>FFS</u>	<u>XGS-PON</u>	<u>FFS</u>	<u>FFS</u>	<u>FFS</u>
<u>50G TDM PON (50G 10G)</u>	<u>FFS</u>	<u>10G-EPON</u>	<u>FFS</u>	<u>FFS</u>	<u>FFS</u>
<u>50G TDM PON (50G 25G)</u>	<u>FFS</u>	<u>10G-EPON</u>	<u>FFS</u>	<u>FFS</u>	<u>FFS</u>

NOTE 1 – Here it is assumed that the CEx has a maximum insertion loss of 0.8 dB and 1.0 dB for COM-to-OLT-1 and COM-to-OLT-2, respectively. Furthermore, the tolerable crosstalk penalty assumption is 0.1dB (this is considered negligible for implementation).

Table I.17 – Directivity requirements for different PON pairings of a generic 2-port coexistence CEx

<u>OLT1</u>		<u>OLT2</u>		<u>Directivity [dB] (Note)</u>	
<u>System</u>	<u>OPL Class</u>	<u>System</u>	<u>OPL Class</u>	<u>[OLT2 to OLT1]</u>	<u>[OLT1 to OLT2]</u>
<u>GPON</u>	<u>C+</u>	<u>XG-PON</u>	<u>E1</u>	<u>50.27</u>	<u>55.45</u>
<u>GPON</u>	<u>C+</u>	<u>XGS-PON</u>	<u>E1</u>	<u>49.27</u>	<u>54.86</u>
<u>50G TDM PON (50G 10G)</u>	<u>FFS</u>	<u>XG-PON</u>	<u>FFS</u>	<u>FFS</u>	<u>FFS</u>
<u>50G TDM PON (50G 25G)</u>	<u>FFS</u>	<u>XGS-PON</u>	<u>FFS</u>	<u>FFS</u>	<u>FFS</u>
<u>50G TDM PON (50G 10G)</u>	<u>FFS</u>	<u>XG-PON</u>	<u>FFS</u>	<u>FFS</u>	<u>FFS</u>
<u>50G TDM PON (50G 25G)</u>	<u>FFS</u>	<u>XGS-PON</u>	<u>FFS</u>	<u>FFS</u>	<u>FFS</u>
<u>50G TDM PON (50G 10G)</u>	<u>FFS</u>	<u>10G-EPON</u>	<u>FFS</u>	<u>FFS</u>	<u>FFS</u>
<u>50G TDM PON (50G 25G)</u>	<u>FFS</u>	<u>10G-EPON</u>	<u>FFS</u>	<u>FFS</u>	<u>FFS</u>

NOTE – Here it is assumed that the CEx has a maximum insertion loss of 0.8 dB and 1.0 dB for COM-to-OLT-1 and COM-to-OLT-2, respectively. Furthermore, the tolerable crosstalk penalty assumption is 0.1 dB (this is considered negligible for implementation).

Appendix II

Examples of wavelength allocation for NGA services and video distribution services

(This appendix does not form an integral part of this Recommendation.)

II.1 Introduction

Considering the possible network scenarios that allow the coexistence of G-PON, NGA and video services, it is assumed that additional guard bands are needed at both sides of the video band to avoid interference which could cause the degradation of video CNR performances of the video receiver. To take the guard bands for both basic band and video into account, the wavelength range between basic band and video may not be applicable for NGA downstream signals. Figure II.1 shows the wavelength plan of the 1.5 μm wavelength band for these scenarios. The ranges of the guard bands depend on the filter characteristics of the video band pass filter and the performance of the video receiver. In this clause, two types of filters are considered. One is the integrated filter within the G-PON ONU transceiver such as triplexer type transceiver and the other is the discrete filter outside of the G-PON diplexer type transceiver and the video receiver. The examples of wavelength allocation and filter characteristics for each case are provided below.

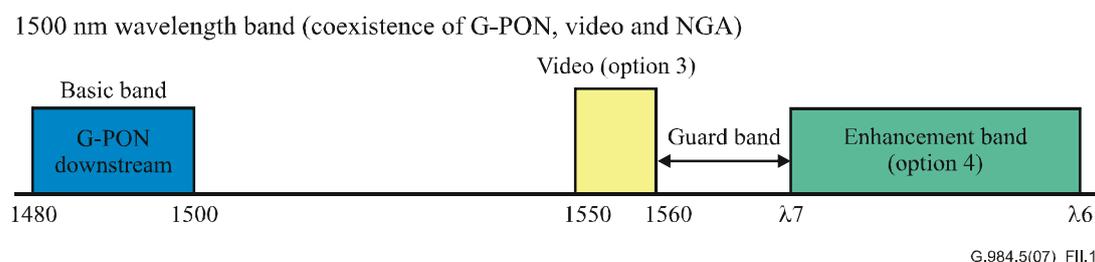


Figure II.1 – Wavelength allocation

II.2 Case 1: Integrated filter for video

Figure II.2 shows an example configuration of a G-PON ONU using a triplexer type transceiver including an integrated video filter. This figure does not intend to limit filter configurations of the triplexer. Filter configurations may be different in each implementation and also depend on the implementations of optics (e.g., micro-optics or PLC-based). In this figure, the isolation values at the reference point are the sum of the isolation values of the WDM filter and the wavelength blocking filter (WBF) in front of the V-Rx. Figure II.3 shows an example of isolation and Table II.1 shows an example of wavelength allocation including the tentative wavelength value of $\lambda 7$ in Figure II.3. One of the example isolation values of y_3 in Figure II.3 is 30 dB with reference to the realistic isolation performances of an integrated filter. Service operators and implementers should take the actual filter characteristics and performance of the video receiver into account when considering additional enhanced services.

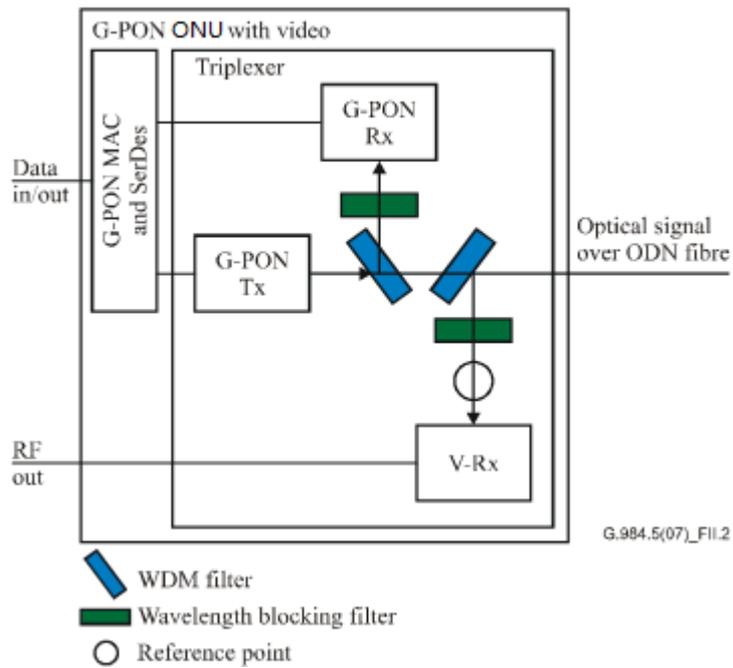


Figure II.2 – Example configuration of G-PON ONU with video (Case 1)

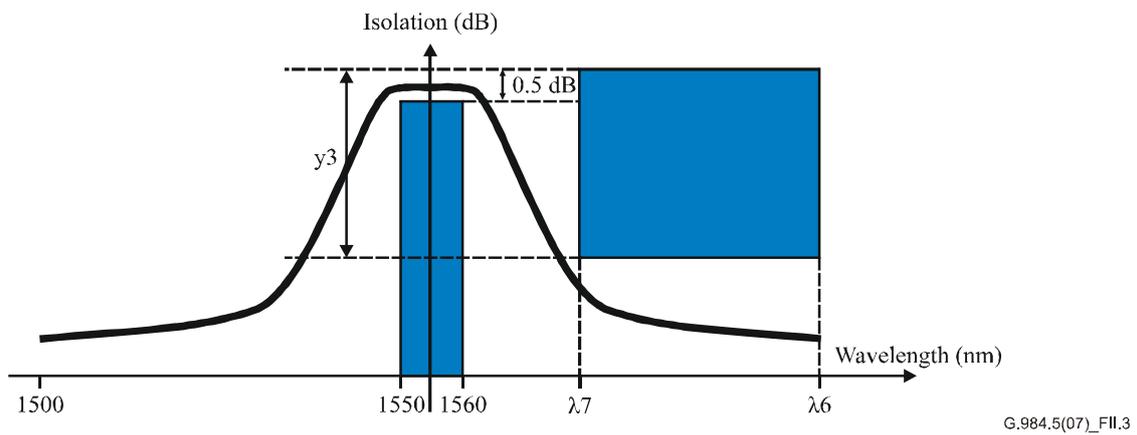


Figure II.3 – Example of integrated filter characteristics for video

Table II.1 – Example of wavelength allocation (Case 1)

Items	Notation	Unit	Nominal value	Application examples
Enhancement band (option 3)				
Lower limit	–	nm	1550	For video distribution service
Upper limit	–	nm	1560	
Enhancement band (option 4)				
Lower limit	$\lambda 7$	nm	To be determined (1574 or 1575)	For next generation access (NGA)
Upper limit	$\lambda 6$	nm	1580 to 1625	
NOTE – Typically applied to the integrated filters inside the triplexer type optical transceiver.				

II.3 Case 2: Discrete WDM filter for video

Figures II.4 and II.5 show example configurations of a G-PON ONU (and a video ONU) using discrete WDM filters. These figures do not intend to limit filter configurations. In these figures, the isolation values at the reference point are the sum of the isolation values of the discrete WDM filter and the WBF in front of the V-Rx. Figure II.6 shows an example of isolation and Table II.2 shows an example of wavelength allocation. One of the example isolation values of y_4 in Figure II.6 is 35 dB with reference to the realistic isolation performances of a discrete filter. Service operators and implementers should take actual filter characteristics and performance of the video receiver into account when considering additional enhanced services.

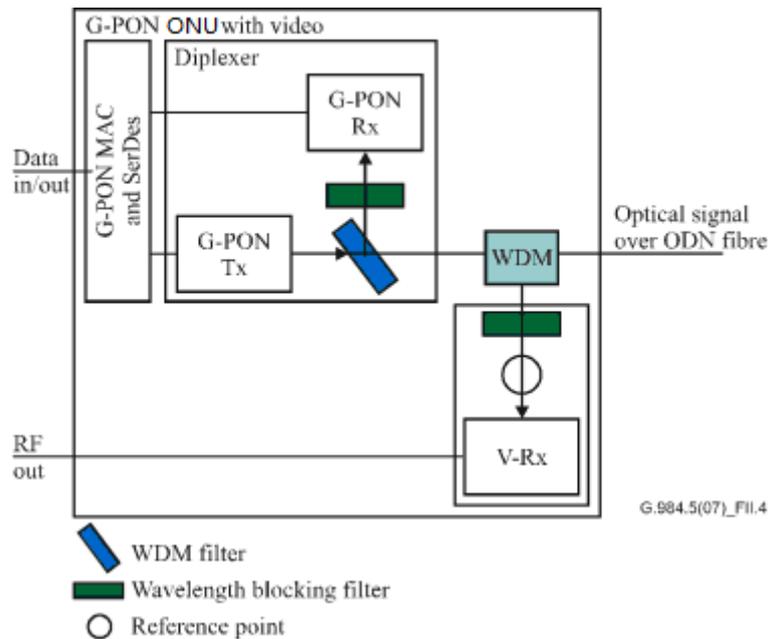


Figure II.4 – Example configuration of G-PON ONU with video (Case 2)

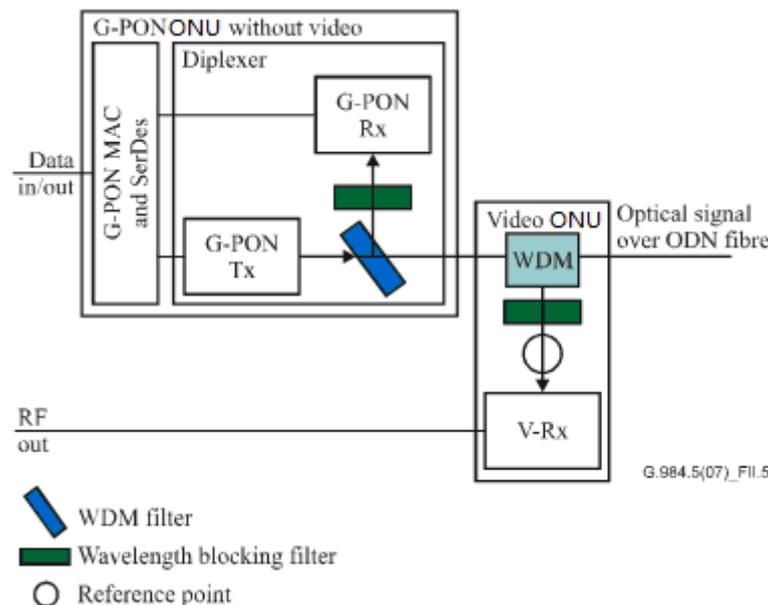


Figure II.5 – Example configuration of G-PON ONU and video ONU (Case 2)

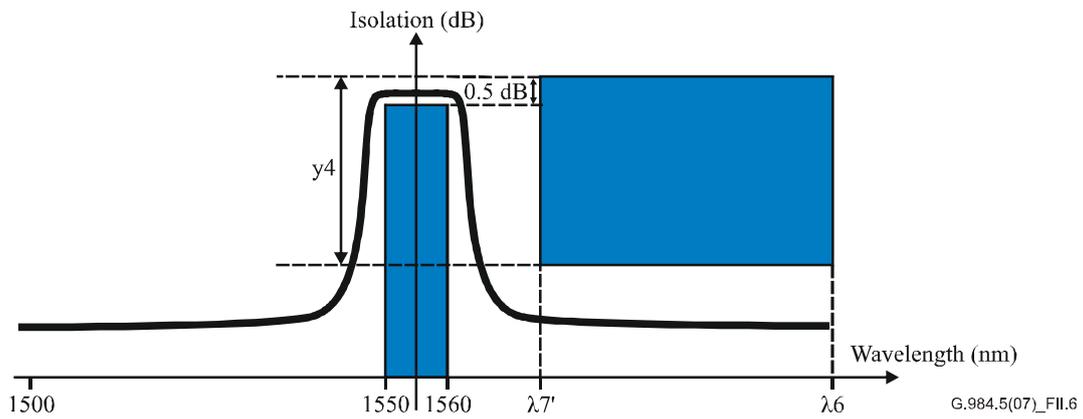


Figure II.6 – Example of discrete filter characteristics for video ONU

Table II.2 – Example of wavelength allocation (Case 2)

Items	Notation	Unit	Nominal value	Application examples
Enhancement band (option 3)				For video distribution service
Lower limit	–	nm	1550	
Upper limit	–	nm	1560	
Enhancement band (option 5)				For next generation access (NGA)
Lower limit	$\lambda 7'$	nm	For further study	
Upper limit	$\lambda 6$	nm	1580 to 1625	

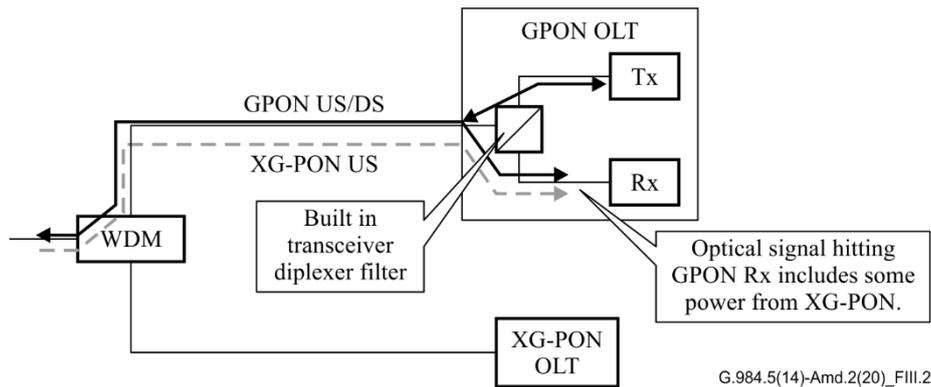
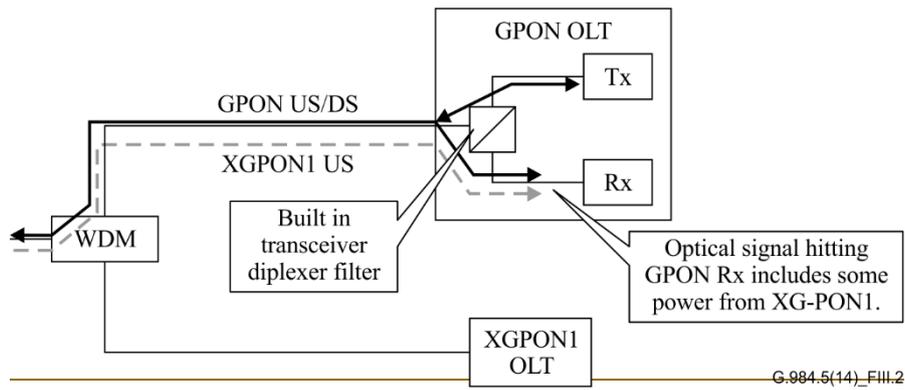


Figure III.2 – Isolation factors to consider at the OLT

To derive the required isolation, the allowed crosstalk ratio is to be calculated at the tolerable penalty in the particular deployment scenario being considered (this is a design choice for the implementer and is not specified by ITU-T Recommendations). The following equation, taken from [ITU-T G.Sup39], for inter-channel crosstalk power penalty may be used to derive the allowed crosstalk.

For a single interfering channel:

$$P_C = 10 \log_{10} \left(1 - 10^{\frac{C_C}{10}} \frac{r+1}{r-1} \right) \text{ dB} \quad (9-28\text{-III-1})$$

where r is the linear extinction ratio.

Using this formula, the chart shown in Figure III.3 can be plotted from which the allowed crosstalk for the system design penalty assumption can be extracted. This chart shows the calculation for GPON, XG-PON+ and NG-PON2 (both 2.5G and 10G US). The source of the difference between each system is the minimum extinction ratio specification in each case i.e., 10 dB, 8.2 dB and 6 dB for GPON, XG-PON+/NG-PON2(2.5G) and NG-PON2(10G) respectively.

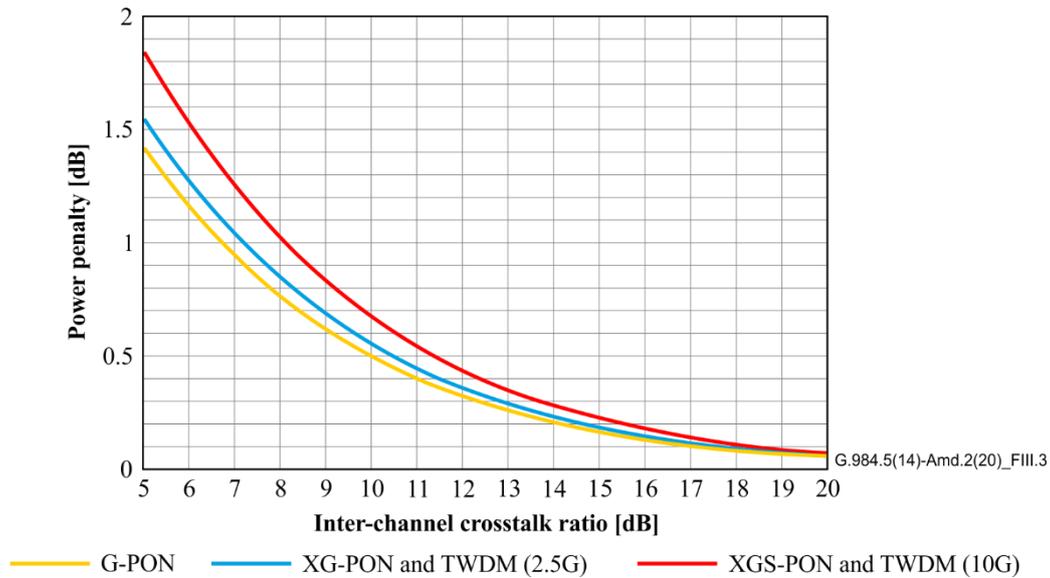


Figure III.3 – Power penalty as a function of inter-channel crosstalk ratio

The following formula may be derived for calculating the required isolation in terms of the allowed crosstalk, differential ODN loss, launch power difference between ONUs (GPON(min) – XG-PON(max)), diplexer (or other WDM to Rx path) isolation and bandwidth ratio. All parameters are in dB.

$$I_{WDM} = XT(dB) - \Delta P + \Delta ODN - I_{BiDi} - B_{comp} \quad \text{(III-2)}$$

I_{WDM} : Port isolation at the interferer wavelength for the WDM device enabling coexistence;

XT : Allowed inter-channel crosstalk power ratio in dB;

ΔP : ONU launch power ratio in dB between the target signal (minimum) and the interfering signal (maximum);

ΔODN : ODN loss difference in dB for the target signal (minimum) and the interfering signal (maximum);

I_{BiDi} : Isolation in the receive path (external to the WDM used for coexistence) at the interferer wavelength e.g., from the internal transceiver diplexer (BiDi);

B_{comp} : Relative bandwidth compensation factor to account for signal bandwidth difference between the target signal and the interfering signal as given by:

$$B_{comp}(dB) = 10 \log \left(\frac{R_{int}}{R_{target}} \right) \quad \text{(III-3)}$$

To illustrate the application of the formula, worked examples are given below:

Example 1

For a 0.5 dB penalty to GPON in a GPON and XG-PON coexistence scenario the permitted inter-channel crosstalk (XT) is approximately 10 dB (from Figure III.3).

For a B+/N1 class ODN, the power ONU launch difference (ΔP) is 0.5 dBm – 7 dBm = –6.5 dB.

The designed ODN loss differential (ΔODN) is 5 dB.

The post WDM isolation (I_{BiDi}) is assumed to be 2 dB.

The bit-rate compensation factor (B_{comp}) is $10 \log(2.5/1.25) = 3$ dB.

So, the required WDM isolation (I_{WDM}) at the GPON port for the XG-PON+ US wavelength is:

$$10 - (-6.5) + 5 - 2 - 3 = \underline{16.5 \text{ dB.}}$$

Example 2

For a 0.1 dB penalty to GPON in a GPON and XG-PON+ coexistence scenario, the permitted inter-channel crosstalk (XT) is approximately 17 dB (from Figure III.3).

For a B+/N1 class ODN The power ONU launch difference (ΔP) is $0.5 \text{ dBm} - 7 \text{ dBm} = -6.5 \text{ dB}$.

The designed ODN loss differential (ΔODN) is 10 dB.

The post WDM isolation (I_{BiDi}) is assumed to be 0 dB.

The bit-rate compensation factor (B_{comp}) is $10\log(2.5/1.25) = 3 \text{ dB}$.

So, the required WDM isolation (I_{WDM}) at the GPON port for the XG-PON+ US wavelength is:

$$17 - (-6.5) + 10 - 0 - 3 = \underline{30.5 \text{ dB.}}$$

To extend the above equation for the required WDM isolation to include multichannel systems (e.g., NG-PON2) acting as the interferer, the number of interfering channels (N) can be included as a parameter.


$$I_{WDM} = XT - \Delta P + \Delta ODN - I_{BiDi} - B_{comp} + 10\log(N) \quad \text{(III-4)}$$

The simple analysis above assumes there is one interfering system where all the interferers are at the same line rate and power. In the event that the three systems (e.g., GPON, XG-PON+ and NG-PON2) are to coexist, the analysis becomes more complex.


[b-ITU-T G-Suppl.39] addresses the multi-interferer case (eq. 9-30), but only for a high number of equal power interferers, hence the multi-interferer formula is clearly not applicable to the PON coexistence scenario, in which the number of interferers is limited and the power differences may be high.

As a first approximation, the single interferer formula is therefore used ([b-ITU-T G-Suppl.39], eq.9.28), assuming the interferers add in power (for multi-channel systems, like NG-PON2, each channel is considered as a separate interferer). Although this approach may require further validation, consideration can be taken of the fact that most practical scenarios result in a single dominant interferer, hence the approximation error should be limited. More rigorous approaches are left for further study.

With the above assumptions and referring to the CEx model (see Figure III.4) and definitions listed below, a simple mathematical derivation leads to the following formulas that can be used to calculate the required per port isolation and directivity figures, once a tolerated penalty value has been defined. The formulas have been derived assuming either an equal isolation/directivity of each port against each interferer or an equal crosstalk level from each interferer. Note that linear quantities are used in all formulas, unless otherwise stated.

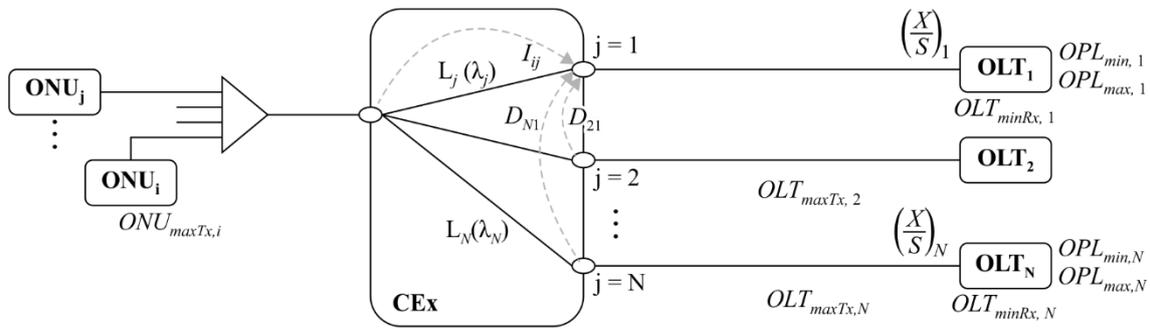

G.984.5(14)-Amd.2(20)_FIII.4

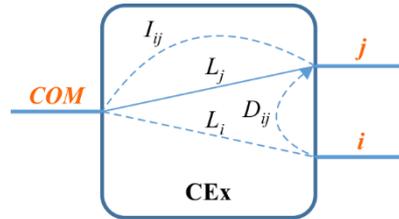

G.984.5(14)-Amd.1(18)_FIII.4

Figure III.4 – CEx model for isolation and directivity calculations

N : Number of coexisting systems;

j, i : CEx ports corresponding to victim signal j and interfering signal i ;

I_{ij} : Isolation (blocking band loss) of port j against band i (i.e., the loss encountered by interferer i when it traverses the CEx from common port to port j);

D_{ij} : Directivity of port i to port j (i.e., the loss encountered by interferer i when it traverses the CEx from port i to port j);

$L_{min/max,j}(\lambda_j)$: Maximum (and minimum) insertion (pass band) loss of (common port to) port j at the victim wavelength λ_j ;

$L_j(\lambda_j)$: Insertion (pass band) loss of (common port to) port j at the interferer wavelength λ_i ; (equivalent to the isolation I_{ij})

~~$I_{B,ij}$ = BiDi isolation to (interferer) band i of the transceiver connected to port j of the CEx;~~

ρ_i, ρ_j : Photodiode responsivities at the interferer and victim signal wavelengths respectively;

R_i, R_j : Bit rates of the interferer and victim signals respectively;

~~OPP_j = Optical path penalty affecting the victim signal;~~

~~$ONU_{minTX,j}$ = Minimum ONU transmitter power of victim signal;~~

$ONU_{maxTX,i}$: Maximum ONU transmitter power of interfering signal;

$OLT_{minRX,j}$: Sensitivity of victim signal OLT Rx at port j ;

$OLT_{maxTX,i}$: Maximum OLT transmitter power of interfering signal from port i ;

$OPL_{min,j}$: Minimum Optical Path Loss supported by the OPL class of the OLT transceiver at port j ;

$OPL_{max,j}$: Maximum Optical Path Loss supported by the OPL class of the OLT transceiver at port j ;

C_j : Crosstalk to (victim signal) port j ;

r_j : Extinction ratio of victim signal j ;

P_c : Tolerated crosstalk penalty on victim signal j .

Isolation formulas

For the condition of uniform isolation: $I_{ij} = I_j, \forall j \neq i$:

$$I_j = \frac{1}{C_j} \cdot \frac{1}{ONU_{\min Rx,j}} \cdot \frac{\max ODN \text{ loss}}{\min ODN \text{ loss}} \cdot OPP_j \cdot \sum_{i=1, (i \neq j)}^N ONU_{\max Tx,i} \cdot \frac{L_i}{I_{B,i,j}} \cdot \frac{\rho_i}{\rho_j} / \max \left[1, \frac{R_i}{R_j} \right]$$

or

$$I_j = \frac{1}{C_j} \cdot \frac{1}{OLT_{\min Rx,j}} \cdot \frac{1}{\min ODN \text{ loss}} \cdot \sum_{i=1, (i \neq j)}^N ONU_{\max Tx,i} \cdot \frac{L_i}{I_{B,i,j}} \cdot \frac{\rho_i}{\rho_j} / \max \left[1, \frac{R_i}{R_j} \right]$$

Uniform crosstalk: $C_{ij} = C_j, \forall j \neq i$:

$$I_{ij} = (N-1) \cdot \frac{1}{C_j} \cdot \frac{ONU_{\max Tx,i}}{ONU_{\min Rx,j}} \cdot \frac{\max ODN \text{ loss}}{\min ODN \text{ loss}} \cdot OPP_j \cdot \frac{L_i}{I_{B,i,j}} \cdot \frac{\rho_i}{\rho_j} / \max \left[1, \frac{R_i}{R_j} \right]$$

or

$$I_{ij} = (N-1) \cdot \frac{1}{C_j} \cdot \frac{ONU_{\max Tx,i}}{OLT_{\min Rx,j}} \cdot \frac{1}{\min ODN \text{ loss}} \cdot \frac{L_i}{I_{B,i,j}} \cdot \frac{\rho_i}{\rho_j} / \max \left[1, \frac{R_i}{R_j} \right]$$

(i) For OLT ports without wavelength blocking filters for which the tolerable crosstalk ratio (C_j) for a given power penalty must be calculated for the victim port:

$$I_{ij} = L_j(\lambda_i) = \frac{1}{OLT_{\min Rx,j} \cdot OPL_{\max,j}} \cdot \frac{\min \left[\left(\frac{OPL_{\max,j}}{L_{\max,j}(\lambda_j)} \right)_{j=1 \text{ to } N} \right]}{\max \left[\left(\frac{OPL_{\min,j}}{L_{\min,j}(\lambda_j)} \right)_{j=1 \text{ to } N} \right]} \cdot \frac{L_{\max,j}(\lambda_j)}{C_j} \cdot \sum_{i=1, (i \neq j)}^N \frac{ONU_{\max Tx,i}}{\max \left[1, \frac{R_i}{R_j} \right]} \cdot \frac{\rho_i}{\rho_j} \quad \text{(III-5)}$$

(ii) For OLT ports with wavelength blocking filters (see Appendix VI) for which the X/S tolerance of the victim port is known:

$$I_{ij} = L_j(\lambda_i) = \frac{1}{OLT_{\min Rx,j} \cdot OPL_{\max,j}} \cdot \frac{\min \left[\left(\frac{OPL_{\max,j}}{L_{\max,j}(\lambda_j)} \right)_{j=1 \text{ to } N} \right]}{\max \left[\left(\frac{OPL_{\min,j}}{L_{\min,j}(\lambda_j)} \right)_{j=1 \text{ to } N} \right]} \cdot \frac{L_{\max,j}(\lambda_j)}{\left(\frac{X}{S} \right)_j} \cdot \sum_{i=1, (i \neq j)}^N ONU_{\max Tx,i} \quad \text{(III-6)}$$

Directivity formulas

For the condition of uniform directivity: $D_{ij} = D_j, \forall j \neq i$

$$D_j = \frac{1}{C_j} \cdot \frac{1}{OLT_{\min Rx,j}} \cdot \sum_{i=1, (i \neq j)}^N \frac{OLT_{\max Tx,i}}{I_{B,i,j}} \cdot \frac{\rho_i}{\rho_j} / \max \left[1, \frac{R_i}{R_j} \right]$$

Uniform crosstalk: $C_{ij} = C_j, \forall j \neq i$

$$D_{ij} = (N-1) \cdot \frac{1}{C_j} \cdot \frac{1}{OLT_{\min Rx,j}} \cdot \frac{OLT_{\max Tx,i}}{I_{B,i,j}} \cdot \frac{\rho_i}{\rho_j} / \max \left[1, \frac{R_i}{R_j} \right]$$

(i) For OLT ports without wavelength blocking filters for which the tolerable crosstalk ratio (C_j) for a given power penalty must be calculated for the victim port:

$$D_{ij} = \frac{1}{OLT_{\min Rx,j} \cdot OPL_{\max,j}} \cdot \min \left[\left(\frac{OPL_{\max,j}}{L_{\max,j}(\lambda_j)} \right)_{j=1 \text{ to } N} \right] \cdot \frac{L_{\max,j}(\lambda_j)}{C_j} \cdot \sum_{i=1, (i \neq j)}^N \frac{OLT_{\max Tx,i}}{\max \left[1, \frac{R_i}{R_j} \right]} \cdot \frac{\rho_i}{\rho_j} \quad \text{(III-7)}$$

(ii) For OLT ports with wavelength blocking filters (see Appendix VI) for which the X/S tolerance of the victim port is known:

$$D_{ij} = \frac{1}{OLT_{minRx,j} \cdot OPL_{max,j}} \cdot \min \left[\left(\frac{OPL_{max,j}}{L_{max,j}(\lambda_j)} \right)_{j=1 \text{ to } N} \right] \cdot \frac{L_{max,j}(\lambda_j)}{\left(\frac{X}{S} \right)_j} \cdot \sum_{i=1, (i \neq j)}^N OLT_{maxTx,i} \quad \text{(III-8)}$$

The tolerated crosstalk C_j in the above formulas can be calculated by inverting the single interferer formula ([b-ITU-T G.Sup39], eq.9.28): and with an additional change of the sign ($-P_c$):


$$C_j = \frac{r_j - 1}{r_j + 1} \left(1 - 10^{\frac{-P_c}{10}} \right) \quad \text{(III-109)}$$

where r_j is the extinction ratio of the victim signal and P_c is the tolerated crosstalk penalty expressed in decibels. Note that penalty caused by eye opening reduction is already included in the isolation and directivity formulas through the OPP or receiver sensitivity terms, hence the effective value of r defined by [b-ITU-T G-Suppl.39], eq. 9.29 must not be used here.

To illustrate the application of the above isolation and directivity equations, worked examples are given below:

Example 1

For a penalty $P_c = 0.1$ dB in a B+ GPON and N1 XGS-PON coexistence scenario, the maximum inter-channel crosstalk (C_j) is -17.3 dB for GPON.

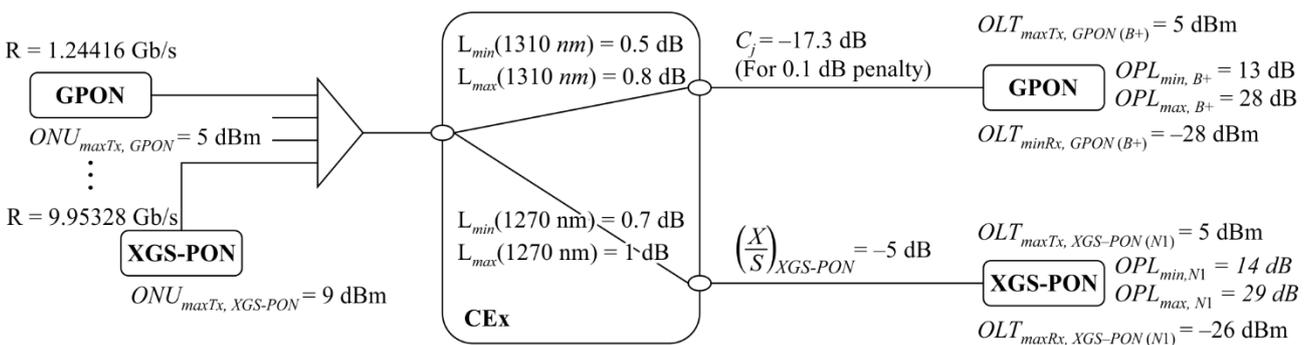

G.984.5(14)-Amd.2(20)_FIII.5

Figure III.5 – 2-port CEx worked example

The relevant parameters for this example scenario are shown in Table III.1. It is assumed that the responsivity of the victim Rx is the same at both the victim and interferer wavelengths as both are in the O-band.

Table III.1 – 2-port CEx worked example parameters

<u>Parameter</u>	<u>Value</u>	<u>Unit</u>	<u>Comment</u>
<u>Bit rate of Victim</u>	<u>1.24416</u>	<u>Gb/s</u>	<u>GPON US line-rate [Note 1]</u>
<u>Bit rate of Interferer</u>	<u>9.95328</u>	<u>Gb/s</u>	<u>XGS-PON US line-rate [Note 2]</u>
<u>Victim OLT Rx sens</u>	<u>-28.0</u>	<u>dBm</u>	<u>min for B+ GPON OLT [Note 1]</u>
<u>Max OPL of Victim OLT port</u>	<u>28.0</u>	<u>dB</u>	<u>max ODN loss of B+ OPL class [Note 1]</u>
<u>Max OPL of Interferer OLT port</u>	<u>29.0</u>	<u>dB</u>	<u>max ODN loss of N1 OPL class [Note 2]</u>
<u>Min OPL of Victim OLT port</u>	<u>13.0</u>	<u>dB</u>	<u>min ODN loss of B+ OPL class [Note 1]</u>
<u>Min OPL of Interferer OLT port</u>	<u>14.0</u>	<u>dB</u>	<u>min ODN loss of N1 OPL class [Note 2]</u>
<u>Min Loss of Victim OLT port</u>	<u>0.5</u>	<u>dB</u>	<u>GPON port of CEx [Note 3]</u>
<u>Min Loss of Interferer OLT port</u>	<u>0.7</u>	<u>dB</u>	<u>XGS-PON port of CEx [Note 3]</u>
<u>Max Loss of Victim OLT port</u>	<u>0.8</u>	<u>dB</u>	<u>GPON port of CEx [Note 3]</u>
<u>Max Loss of Interferer OLT port</u>	<u>1.0</u>	<u>dB</u>	<u>XGS-PON port of CEx [Note 3]</u>
<u>Max allowed X/S of the victim OLT port</u>	<u>-17.3</u>	<u>dB</u>	<u>As calculated as no X/S defined for GPON OLT [Note 4]</u>
<u>Launch power max interfering ONU</u>	<u>9.0</u>	<u>dBm</u>	<u>Max for XGS-PON ONU [Note 2]</u>
<u>NOTE 1 – See [ITU-T G.984.2]</u>			
<u>NOTE 2 – See [ITU-T G.9807.1]</u>			
<u>NOTE 3 – Estimated values for the purpose of this worked example</u>			
<u>NOTE 4 – See equation 9.28 of [ITU-T G.Sup39]</u>			

The equation for isolation can be expressed in dB for a 2 port CEx as follows:

$$\begin{aligned}
 I_{21}(dB) = & -OLT_{minRx,1}(dBm) - OPL_{max,1}(dB) \\
 & + \min \left[(OPL_{max,j}(dB) - L_{max,j}(\lambda_j)dB)_{j=1 \text{ to } 2} \right] \\
 & - \max \left[(OPL_{min,j}(dB) - L_{min,j}(\lambda_j)dB)_{j=1 \text{ to } 2} \right] + L_{max,1}(\lambda_1) dB - C_1(dB) \\
 & + ONU_{maxTx,2}(dBm) - \max \left[1, \frac{R_2}{R_1} \right] (dB) + 10 \log \left(\frac{\rho_2}{\rho_1} \right)
 \end{aligned}$$

For GPON as the victim at port 1,

$$\begin{aligned}
 I_{21}(dB) = & -(-28dBm) - 28dB + \min[(28dB - 0.8dB), (29dB - 1dB)] \\
 & - \max[(13dB - 0.5dB), (14dB - 0.7dB)] + 0.8dB - (-17.3dB) + 9dBm \\
 & - \max \left[0, 10 \log \left(\frac{9.95328}{1.24416} \right) \right] (dB) + 0dB
 \end{aligned}$$

$$I_{21}(dB) = 28dBm - 28dB + 27.2dB - 13.3dB + 0.8dB + 17.3dB + 9dBm - 9dB = \mathbf{32dB}$$

For the XGS-PON port of the CEx, in the case that a blocking filter has been implemented with (X/S)=-5dB, the required isolation in dB is given as follows:

$$\begin{aligned}
 I_{21}(dB) = & -OLT_{minRx,1}(dBm) - OPL_{max,1}(dB) \\
 & + \min \left[(OPL_{max,j}(dB) - L_{max,j}(\lambda_j)dB)_{j=1 \text{ to } 2} \right] \\
 & - \max \left[(OPL_{min,j}(dB) - L_{min,j}(\lambda_j)dB)_{j=1 \text{ to } 2} \right] + L_{max,1}(\lambda_1) dB - \left(\frac{X}{S} \right)_1 (dB) \\
 & + ONU_{maxTx,2}(dBm)
 \end{aligned}$$

$$\begin{aligned}
 I_{21}(dB) = & -(-26dBm) - 29dB + \min[(29dB - 1dB), (28dB - 0.8dB)] \\
 & - \max[(14dB - 0.7dB), (13dB - 0.5dB)] + 1dB - (-5dB) + 5dBm
 \end{aligned}$$

$$I_{21}(dB) = 26dBm - 29dB + 27.2dB - 13.3dB + 1dB + 5dB + 5dBm = \mathbf{21.9dB}$$

In the case of directivity, the dB form of the equation is given as follows for this 2-port CEx example:

$$D_{21}(dB) = -OLT_{minRx,1}(dB) - OPL_{max,1}(dB) + \min \left[(OPL_{max,j}(dB) - L_{max,j}(\lambda_j)dB)_{j=1 \text{ to } 2} \right] \\ + L_{max,1}(\lambda_1) dB - C_1(dB) + OLT_{maxTx,2}(dBm) - \max \left[0, 10 \log \left(\frac{R_2}{R_1} \right) \right] \\ + 10 \log \left(\frac{\rho_2}{\rho_1} \right)$$

The interference to the GPON signal comes from the N1 OPL class XGS-PON OLT Tx at +5dBm (max).

$$D_{21}(dB) = -(-28dBm) - 28dB + \min[(28dB - 0.8dB), (29dB - 1dB)] + 0.8 dB \\ - (-17.3dB) + 5dBm - \max \left[0, 10 \log \left(\frac{9.95328}{1.24416} \right) \right] (dB) + 0dB$$

$$D_{21}(dB) = 28dBm - 28dB + 27.2dB + 0.8 dB + 17.3dB + 5dBm - 9dB + 0dB = \mathbf{41.3dB}$$

In this scenario the GPON upstream victim signal is in the 1300nm spectral region and the interferer is at 1577 nm and, for such a wide wavelength separation, it is likely that the responsivity of the victim receiver will be different at these wavelengths. If the receiver module responsivity difference is purely due to the absorption coefficient in the photodiode (i.e., not due to other wavelength dependent losses in between the S/R reference point and the detector), then one might expect about 10% higher responsivity at the longer wavelength for InGaAs based detectors. This would result in about 0.5 dB additional directivity requirement. However, the exact responsivity difference must be determined by application.

For XGS-PON, in the case that a blocking filter has been implemented with (X/S)=-5dB, the required directivity in dB is given as follows:

$$D_{21}(dB) = -OLT_{minRx,1}(dBm) - OPL_{max,1}(dB) \\ + \min \left[(OPL_{max,j}(dB) - L_{max,j}(\lambda_j)dB)_{j=1 \text{ to } 2} \right] + L_{max,1}(\lambda_1) dB - \left(\frac{X}{S} \right)_1 (dB) \\ + OLT_{maxTx,2}(dBm)$$

$$D_{21}(dB) = -(-26dBm) - 29dB + \min[(29dB - 1dB), (28dB - 0.8dB)] + 1dB - (-5dB) \\ + 5dBm$$

$$D_{21}(dB) = 26dBm - 29dB + 27.2dB + 1dB + 5dB + 5dBm = \mathbf{35.2dB}$$

Appendix IV

Multi-PON module with integrated WDM

(This appendix does not form an integral part of this Recommendation.)

When a PON system is migrated from a legacy PON to a next generation PON (NG PON), coexistence and smooth migration are important requirements. External WDM1, WDM1r, CEx and CEMx devices discussed in Appendix I provide a good way to support coexistence and smooth migration. However, these external WDM approaches introduce extra insertion loss in the ODN. For example, loss without connectors for G-PON bands is less than 0.8 dB in Table I.2 and Table I.3 of Appendix I, applied and counted in the ODN design. This is a challenge in ODN cases with tight optical margin. Furthermore, it is advantageous for some operators to have an upgrade approach that replaces existing line cards in the OLT chassis with new line cards in order to upgrade to multiple PON technologies integrated into the line card. The new line card can simplify the upgrade engineering and reduce the probability of manual operational error during migration.

To meet the engineering and operation requirements mentioned above, an OLT line card with an integrated WDM function is introduced. This card is called an OLT multi-PON module (MPM).

An architectural reference diagram using the OLT MPM is shown in Figure IV.1.

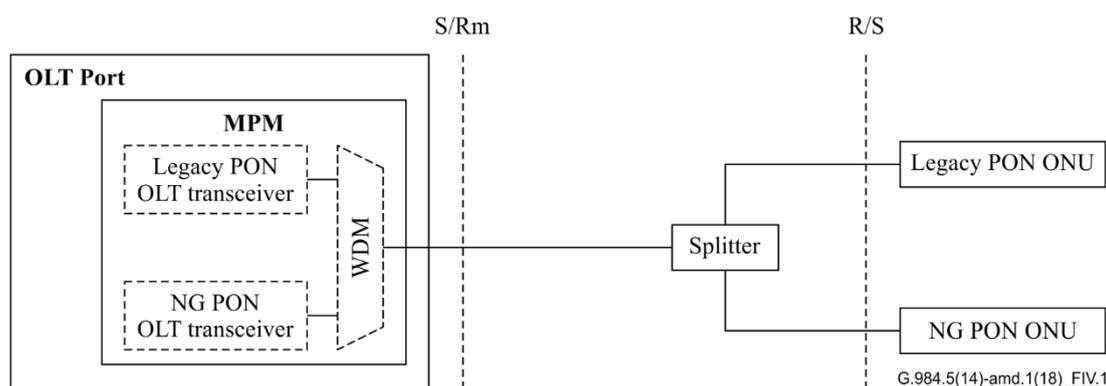


Figure IV.1 – Example of an architectural reference diagram employing OLT MPM

The PMD requirements for the optical interface between OLT MPM and ODN should be chosen accordingly for NG PON and legacy PON supported in the OLT MPM. The OPL class of NG PON should not be less than the OPL class of legacy PON as both PON systems share the same ODN ensuring the legacy PON system has sufficient optical budget over the legacy ODN network. Furthermore, the next generation PON system has sufficient link budget to work over the legacy ODN.

NOTE – The optical levels present at the interface point S/Rm may be different from standards based S/R levels depending on the PON family presented to the interface. New CE or CEM types may be required when a PON with MPM migrates to future PON systems. The CE or CEM would consist of one port to the MPM and another port to the future PON.

An example reference diagram for the OLT MPM function is shown in Figure IV.2.

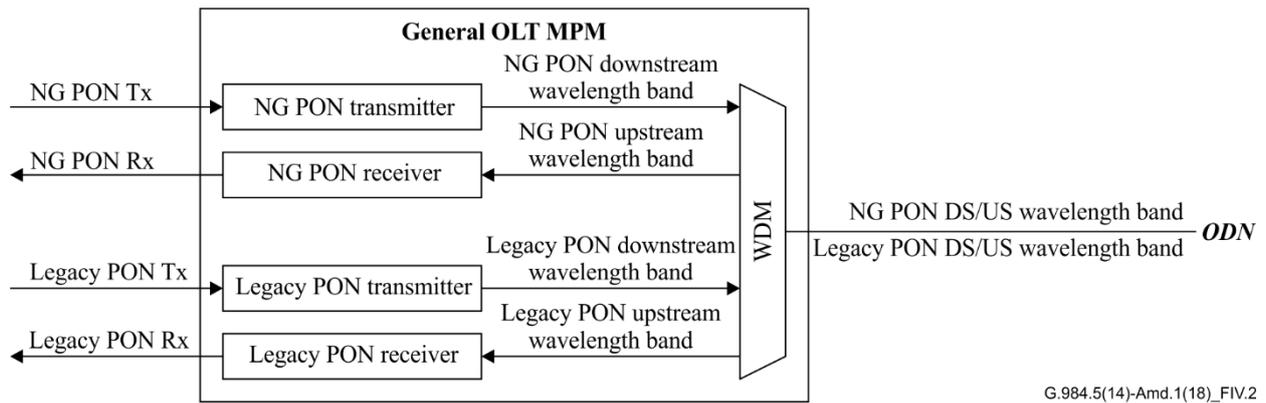


Figure IV.2 – Example reference diagram for OLT MPM with integrated WDM

In Figure IV.2, a WDM is used to accommodate two pairs of wavelength bands, for legacy PON and NG PON respectively.

When upgrading using an OLT MPM, no external coexistence element is necessary at the OLT side, since its function has been integrated inside the OLT optical module for each PON port. Hence no extra space or associated engineering operation are required to achieve coexistence.

To accompany the OLT MPM with an integrated WDM in an upgrade scenario, a TC chipset supporting both legacy PON and NG PON may be required in the OLT configuration, including specific MSA with dual interfaces to legacy PON and NG PON.

An example reference diagram of GPON/XG-PON OLT MPM with integrated WDM is shown in Figure IV.3.


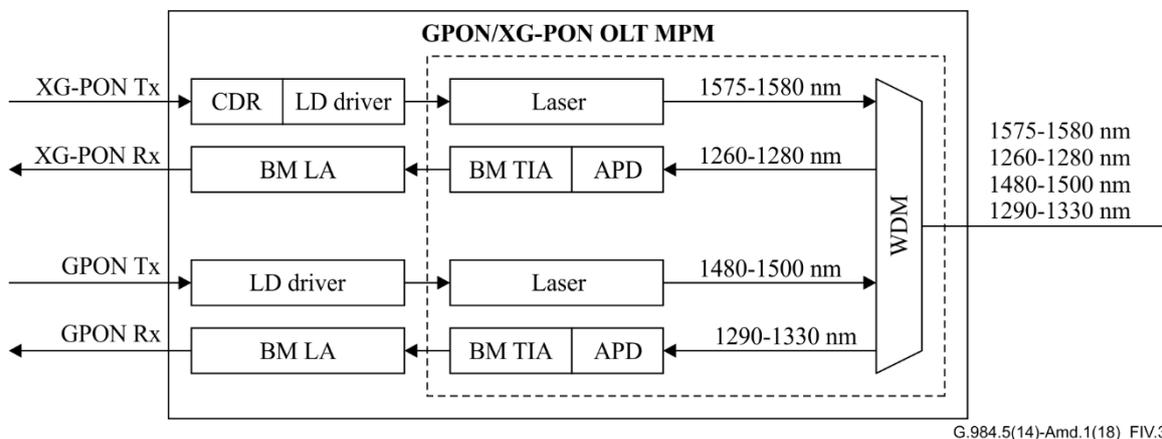


Figure IV.3 – Reference diagram of GPON/XG-PON OLT MPM with integrated WDM

By employing GPON/XG-PON OLT MPM in the migration scenario, GPON ONUs and XG-PON ONUs coexist in the same ODN and simultaneously operate with a common OLT in the corresponding standards-based wavelength bands. The narrow option can be supported as well as the reduced wavelength options of GPON shown in Figure IV.3.

An example reference diagram of GPON/XG-PON OLT MPM with dual-rate receiver and triplexer optical sub-assembly (OSA) is shown in Figure IV.4. The triplexer OSA is used to simplify the components assembly to make it easier and more compact. One GPON transmitter, one XG-PON transmitter and one GPON/XG-PON dual rate receiver are connected to the WDM (GPON and XG-PON share one receiver).

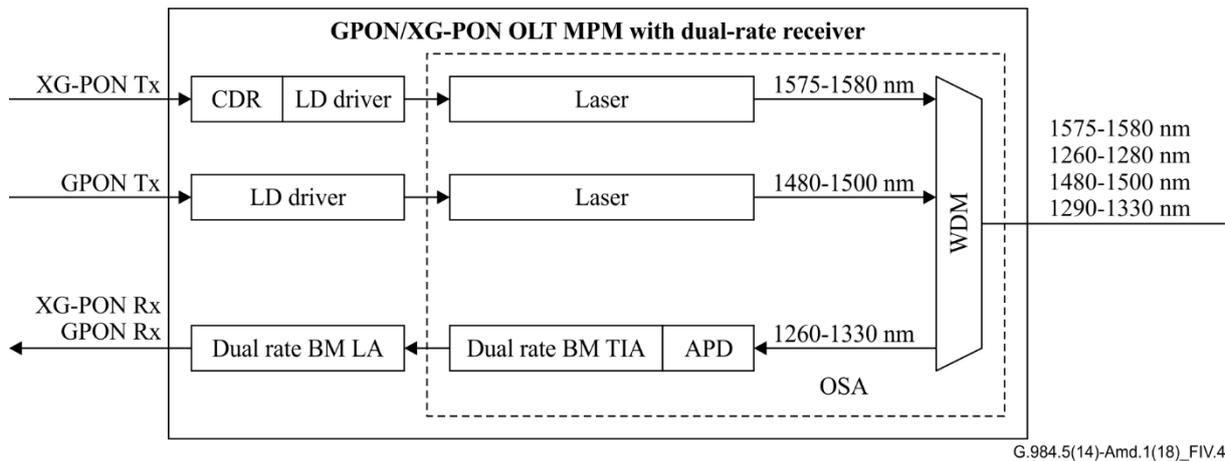


G.984.5(14)-Amd.1(18)_FIV.4

Figure IV.4 – Reference diagram of GPON/XG-PON OLT MPM with dual-rate receiver and WDM

The PMD requirements for the ODN optical interface should ensure that the legacy GPON and XG-PON ONUs can work on the legacy ODN.

An example reference diagram of GPON/XG-PON/XGS-PON OLT MPM with WDM is shown in Figure IV.5. The WDM is used to support all three types of ONU on the same ODN. The GPON transmitter and receiver, XGS-PON transmitter and dual rate receiver (also supporting XG-PON ONUs) are connected to the internal WDM.

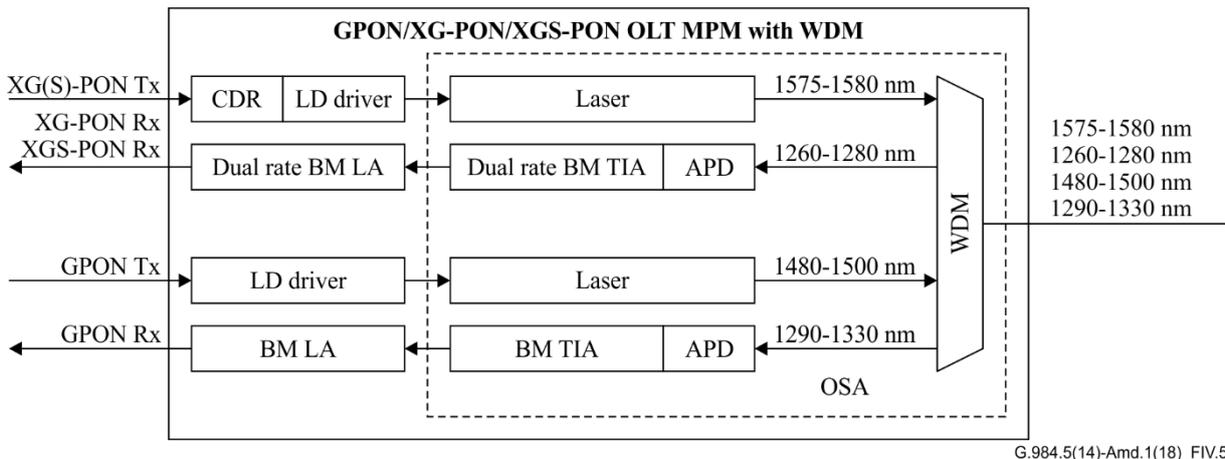


G.984.5(14)-Amd.1(18)_FIV.5

Figure IV.5 – Reference diagram of GPON/XG-PON/XGS-PON OLT MPM with WDM

The PMD requirements for optical interface should ensure that the legacy GPON, XG-PON and XGS-PON ONUs can work on the legacy ODN. If the support of XG-PON ONUs is not required on the ODN, then the dual rate receiver can be simplified to a single rate XGS-PON receiver.

An example reference diagram of GPON/XG-PON/XGS-PON OLT MPM with triple-rate receiver is shown in Figure IV.6. The OSA is used to make the components assembly easier and more compact. One GPON transmitter, one XG-PON/XGS-PON transmitter, and one GPON/XG-PON/XGS-PON triple rate receiver are connected to the WDM inside the OSA (GPON/XG-PON/XGS-PON share one receiver).

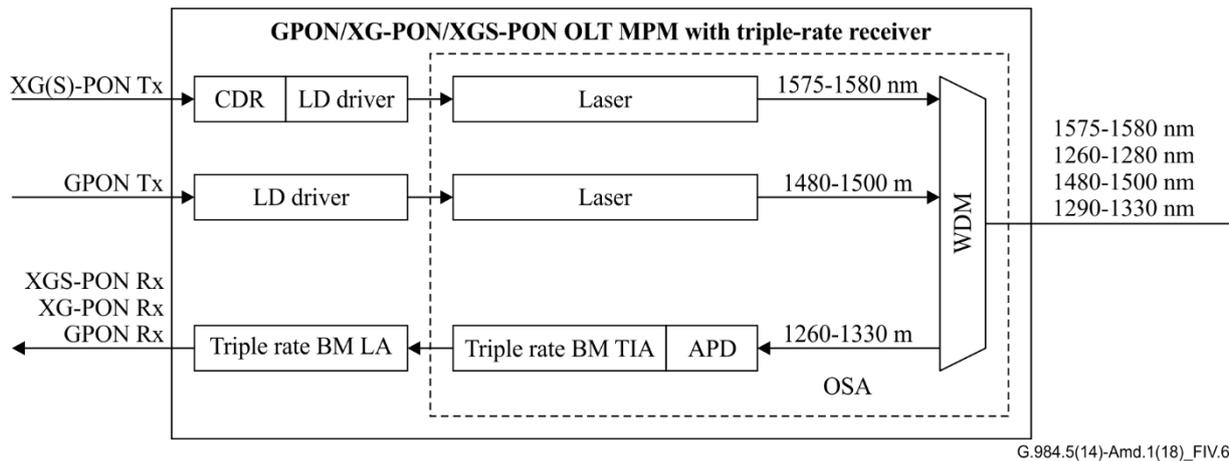

G.984.5(14)-Amd.1(18)_FIV.6

Figure IV.6 – Reference diagram of GPON/XG-PON/XGS-PON OLT MPM with triple-rate receiver

The PMD requirements for ODN optical interface should ensure that the legacy GPON, XG-PON and XGS-PON ONUs can work on the legacy ODN. If the XG-PON ONUs are not required, then the triple rate receiver can be simplified to a dual-rate GPON/XGS-PON receiver.

The advantages of a single Rx MPM configuration is a reduction in the number of components. It reduces the filtering losses and so enables higher OPL classes with lower power consumption. Moreover, there is no interoperability issue in using such modules and the key goal of co-existence (i.e., simultaneous operation of GPON and XG-PON in the same ODN) is still guaranteed. Other benefits of co-existence, such as more aggregate upstream bandwidth, are dependent on the use case of each operator. There is no change to the BWmap structure, but it does require co-ordination between the GPON DBA and the XG(S)-PON DBA engines to construct each respective BWmap.

Table IV.1 – Classes for optical path loss GPON & XG(S)-PON MPM between S/Rm and R/S

OPL class	B+	C+	<u>D</u>
Minimum loss	13 dB	17dB	<u>20 dB</u>
Maximum loss	28 dB	32dB	<u>35 dB</u>

NOTE – Optical path loss classes B+, C+ and D are generally applicable for GPON and XG(S)-PON MPM from the S/Rm point, including both single and dual receiver's configuration. [\[LL-11\]](#)

Classes for optical path loss GPON and XG(S)-PON MPM are shown in Table IV.1. Key optical power parameters at the S/Rm reference point are given in Table IV.2, while all other PMD parameters are same with corresponding values defined in [ITU-T G.984.2], [ITU-T G.987.2] and [ITU-T G.9807.1] respectively.

Table IV.2 – Key optical power parameters at the S/Rm reference point

Source	Item	Unit	Value		
	ODN class	dBm	B+	C+	<u>D</u>
GPON 2.488 Gbit/s downstream, 1.244 Gbit/s upstream (Note 1)	Mean launched power MIN	dBm	+1.5	+3	<u>+6</u>
	Mean launched power MAX	dBm	+5	+7	<u>+10</u>
	Minimum sensitivity	dBm	-28 (BER@ 1E-10)	-32 (BER@ 1E-4)	<u>-35</u> <u>(BER@ 1E-4)</u>
	Minimum overload	dBm	-8	-12	<u>-15</u>
XG-PON 9.95328 Gbit/s downstream, 2.48832 Gbit/s upstream (Note 2)	Mean launched power MIN	dBm	+1	+5	<u>+8</u>
	Mean launched power MAX	dBm	+5	+9	<u>+12</u>
	Minimum sensitivity@ 1E-4	dBm	-26.5	-30.5	<u>-33.5</u>
	Minimum overload	dBm	-6	-10	<u>-13</u>
XGS-PON 9.95328 Gbit/s downstream, 9.95328 Gbit/s upstream (Note 3)	Mean launched power MIN	dBm	+1	+5	<u>+8</u>
	Mean launched power MAX	dBm	+4	+8	<u>+11</u>
	Minimum sensitivity@ 1E-3	dBm	-25	-29	<u>-32</u>
	Minimum overload	dBm	-4	-8	<u>-11</u>
<p>NOTE 1 – The parameters for GPON are same with class B+, C+ <u>and D</u> in [ITU-T G.984.2 Amd.1] <u>and [ITU-T G.984.2 Amd.2], respectively.</u></p> <p>NOTE 2 – <u>Parameters For classes B+ and C+, parameters</u> for XG-PON are relaxed by 1dB compared with corresponding values defined in [ITU-T G.987.2].</p> <p>NOTE 3 – <u>Parameters For classes B+ and C+, parameters</u> for XGS-PON are relaxed by 1dB compared with corresponding values defined in [ITU-T G.9807.1].</p>					

Appendix V

Wavelength coexistence using M:N splitter

(This appendix does not form an integral part of this Recommendation.)

This appendix provides an alternative approach to wavelength coexistence to that provided by traditional WDM schemes as captured in Appendix I, and the multi-PON module (MPM) approach captured in Appendix IV. The term WDM will be used elsewhere in this appendix to reference the range of the external solutions (WDM1, WDM1r, CE and CEM).

This Recommendation contains two optical access network architecture reference diagrams, Figure 2 and Figure 3. Figure 2 provides the traditional scheme of combining WDM technologies, typically via external devices. Figure 3 provides for combining wavelengths using power splitters with the assumption that the needed wavelength isolation between wavelength bands is provided by wavelength blocking filters in the equipment. This appendix addresses a variant of this latter approach.

Different operators deploy PON using different schemes for the outside plant, some deploy a single splitter scheme and some deploy using cascaded splitter (2 or more splitters in tandem) schemes. Figure V.1 shows a possible architecture for this latter case. The first splitter could be used as an integral part of a wavelength combining architecture. Employing a M:N splitter (for instance 2:n) as the first splitter (often located in the central office), provides that the first PON (OLT) system can be connected to input port A, and the second PON system connected to input port B.

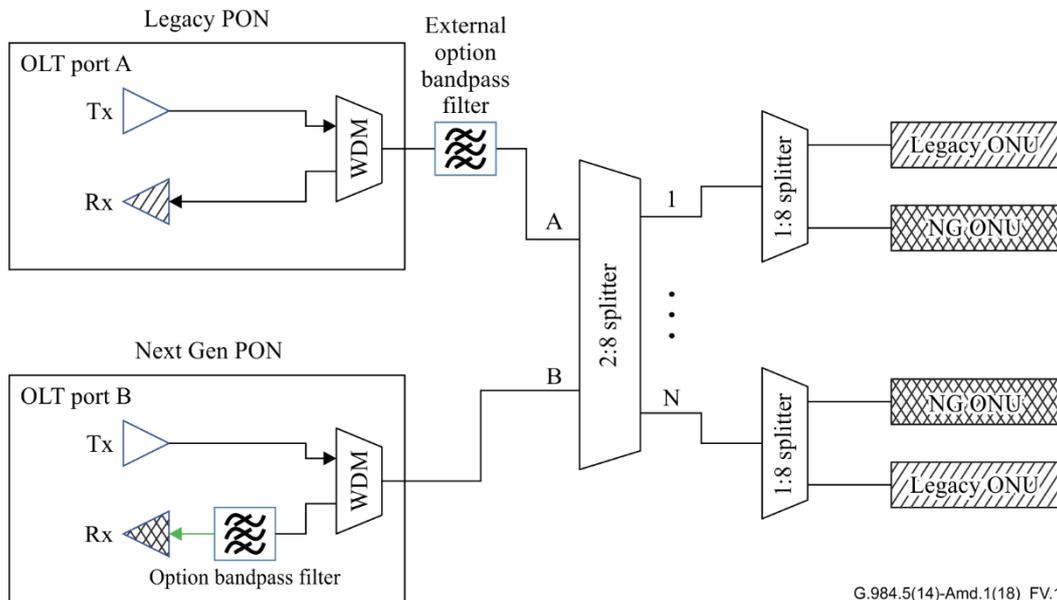


Figure V.1 – Example of architecture reference diagram employing 2:n splitter

In order for the splitter approach to work, the terminating (receiving) ports must have appropriate band to band filtering, providing sufficient isolation to the interfering wavelength bands. While nowadays a number of OLT's have wavelength blocking filters in their receivers, this may not be the case for older implementations. In that case, external wavelength blocking mechanisms would have to be considered, such as pluggable SC type WBF adapters. In this example, it is noted that as long as the OLT receiver has sufficient isolation to the interfering bands of interest, the M:N splitter scheme could even support three (3) PON coexistence by substituting the 2:n splitter with a 3:n splitter.

The M:N splitter has some of the same advantages, in that the existing fibre connections to/from the OLT equipment remain the same; however, the M:N approach require the addition of a second fibre from the new PON OLT equipment/port to the splitter's second input port. The extra loss for the addition of the second input port of the power splitter is minimal in most devices, typically less than 0.5 dB, resulting in a lower insertion loss solution to the traditional WDM approach.

Appendix VI

Filter considerations for XG(S)-PON OLT and HSP OLT

(This appendix does not form an integral part of this Recommendation.)

The minimum optical sensitivity requirements of a XG(S)-PON OLT or HSP OLT must be met in the presence of the interference signals caused by coexisting PON system and/or video signals. To minimize the effect of interference signals, XG(S)-PON OLT or HSP OLT need to isolate interference signals using an appropriate WBF and WDM filter. Figure VI.1 shows the optical reference diagram for XG(S)-PON and HSP.

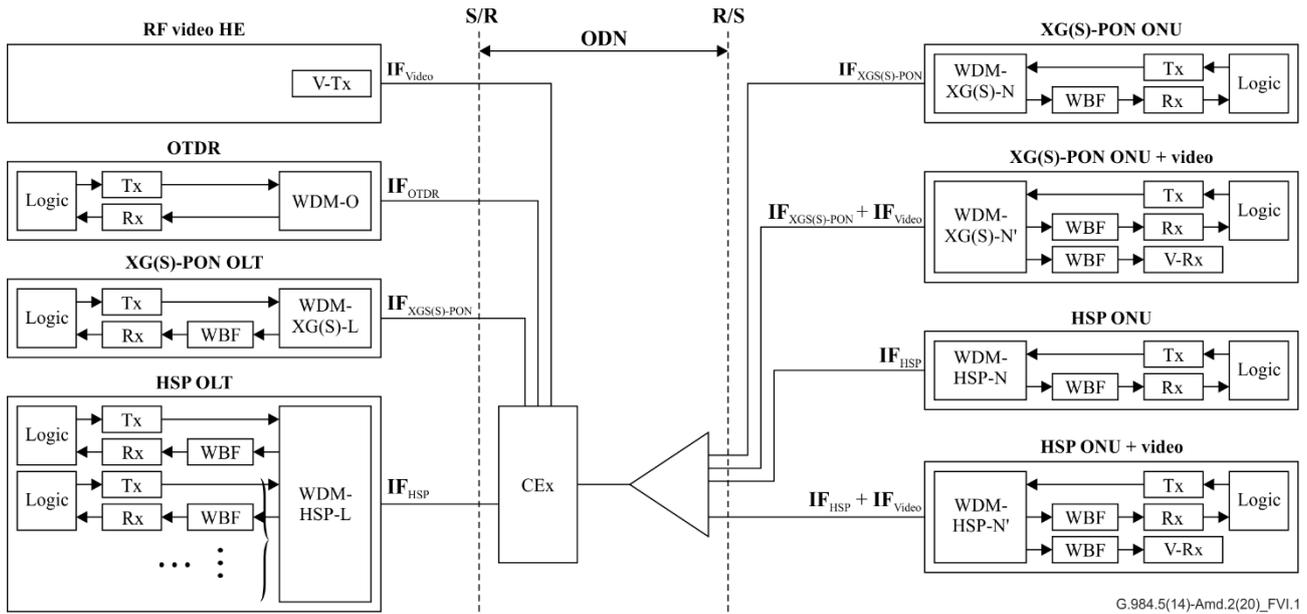


Figure VI.1 – Optical reference diagram for XG(S)-PON and HSP

The following abbreviations are used in Figure VI.1:

<u>CEx</u>	<u>Coexistence element, be used to combine/isolate the wavelengths of XG(S)-PON and HSP signals and which occasionally combines the video signals and/or OTDR signals</u>
<u>Rx</u>	<u>Optical receiver</u>
<u>Tx</u>	<u>Optical transmitter</u>
<u>V-Rx</u>	<u>Video receiver</u>
<u>V-Tx</u>	<u>Video transmitter</u>
<u>WBF</u>	<u>Wavelength blocking filter for blocking interference signals to Rx</u>
<u>WBF-V</u>	<u>Wavelength blocking filter for blocking interference signals to V-Rx</u>
<u>WDM-XG(S)-L</u>	<u>WDM filter in XG(S)-PON OLT to combine/isolate the wavelengths of XG(S)-PON upstream and downstream</u>
<u>WDM-XG(S)-N</u>	<u>WDM filter in XG(S)-PON ONU to combine/isolate the wavelengths of XG(S)-PON upstream and downstream</u>
<u>WDM-XG(S)-N'</u>	<u>WDM filter in XG(S)-PON ONU to combine/isolate the wavelengths of XG(S)-PON upstream and downstream and isolate the video signal(s)</u>

<u>WDM-HSP-L</u>	<u>WDM filter in HSP OLT to combine/isolate the wavelengths of HSP upstream and downstream</u>
<u>WDM-HSP-N</u>	<u>WDM filter in HSP ONU to combine/isolate the wavelengths of HSP upstream and downstream</u>
<u>WDM-HSP-N'</u>	<u>WDM filter in HSP ONU to combine/isolate the wavelengths of HSP upstream and downstream and isolate the video signal(s)</u>
<u>WDM-HSP-O</u>	<u>WDM filter in HSP OLT to combine/isolate the wavelengths of HSP upstream and downstream.</u>

Bibliography

- [b-ITU-T G-Suppl.39] Recommendation ITU-T G-Suppl.39 (2016), *Optical system design and engineering considerations*.

SERIES OF ITU-T RECOMMENDATIONS

Series A	Organization of the work of ITU-T
Series D	Tariff and accounting principles and international telecommunication/ICT economic and policy issues
Series E	Overall network operation, telephone service, service operation and human factors
Series F	Non-telephone telecommunication services
Series G	Transmission systems and media, digital systems and networks
Series H	Audiovisual and multimedia systems
Series I	Integrated services digital network
Series J	Cable networks and transmission of television, sound programme and other multimedia signals
Series K	Protection against interference
Series L	Environment and ICTs, climate change, e-waste, energy efficiency; construction, installation and protection of cables and other elements of outside plant
Series M	Telecommunication management, including TMN and network maintenance
Series N	Maintenance: international sound programme and television transmission circuits
Series O	Specifications of measuring equipment
Series P	Telephone transmission quality, telephone installations, local line networks
Series Q	Switching and signalling, and associated measurements and tests
Series R	Telegraph transmission
Series S	Telegraph services terminal equipment
Series T	Terminals for telematic services
Series U	Telegraph switching
Series V	Data communication over the telephone network
Series X	Data networks, open system communications and security
Series Y	Global information infrastructure, Internet protocol aspects, next-generation networks, Internet of Things and smart cities
Series Z	Languages and general software aspects for telecommunication systems