



INTERNATIONAL TELECOMMUNICATION UNION

ITU-T

TELECOMMUNICATION
STANDARDIZATION SECTOR
OF ITU

Q.781

(04/2002)

SERIES Q: SWITCHING AND SIGNALLING

Specifications of Signalling System No. 7 – Test
specification

MTP level 2 test specification

ITU-T Recommendation Q.781

ITU-T Q-SERIES RECOMMENDATIONS
SWITCHING AND SIGNALLING

SIGNALLING IN THE INTERNATIONAL MANUAL SERVICE	Q.1–Q.3
INTERNATIONAL AUTOMATIC AND SEMI-AUTOMATIC WORKING	Q.4–Q.59
FUNCTIONS AND INFORMATION FLOWS FOR SERVICES IN THE ISDN	Q.60–Q.99
CLAUSES APPLICABLE TO ITU-T STANDARD SYSTEMS	Q.100–Q.119
SPECIFICATIONS OF SIGNALLING SYSTEM No. 4	Q.120–Q.139
SPECIFICATIONS OF SIGNALLING SYSTEM No. 5	Q.140–Q.199
SPECIFICATIONS OF SIGNALLING SYSTEM No. 6	Q.250–Q.309
SPECIFICATIONS OF SIGNALLING SYSTEM R1	Q.310–Q.399
SPECIFICATIONS OF SIGNALLING SYSTEM R2	Q.400–Q.499
DIGITAL EXCHANGES	Q.500–Q.599
INTERWORKING OF SIGNALLING SYSTEMS	Q.600–Q.699
SPECIFICATIONS OF SIGNALLING SYSTEM No. 7	Q.700–Q.799
General	Q.700
Message transfer part (MTP)	Q.701–Q.709
Signalling connection control part (SCCP)	Q.711–Q.719
Telephone user part (TUP)	Q.720–Q.729
ISDN supplementary services	Q.730–Q.739
Data user part	Q.740–Q.749
Signalling System No. 7 management	Q.750–Q.759
ISDN user part	Q.760–Q.769
Transaction capabilities application part	Q.770–Q.779
Test specification	Q.780–Q.799
Q3 INTERFACE	Q.800–Q.849
DIGITAL SUBSCRIBER SIGNALLING SYSTEM No. 1	Q.850–Q.999
PUBLIC LAND MOBILE NETWORK	Q.1000–Q.1099
INTERWORKING WITH SATELLITE MOBILE SYSTEMS	Q.1100–Q.1199
INTELLIGENT NETWORK	Q.1200–Q.1699
SIGNALLING REQUIREMENTS AND PROTOCOLS FOR IMT-2000	Q.1700–Q.1799
SPECIFICATIONS OF SIGNALLING RELATED TO BEARER INDEPENDENT CALL CONTROL (BICC)	Q.1900–Q.1999
BROADBAND ISDN	Q.2000–Q.2999

For further details, please refer to the list of ITU-T Recommendations.

ITU-T Recommendation Q.781

MTP level 2 test specification

Summary

This Recommendation contains a set of detailed tests of Signalling System No. 7 MTP level 2 protocol. These tests intend to validate the protocol specified in ITU-T Rec. Q.703.

This Recommendation conforms to ITU-T Rec. Q.780 which describes the basic rules of the Test Specification. In addition, the conditions which are specific to level 2 tests are described.

Source

ITU-T Recommendation Q.781 was prepared by ITU-T Study Group 11 (2001-2004) and approved under the WTSA Resolution 1 procedure on 13 April 2002.

FOREWORD

The International Telecommunication Union (ITU) is the United Nations specialized agency in the field of telecommunications. The ITU Telecommunication Standardization Sector (ITU-T) is a permanent organ of ITU. ITU-T is responsible for studying technical, operating and tariff questions and issuing Recommendations on them with a view to standardizing telecommunications on a worldwide basis.

The World Telecommunication Standardization Assembly (WTSA), which meets every four years, establishes the topics for study by the ITU-T study groups which, in turn, produce Recommendations on these topics.

The approval of ITU-T Recommendations is covered by the procedure laid down in WTSA Resolution 1.

In some areas of information technology which fall within ITU-T's purview, the necessary standards are prepared on a collaborative basis with ISO and IEC.

NOTE

In this Recommendation, the expression "Administration" is used for conciseness to indicate both a telecommunication administration and a recognized operating agency.

INTELLECTUAL PROPERTY RIGHTS

ITU draws attention to the possibility that the practice or implementation of this Recommendation may involve the use of a claimed Intellectual Property Right. ITU takes no position concerning the evidence, validity or applicability of claimed Intellectual Property Rights, whether asserted by ITU members or others outside of the Recommendation development process.

As of the date of approval of this Recommendation, ITU had not received notice of intellectual property, protected by patents, which may be required to implement this Recommendation. However, implementors are cautioned that this may not represent the latest information and are therefore strongly urged to consult the TSB patent database.

© ITU 2002

All rights reserved. No part of this publication may be reproduced, by any means whatsoever, without the prior written permission of ITU.

CONTENTS

	Page
1 Introduction	1
2 General principles of level 2 tests	1
2.1 Presentation of test descriptions	1
2.2 Presentation of the test list	1
3 Test configuration.....	1
4 Test environment	1
5 Test list	2
6 Test descriptions.....	6

ITU-T Recommendation Q.781

MTP level 2 test specification

1 Introduction

This Recommendation contains a set of detailed tests of signalling system No. 7 MTP level 2 protocol. These tests intend to validate the protocol specified in ITU-T Rec. Q.703.

This Recommendation conforms to ITU-T Rec. Q.780 which describes the basic rules of the Test Specification. In addition, the conditions which are specific to level 2 tests are described in the following clauses.

2 General principles of level 2 tests

2.1 Presentation of test descriptions

The level 2 tests aim at testing the level 2 protocol conformance in a given implementation.

Each test description indicates in the "type of test" column; "Validation" (VAT) or "Validation" (VAT) and "compatibility" (CPT).

Although signal units are transmitted and received continuously on level 2, only the signal units which cause and/or indicate the changes of level 2 status are shown in the EXPECTED SIGNAL UNIT SEQUENCE column of each test description.


2.2 Presentation of the test list

These tests as a whole, aim at a complete validation of the level 2 protocol without redundancies. Each test is described as simply as possible to check precisely each elementary function of the protocol, which is referred in the columns "reference", "title" and "subtitle" of each test description.

This list is presented in the form of a succession of tests. The presentation order is essentially functional. However, the operator performing these tests may change this order, taking into account some other practical criteria such as: use pre-test conditions to order the list, the end of a given test may be the pre-test condition of another test.

3 Test configuration

A single link will be used for level 2 tests. Figure 1 shows a single link between SP A and SP B. Test specifications are written to test the level 2 of the SP A.

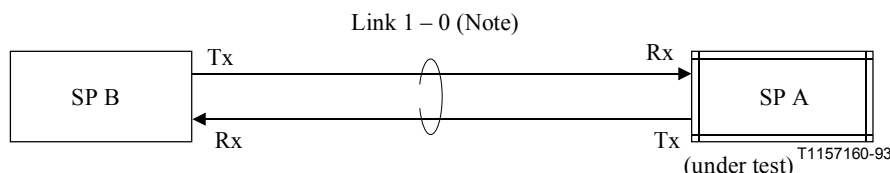

NOTE – First digit: linkset number.
Second digit: link number.

Figure 1/Q.781 – Test configuration of MTP level 2 test configuration 1

4 Test environment

See 6.2/Q.780.

5 Test list

NOTE – Compatibility test items are indicated in this list by an asterisk (*).

The abbreviations *PO*, *LPO*, *RPO*, *EM* and *EDA* are used for processor outage, local processor outage, remote processor outage, emergency and expected delay of acknowledgement, respectively.

1 *Link State Control – Expected signal units/orders* (see Figures 8 and 9/Q.703)

- * 1.1 Initialisation (Power-up)
- * 1.2 Timer T2
- 1.3 Timer T3
- 1.4 Timer T1 and T4 (Normal)
- * 1.5 Normal alignment – correct procedure (FISU)
- 1.6 Normal alignment – correct procedure (MSU)
- 1.7 SIO received during normal proving period
- 1.8 Normal alignment with PO set (FISU)
- 1.9 Normal alignment with PO set (MSU)
- 1.10 Normal alignment with PO set and clear
- 1.11 Set RPO when "Aligned not ready"
- 1.12 SIOS received when "Aligned not ready"
- 1.13 SIO received when "Aligned not ready"
- 1.14 Set and clear LPO when "Initial alignment"
- 1.15 Set and clear LPO when "Aligned ready"
- 1.16 Timer T1 in "Aligned not ready" state
- 1.17 No SIO sent during normal proving period
- 1.18 Set and cease emergency prior to "start alignment"
- * 1.19 Set emergency while in "not aligned state"
- 1.20 Set emergency when "aligned"
- 1.21 Both ends set emergency
- 1.22 Individual end sets emergency
- 1.23 Set emergency during normal proving
- 1.24 No SIO sent during emergency alignment
- * 1.25 Deactivation during initial alignment
- 1.26 Deactivation during aligned state
- 1.27 Deactivation during aligned not ready
- 1.28 SIO received during link in service
- * 1.29 Deactivation during link in service
- 1.30 Deactivation during LPO
- 1.31 Deactivation during RPO
- * 1.32 Deactivation during the proving period

- 1.33 SIO received instead of FISUs
- 1.34 SIOS received instead of FISUs
- 1.35 SIPO received instead of FISUs
- 2 *Link State Control – Unexpected signal units/orders* (see Figure 8/Q.703)
 - 2.1 Unexpected signal units/orders in "Out of service" state
 - 2.2 Unexpected signal units/orders in "Not aligned" state
 - 2.3 Unexpected signal units/orders in "Aligned" state
 - 2.4 Unexpected signal units/orders in "Proving" state
 - 2.5 Unexpected signal units/orders in "Aligned ready" state
 - 2.6 Unexpected signal units/orders in "Aligned not ready" state
 - 2.7 Unexpected signal units/orders in "In service" state
 - 2.8 Unexpected signal units/orders in "Processor outage" state
- 3 *Transmission failure* (see Figure 8/Q.703)
 - 3.1 Link aligned ready (Break Tx path)
 - 3.2 Link aligned ready (Corrupt FIBs – Basic)
 - 3.3 Link aligned not ready (Break Tx path)
 - 3.4 Link aligned not ready (Corrupt FIBs – Basic)
 - * 3.5 Link in service (Break Tx path)
 - 3.6 Link in service (Corrupt FIBs – Basic)
 - 3.7 Link in processor outage (Break Tx path)
 - 3.8 Link in processor outage (Corrupt FIBs – Basic)
- 4 *Processor Outage Control* (see Figure 10/Q.703)
 - 4.1 Set and clear LPO while link in service
 - 4.2 RPO during LPO
 - 4.3 Clear LPO when "Both processor outage"
- 5 *SU Delimitation, Alignment, Error Detection and Correction* (see Figures 11 and 12/Q.703)
 - 5.1 Seven or more "1"s between MSU opening and closing flags
 - 5.2 Greater than maximum signal unit length
 - 5.3 Below minimum signal unit length
 - 5.4 Reception of single and multiple flags between FISUs
 - 5.5 Reception of single and multiple flags between MSUs
- 6 *SUERM Check* (see Figure 18/Q.703)
 - 6.1 Error rate of 1 in 256 – Link remains in service
 - 6.2 Error rate of 1 in 254 – Link into out of service
 - 6.3 Consecutive corrupted SUs
 - 6.4 Time controlled break of the link

- 7 *AERM check* (see Figure 17/Q.703)
 - 7.1 Error rate below the normal threshold
 - 7.2 Error rate at the normal threshold
 - 7.3 Error rate above the normal threshold
 - 7.4 Error rate at the emergency threshold
- 8 *Transmission and reception control (Basic)* (see Figures 13 and 14/Q.703)
 - 8.1 MSU transmission and reception
 - 8.2 Negative acknowledgement of MSU
 - 8.3 Check RTB full
 - 8.4 Single MSU with erroneous FIB
 - 8.5 Duplicated FSN
 - 8.6 Erroneous retransmission – Single MSU
 - 8.7 Erroneous retransmission – Multiple FISUs
 - 8.8 Single FISU with corrupt FIB
 - 8.9 Single FISU prior to RPO being set
 - 8.10 Abnormal BSN – Single MSU
 - 8.11 Abnormal BSN – Two consecutive FISUs
 - 8.12 Excessive delay of acknowledgement
 - 8.13 Level 3 Stop Command
- 9 *Transmission and reception control (PCR)* (see Figures 15 and 16/Q.703)
 - * 9.1 MSU transmission and reception
 - 9.2 Priority control
 - 9.3 Forced retransmission with the value N_1
 - 9.4 Forced retransmission with the value N_2
 - 9.5 Forced retransmission cancel
 - 9.6 Repetition of forced retransmission
 - 9.7 MSU transmission while RPO set
 - 9.8 Abnormal BSN – Single MSU
 - 9.9 Abnormal BSN – Two MSUs
 - 9.10 Unexpected FSN
 - 9.11 Excessive delay of acknowledgement
 - 9.12 FISU with FSN expected for MSU
 - 9.13 Level 3 Stop Command

10 *Congestion Control* (see Figure 19/Q.703)

10.1 Congestion abatement

10.2 Timer T7

10.3 Timer T6

10.4 Congestion and RTB empty

6 Test descriptions

MTP, LEVEL 2

TEST NUMBER: 1.1		PAGE: 1 OF 1	
REFERENCE: Clause 7/Q.703 STD: Fig. 8; Fig. 12; Fig. 13			
TITLE: Link State Control – Expected signal units/orders			
SUBTITLE: Initialization (Power-up)			
PURPOSE: To check that the No. 7 terminal equipment enters the correct state on power-up			
PRE-TEST CONDITIONS: Line equipment – ON; No. 7 equipment – OFF			
CONFIGURATION: 1		TYPE OF TEST: VAT, CPT	
<div>EXPECTED SIGNAL UNIT SEQUENCE:</div> <div><div><div>SP B</div><div>Link</div><div>1 – 0 SIOS</div><div>-----></div><div><-----</div></div><div><div>SP A</div><div>Link</div><div>1 – 0 SIOS</div><div>: Power ON</div></div></div>			
TEST DESCRIPTION			
1.	Check link enters correct state.		
2.	At "Power – On" or Initialization the FIB, BIB, FSN, and BSN shall be as follows: FIN = BIB = 1 : FSN = BSN = 127 (HEX 7F).		
3.	Repeat test in reverse direction.		

MTP, LEVEL 2

TEST NUMBER: 1.2		PAGE: 1 OF 1																																																																																																											
REFERENCE: Clause 7/Q.703 STD: Fig. 8; Fig. 9; Fig. 11; Fig. 13; Fig. 14																																																																																																													
TITLE: Link State Control – Expected signal units/orders																																																																																																													
SUBTITLE: Timer T2																																																																																																													
PURPOSE: To check "Not Aligned" Timer T2																																																																																																													
PRE-TEST CONDITIONS: Link out of service																																																																																																													
CONFIGURATION: 1		TYPE OF TEST: VAT, CPT																																																																																																											
<p>EXPECTED SIGNAL UNIT SEQUENCE:</p> <table style="width: 100%; border: none;"> <tr> <td style="width: 50%; vertical-align: top;"> <table style="width: 100%; border: none;"> <tr> <td style="width: 10%;"></td> <td style="width: 10%; text-align: center;">SP</td> <td style="width: 10%; text-align: center;">B</td> <td style="width: 10%;"></td> <td style="width: 10%;"></td> <td style="width: 10%;"></td> <td style="width: 10%;"></td> <td style="width: 10%;"></td> </tr> <tr> <td>Link</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>1 – 0</td> <td style="text-align: center;">SIOS</td> <td></td> <td style="text-align: center;">-----></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> <td style="text-align: center;"><-----</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> <td style="text-align: center;"><-----</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> <td style="text-align: center;"><-----</td> <td></td> <td></td> <td></td> <td></td> </tr> </table> </td> <td style="width: 50%; vertical-align: top;"> <table style="width: 100%; border: none;"> <tr> <td style="width: 10%;"></td> <td style="width: 10%; text-align: center;">SP</td> <td style="width: 10%; text-align: center;">A</td> <td style="width: 10%;"></td> <td style="width: 10%;"></td> <td style="width: 10%;"></td> <td style="width: 10%;"></td> <td style="width: 10%;"></td> </tr> <tr> <td>Link</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>1 – 0</td> <td style="text-align: center;">SIOS</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td style="text-align: center;">:</td> <td style="text-align: center;">start</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>1 – 0</td> <td style="text-align: center;">SIO</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td style="text-align: center;"> T2</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>1 – 0</td> <td style="text-align: center;">SIOS</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </table> </td> </tr> </table>				<table style="width: 100%; border: none;"> <tr> <td style="width: 10%;"></td> <td style="width: 10%; text-align: center;">SP</td> <td style="width: 10%; text-align: center;">B</td> <td style="width: 10%;"></td> <td style="width: 10%;"></td> <td style="width: 10%;"></td> <td style="width: 10%;"></td> <td style="width: 10%;"></td> </tr> <tr> <td>Link</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>1 – 0</td> <td style="text-align: center;">SIOS</td> <td></td> <td style="text-align: center;">-----></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> <td style="text-align: center;"><-----</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> <td style="text-align: center;"><-----</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> <td style="text-align: center;"><-----</td> <td></td> <td></td> <td></td> <td></td> </tr> </table>		SP	B						Link								1 – 0	SIOS		----->								<-----								<-----								<-----					<table style="width: 100%; border: none;"> <tr> <td style="width: 10%;"></td> <td style="width: 10%; text-align: center;">SP</td> <td style="width: 10%; text-align: center;">A</td> <td style="width: 10%;"></td> <td style="width: 10%;"></td> <td style="width: 10%;"></td> <td style="width: 10%;"></td> <td style="width: 10%;"></td> </tr> <tr> <td>Link</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>1 – 0</td> <td style="text-align: center;">SIOS</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td style="text-align: center;">:</td> <td style="text-align: center;">start</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>1 – 0</td> <td style="text-align: center;">SIO</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td style="text-align: center;"> T2</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>1 – 0</td> <td style="text-align: center;">SIOS</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </table>		SP	A						Link								1 – 0	SIOS								:	start						1 – 0	SIO									T2						1 – 0	SIOS						
<table style="width: 100%; border: none;"> <tr> <td style="width: 10%;"></td> <td style="width: 10%; text-align: center;">SP</td> <td style="width: 10%; text-align: center;">B</td> <td style="width: 10%;"></td> <td style="width: 10%;"></td> <td style="width: 10%;"></td> <td style="width: 10%;"></td> <td style="width: 10%;"></td> </tr> <tr> <td>Link</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>1 – 0</td> <td style="text-align: center;">SIOS</td> <td></td> <td style="text-align: center;">-----></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> <td style="text-align: center;"><-----</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> <td style="text-align: center;"><-----</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> <td style="text-align: center;"><-----</td> <td></td> <td></td> <td></td> <td></td> </tr> </table>		SP	B						Link								1 – 0	SIOS		----->								<-----								<-----								<-----					<table style="width: 100%; border: none;"> <tr> <td style="width: 10%;"></td> <td style="width: 10%; text-align: center;">SP</td> <td style="width: 10%; text-align: center;">A</td> <td style="width: 10%;"></td> <td style="width: 10%;"></td> <td style="width: 10%;"></td> <td style="width: 10%;"></td> <td style="width: 10%;"></td> </tr> <tr> <td>Link</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>1 – 0</td> <td style="text-align: center;">SIOS</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td style="text-align: center;">:</td> <td style="text-align: center;">start</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>1 – 0</td> <td style="text-align: center;">SIO</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td style="text-align: center;"> T2</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>1 – 0</td> <td style="text-align: center;">SIOS</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </table>		SP	A						Link								1 – 0	SIOS								:	start						1 – 0	SIO									T2						1 – 0	SIOS										
	SP	B																																																																																																											
Link																																																																																																													
1 – 0	SIOS		----->																																																																																																										
			<-----																																																																																																										
			<-----																																																																																																										
			<-----																																																																																																										
	SP	A																																																																																																											
Link																																																																																																													
1 – 0	SIOS																																																																																																												
	:	start																																																																																																											
1 – 0	SIO																																																																																																												
		T2																																																																																																											
1 – 0	SIOS																																																																																																												
TEST DESCRIPTION																																																																																																													
1.	Timer T2 shall be in the range 5 secs to 150 secs.																																																																																																												

MTP, LEVEL 2

TEST NUMBER: 1.3		PAGE: 1 OF 1	
REFERENCE: Clause 7/Q.703 STD: Fig. 9; Fig. 14			
TITLE: Link State Control – Expected signal units/orders			
SUBTITLE: Timer T3			
PURPOSE: To check "Aligned" Timer T3			
PRE-TEST CONDITIONS: Link out of service			
CONFIGURATION: 1		TYPE OF TEST: VAT	
EXPECTED SIGNAL UNIT SEQUENCE:			
Link		Link	
1 – 0	SP B	1 – 0	SP A
	SIOS		SIOS
			: start
1 – 0	SIO	1 – 0	SIO
		1 – 0	SIN
			T3
		1 – 0	SIOS
TEST DESCRIPTION			
1.	Timer T3 shall be in the range 1 sec to 1.5 secs.		

MTP, LEVEL 2

TEST NUMBER: 1.4			PAGE: 1 OF 1		
REFERENCE: Clause 7/Q.703 STD: Fig. 8; Fig. 9					
TITLE: Link State Control – Expected signal units/orders					
SUBTITLE: Timer T1 and Timer T4 (Normal)					
PURPOSE: To check "Aligned ready" Timer T1 and "Proving period" Timer T4 (Normal)					
PRE-TEST CONDITIONS: Link out of service					
CONFIGURATION: 1			TYPE OF TEST: VAT		
EXPECTED SIGNAL UNIT SEQUENCE:					
SP B			SP A		
Link			Link		
		<-----	1 – 0	SIOS	
1 – 0	SIOS	----->		:	start
		<-----	1 – 0	SIO	
1 – 0	SIO	----->			
		<-----	1 – 0	SIN	
1 – 0	SIN	----->			T4 (Pn)
		<-----	1 – 0	FISU	
		<-----	1 – 0		T1
				SIOS	
TEST DESCRIPTION					
1.	At 64 kbit/s Timer T4 shall be in the range 7.5 secs to 9.5 secs (nominally 8.2 secs) and Timer T1 shall be in the range 40 secs to 50 secs.				
2.	At 4.8 kbit/s Timer T4 shall be in the range 100 secs to 120 secs (nominally 110 secs) and Timer T1 shall be in the range 500 secs to 600 secs.				

MTP, LEVEL 2

TEST NUMBER: 1.5			PAGE: 1 OF 1																																																																								
REFERENCE: Clause 7/Q.703 STD: Fig. 8; Fig. 9																																																																											
TITLE: Link State Control – Expected signal units/orders																																																																											
SUBTITLE: Normal alignment – correct procedure (FISU)																																																																											
PURPOSE: To check normal alignment procedure																																																																											
PRE-TEST CONDITIONS: Link out of service																																																																											
CONFIGURATION: 1			TYPE OF TEST: VAT, CPT																																																																								
MESSAGE SEQUENCE:																																																																											
<table><thead><tr><th></th><th>SP</th><th>B</th><th></th><th></th><th>SP</th><th>A</th></tr></thead><tbody><tr><td>Link</td><td></td><td></td><td></td><td>Link</td><td></td><td></td></tr><tr><td></td><td></td><td></td><td><-----</td><td>1 – 0</td><td>SIOS</td><td></td></tr><tr><td>1 – 0</td><td>SIOS</td><td></td><td>-----></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td><-----</td><td></td><td>: start</td><td></td></tr><tr><td>1 – 0</td><td>SIO</td><td></td><td>-----></td><td>1 – 0</td><td>SIO</td><td></td></tr><tr><td></td><td></td><td></td><td><-----</td><td></td><td></td><td></td></tr><tr><td>1 – 0</td><td>SIN</td><td></td><td>-----></td><td>1 – 0</td><td>SIN</td><td></td></tr><tr><td></td><td></td><td></td><td><-----</td><td></td><td></td><td></td></tr><tr><td>1 – 0</td><td>FISU</td><td></td><td>-----></td><td>1 – 0</td><td>FISU</td><td></td></tr></tbody></table>							SP	B			SP	A	Link				Link						<-----	1 – 0	SIOS		1 – 0	SIOS		----->							<-----		: start		1 – 0	SIO		----->	1 – 0	SIO					<-----				1 – 0	SIN		----->	1 – 0	SIN					<-----				1 – 0	FISU		----->	1 – 0	FISU	
	SP	B			SP	A																																																																					
Link				Link																																																																							
			<-----	1 – 0	SIOS																																																																						
1 – 0	SIOS		----->																																																																								
			<-----		: start																																																																						
1 – 0	SIO		----->	1 – 0	SIO																																																																						
			<-----																																																																								
1 – 0	SIN		----->	1 – 0	SIN																																																																						
			<-----																																																																								
1 – 0	FISU		----->	1 – 0	FISU																																																																						
TEST DESCRIPTION																																																																											
1.	Start normal alignment procedure.																																																																										
2.	Check link aligns and enters "In service" state.																																																																										
3.	Check that "In service" state is maintained.																																																																										
4.	In VAT only check it is possible to perform a normal alignment procedure in the following cases: <ul style="list-style-type: none">– use LSSU in point B with a status field of 8 bits;– use LSSU in point B with a status field of 16 bits.																																																																										

MTP, LEVEL 2

TEST NUMBER: 1.6		PAGE: 1 OF 1			
REFERENCE: Clause 7/Q.703 STD: Fig. 8; Fig. 9					
TITLE: Link State Control – Expected signal units/orders					
SUBTITLE: Normal alignment – correct procedure (MSU)					
PURPOSE: To check normal alignment procedure					
PRE-TEST CONDITIONS: Link out of service					
CONFIGURATION: 1		TYPE OF TEST: VAT			
EXPECTED SIGNAL UNIT SEQUENCE:					
Link	SP	B	Link	SP	A
			1 – 0	SIOS	
1 – 0	SIOS	<----- ----->		:	start
			1 – 0	SIO	
1 – 0	SIO	<----- ----->			
			1 – 0	SIN	
1 – 0	SIN	<----- ----->			
			1 – 0	FISU	
1 – 0	MSU	<----- ----->			
TEST DESCRIPTION					
1.	Start normal alignment procedure.				
2.	Check link aligns and enters "In service" state.				
3.	Check that "In service" state is maintained.				

MTP, LEVEL 2

TEST NUMBER: 1.7				PAGE: 1 OF 1			
REFERENCE: Clause 7, 10.3/Q.703 STD: Fig. 9; Fig. 17							
TITLE: Link State Control – Expected signal units/orders							
SUBTITLE: SIO received during normal proving period							
PURPOSE: To test the response to the reception of an SIO during the normal proving period							
PRE-TEST CONDITIONS: Link out of service							
CONFIGURATION: 1				TYPE OF TEST: VAT			
EXPECTED SIGNAL UNIT SEQUENCE:							
<div><div>SP</div><div>B</div><div>Link</div><div>1 – 0</div><div>1 – 0</div><div>1 – 0</div><div>1 – 0</div><div>1 – 0</div><div>1 – 0</div><div>1 – 0</div><div>1 – 0</div><div>1 – 0</div><div>1 – 0</div></div>				<div><div>SP</div><div>A</div><div>Link</div><div>1 – 0</div><div>1 – 0</div><div>1 – 0</div><div>1 – 0</div><div>1 – 0</div><div>1 – 0</div><div>1 – 0</div><div>1 – 0</div><div>1 – 0</div><div>1 – 0</div></div>			
<div><div>SIOS</div><div>SIO</div><div>SIN</div><div>SIO (one only)</div><div>SIN</div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div>				<div><div>SIOS</div><div>SIO</div><div>SIN</div><div>T4 Stopped</div><div>SIN T4(Pn)</div><div>FISU</div></div>			
TEST DESCRIPTION							
1.	Send an SIO at B during normal proving period.						
2.	Check that new normal period is entered.						

MTP, LEVEL 2

TEST NUMBER: 1.8		PAGE: 1 OF 1		
REFERENCE: Clauses 7 and 8/Q.703 STD: Fig. 8				
TITLE: Link State Control – Expected signal units/orders				
SUBTITLE: Normal alignment with PO set (FISU)				
PURPOSE: To check the response following normal alignment when PO has been set				
PRE-TEST CONDITIONS: Link out of service				
CONFIGURATION: 1		TYPE OF TEST: VAT		
EXPECTED SIGNAL UNIT SEQUENCE:				
	SP	B	SP A	
Link			Link	
		<-----	1 – 0	SIOS
1 – 0	SIOS	----->		
				: set LPO
				: start
		<-----	1 – 0	SIO
1 – 0	SIO	----->		
		<-----	1 – 0	SIN
1 – 0	SIN	----->		
		<-----	1 – 0	SIPO
1 – 0	FISU	----->		
		<-----	1 – 0	SIPO
TEST DESCRIPTION				
1.	Check that normal alignment is carried out with LPO set at A.			
2.	Check that SIPO is returned when aligned, and that A stays in "processor outage" state.			
3.	Repeat test with LPO set at B.			

MTP, LEVEL 2

TEST NUMBER: 1.9		PAGE: 1 OF 1		
REFERENCE: Clauses 7 and 8/Q.703 STD: Fig. 8				
TITLE: Link State Control – Expected signal units/orders				
SUBTITLE: Normal alignment with PO set (MSU)				
PURPOSE: To check the response following normal alignment when PO has been set				
PRE-TEST CONDITIONS: Link out of service				
CONFIGURATION: 1		TYPE OF TEST: VAT		
EXPECTED SIGNAL UNIT SEQUENCE:				
	SP	B	SP A	
Link			Link	
		<-----	1 – 0	SIOS
1 – 0	SIOS	----->		
				: set LPO
				: start
		<-----	1 – 0	SIO
1 – 0	SIO	----->		
		<-----	1 – 0	SIN
1 – 0	SIN	----->		
		<-----	1 – 0	SIPO
1 – 0	MSU	----->		
		<-----	1 – 0	SIPO
TEST DESCRIPTION				
1.	Check that normal alignment is carried out with LPO set at A.			
2.	Check that SIPO is returned when aligned, and that A stays in "processor outage" state.			
3.	Repeat test with LPO set at B.			

MTP, LEVEL 2

TEST NUMBER: 1.10		PAGE: 1 OF 1																																																																																					
REFERENCE: Clauses 7 and 8/Q.703 STD: Fig. 8																																																																																							
TITLE: Link State Control – Expected signal units/orders																																																																																							
SUBTITLE: Normal alignment with PO set and clear																																																																																							
PURPOSE: To check the response following normal alignment when PO has been set and cleared																																																																																							
PRE-TEST CONDITIONS: Link out of service																																																																																							
CONFIGURATION: 1		TYPE OF TEST: VAT																																																																																					
<div>EXPECTED SIGNAL UNIT SEQUENCE:</div> <table><thead><tr><th></th><th>SP</th><th>B</th><th></th><th></th><th>SP</th><th>A</th></tr></thead><tbody><tr><td>Link</td><td></td><td></td><td></td><td>Link</td><td></td><td></td></tr><tr><td></td><td></td><td></td><td><-----</td><td>1 – 0</td><td>SIOS</td><td></td></tr><tr><td>1 – 0</td><td>SIOS</td><td></td><td>-----></td><td></td><td></td><td>: set LPO</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td>: clear LPO</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td>: start</td></tr><tr><td></td><td></td><td></td><td><-----</td><td>1 – 0</td><td>SIO</td><td></td></tr><tr><td>1 – 0</td><td>SIO</td><td></td><td>-----></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td><-----</td><td>1 – 0</td><td>SIN</td><td></td></tr><tr><td>1 – 0</td><td>SIN</td><td></td><td>-----></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td><-----</td><td>1 – 0</td><td>FISU</td><td></td></tr><tr><td>1 – 0</td><td>FISU</td><td></td><td>-----></td><td></td><td></td><td></td></tr></tbody></table>					SP	B			SP	A	Link				Link						<-----	1 – 0	SIOS		1 – 0	SIOS		----->			: set LPO							: clear LPO							: start				<-----	1 – 0	SIO		1 – 0	SIO		----->							<-----	1 – 0	SIN		1 – 0	SIN		----->							<-----	1 – 0	FISU		1 – 0	FISU		----->			
	SP	B			SP	A																																																																																	
Link				Link																																																																																			
			<-----	1 – 0	SIOS																																																																																		
1 – 0	SIOS		----->			: set LPO																																																																																	
						: clear LPO																																																																																	
						: start																																																																																	
			<-----	1 – 0	SIO																																																																																		
1 – 0	SIO		----->																																																																																				
			<-----	1 – 0	SIN																																																																																		
1 – 0	SIN		----->																																																																																				
			<-----	1 – 0	FISU																																																																																		
1 – 0	FISU		----->																																																																																				
TEST DESCRIPTION																																																																																							
1.	Check that normal alignment is carried out.																																																																																						
2.	Check that link aligns and enters "In service" state.																																																																																						

MTP, LEVEL 2

TEST NUMBER: 1.11		PAGE: 1 OF 1	
REFERENCE: Clauses 7 and 8/Q.703 STD: Fig. 8			
TITLE: Link State Control – Expected signal units/orders			
SUBTITLE: Set RPO when "Aligned not ready"			
PURPOSE: To check the response following normal alignment when PO has been set			
PRE-TEST CONDITIONS: Link out of service; ability to set PO			
CONFIGURATION: 1		TYPE OF TEST: VAT	
EXPECTED SIGNAL UNIT SEQUENCE:			
Link	SP B	Link	SP A
1 – 0	SIOS : set LPO	1 – 0	SIOS : set LPO : start
1 – 0	SIO	1 – 0	SIO
1 – 0	SIN	1 – 0	SIN
1 – 0	SIPO	1 – 0	SIPO
TEST DESCRIPTION			
1.	Set LPO at A and B.		
2.	Start alignment.		
3.	Check that both LPO and RPO after alignment completes.		

MTP, LEVEL 2

TEST NUMBER: 1.12		PAGE: 1 OF 1																																																																																																										
REFERENCE: Clauses 7 and 8/Q.703 STD: Fig. 8																																																																																																												
TITLE: Link State Control – Expected signal units/orders																																																																																																												
SUBTITLE: SIOS received when "Aligned not ready"																																																																																																												
PURPOSE: To check the response following normal alignment when PO has been set																																																																																																												
PRE-TEST CONDITIONS: Link out of service																																																																																																												
CONFIGURATION: 1		TYPE OF TEST: VAT																																																																																																										
EXPECTED SIGNAL UNIT SEQUENCE:																																																																																																												
<table><tr><td></td><td>SP</td><td>B</td><td></td><td></td><td>SP</td><td>A</td></tr><tr><td>Link</td><td></td><td></td><td></td><td>Link</td><td></td><td></td></tr><tr><td></td><td></td><td></td><td><-----</td><td>1 – 0</td><td>SIOS</td><td></td></tr><tr><td>1 – 0</td><td>SIOS</td><td></td><td>-----></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td><td></td><td>: set LPO</td><td></td></tr><tr><td></td><td></td><td></td><td></td><td></td><td>: start</td><td></td></tr><tr><td></td><td></td><td></td><td><-----</td><td>1 – 0</td><td>SIO</td><td></td></tr><tr><td>1 – 0</td><td>SIO</td><td></td><td>-----></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td><-----</td><td>1 – 0</td><td>SIN</td><td></td></tr><tr><td>1 – 0</td><td>SIN</td><td></td><td>-----></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td><-----</td><td>1 – 0</td><td>SIPO</td><td></td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>1 – 0</td><td>: stop</td><td></td><td>-----></td><td></td><td></td><td></td></tr><tr><td></td><td>SIOS</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td><-----</td><td>1 – 0</td><td>SIOS</td><td></td></tr></table>					SP	B			SP	A	Link				Link						<-----	1 – 0	SIOS		1 – 0	SIOS		----->									: set LPO							: start					<-----	1 – 0	SIO		1 – 0	SIO		----->							<-----	1 – 0	SIN		1 – 0	SIN		----->							<-----	1 – 0	SIPO									1 – 0	: stop		----->					SIOS									<-----	1 – 0	SIOS	
	SP	B			SP	A																																																																																																						
Link				Link																																																																																																								
			<-----	1 – 0	SIOS																																																																																																							
1 – 0	SIOS		----->																																																																																																									
					: set LPO																																																																																																							
					: start																																																																																																							
			<-----	1 – 0	SIO																																																																																																							
1 – 0	SIO		----->																																																																																																									
			<-----	1 – 0	SIN																																																																																																							
1 – 0	SIN		----->																																																																																																									
			<-----	1 – 0	SIPO																																																																																																							
1 – 0	: stop		----->																																																																																																									
	SIOS																																																																																																											
			<-----	1 – 0	SIOS																																																																																																							
TEST DESCRIPTION																																																																																																												
1.	Soon after alignment completes, A enters "Aligned not ready".																																																																																																											
2.	Before alignment completes, stop command is given at B.																																																																																																											
3.	Check that, on reception of SIOS, A enters "Out of service" state.																																																																																																											
4.	Repeat test with LPO set at B.																																																																																																											

MTP, LEVEL 2

TEST NUMBER: 1.13		PAGE: 1 OF 1		
REFERENCE: Clauses 7 and 8/Q.703 STD: Fig. 8				
TITLE: Link State Control – Expected signal units/orders				
SUBTITLE: SIO received when "Aligned not ready"				
PURPOSE: To check the response following normal alignment when PO has been set				
PRE-TEST CONDITIONS: Link out of service				
CONFIGURATION: 1		TYPE OF TEST: VAT		
EXPECTED SIGNAL UNIT SEQUENCE:				
	SP	B	SP A	
Link			Link	
		<-----	1 – 0	SIOS
1 – 0	SIOS	----->		
				: set LPO
				: start
		<-----	1 – 0	SIO
1 – 0	SIO	----->		
		<-----	1 – 0	SIN
1 – 0	SIN	----->		
		<-----	1 – 0	SIPO
1 – 0	SIO	----->		
		<-----	1 – 0	SIOS
TEST DESCRIPTION				
1.	Soon after alignment completes, A enters "Aligned not ready".			
2.	Before alignment completes at B, SIO is sent to A.			
3.	Check that, on reception of SIO, A enters "Out of service" state.			
4.	Repeat test with LPO set at B.			

MTP, LEVEL 2

TEST NUMBER: 1.14		PAGE: 1 OF 1	
REFERENCE: Clauses 7 and 8/Q.703 STD: Fig. 8			
TITLE: Link State Control – Expected signal units/orders			
SUBTITLE: Set and clear LPO when "Initial alignment"			
PURPOSE: To check normal alignment when PO set and clear during "Initial alignment"			
PRE-TEST CONDITIONS: Link out of service			
CONFIGURATION: 1		TYPE OF TEST: VAT	
EXPECTED SIGNAL UNIT SEQUENCE:			
	SP	B	SP A
Link			Link
		<-----	1 – 0 SIOS
1 – 0	SIOS	----->	
			: start
		<-----	1 – 0 SIO
1 – 0	SIO	----->	
		<-----	1 – 0 SIN
			: set LPO
1 – 0	SIN	----->	
			: clear LPO
		<-----	1 – 0 FISU
1 – 0	FISU	----->	
		<-----	1 – 0 FISU
TEST DESCRIPTION			
1.	Set LPO at A during "Initial alignment" state.		
2.	Check A remains in "Initial alignment" state.		
3.	Clear LPO before alignment completes at A.		
4.	Check A enters "In service" state after normal alignment.		
5.	Repeat the test at B.		

MTP, LEVEL 2

TEST NUMBER: 1.15			PAGE: 1 OF 1		
REFERENCE: Clauses 7 and 8/Q.703 STD: Fig. 8					
TITLE: Link State Control – Expected signal units/orders					
SUBTITLE: Set and clear LPO when "Aligned ready"					
PURPOSE: To test the response to LPO when "aligned ready" and to ensure that the aligned ready state resumes when LPO is cleared					
PRE-TEST CONDITIONS: Link out of service					
CONFIGURATION: 1			TYPE OF TEST: VAT		
EXPECTED SIGNAL UNIT SEQUENCE:					
SP B			SP A		
Link			Link		
		<-----	1 – 0	SIOS	
1 – 0	SIOS	----->			
				: start	
		<-----	1 – 0	SIO	
1 – 0	SIO	----->			
		<-----	1 – 0	SIN	
1 – 0	SIN	----->			
		<-----	1 – 0	FISU	
				: set LPO	
		<-----	1 – 0	SIPO	
				: wait 5 secs.	
				: clear LPO	
		<-----	1 – 0	FISU	
TEST DESCRIPTION					
1.	Start link at A.				
2.	At "aligned ready" state set LPO at A. (Suppress return of FISUs at B to maintain "aligned ready" state.)				
3.	Clear LPO at A.				
4.	Check A resumes "aligned ready" state.				

MTP, LEVEL 2

TEST NUMBER: 1.16				PAGE: 1 OF 1			
REFERENCE: Clauses 7 and 8/Q.703 STD: Fig. 8							
TITLE: Link State Control – Expected signal units/orders							
SUBTITLE: Timer T1 in "Aligned not ready" state							
PURPOSE: To test the operation of Timer T1 when in the "aligned not ready" state							
PRE-TEST CONDITIONS: Link out of service							
CONFIGURATION: 1				TYPE OF TEST: VAT			
EXPECTED SIGNAL UNIT SEQUENCE:							
<div>SP B</div> <div>Link</div> <div>1 – 0 SIOS</div> <div>1 – 0 SIO</div> <div>1 – 0 SIN</div>				<div>SP A</div> <div>Link</div> <div>1 – 0 SIOS</div> <div>: set LPO</div> <div>: start</div> <div>1 – 0 SIO</div> <div>1 – 0 SIN</div> <div>1 – 0 SIPO</div> <div> T1</div> <div>1 – 0 SIOS</div>			
TEST DESCRIPTION							
1.	Set LPO and start link at A.						
2.	Check A enters the "aligned not ready" state.						
3.	Check A takes the link out of service after time T1.						
4.	Timer T1 shall be in the range 40 secs to 50 secs.						

MTP, LEVEL 2

TEST NUMBER: 1.17		PAGE: 1 OF 1				
REFERENCE: Clause 7/Q.703 STD: Fig. 9						
TITLE: Link State Control – Expected signal units/orders						
SUBTITLE: No SIO sent during normal proving period						
PURPOSE: To ensure that normal alignment still occurs when SIO is omitted						
PRE-TEST CONDITIONS: Link out of service						
CONFIGURATION: 1		TYPE OF TEST: VAT				
EXPECTED SIGNAL UNIT SEQUENCE:						
	SP	B			SP	A
Link				Link		
			<-----	1 – 0		SIOS
1 – 0	SIOS		----->			: start
			<-----	1 – 0		SIO not aligned
1 – 0	SIN		----->			
			<-----	1 – 0		SIN
1 – 0	SIN		----->			T3
			<-----	1 – 0		T4(Pn)
						FISU
TEST DESCRIPTION						
1.	Check normal alignment occurs with no SIO sent from SP B.					

MTP, LEVEL 2

TEST NUMBER: 1.18				PAGE: 1 OF 1			
REFERENCE: Clause 7/Q.703 STD: Fig. 8							
TITLE: Link State Control – Expected signal units/orders							
SUBTITLE: Set and cease emergency prior to "start alignment"							
PURPOSE: To test the normal proving period is employed having "emergency" set and cleared							
PRE-TEST CONDITIONS: Link out of service							
CONFIGURATION: 1				TYPE OF TEST: VAT			
EXPECTED SIGNAL UNIT SEQUENCE:							
<div><div>SP</div><div>B</div><div>Link</div><div>1 – 0</div><div>SIOS</div><div>1 – 0</div><div>SIO</div><div>1 – 0</div><div>SIN</div></div>				<div><div>SP</div><div>A</div><div>Link</div><div>1 – 0</div><div>SIOS</div><div>: set EM</div><div>: clear EM</div><div>: start</div><div>1 – 0</div><div>SIO</div><div>1 – 0</div><div>SIN</div><div>1 – 0</div><div>FISU</div></div>			
TEST DESCRIPTION							
1.	Check emergency set and cleared prior to start of alignment.						
2.	Check normal proving period is carried out.						

MTP, LEVEL 2

TEST NUMBER: 1.19				PAGE: 1 OF 1																																																			
REFERENCE: Clause 7/Q.703 STD: Fig. 8; Fig. 9																																																							
TITLE: Link State Control – Expected signal units/orders																																																							
SUBTITLE: Set emergency while in "not aligned state"																																																							
PURPOSE: To test that emergency proving can be set during normal initial alignment																																																							
PRE-TEST CONDITIONS: Link out of service																																																							
CONFIGURATION: 1				TYPE OF TEST: VAT, CPT																																																			
EXPECTED SIGNAL UNIT SEQUENCE:																																																							
<table><tr><td>SP</td><td>B</td><td></td><td>SP</td><td>A</td></tr><tr><td>Link</td><td></td><td></td><td>Link</td><td></td></tr><tr><td></td><td></td><td><-----</td><td>1 – 0</td><td>SIOS</td></tr><tr><td>1 – 0</td><td>SIOS</td><td>-----></td><td></td><td>: start</td></tr><tr><td></td><td></td><td><-----</td><td>1 – 0</td><td>SIO</td></tr><tr><td></td><td></td><td></td><td></td><td>: set EM</td></tr><tr><td>1 – 0</td><td>SIO</td><td>-----></td><td></td><td></td></tr><tr><td></td><td></td><td><-----</td><td>1 – 0</td><td>SIE</td></tr><tr><td>1 – 0</td><td>SIN</td><td>-----></td><td></td><td><div><div></div><div>T4(Pe)</div></div></td></tr><tr><td></td><td></td><td><-----</td><td>1 – 0</td><td>FISU</td></tr></table>						SP	B		SP	A	Link			Link				<-----	1 – 0	SIOS	1 – 0	SIOS	----->		: start			<-----	1 – 0	SIO					: set EM	1 – 0	SIO	----->					<-----	1 – 0	SIE	1 – 0	SIN	----->		<div><div></div><div>T4(Pe)</div></div>			<-----	1 – 0	FISU
SP	B		SP	A																																																			
Link			Link																																																				
		<-----	1 – 0	SIOS																																																			
1 – 0	SIOS	----->		: start																																																			
		<-----	1 – 0	SIO																																																			
				: set EM																																																			
1 – 0	SIO	----->																																																					
		<-----	1 – 0	SIE																																																			
1 – 0	SIN	----->		<div><div></div><div>T4(Pe)</div></div>																																																			
		<-----	1 – 0	FISU																																																			
TEST DESCRIPTION																																																							
1.	Check that emergency proving period is used after set EM during normal initial alignment.																																																						
2.	The timing of this test is critical, emergency must be set once the start command has been given and before SIO is received (i.e. during Timer T2 operation).																																																						
3.	At 64 kbit/s Timer T4 shall be in the range 0.4 sec to 0.6 sec (nominally 0.5 sec).																																																						
4.	At 4.8 kbit/s Timer T4 shall be in the range 6 secs to 8 secs (nominally 7 secs).																																																						

MTP, LEVEL 2

TEST NUMBER: 1.20				PAGE: 1 OF 1			
REFERENCE: Clause 7/Q.703 STD: Fig. 9							
TITLE: Link State Control – Expected signal units/orders							
SUBTITLE: Set emergency when "aligned"							
PURPOSE: To test that emergency proving period is used when emergency set prior to receiving SIN							
PRE-TEST CONDITIONS: Link out of service							
CONFIGURATION: 1				TYPE OF TEST: VAT			
EXPECTED SIGNAL UNIT SEQUENCE:							
<div>SP B</div> <div>Link</div> <div>1 – 0 SIOS</div> <div>1 – 0 SIO</div> <div>1 – 0 SIN</div>				<div>SP A</div> <div>Link</div> <div>1 – 0 SIOS</div> <div>1 – 0 SIO</div> <div>1 – 0 SIN</div> <div>1 – 0 SIE</div> <div>1 – 0 FISU</div>			
<div><div><-----</div><div>-----></div><div><-----</div><div>-----></div><div><-----</div><div>-----></div><div><-----</div></div> <div><div>: start</div><div>:</div><div>T4(Pe)</div></div>							
TEST DESCRIPTION							
<div>1. Check that emergency proving period is used after SIE sent during "aligned" state.</div> <div>2. The timing of this test is critical. Emergency must be set once SIN has been sent but before Timer T3 expires.</div>							

MTP, LEVEL 2

TEST NUMBER: 1.21			PAGE: 1 OF 1		
REFERENCE: Clause 7/Q.703 STD: Fig. 8; Fig. 9					
TITLE: Link State Control – Expected signal units/orders					
SUBTITLE: Both ends set emergency					
PURPOSE: To check the emergency alignment procedure and Timer T4(Pe)					
PRE-TEST CONDITIONS: Link out of service					
CONFIGURATION: 1			TYPE OF TEST: VAT		
EXPECTED SIGNAL UNIT SEQUENCE:					
SP B			SP A		
Link			Link		
		<-----	1 – 0		SIOS
1 – 0	SIOS	----->			
				:	set EM
				:	start
		<-----	1 – 0		SIO
1 – 0	SIO	----->			
		<-----	1 – 0		SIE
1 – 0	SIE	----->			
					T4(Pe)
		<-----	1 – 0		FISU
TEST DESCRIPTION					
1.	Check correct emergency alignment procedure is performed.				

MTP, LEVEL 2

TEST NUMBER: 1.22		PAGE: 1 OF 1	
REFERENCE: Clause 7/Q.703 STD: Fig. 9			
TITLE: Link State Control – Expected signal units/orders			
SUBTITLE: Individual end sets emergency			
PURPOSE: To check emergency alignment procedure, Emergency set at the other end			
PRE-TEST CONDITIONS: Link out of service			
CONFIGURATION: 1		TYPE OF TEST: VAT	
EXPECTED SIGNAL UNIT SEQUENCE:			
SP B		SP A	
Link		Link	
	<-----	1 – 0	SIOS
1 – 0	SIOS		
1 – 0	SIO		
			: start
	<-----	1 – 0	SIO
1 – 0	SIE		
	<-----	1 – 0	SIN
			T4(Pe)
	<-----	1 – 0	FISU
TEST DESCRIPTION			
1.	Emergency alignment set at B.		
2.	Start alignment at A.		
3.	Check that alignment occurs with the emergency proving period.		

MTP, LEVEL 2

TEST NUMBER: 1.23				PAGE: 1 OF 1			
REFERENCE: Clause 7/Q.703 STD: Fig. 9							
TITLE: Link State Control – Expected signal units/orders							
SUBTITLE: Set emergency during normal proving							
PURPOSE: To test that setting emergency during normal proving stops normal proving and starts the emergency proving							
PRE-TEST CONDITIONS: Link out of service							
CONFIGURATION: 1				TYPE OF TEST: VAT			
EXPECTED SIGNAL UNIT SEQUENCE:							
<div>SP B</div> <div>Link</div> <div>1 – 0 SIOS</div> <div>1 – 0 SIO</div> <div>1 – 0 SIN</div> <div>1 – 0 SIN</div>				<div>SP A</div> <div>Link</div> <div>1 – 0 SIOS</div> <div>: start</div> <div>1 – 0 SIO</div> <div>1 – 0 SIN</div> <div>: set EM</div> <div>1 – 0 SIE</div> <div> </div> <div> T4(Pe)</div> <div>1 – 0 FISU</div>			
TEST DESCRIPTION							
1.	Set emergency during normal proving period at A.						
2.	Check A sends SIE.						
3.	Repeat test in reverse direction.						

MTP, LEVEL 2

TEST NUMBER: 1.24		PAGE: 1 OF 1	
REFERENCE: Clause 7/Q.703 STD: Fig. 9			
TITLE: Link State Control – Expected signal units/orders			
SUBTITLE: No SIO sent during emergency alignment			
PURPOSE: To ensure that emergency alignment still occurs when SIE is received following SIOS			
PRE-TEST CONDITIONS: Link out of service			
CONFIGURATION: 1		TYPE OF TEST: VAT	
EXPECTED SIGNAL UNIT SEQUENCE:			
	SP	B	SP A
Link			Link
		<-----	1 – 0 SIOS
1 – 0	SIOS	----->	
			: set EM
			: start
		<-----	1 – 0 SIO
1 – 0	SIE	----->	
		<-----	1 – 0 SIE
			T4(Pe)
		<-----	1 – 0 FISU
TEST DESCRIPTION			
1.	Set emergency and start link at A.		
2.	A receives SIE after sending SIO.		
3.	Check that link aligns OK after emergency proving.		

MTP, LEVEL 2

TEST NUMBER: 1.25		PAGE: 1 OF 1																																														
REFERENCE: Clause 7/Q.703 STD: Fig. 8; Fig. 9																																																
TITLE: Link State Control – Expected signal units/orders																																																
SUBTITLE: Deactivation during initial alignment																																																
PURPOSE: To test the response to the receipt of the stop command while in the initial alignment state (initial alignment is Not Aligned State)																																																
PRE-TEST CONDITIONS: Link out of service																																																
CONFIGURATION: 1		TYPE OF TEST: VAT, CPT																																														
EXPECTED SIGNAL UNIT SEQUENCE:																																																
<table><tr><td>SP</td><td>B</td><td></td><td>SP</td><td>A</td></tr><tr><td>Link</td><td></td><td></td><td>Link</td><td></td></tr><tr><td></td><td></td><td><-----</td><td>1 – 0</td><td>SIOS</td></tr><tr><td>1 – 0</td><td>SIOS</td><td>-----></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td><td>: start</td></tr><tr><td></td><td></td><td><-----</td><td>1 – 0</td><td>SIO</td></tr><tr><td></td><td></td><td></td><td></td><td>: wait 5 secs.</td></tr><tr><td></td><td></td><td></td><td></td><td>: stop</td></tr><tr><td></td><td></td><td><-----</td><td>1 – 0</td><td>SIOS</td></tr></table>				SP	B		SP	A	Link			Link				<-----	1 – 0	SIOS	1 – 0	SIOS	----->							: start			<-----	1 – 0	SIO					: wait 5 secs.					: stop			<-----	1 – 0	SIOS
SP	B		SP	A																																												
Link			Link																																													
		<-----	1 – 0	SIOS																																												
1 – 0	SIOS	----->																																														
				: start																																												
		<-----	1 – 0	SIO																																												
				: wait 5 secs.																																												
				: stop																																												
		<-----	1 – 0	SIOS																																												
TEST DESCRIPTION																																																
1.	Check that alignment ceases after Stop command given.																																															
2.	The stop command must be issued before timer T2 expires.																																															
3.	Timer T2 shall be in the range 5 secs to 150 secs.																																															

MTP, LEVEL 2

TEST NUMBER: 1.26		PAGE: 1 OF 1																																																																
REFERENCE: Clause 7/Q.703 STD: Fig. 8; Fig. 9																																																																		
TITLE: Link State Control – Expected signal units/orders																																																																		
SUBTITLE: Deactivation during aligned state																																																																		
PURPOSE: To test the response to the receipt of the stop command while in the initial alignment state (initial alignment is aligned state)																																																																		
PRE-TEST CONDITIONS: Link out of service																																																																		
CONFIGURATION: 1		TYPE OF TEST: VAT																																																																
<div>EXPECTED SIGNAL UNIT SEQUENCE:</div> <table><thead><tr><th></th><th>SP</th><th>B</th><th></th><th></th><th>SP</th><th>A</th></tr></thead><tbody><tr><td>Link</td><td></td><td></td><td><-----</td><td>Link</td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td><td>1 – 0</td><td></td><td>SIOS</td></tr><tr><td>1 – 0</td><td>SIOS</td><td></td><td>-----></td><td></td><td></td><td>: start</td></tr><tr><td></td><td></td><td></td><td><-----</td><td>1 – 0</td><td></td><td>SIO</td></tr><tr><td>1 – 0</td><td>SIO</td><td></td><td>-----></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td><-----</td><td>1 – 0</td><td></td><td>SIN</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td>: stop</td></tr><tr><td></td><td></td><td></td><td><-----</td><td>1 – 0</td><td></td><td>SIOS</td></tr></tbody></table>					SP	B			SP	A	Link			<-----	Link							1 – 0		SIOS	1 – 0	SIOS		----->			: start				<-----	1 – 0		SIO	1 – 0	SIO		----->							<-----	1 – 0		SIN							: stop				<-----	1 – 0		SIOS
	SP	B			SP	A																																																												
Link			<-----	Link																																																														
				1 – 0		SIOS																																																												
1 – 0	SIOS		----->			: start																																																												
			<-----	1 – 0		SIO																																																												
1 – 0	SIO		----->																																																															
			<-----	1 – 0		SIN																																																												
						: stop																																																												
			<-----	1 – 0		SIOS																																																												
TEST DESCRIPTION																																																																		
1.	Check that alignment ceases after STOP command given.																																																																	
2.	The stop command must be issued before timer T3 expires.																																																																	
3.	Timer T3 shall be in the range 1 sec to 1.5 secs.																																																																	

MTP, LEVEL 2

TEST NUMBER: 1.27				PAGE: 1 OF 1			
REFERENCE: Clauses 7 and 8/Q.703 STD: Fig. 8							
TITLE: Link State Control – Expected signal units/orders							
SUBTITLE: Deactivation during aligned not ready							
PURPOSE: To check the response following normal alignment when PO has been set							
PRE-TEST CONDITIONS: Link out of service							
CONFIGURATION: 1				TYPE OF TEST: VAT			
EXPECTED SIGNAL UNIT SEQUENCE:							
<div>SP B</div> <div>Link</div> <div>1 – 0 SIOS</div> <div>1 – 0 SIO</div> <div>1 – 0 SIN</div>				<div>SP A</div> <div>Link</div> <div>1 – 0 SIOS</div> <div> </div>			

MTP, LEVEL 2

TEST NUMBER: 1.28		PAGE: 1 OF 1	
REFERENCE: Clause 7/Q.703 STD: Fig. 8; Fig. 14			
TITLE: Link State Control – Expected signal units/orders			
SUBTITLE: SIO received during link in service			
PURPOSE: To check the deactivation of a signalling link from the "In Service" state			
PRE-TEST CONDITIONS: Link in service			
CONFIGURATION: 1		TYPE OF TEST: VAT	
EXPECTED SIGNAL UNIT SEQUENCE:			
SP B		SP A	
Link		Link	
1 – 0	FISU		
1 – 0	SIO		

MTP, LEVEL 2

TEST NUMBER: 1.29		PAGE: 1 OF 1																																											
REFERENCE: Clause 7/Q.703 STD: Fig. 8; Fig. 14																																													
TITLE: Link State Control – Expected signal units/orders																																													
SUBTITLE: Deactivation during link in service																																													
PURPOSE: To check the deactivation of a signalling link from the "In Service" state																																													
PRE-TEST CONDITIONS: Link in service																																													
CONFIGURATION: 1		TYPE OF TEST: VAT, CPT																																											
<div>EXPECTED SIGNAL UNIT SEQUENCE:</div> <table><tr><td>Link</td><td>SP</td><td>B</td><td></td><td>Link</td><td>SP</td><td>A</td></tr><tr><td>1 – 0</td><td>FISU</td><td></td><td>-----></td><td>1 – 0</td><td>FISU</td><td></td></tr><tr><td></td><td></td><td></td><td><-----</td><td></td><td></td><td></td></tr><tr><td></td><td>: stop</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>1 – 0</td><td>SIOS</td><td></td><td>-----></td><td>1 – 0</td><td>SIOS</td><td></td></tr><tr><td></td><td></td><td></td><td><-----</td><td></td><td></td><td></td></tr></table>				Link	SP	B		Link	SP	A	1 – 0	FISU		----->	1 – 0	FISU					<-----					: stop						1 – 0	SIOS		----->	1 – 0	SIOS					<-----			
Link	SP	B		Link	SP	A																																							
1 – 0	FISU		----->	1 – 0	FISU																																								
			<-----																																										
	: stop																																												
1 – 0	SIOS		----->	1 – 0	SIOS																																								
			<-----																																										
TEST DESCRIPTION																																													
1.	Check that an "In service" link can be taken out of service by command at B.																																												
2.	Repeat test, command given at A.																																												

MTP, LEVEL 2

TEST NUMBER: 1.30			PAGE: 1 OF 1		
REFERENCE: Clauses 7 and 8/Q.703 STD: Fig. 10					
TITLE: Link State Control – Expected signal units/orders					
SUBTITLE: Deactivation during LPO					
PURPOSE: To check the response to the stop command during LPO					
PRE-TEST CONDITIONS: Link in service					
CONFIGURATION: 1			TYPE OF TEST: VAT		
EXPECTED SIGNAL UNIT SEQUENCE:					
SP B			SP A		
Link			Link		
1 – 0 FISU			1 – 0 FISU		
			: set LPO		
1 – 0 FISU			1 – 0 SIPO		
			: stop		
			1 – 0 SIOS		
TEST DESCRIPTION					
1.	SIPO sent from A, stop command given at A, check link enters out of service state.				
2.	Repeat test, SIPO sent from B, stop command at B, check link enters out of service state.				

MTP, LEVEL 2

TEST NUMBER: 1.31		PAGE: 1 OF 1																																																									
REFERENCE: Clauses 7and 8/Q.703 STD: Fig. 10																																																											
TITLE: Link State Control – Expected signal units/orders																																																											
SUBTITLE: Deactivation during RPO																																																											
PURPOSE: To test the response to the stop command during RPO																																																											
PRE-TEST CONDITIONS: Link in service																																																											
CONFIGURATION: 1		TYPE OF TEST: VAT																																																									
<div>EXPECTED SIGNAL UNIT SEQUENCE:</div> <table><tr><td></td><td>SP</td><td>B</td><td></td><td></td><td></td><td>SP</td><td>A</td></tr><tr><td>Link</td><td></td><td></td><td></td><td></td><td>Link</td><td></td><td></td></tr><tr><td>1 – 0</td><td>FISU</td><td></td><td>-----></td><td></td><td>1 – 0</td><td>FISU</td><td></td></tr><tr><td></td><td></td><td></td><td><-----</td><td></td><td></td><td></td><td></td></tr><tr><td>1 – 0</td><td>SIPO</td><td></td><td>-----></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td>: stop</td><td></td></tr><tr><td></td><td></td><td></td><td><-----</td><td></td><td>1 – 0</td><td>SIOS</td><td></td></tr></table>					SP	B				SP	A	Link					Link			1 – 0	FISU		----->		1 – 0	FISU					<-----					1 – 0	SIPO		----->											: stop					<-----		1 – 0	SIOS	
	SP	B				SP	A																																																				
Link					Link																																																						
1 – 0	FISU		----->		1 – 0	FISU																																																					
			<-----																																																								
1 – 0	SIPO		----->																																																								
						: stop																																																					
			<-----		1 – 0	SIOS																																																					
TEST DESCRIPTION																																																											
1.	SIPO received at A, stop command given at A, check link enters out of service state.																																																										
2.	Repeat test, SIPO received at B, stop command given at B, check link enters out of service state.																																																										

MTP, LEVEL 2

TEST NUMBER: 1.32				PAGE: 1 OF 1			
REFERENCE: Clause 7, 10.3/Q.703 STD: Fig. 8; Fig. 9							
TITLE: Link State Control – Expected signal units/orders							
SUBTITLE: Deactivation during the proving period							
PURPOSE: To test the response to the receipt of SIOS during the proving period							
PRE-TEST CONDITIONS: Link out of service							
CONFIGURATION: 1				TYPE OF TEST: VAT, CPT			
EXPECTED SIGNAL UNIT SEQUENCE:							
SP B				SP A			
Link				Link			
				1 – 0 SIOS			
1 – 0 SIOS				: start			
				1 – 0 SIO			
1 – 0 SIO							
				1 – 0 SIN			
1 – 0 SIN							
: stop							
1 – 0 SIOS				1 – 0 SIOS			
TEST DESCRIPTION							
1.	Check link enters out of service state when SIOS is received at A during the proving period.						
2.	Repeat test, SIOS received at B during proving period.						

MTP, LEVEL 2

TEST NUMBER: 1.33				PAGE: 1 OF 1			
REFERENCE: Clause 7/Q.703 STD: Fig. 8							
TITLE: Link State Control – Expected signal units/orders							
SUBTITLE: SIO received instead of FISUs							
PURPOSE: To check the response to the receipt of SIO instead of FISUs in the aligned ready state							
PRE-TEST CONDITIONS: Link out of service							
CONFIGURATION: 1				TYPE OF TEST: VAT			
EXPECTED SIGNAL UNIT SEQUENCE:							
SP		B		SP		A	
Link				Link			
		<-----		1 – 0		SIOS	
1 – 0		SIOS		----->			
						: start	
		<-----		1 – 0		SIO	
1 – 0		SIO		----->			
		<-----		1 – 0		SIN	
1 – 0		SIN		----->			
		<-----		1 – 0		FISU	
1 – 0		SIO		----->			
		<-----		1 – 0		SIOS	
TEST DESCRIPTION							
1.	Check link enters out of service state when SIO is received at A instead of FISUs in the aligned ready state.						

MTP, LEVEL 2

TEST NUMBER: 1.34				PAGE: 1 OF 1			
REFERENCE: Clause 7/Q.703 STD: Fig. 8							
TITLE: Link State Control – Expected signal units/orders							
SUBTITLE: SIOS received instead of FISUs							
PURPOSE: To check the response to the receipt of SIOS instead of FISUs in the aligned ready state							
PRE-TEST CONDITIONS: Link out of service							
CONFIGURATION: 1				TYPE OF TEST: VAT			
EXPECTED SIGNAL UNIT SEQUENCE:							
SP B				SP A			
Link				Link			
1 – 0 SIOS				1 – 0 SIOS			
: start							
1 – 0 SIO				1 – 0 SIO			
1 – 0 SIN				1 – 0 SIN			
: stop							
1 – 0 SIOS				1 – 0 FISU			
				1 – 0 SIOS			
TEST DESCRIPTION							
1.	Check link enters out of service state when SIOS is received at A instead of FISUs in the aligned ready state.						

MTP, LEVEL 2

TEST NUMBER: 1.35			PAGE: 1 OF 1		
REFERENCE: Clauses 7 and 8/Q.703 STD: Fig. 8					
TITLE: Link State Control – Expected signal units/orders					
SUBTITLE: SIPO received instead of FISUs					
PURPOSE: To check the response to the receipt of SIPO instead of FISUs in the aligned ready state					
PRE-TEST CONDITIONS: Link out of service					
CONFIGURATION: 1			TYPE OF TEST: VAT		
EXPECTED SIGNAL UNIT SEQUENCE:					
SP		B	SP		A
Link			Link		
		<-----	1 – 0		SIOS
1 – 0	SIOS	----->			
				:	start
		<-----	1 – 0		SIO
1 – 0	SIO	----->			
		<-----	1 – 0		SIN
1 – 0	SIN	----->			
		<-----	1 – 0		FISU
	:	set LPO			
1 – 0	SIPO	----->			
		<-----	1 – 0		FISU
TEST DESCRIPTION					
1.	Check link enters processor outage state when SIPO is received at A instead of FISUs in the aligned ready state.				

MTP, LEVEL 2

TEST NUMBER: 2.1				PAGE: 1 OF 1			
REFERENCE: Clauses 7 and 11/Q.703 STD: Fig. 8							
TITLE: Link State Control – Unexpected signal units/orders							
SUBTITLE: Unexpected signal units/orders in "Out of service" state							
PURPOSE: To check that the unexpected signal units/orders are ignored							
PRE-TEST CONDITIONS: Link out of service							
CONFIGURATION: 1				TYPE OF TEST: VAT			
EXPECTED SIGNAL UNIT SEQUENCE:							
SP		B		SP		A	
Link				Link			
		<-----		1 – 0		SIOS	
1 – 0		----->					
xxx		----->					
						yyy	
						: start	
		<-----		1 – 0		SIO	
1 – 0		----->					
		<-----		1 – 0		SIN	
1 – 0		----->					
		<-----		1 – 0		FISU	
1 – 0		----->					
TEST DESCRIPTION							
1.	Check that the unexpected signal units xxx received from B are ignored without impact on the system. xxx are successively SIO, SIN, SIE, SIPO, SIB, aberrant LSSU (non-existing status, one and two octets), FISU and MSU.						
2.	Check that the unexpected orders yyy = Stop from level 3 are ignored without impact on system (if applicable).						

MTP, LEVEL 2

TEST NUMBER: 2.2				PAGE: 1 OF 1			
REFERENCE: Clauses 7 and 11/Q.703 STD: Fig. 9							
TITLE: Link State Control – Unexpected signal units/orders							
SUBTITLE: Unexpected signal units/orders in "Not aligned" state							
PURPOSE: To check that the unexpected signal units/orders are ignored							
PRE-TEST CONDITIONS: Link out of service							
CONFIGURATION: 1				TYPE OF TEST: VAT			
EXPECTED SIGNAL UNIT SEQUENCE:							
SP		B		SP		A	
Link				Link			
		<-----		1 – 0		SIOS	
1 – 0		----->					
		<-----		1 – 0		: start	
		----->				SIO	
xxx						yyy	
1 – 0		----->					
		<-----		1 – 0		SIN	
1 – 0		----->					
		<-----		1 – 0		FISU	
1 – 0		----->					
TEST DESCRIPTION							
1.	Check that the unexpected signal units xxx received from B are ignored without impact on the system. xxx are successively SIOS, SIPO, SIB, aberrant LSSU, FISU and MSU.						
2.	Check that the unexpected orders yyy received from level 3 are ignored without impact on the system. yyy are successively clear EM and start (if applicable).						

MTP, LEVEL 2

TEST NUMBER: 2.3				PAGE: 1 OF 1			
REFERENCE: Clauses 7 and 11/Q.703 STD: Fig. 9							
TITLE: Link State Control – Unexpected signal units/orders							
SUBTITLE: Unexpected signal units/orders in "Aligned" state							
PURPOSE: To check that the unexpected signal units/orders are ignored							
PRE-TEST CONDITIONS: Link out of service							
CONFIGURATION: 1				TYPE OF TEST: VAT			
EXPECTED SIGNAL UNIT SEQUENCE:							
SP B				SP A			
Link				Link			
1 – 0 SIOS				1 – 0 SIOS			
				: start			
1 – 0 SIO				1 – 0 SIO			
xxx				1 – 0 SIN			
				yyy			
1 – 0 SIN							
				1 – 0 FISU			
1 – 0 FISU							
TEST DESCRIPTION							
1.	Check that the unexpected signal units xxx received from B are ignored without impact on the system. xxx are successively SIO, SIPO, SIB, aberrant LSSU, FISU and MSU.						
2.	Check that the unexpected orders yyy received from level 3 are ignored without impact on the system. yyy are successively clear EM and start (if applicable).						

MTP, LEVEL 2

TEST NUMBER: 2.4				PAGE: 1 OF 1			
REFERENCE: Clauses 7 and 11/Q.703 STD: Fig. 9							
TITLE: Link State Control – Unexpected signal units/orders							
SUBTITLE: Unexpected signal units/orders in "Proving" state							
PURPOSE: To check that the unexpected signal units/orders are ignored							
PRE-TEST CONDITIONS: Link out of service							
CONFIGURATION: 1				TYPE OF TEST: VAT			
EXPECTED SIGNAL UNIT SEQUENCE:							
SP		B		SP		A	
Link				Link			
			<-----	1 – 0		SIOS	
1 – 0	SIOS		----->			: start	
			<-----	1 – 0		SIO	
1 – 0	SIO		----->				
			<-----	1 – 0		SIN	
1 – 0	SIN		----->				
	xxx		----->			yyy	
			<-----	1 – 0		FISU	
1 – 0	FISU		----->				
TEST DESCRIPTION							
1.	Check that the unexpected signal units xxx received from B are ignored without impact on the system. xxx are successively SIPO, SIB, aberrant LSSU, FISU and MSU.						
2.	Check that the unexpected orders yyy received from level 3 are ignored without impact on the system. yyy are successively clear EM and start (if applicable). NOTE – The reception of SIB in "Initial alignment" state may possibly cause link failure after transferring to "In service" state because of the T6 expiration.						

MTP, LEVEL 2

TEST NUMBER: 2.5				PAGE: 1 OF 1			
REFERENCE: Clauses 7 and 11/Q.703 STD: Fig. 8							
TITLE: Link State Control – Unexpected signal units/orders							
SUBTITLE: Unexpected signal units/orders in "Aligned ready" state							
PURPOSE: To check that the unexpected signal units/orders are ignored							
PRE-TEST CONDITIONS: Link out of service							
CONFIGURATION: 1				TYPE OF TEST: VAT			
EXPECTED SIGNAL UNIT SEQUENCE:							
SP		B		SP		A	
Link				Link			
		<-----		1 – 0		SIOS	
1 – 0	SIOS	----->				: start	
		<-----		1 – 0		SIO	
1 – 0	SIO	----->					
		<-----		1 – 0		SIN	
1 – 0	SIN	----->					
		<-----		1 – 0		FISU	
	xxx	----->				yyy	
1 – 0	FISU	----->					
TEST DESCRIPTION							
1.	Check that the unexpected signal units xxx received from B are ignored without impact on the system. xxx are successively SIB and aberrant LSSU.						
2.	Check that the unexpected orders yyy received from level 3 are ignored without impact on the system. yyy are successively set EM, clear EM, clear LPO and start (if applicable).						
	NOTE – The reception of SIB in "Aligned ready" state may possibly cause link failure after transferring to "In service" state because of the T6 expiration.						

MTP, LEVEL 2

TEST NUMBER: 2.6				PAGE: 1 OF 1			
REFERENCE: Clauses 7 and 11/Q.703 STD: Fig. 8							
TITLE: Link State Control – Unexpected signal units/orders							
SUBTITLE: Unexpected signal units/orders in "Aligned not ready" state							
PURPOSE: To check that the unexpected signal units/orders are ignored							
PRE-TEST CONDITIONS: Link out of service							
CONFIGURATION: 1				TYPE OF TEST: VAT			
EXPECTED SIGNAL UNIT SEQUENCE:							
SP B				SP A			
Link				Link			
				1 – 0 SIOS			
1 – 0 SIOS				: set LPO			
				: start			
				1 – 0 SIO			
1 – 0 SIO							
				1 – 0 SIN			
1 – 0 SIN							
				1 – 0 SIPO			
xxx							
				yyy			
1 – 0 FISU							
				1 – 0 SIPO			
TEST DESCRIPTION							
1.	Check that the unexpected signal units xxx received from B are ignored without impact on the system. xxx are successively SIB and aberrant LSSU.						
2.	Check that the unexpected orders yyy received from level 3 are ignored without impact on the system. yyy are successively set EM, clear EM, clear LPO and start (if applicable).						

MTP, LEVEL 2

TEST NUMBER: 2.7			PAGE: 1 OF 1																																																		
REFERENCE: Clauses 7 and 11/Q.703 STD: Fig. 8																																																					
TITLE: Link State Control – Unexpected signal units/orders																																																					
SUBTITLE: Unexpected signal units/orders in "In service" state																																																					
PURPOSE: To check that the unexpected signal units/orders are ignored																																																					
PRE-TEST CONDITIONS: Link out of service																																																					
CONFIGURATION: 1			TYPE OF TEST: VAT																																																		
EXPECTED SIGNAL UNIT SEQUENCE:																																																					
<table><tr><td></td><td>SP</td><td>B</td><td></td><td>SP</td><td>A</td></tr><tr><td>Link</td><td></td><td></td><td></td><td>Link</td><td></td></tr><tr><td></td><td></td><td></td><td><-----</td><td>1 – 0</td><td>FISU</td></tr><tr><td>1 – 0</td><td>FISU</td><td></td><td>-----></td><td></td><td></td></tr><tr><td></td><td>aberrant LSSU</td><td></td><td>-----></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td><-----</td><td></td><td>yyy</td></tr><tr><td></td><td></td><td></td><td>-----></td><td>1 – 0</td><td>FISU</td></tr><tr><td>1 – 0</td><td>FISU</td><td></td><td>-----></td><td></td><td></td></tr></table>							SP	B		SP	A	Link				Link					<-----	1 – 0	FISU	1 – 0	FISU		----->				aberrant LSSU		----->						<-----		yyy				----->	1 – 0	FISU	1 – 0	FISU		----->		
	SP	B		SP	A																																																
Link				Link																																																	
			<-----	1 – 0	FISU																																																
1 – 0	FISU		----->																																																		
	aberrant LSSU		----->																																																		
			<-----		yyy																																																
			----->	1 – 0	FISU																																																
1 – 0	FISU		----->																																																		
TEST DESCRIPTION																																																					
1.	Check that an aberrant LSSU received from B is ignored without impact on the system.																																																				
2.	Check that the unexpected orders yyy received from level 3 are ignored without impact on the system. yyy are successively set EM, clear EM, clear LPO and start (if applicable).																																																				

MTP, LEVEL 2

TEST NUMBER: 2.8		PAGE: 1 OF 1	
REFERENCE: Clauses 7 and 11/Q.703 STD: Fig. 8			
TITLE: Link State Control – Unexpected signal units/orders			
SUBTITLE: Unexpected signal units/orders in "Processor outage" state			
PURPOSE: To check that the unexpected signal units/orders are ignored			
PRE-TEST CONDITIONS: Link in service			
CONFIGURATION: 1		TYPE OF TEST: VAT	
<div>EXPECTED SIGNAL UNIT SEQUENCE:</div> <div><div><div>SP B</div><div>Link</div><div>xxx</div><div>1 – 0 FISU</div></div><div><div><-----</div><div>-----></div><div>-----></div></div></div> <div><div>SP A</div><div>Link</div><div>: set LPO</div><div>SIPO</div><div>yyy</div></div>			
TEST DESCRIPTION			
1.	Check that the unexpected signal units xxx received from B are ignored without impact on the system. xxx are successively SIB and aberrant LSSU.		
2.	Check that the unexpected orders yyy received from level 3 are ignored without impact on the system. yyy are successively set EM, clear EM and start (if applicable).		

MTP, LEVEL 2

TEST NUMBER: 3.1		PAGE: 1 OF 1																																																			
REFERENCE: Clause 4, 10.2/Q.703 STD: Fig. 8																																																					
TITLE: Transmission failure																																																					
SUBTITLE: Link aligned ready (Break Tx path)																																																					
PURPOSE: To test the response to a transmission failure – detected by SUERM – when in "Aligned ready" state																																																					
PRE-TEST CONDITIONS: Link out of service																																																					
CONFIGURATION: 1		TYPE OF TEST: VAT																																																			
EXPECTED SIGNAL UNIT SEQUENCE:																																																					
<table><tr><td>SP</td><td>B</td><td></td><td>SP</td><td>A</td></tr><tr><td>Link</td><td></td><td></td><td>Link</td><td></td></tr><tr><td></td><td></td><td><-----</td><td>1 – 0</td><td>SIOS</td></tr><tr><td>1 – 0</td><td>SIOS</td><td>-----></td><td></td><td>: start</td></tr><tr><td></td><td></td><td><-----</td><td>1 – 0</td><td>SIO</td></tr><tr><td>1 – 0</td><td>SIO</td><td>-----></td><td></td><td></td></tr><tr><td></td><td></td><td><-----</td><td>1 – 0</td><td>SIN</td></tr><tr><td>1 – 0</td><td>SIN</td><td>-----></td><td></td><td></td></tr><tr><td></td><td></td><td><-----</td><td>1 – 0</td><td>FISU</td></tr><tr><td></td><td>: break Tx</td><td><-----</td><td>1 – 0</td><td>SIOS</td></tr></table>				SP	B		SP	A	Link			Link				<-----	1 – 0	SIOS	1 – 0	SIOS	----->		: start			<-----	1 – 0	SIO	1 – 0	SIO	----->					<-----	1 – 0	SIN	1 – 0	SIN	----->					<-----	1 – 0	FISU		: break Tx	<-----	1 – 0	SIOS
SP	B		SP	A																																																	
Link			Link																																																		
		<-----	1 – 0	SIOS																																																	
1 – 0	SIOS	----->		: start																																																	
		<-----	1 – 0	SIO																																																	
1 – 0	SIO	----->																																																			
		<-----	1 – 0	SIN																																																	
1 – 0	SIN	----->																																																			
		<-----	1 – 0	FISU																																																	
	: break Tx	<-----	1 – 0	SIOS																																																	
TEST DESCRIPTION																																																					
1.	Break Tx path at B when in "Aligned ready" state, check that the SUERM detects the failure and the link is taken out of service.																																																				
2.	Repeat test, break Tx at A.																																																				

MTP, LEVEL 2

TEST NUMBER: 3.2			PAGE: 1 OF 1		
REFERENCE: 5.3/Q.703 STD: Fig. 8					
TITLE: Transmission failure					
SUBTITLE: Link aligned ready (Corrupt FIBs – Basic)					
PURPOSE: To check the response to a link failure after corruption of two FIBs – detected by reception control – while in Aligned ready State					
PRE-TEST CONDITIONS: Aligned ready					
CONFIGURATION: 1			TYPE OF TEST: VAT		
EXPECTED SIGNAL UNIT SEQUENCE:					
SP B			SP A		
Link			Link		
<-----			1 – 0 FISU		
1 – 0	FISU corrupt FIB (FIB + FSN = 7F)		----->		
1 – 0	FISU corrupt FIB (FIB + FSN = 7F)		----->		
<-----			1 – 0 SIOS		
TEST DESCRIPTION					
1.	Check that receipt of two FISUs at A with corrupt FIB's at link aligned ready state causes the link to be taken out of service.				

MTP, LEVEL 2

TEST NUMBER: 3.3				PAGE: 1 OF 1			
REFERENCE: Clause 8, 10.3/Q.703 STD: Fig. 8							
TITLE: Transmission failure							
SUBTITLE: Link aligned not ready (Break Tx path)							
PURPOSE: To test the response to a break in the transmission path – detected by SUERM – in "Aligned not ready" state							
PRE-TEST CONDITIONS: Link out of service							
CONFIGURATION: 1				TYPE OF TEST: VAT			
EXPECTED SIGNAL UNIT SEQUENCE:							
SP		B		SP		A	
Link				Link			
		<-----		1 – 0		SIOS	
1 – 0		SIOS					
		----->					
						: set LPO	
						: start	
		<-----		1 – 0		SIO	
1 – 0		SIO					
		----->					
		<-----		1 – 0		SIN	
1 – 0		SIN					
		----->					
		<-----		1 – 0		SIPO	
		<-----		1 – 0		SIOS	

MTP, LEVEL 2

TEST NUMBER: 3.4		PAGE: 1 OF 1	
REFERENCE: Clause 8, 5.3/Q.703 STD: Fig. 8			
TITLE: Transmission failure			
SUBTITLE: Link aligned not ready (Corrupt FIBs – Basic)			
PURPOSE: To check the response to a link failure after corruption of two FIBs – detected by reception control – while in "Aligned not ready"			
PRE-TEST CONDITIONS: Link out of service			
CONFIGURATION: 1		TYPE OF TEST: VAT	
EXPECTED SIGNAL UNIT SEQUENCE:			
	SP	B	SP A
Link			Link
		<-----	1 – 0 SIOS
1 – 0	SIOS	----->	
			: set LPO
			: start
		<-----	1 – 0 SIO
1 – 0	SIO	----->	
		<-----	1 – 0 SIN
1 – 0	SIN	----->	
		<-----	1 – 0 SIPO
1 – 0	FISU corrupt FIB (FIB + FSN = 7F)	----->	
1 – 0	FISU corrupt FIB (FIB + FSN = 7F)	----->	
		<-----	1 – 0 SIOS
TEST DESCRIPTION			
1.	Set LPO at A.		
2.	Start link alignment at A.		
3.	Send two corrupt FISUs (corrupt FIBs) on link aligned not ready.		
4.	Check link is taken out of service at A.		

MTP, LEVEL 2

TEST NUMBER: 3.5		PAGE: 1 OF 1																															
REFERENCE: Clause 4, 10.2/Q.703 STD: Fig. 8																																	
TITLE: Transmission failure																																	
SUBTITLE: Link in service (Break Tx path)																																	
PURPOSE: To test the response to a transmission failure when the link is "In service"																																	
PRE-TEST CONDITIONS: Link in service																																	
CONFIGURATION: 1		TYPE OF TEST: VAT, CPT																															
<div>EXPECTED SIGNAL UNIT SEQUENCE:</div> <table><tr><td>SP</td><td>B</td><td></td><td>SP</td><td>A</td></tr><tr><td>Link</td><td></td><td></td><td>Link</td><td></td></tr><tr><td></td><td></td><td><-----</td><td>1 – 0</td><td>FISU</td></tr><tr><td>1 – 0</td><td>FISU</td><td>-----></td><td></td><td></td></tr><tr><td></td><td>: break Tx</td><td></td><td></td><td></td></tr><tr><td></td><td></td><td><-----</td><td></td><td>SIOS</td></tr></table>				SP	B		SP	A	Link			Link				<-----	1 – 0	FISU	1 – 0	FISU	----->				: break Tx						<-----		SIOS
SP	B		SP	A																													
Link			Link																														
		<-----	1 – 0	FISU																													
1 – 0	FISU	----->																															
	: break Tx																																
		<-----		SIOS																													
TEST DESCRIPTION																																	
1.	Break Tx at B, check SIOS returned from A.																																
2.	Repeat test, break at A.																																

MTP, LEVEL 2

TEST NUMBER: 3.6			PAGE: 1 OF 1																																																														
REFERENCE: 5.3/Q.703 STD: Fig. 8																																																																	
TITLE: Transmission failure																																																																	
SUBTITLE: Link in service (Corrupt FIBs – Basic)																																																																	
PURPOSE: To check the response to a link failure after corruption of two FIBs – detected by reception control – while "In service"																																																																	
PRE-TEST CONDITIONS: Link in service																																																																	
CONFIGURATION: 1			TYPE OF TEST: VAT																																																														
EXPECTED SIGNAL UNIT SEQUENCE:																																																																	
<table><tr><td></td><td>SP</td><td>B</td><td></td><td>SP</td><td>A</td></tr><tr><td>Link</td><td></td><td></td><td>Link</td><td></td><td></td></tr><tr><td></td><td></td><td></td><td>1 – 0</td><td>FISU</td><td></td></tr><tr><td>1 – 0</td><td>FISU</td><td></td><td></td><td></td><td></td></tr><tr><td></td><td>(FIB + FSN = FF)</td><td></td><td></td><td></td><td></td></tr><tr><td>1 – 0</td><td>FISU corrupt FIB</td><td></td><td></td><td></td><td></td></tr><tr><td></td><td>(FIB + FSN = 7F)</td><td></td><td></td><td></td><td></td></tr><tr><td>1 – 0</td><td>FISU corrupt FIB</td><td></td><td></td><td></td><td></td></tr><tr><td></td><td>(FIB + FSN = 7F)</td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td>1 – 0</td><td>SIOS</td><td></td></tr></table>							SP	B		SP	A	Link			Link						1 – 0	FISU		1 – 0	FISU						(FIB + FSN = FF)					1 – 0	FISU corrupt FIB						(FIB + FSN = 7F)					1 – 0	FISU corrupt FIB						(FIB + FSN = 7F)								1 – 0	SIOS	
	SP	B		SP	A																																																												
Link			Link																																																														
			1 – 0	FISU																																																													
1 – 0	FISU																																																																
	(FIB + FSN = FF)																																																																
1 – 0	FISU corrupt FIB																																																																
	(FIB + FSN = 7F)																																																																
1 – 0	FISU corrupt FIB																																																																
	(FIB + FSN = 7F)																																																																
			1 – 0	SIOS																																																													
TEST DESCRIPTION																																																																	
1.	Check that receipt of two FISUs at A with corrupt FIBs at link in service state causes the link to be taken out of service.																																																																

MTP, LEVEL 2

TEST NUMBER: 3.7				PAGE: 1 OF 1			
REFERENCE: Clause 8, 10.2/Q.703 STD: Fig. 8							
TITLE: Transmission failure							
SUBTITLE: Link in processor outage (Break Tx path)							
PURPOSE: To test the response to a transmission failure when the link is "Processor outage"							
PRE-TEST CONDITIONS: Link in service							
CONFIGURATION: 1				TYPE OF TEST: VAT			
EXPECTED SIGNAL UNIT SEQUENCE:							
<div>SP B</div> <div>Link</div> <div>1 – 0 FISU</div> <div> </div> <div>: break Tx</div>				<div>SP A</div> <div>Link</div> <div>1 – 0 FISU</div> <div> </div> <div>: set LPO</div> <div>1 – 0 SIPO</div> <div> </div> <div>1 – 0 SIOS</div>			
TEST DESCRIPTION							
1.	Break Tx path at B when in "Processor outage" state, check that the SUERM detects the failure and the link is taken out of service.						
2.	Repeat test, break Tx at A.						

MTP, LEVEL 2

TEST NUMBER: 3.8				PAGE: 1 OF 1	
REFERENCE: Clause 8, 5.3/Q.703 STD: Fig. 8					
TITLE: Transmission failure					
SUBTITLE: Link in processor outage (Corrupt FIBs – Basic)					
PURPOSE: To check the response to a link failure after corruption of two FIBs – detected by reception control – while in "Processor outage"					
PRE-TEST CONDITIONS: Link in service					
CONFIGURATION: 1				TYPE OF TEST: VAT	
EXPECTED SIGNAL UNIT SEQUENCE:					
	SP	B		SP	A
Link				Link	
			<-----	1 – 0	FISU
1 – 0	FISU		----->		
					: set LPO
			<-----	1 – 0	SIPO
1 – 0	FISU corrupt FIB (FIB + FSN = 7F)		----->		
1 – 0	FISU corrupt FIB (FIB + FSN = 7F)		----->		
			<-----	1 – 0	SIOS
TEST DESCRIPTION					
1.	Check that receipt of two FISUs at A with corrupt FIBs on processor outage state causes the link to be taken out of service.				

MTP, LEVEL 2

TEST NUMBER: 4.1			PAGE: 1 OF 1		
REFERENCE: Clause 8/Q.703 STD: Fig. 10					
TITLE: Processor outage control					
SUBTITLE: Set and clear LPO while link in service					
PURPOSE: To check the ability to perform correctly when LPO is set and recovered					
PRE-TEST CONDITIONS: Link in service					
CONFIGURATION: 1			TYPE OF TEST: VAT		
EXPECTED SIGNAL UNIT SEQUENCE:					
SP B			SP A		
Link			Link		
		<-----	1 – 0	FISU	
1 – 0	FISU	----->		(FSN = 7F, BSN = 7F)	
	(FSN = 7F, BSN = 7F)				
		accepted			
		<-----	1 – 0	MSU (1)	
				(FSN = 0, BSN = 7F)	
		<-----	1 – 0	MSU (2)	
				(FSN = 1, BSN = 7F)	
				: set LPO	
1 – 0	MSU	----->			
	(FSN = 0, BSN = 0)				
		<-----	1 – 0	SIPO	
				(FSN = 1, BSN = 7F)	
1 – 0	FISU	----->			
	(FSN = 0, BSN = 0)				
				: clear LPO	
		<-----	1 – 0	MSU (3)	
				(FSN = 1, BSN = x)	
TEST DESCRIPTION					
1.	Set LPO at A while link in service.				
2.	Check that MSU from B is discarded.				
3.	Clear LPO at A after at least 1.2 s.				
4.	Check that "old" messages are flushed from level 2 buffers and not transmitted on the link. Check that new MSUs are sent correctly.				

MTP, LEVEL 2

TEST NUMBER: 4.2		PAGE: 1 OF 1	
REFERENCE: Clause 8/Q.703 STD: Fig. 10			
TITLE: Processor outage control			
SUBTITLE: RPO during LPO			
PURPOSE: To test the response to RPO is set and cleared when "LPO"			
PRE-TEST CONDITIONS: Link in service. LPO set at B			
CONFIGURATION: 1		TYPE OF TEST: VAT	
EXPECTED SIGNAL UNIT SEQUENCE:			
SP B		SP A	
Link		Link	
		:	set LPO
	<-----	1 – 0	SIPO
1 – 0	SIPO		
	----->		
	<-----	1 – 0	SIPO
	:		
	clear LPO		
1 – 0	TSR		
	----->		
	<-----	1 – 0	SIPO
TEST DESCRIPTION			
1.	Set LPO at A.		
2.	Clear LPO at B.		
3.	Check is SIPO sent from A.		

MTP, LEVEL 2

TEST NUMBER: 4.3				PAGE: 1 OF 1																																																																		
REFERENCE: Clause 8/Q.703 STD: Fig. 10																																																																						
TITLE: Processor outage control																																																																						
SUBTITLE: Clear LPO when "Both processor outage"																																																																						
PURPOSE: To test the response to LPO, RPO recovered when "Both processor outage"																																																																						
PRE-TEST CONDITIONS: LPO set at A and B																																																																						
CONFIGURATION: 1				TYPE OF TEST: VAT																																																																		
EXPECTED SIGNAL UNIT SEQUENCE:																																																																						
<table><tr><td></td><td>SP</td><td>B</td><td></td><td></td><td>SP</td><td>A</td></tr><tr><td>Link</td><td></td><td></td><td></td><td>Link</td><td></td><td></td></tr><tr><td></td><td></td><td></td><td><-----</td><td>1 – 0</td><td></td><td>SIPO</td></tr><tr><td>1 – 0</td><td></td><td>SIPO</td><td>-----></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td><td></td><td>:</td><td>clear LPO</td></tr><tr><td></td><td></td><td></td><td><-----</td><td>1 – 0</td><td></td><td>FISU</td></tr><tr><td></td><td></td><td>: clear LPO</td><td></td><td></td><td></td><td></td></tr><tr><td>1 – 0</td><td></td><td>FISU</td><td>-----></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td><-----</td><td>1 – 0</td><td></td><td>FISU</td></tr></table>									SP	B			SP	A	Link				Link						<-----	1 – 0		SIPO	1 – 0		SIPO	----->									:	clear LPO				<-----	1 – 0		FISU			: clear LPO					1 – 0		FISU	----->							<-----	1 – 0		FISU
	SP	B			SP	A																																																																
Link				Link																																																																		
			<-----	1 – 0		SIPO																																																																
1 – 0		SIPO	----->																																																																			
					:	clear LPO																																																																
			<-----	1 – 0		FISU																																																																
		: clear LPO																																																																				
1 – 0		FISU	----->																																																																			
			<-----	1 – 0		FISU																																																																
TEST DESCRIPTION																																																																						
1.	Clear LPO at A.																																																																					
2.	Clear LPO at B.																																																																					
3.	Check is FISU sent from A.																																																																					

MTP, LEVEL 2

TEST NUMBER: 5.1		PAGE: 1 OF 1	
REFERENCE: 4.1/Q.703 STD: Fig. 11			
TITLE: SU delimitation, alignment, error detection and correction			
SUBTITLE: Seven or more '1's between MSU opening and closing flags			
PURPOSE: To test the signal unit delimitation, alignment, and error detection action on receipt of an MSU containing seven or more consecutive '1's			
PRE-TEST CONDITIONS: Link in service			
CONFIGURATION: 1		TYPE OF TEST: VAT	
EXPECTED SIGNAL UNIT SEQUENCE:			
SP B		SP A	
Link		Link	
	<-----	1 – 0	FISU
1 – 0	FISU ----->		
1 – 0	corrupt MSU ----->		
	(FIB + FSN = 80)		
	(containing seven or more		
	consecutive '1's)		
	<-----	1 – 0	FISU
			(BSN unchanged)
1 – 0	FISU ----->		
TEST DESCRIPTION			
1.	Send a corrupt MSU at B containing seven or more consecutive '1's.		
2.	Check that A discards the signal unit, and goes into octet counting mode.		
3.	On reception of a correct FISU, check that A leaves the octet counting mode and remains in the "in service" state.		

MTP, LEVEL 2

TEST NUMBER: 5.2		PAGE: 1 OF 1	
REFERENCE: 4.1/Q.703 STD: Fig. 11			
TITLE: SU delimitation, alignment, error detection and correction			
SUBTITLE: Greater than maximum signal unit length			
PURPOSE: To test the signal unit delimitation, alignment, error detection action on receipt of signal unit greater than the maximum length			
PRE-TEST CONDITIONS: Link in service			
CONFIGURATION: 1		TYPE OF TEST: VAT	
EXPECTED SIGNAL UNIT SEQUENCE:			
SP B		SP A	
Link		Link	
	<-----	1 – 0	FISU
1 – 0	FISU ----->		
1 – 0	corrupt MSU ----->		
	(FIB + FSN = 80)		
	(signal unit length		
	> max. Allowed)		
	<-----	1 – 0	FISU
			(BSN unchanged)
1 – 0	FISU ----->		
TEST DESCRIPTION			
1.	Send corrupt MSU at B with maximum length plus extra bits and good sumcheck.		
2.	Check A discards the signal unit, and goes into octet counting mode.		
3.	On reception of a correct FISU, check that A leaves the octet counting mode and remains in the "in service" state.		

MTP, LEVEL 2

TEST NUMBER: 5.3		PAGE: 1 OF 1	
REFERENCE: 4.1/Q.703 STD: Fig. 11			
TITLE: SU delimitation, alignment, error detection and correction			
SUBTITLE: Below minimum signal unit length			
PURPOSE: To test the signal unit delimitation, alignment and error detection action on receipt of signal unit less than the minimum length			
PRE-TEST CONDITIONS: Link in service			
CONFIGURATION: 1		TYPE OF TEST: VAT	
EXPECTED SIGNAL UNIT SEQUENCE:			
SP B		SP A	
Link		Link	
	<-----	1 – 0	FISU (BIB + BSN = FF)
1 – 0	FISU ----->		
1 – 0	corrupt MSU -----> (FIB + FSN = 80) (signal unit less than 6 octets)		
	<-----	1 – 0	FISU (BSN unchanged)
1 – 0	FISU ----->		
TEST DESCRIPTION			
1.	Generate a corrupt MSU at B of less than 6 octet (i.e. less than 5 octets between flags).		
2.	Check A discards the signal unit and may go into octet counting mode.		
3.	On reception of a correct FISU, check that A leaves the octet counting mode if it was entered and remains in the "in service" state.		

MTP, LEVEL 2

TEST NUMBER: 5.4		PAGE: 1 OF 1	
REFERENCE: Clause 2/Q.703 STD: Fig. 11			
TITLE: SU delimitation, alignment, error detection and correction			
SUBTITLE: Reception of single and multiple flags between FISUs			
PURPOSE: To check that single and multiple flags between FISUs can be received			
PRE-TEST CONDITIONS: Link in service			
CONFIGURATION: 1		TYPE OF TEST: VAT	
<div>EXPECTED SIGNAL UNIT SEQUENCE:</div> <div><div><div>SP B</div><div>Link</div><div>1 – 0 FISU</div><div>case 1</div><div>case 2</div><div>1 – 0 FISU</div></div><div><div>-----></div><div>FISU F FISU</div><div>FISU F F FISU</div><div>n(≥2)</div><div>-----></div></div><div><div>SP A</div><div>Link</div><div>F: Flag</div><div>n = number of flags</div></div></div>			
TEST DESCRIPTION			
1.	Check that single and n flags, case 1 and case 2 respectively, can be received.		

MTP, LEVEL 2

TEST NUMBER: 5.5		PAGE: 1 OF 1	
REFERENCE: Clause 2/Q.703 STD: Fig. 11			
TITLE: SU delimitation, alignment, error detection and correction			
SUBTITLE: Reception of single and multiple flags between MSUs			
PURPOSE: To check that single and multiple flags between MSUs can be received			
PRE-TEST CONDITIONS: Link in service			
CONFIGURATION: 1		TYPE OF TEST: VAT	
<div>EXPECTED SIGNAL UNIT SEQUENCE:</div> <div><div><div>Link</div><div>1 – 0</div><div>FISU</div><div>case 1</div><div>case 2</div><div>1 – 0</div><div>FISU</div></div><div><div>-----></div><div><div>MSU F MSU</div><div>MSU F F MSU</div><div>n(≥2)</div></div><div>-----></div></div><div><div>Link</div><div></div><div></div><div>F: Flag</div><div>n = number of flags</div></div></div>			
TEST DESCRIPTION			
1.	Check that single and n flags, case 1 and case 2 respectively, can be received.		

MTP, LEVEL 2

TEST NUMBER: 6.1		PAGE: 1 OF 1	
REFERENCE: 10.2/Q.703 STD: Fig. 11; Fig. 18; Fig. 8			
TITLE: SUERM check			
SUBTITLE: Error rate of 1 in 256 – Link remains in service			
PURPOSE: To check the SUERM at a link error rate of 1 in 256 units			
PRE-TEST CONDITIONS: Link in service			
CONFIGURATION: 1		TYPE OF TEST: VAT	
EXPECTED SIGNAL UNIT SEQUENCE:			
<div><div><div>Link</div><div>1 – 0</div><div>Ct</div></div><div><div>SP</div><div>B</div><div>FISU</div><div>: corrupt 1 in 256</div></div><div><div><-----</div><div>-----></div></div><div><div>Link</div><div>1 – 0</div></div><div><div>SP</div><div>A</div><div>FISU</div></div></div>			
TEST DESCRIPTION			
1.	Check that "In service" state is maintained. The test should run for several minutes.		
2.	Ct = the count of corrupted FISUs.		
	NOTE – 1) The number (x) of corrupt signal units before an SIOS returned is calculated according to the following formula (a = number of correct signal units): <div>$x = \frac{1}{1 + a} \left(\frac{256 \times 64}{\frac{256}{1 + a} - 1} \right) \quad \text{for } a < 256$</div>		
	2) In this case as a = 255, so x = infinity.		

MTP, LEVEL 2

TEST NUMBER: 6.2		PAGE: 1 OF 1																																											
REFERENCE: 10.2/Q.703 STD: Fig. 11; Fig. 18; Fig. 8																																													
TITLE: SUERM check																																													
SUBTITLE: Error rate of 1 in 254 – Link into out of service																																													
PURPOSE: To check the SUERM at a link error rate of 1 in 254 units																																													
PRE-TEST CONDITIONS: Link in service																																													
CONFIGURATION: 1		TYPE OF TEST: VAT																																											
EXPECTED SIGNAL UNIT SEQUENCE:																																													
<table><tr><td></td><td>SP</td><td>B</td><td></td><td></td><td>SP</td><td>A</td></tr><tr><td>Link</td><td></td><td></td><td></td><td>Link</td><td></td><td></td></tr><tr><td></td><td></td><td></td><td><-----</td><td>1 – 0</td><td>FISU</td><td></td></tr><tr><td>1 – 0</td><td>FISU</td><td></td><td>-----></td><td></td><td></td><td></td></tr><tr><td>Ct</td><td> : corrupt 1 in 254</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td><-----</td><td>1 – 0</td><td>SIOS</td><td></td></tr></table>					SP	B			SP	A	Link				Link						<-----	1 – 0	FISU		1 – 0	FISU		----->				Ct	: corrupt 1 in 254									<-----	1 – 0	SIOS	
	SP	B			SP	A																																							
Link				Link																																									
			<-----	1 – 0	FISU																																								
1 – 0	FISU		----->																																										
Ct	: corrupt 1 in 254																																												
			<-----	1 – 0	SIOS																																								
TEST DESCRIPTION																																													
1.	SIOS should be returned after approx. 8192 corrupt FISUs (e.g. CRC error).																																												
2.	Ct = the count of corrupted FISUs.																																												

MTP, LEVEL 2

TEST NUMBER: 6.3			PAGE: 1 OF 1		
REFERENCE: 10.2/Q.703 STD: Fig. 11; Fig. 18; Fig. 8					
TITLE: SUERM check					
SUBTITLE: Consecutive corrupted SUS					
PURPOSE: To test the SUERM on consecutive corrupted signal units					
PRE-TEST CONDITIONS: Link in service					
CONFIGURATION: 1			TYPE OF TEST: VAT		
EXPECTED SIGNAL UNIT SEQUENCE:					
<div>SP B</div> <div>Link</div> <div>1 – 0 FISU</div> <div>Ct : corrupt 1 in 1</div>			<div>SP A</div> <div>Link</div> <div>1 – 0 FISU</div> <div>1 – 0 SIOS</div>		
TEST DESCRIPTION					
1.	SIOS should be returned after approx. 64 corrupt FISUs (e.g. CRC error).				
2.	Ct = the count of corrupted FISUs.				

MTP, LEVEL 2

TEST NUMBER: 6.4		PAGE: 1 OF 1																																																									
REFERENCE: 10.2/Q.703 STD: Fig. 11; Fig. 18																																																											
TITLE: SUERM check																																																											
SUBTITLE: Time controlled break of the link																																																											
PURPOSE: To check response to a range of time controlled breaks of Tx or Rx																																																											
PRE-TEST CONDITIONS: Link in service																																																											
CONFIGURATION: 1		TYPE OF TEST: VAT																																																									
EXPECTED SIGNAL UNIT SEQUENCE:																																																											
<table><tr><td></td><td>SP</td><td>B</td><td></td><td></td><td>SP</td><td>A</td></tr><tr><td>Link</td><td></td><td></td><td></td><td>Link</td><td></td><td></td></tr><tr><td></td><td></td><td></td><td><-----</td><td>1 – 0</td><td>FISU</td><td></td></tr><tr><td>1 – 0</td><td>FISU</td><td></td><td>-----></td><td></td><td></td><td></td></tr><tr><td></td><td>: break Tx</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td>: restore Tx</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td>FISU</td><td></td><td>-----></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td><-----</td><td>1 – 0</td><td>FISU</td><td></td></tr></table>					SP	B			SP	A	Link				Link						<-----	1 – 0	FISU		1 – 0	FISU		----->					: break Tx							: restore Tx							FISU		----->							<-----	1 – 0	FISU	
	SP	B			SP	A																																																					
Link				Link																																																							
			<-----	1 – 0	FISU																																																						
1 – 0	FISU		----->																																																								
	: break Tx																																																										
	: restore Tx																																																										
	FISU		----->																																																								
			<-----	1 – 0	FISU																																																						
TEST DESCRIPTION																																																											
1.	Break the transmission link, and restore before level 2 goes out of service. (Break time is less than approx. 128 ms for 64 kbit/s).																																																										
2.	Check that A enters and leaves the octet counting mode on reception of an FISU.																																																										

MTP, LEVEL 2

TEST NUMBER: 7.1		PAGE: 1 OF 1				
REFERENCE: 10.3/Q.703 STD: Fig. 9; Fig. 11; Fig. 17						
TITLE: AERM check						
SUBTITLE: Error rate below the normal threshold						
PURPOSE: To test the AERM on error rates below the normal threshold						
PRE-TEST CONDITIONS: Link out of service						
CONFIGURATION: 1		TYPE OF TEST: VAT				
EXPECTED SIGNAL UNIT SEQUENCE:						
	SP	B			SP	A
Link				Link		
			<-----	1 – 0		SIOS
1 – 0	SIOS		----->			
					:	start
			<-----	1 – 0		SIO
1 – 0	SIO		----->			
			<-----	1 – 0		SIN
1 – 0	SIN		----->			
1 – 0	corrupt LSSUs		----->			
1 – 0	SIN		----->			
			<-----	1 – 0		FISU
TEST DESCRIPTION						
1.	Start link at A.					
2.	Generate x number of corrupt LSSUs (e.g. CRC error) at B (x < Tin).					
3.	Check that the proving period continues and the link aligns successfully.					

MTP, LEVEL 2

TEST NUMBER: 7.2				PAGE: 1 OF 1																																																																																
REFERENCE: 10.3/Q.703 STD: Fig. 9; Fig. 11; Fig. 17																																																																																				
TITLE: AERM check																																																																																				
SUBTITLE: Error rate at the normal threshold																																																																																				
PURPOSE: To test the AERM at an error rate equal to the normal threshold																																																																																				
PRE-TEST CONDITIONS: Link out of service																																																																																				
CONFIGURATION: 1				TYPE OF TEST: VAT																																																																																
EXPECTED SIGNAL UNIT SEQUENCE:																																																																																				
<table><tr><td></td><td>SP</td><td>B</td><td></td><td></td><td>SP</td><td>A</td></tr><tr><td>Link</td><td></td><td></td><td></td><td>Link</td><td></td><td></td></tr><tr><td></td><td></td><td></td><td><-----</td><td>1 – 0</td><td>SIOS</td><td></td></tr><tr><td>1 – 0</td><td>SIOS</td><td></td><td>-----></td><td></td><td></td><td>: start</td></tr><tr><td></td><td></td><td></td><td><-----</td><td>1 – 0</td><td>SIO</td><td></td></tr><tr><td>1 – 0</td><td>SIO</td><td></td><td>-----></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td><-----</td><td>1 – 0</td><td>SIN</td><td></td></tr><tr><td>1 – 0</td><td>SIN</td><td></td><td>-----></td><td></td><td></td><td></td></tr><tr><td>1 – 0</td><td>corrupt LSSUs</td><td></td><td>-----></td><td></td><td></td><td></td></tr><tr><td></td><td>SIN</td><td></td><td>-----></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td><-----</td><td>1 – 0</td><td>FISU</td><td></td></tr></table>									SP	B			SP	A	Link				Link						<-----	1 – 0	SIOS		1 – 0	SIOS		----->			: start				<-----	1 – 0	SIO		1 – 0	SIO		----->							<-----	1 – 0	SIN		1 – 0	SIN		----->				1 – 0	corrupt LSSUs		----->					SIN		----->							<-----	1 – 0	FISU	
	SP	B			SP	A																																																																														
Link				Link																																																																																
			<-----	1 – 0	SIOS																																																																															
1 – 0	SIOS		----->			: start																																																																														
			<-----	1 – 0	SIO																																																																															
1 – 0	SIO		----->																																																																																	
			<-----	1 – 0	SIN																																																																															
1 – 0	SIN		----->																																																																																	
1 – 0	corrupt LSSUs		----->																																																																																	
	SIN		----->																																																																																	
			<-----	1 – 0	FISU																																																																															
TEST DESCRIPTION																																																																																				
1.	Start link at A.																																																																																			
2.	Generate x number of corrupt LSSUs (e.g. CRC error) at B (x ≥ Tin).																																																																																			
3.	Check that the proving period is aborted, then restarted and link aligns successfully.																																																																																			

MTP, LEVEL 2

TEST NUMBER: 7.3			PAGE: 1 OF 1		
REFERENCE: 10.3/Q.703 STD: Fig. 9; Fig. 11; Fig. 17					
TITLE: AERM check					
SUBTITLE: Error rate above the normal threshold					
PURPOSE: To test the AERM at an error rate above the threshold over five proving periods					
PRE-TEST CONDITIONS: Link out of service					
CONFIGURATION: 1			TYPE OF TEST: VAT		
EXPECTED SIGNAL UNIT SEQUENCE:					
SP B			SP A		
Link			Link		
		<-----	1 – 0	SIOS	
1 – 0	SIOS	----->			: start
		<-----	1 – 0	SIO	
1 – 0	SIO	----->			
		<-----	1 – 0	SIN	
1 – 0	SIN	----->			
1 – 0	corrupt LSSUs	----->			
		<-----	1 – 0	SIN	
1 – 0	SIN	----->			
1 – 0	corrupt LSSUs	----->			
		<-----	1 – 0	SIN	
1 – 0	SIN	----->			
1 – 0	corrupt LSSUs	----->			
		<-----	1 – 0	SIN	
1 – 0	SIN	----->			
1 – 0	corrupt LSSUs	----->			
		<-----	1 – 0	SIN	
1 – 0	SIN	----->			
1 – 0	corrupt LSSUs	----->			
		<-----	1 – 0	SIOS	
TEST DESCRIPTION					
1.	Start link at A.				
2.	Generate x number of corrupt LSSUs (e.g. CRC error) at B (x ≥ Tin).				
3.	Observe that 5 proving period attempts are made before link out of service state.				

MTP, LEVEL 2

TEST NUMBER: 7.4			PAGE: 1 OF 1		
REFERENCE: 10.3/Q.703 STD: Fig. 9; Fig. 11; Fig. 17					
TITLE: AERM check					
SUBTITLE: Error rate at the emergency threshold					
PURPOSE: To test the AERM at the emergency threshold					
PRE-TEST CONDITIONS: Link out of service					
CONFIGURATION: 1			TYPE OF TEST: VAT		
EXPECTED SIGNAL UNIT SEQUENCE:					
SP B			SP A		
Link			Link		
		<-----	1 – 0	SIOS	
1 – 0	SIOS	----->			
				: start	
		<-----	1 – 0	SIO	
1 – 0	SIO	----->			
		<-----	1 – 0	SIN	
1 – 0	SIE	----->			
1 – 0	corrupt LSSU	----->			
1 – 0	SIE	----->			
T4		<-----	1 – 0	SIN	
(Pe)		<-----	1 – 0	FISU	
TEST DESCRIPTION					
1.	Start link at A, check emergency proving started from B.				
2.	Generate x number of corrupt LSSUs (e.g. CRC error) at B (5 > x ≥ Tie).				
3.	Check that link aligns successfully.				

MTP, LEVEL 2

TEST NUMBER: 8.1			PAGE: 1 OF 1																																																																																																																																
REFERENCE: 5.2/Q.703 STD: Fig. 13; Fig. 14																																																																																																																																			
TITLE: Transmission and reception control (Basic)																																																																																																																																			
SUBTITLE: MSU transmission and reception																																																																																																																																			
PURPOSE: To check basic MSU transmission and reception																																																																																																																																			
PRE-TEST CONDITIONS: Link in service																																																																																																																																			
CONFIGURATION: 1			TYPE OF TEST: VAT, CPT																																																																																																																																
EXPECTED SIGNAL UNIT SEQUENCE:																																																																																																																																			
<table><thead><tr><th></th><th>SP</th><th>B</th><th></th><th>Link</th><th>SP</th><th>A</th></tr></thead><tbody><tr><td></td><td></td><td></td><td><-----</td><td>1 - 0</td><td>FISU</td><td></td></tr><tr><td>1 - 0</td><td>FISU</td><td></td><td>-----></td><td></td><td></td><td></td></tr><tr><td>1 - 0</td><td>MSU</td><td></td><td>-----></td><td></td><td></td><td></td></tr><tr><td></td><td>(FIB + FSN = 80)</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td>(BIB + BSN = FF)</td><td></td><td><-----</td><td>1 - 0</td><td>FISU</td><td></td></tr><tr><td></td><td></td><td></td><td></td><td></td><td>(FIB + FSN = FF)</td><td></td></tr><tr><td></td><td></td><td></td><td></td><td></td><td>(BIB + BSN = 80)</td><td></td></tr><tr><td>1 - 0</td><td>FISU</td><td></td><td>-----></td><td></td><td></td><td></td></tr><tr><td></td><td>(FIB + FSN = 80)</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td>(BIB + BSN = FF)</td><td></td><td><-----</td><td>1 - 0</td><td>MSU</td><td></td></tr><tr><td></td><td></td><td></td><td></td><td></td><td>(FIB + FSN = 80)</td><td></td></tr><tr><td></td><td></td><td></td><td></td><td></td><td>(BIB + BSN = 80)</td><td></td></tr><tr><td>1 - 0</td><td>FISU</td><td></td><td>-----></td><td></td><td></td><td></td></tr><tr><td></td><td>(FIB + FSN = 80)</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td>(BIB + BSN = 80)</td><td></td><td><-----</td><td>1 - 0</td><td>FISU</td><td></td></tr><tr><td></td><td></td><td></td><td></td><td></td><td>(FIB + FSN = 80)</td><td></td></tr><tr><td></td><td></td><td></td><td></td><td></td><td>(BIB + BSN = 80)</td><td></td></tr></tbody></table>							SP	B		Link	SP	A				<-----	1 - 0	FISU		1 - 0	FISU		----->				1 - 0	MSU		----->					(FIB + FSN = 80)							(BIB + BSN = FF)		<-----	1 - 0	FISU							(FIB + FSN = FF)							(BIB + BSN = 80)		1 - 0	FISU		----->					(FIB + FSN = 80)							(BIB + BSN = FF)		<-----	1 - 0	MSU							(FIB + FSN = 80)							(BIB + BSN = 80)		1 - 0	FISU		----->					(FIB + FSN = 80)							(BIB + BSN = 80)		<-----	1 - 0	FISU							(FIB + FSN = 80)							(BIB + BSN = 80)	
	SP	B		Link	SP	A																																																																																																																													
			<-----	1 - 0	FISU																																																																																																																														
1 - 0	FISU		----->																																																																																																																																
1 - 0	MSU		----->																																																																																																																																
	(FIB + FSN = 80)																																																																																																																																		
	(BIB + BSN = FF)		<-----	1 - 0	FISU																																																																																																																														
					(FIB + FSN = FF)																																																																																																																														
					(BIB + BSN = 80)																																																																																																																														
1 - 0	FISU		----->																																																																																																																																
	(FIB + FSN = 80)																																																																																																																																		
	(BIB + BSN = FF)		<-----	1 - 0	MSU																																																																																																																														
					(FIB + FSN = 80)																																																																																																																														
					(BIB + BSN = 80)																																																																																																																														
1 - 0	FISU		----->																																																																																																																																
	(FIB + FSN = 80)																																																																																																																																		
	(BIB + BSN = 80)		<-----	1 - 0	FISU																																																																																																																														
					(FIB + FSN = 80)																																																																																																																														
					(BIB + BSN = 80)																																																																																																																														
TEST DESCRIPTION																																																																																																																																			
1.	Generate an MSU at B.																																																																																																																																		
2.	Check that A receives the MSU correctly, and returns a positive acknowledgement.																																																																																																																																		
3.	Generate an MSU at A.																																																																																																																																		
4.	Check that B receives the MSU correctly, and returns a positive acknowledgement.																																																																																																																																		

MTP, LEVEL 2

TEST NUMBER: 8.2				PAGE: 1 OF 1	
REFERENCE: 5.3/Q.703 STD: Fig. 13					
TITLE: Transmission and reception control (Basic)					
SUBTITLE: Negative acknowledgement of MSU					
PURPOSE: To test the response to a negatively acknowledged MSU					
PRE-TEST CONDITIONS: Link in service					
CONFIGURATION: 1				TYPE OF TEST: VAT	
EXPECTED SIGNAL UNIT SEQUENCE:					
SP		B		SP A	
Link				Link	
		<-----		1 – 0	FISU
1 – 0	FISU	----->			
		<-----		1 – 0	MSU
					(FIB + FSN = 80)
		<-----		1 – 0	MSU
					(FIB + FSN = 81)
1 – 0	FISU	----->			
	(BIB + BSN = 7F)				
		<-----		1 – 0	MSU
					(FIB + FSN = 00)
		<-----		1 – 0	MSU
					(FIB + FSN = 01)
TEST DESCRIPTION					
1.	Send MSU from A.				
2.	Reply with negative acknowledgement from B.				
3.	Check that A retransmits the MSU.				

MTP, LEVEL 2

TEST NUMBER: 8.3				PAGE: 1 OF 1			
REFERENCE: 5.3/Q.703 STD: Fig. 13							
TITLE: Transmission and reception control (Basic)							
SUBTITLE: Check RTB full							
PURPOSE: To check that MSUs are buffered when no acknowledgements are received							
PRE-TEST CONDITIONS: Link in service							
CONFIGURATION: 1				TYPE OF TEST: VAT			
EXPECTED SIGNAL UNIT SEQUENCE:							
<div>SP B</div> <div>Link</div> <div>1 - 0 FISU (BIB + BSN = FF)</div> <div>1 - 0 FISU (BIB + BSN = 7F)</div>				<div>SP A</div> <div>Link</div> <div>1 - 0 FISU</div> <div>1 - 0 MSU (FIB + FSN = 80) • •</div> <div>1 - 0 MSU (FIB + FSN = FE)</div> <div>1 - 0 FISU (FIB + FSN = FE)</div> <div>1 - 0 MSU (FIB + FSN = 00) • •</div> <div>1 - 0 MSU (FIB + FSN = 7E)</div>			
TEST DESCRIPTION							
1.	Generate MSUs at A, at a rate of 100 per second, in order to fill the RTB before the EDA timer T7 expires.						
2.	No acknowledgements are sent from B until the last message is received, then send negative acknowledgement to the first message received.						
3.	Check that the complete contents of the RTB are retransmitted.						

MTP, LEVEL 2

TEST NUMBER: 8.4			PAGE: 1 OF 1		
REFERENCE: 5.2/Q.703 STD: Fig. 14					
TITLE: Transmission and reception control (Basic)					
SUBTITLE: Single MSU with erroneous FIB					
PURPOSE: To ensure correct performance when an MSU with erroneous FIB is received					
PRE-TEST CONDITIONS: Link in service					
CONFIGURATION: 1			TYPE OF TEST: VAT		
EXPECTED SIGNAL UNIT SEQUENCE:					
SP B			SP A		
Link			Link		
		<-----	1 - 0	FISU	
				(BIB + BSN = 7F)	
1 - 0	FISU	----->			
	(FIB + FSN = 7F)				
1 - 0	MSU	----->			
	(FIB + FSN = 80)				
		<-----	1 - 0	FISU	
				(BIB + BSN = 7F)	
1 - 0	FISU	----->			
	(FIB + FSN = 00)				
1 - 0	FISU	----->			
	(FIB + FSN = 00)				
		<-----	1 - 0	FISU	
				(BIB + BSN = FF)	
1 - 0	MSU	----->			
	(FIB + FSN = 80)				
		<-----	1 - 0	FISU	
				(BIB + BSN = 80)	
TEST DESCRIPTION					
1.	Generate an MSU at B with FIB inverted.				
2.	Check A discards the MSU.				
3.	Generate 2 FISUs at B with correct FIB.				
4.	Check A discards the FISU and negative acknowledgement returned.				
5.	Check that B retransmits the MSU correctly, and positive acknowledgement returned.				

MTP, LEVEL 2

TEST NUMBER: 8.5			PAGE: 1 OF 1		
REFERENCE: 5.2/Q.703 STD: Fig. 14					
TITLE: Transmission and reception control (Basic)					
SUBTITLE: Duplicated FSN					
PURPOSE: To test the reception control response to duplicated FSNs					
PRE-TEST CONDITIONS: Link in service					
CONFIGURATION: 1			TYPE OF TEST: VAT		
EXPECTED SIGNAL UNIT SEQUENCE:					
SP B			SP A		
Link			Link		
		<-----	1 - 0	FISU	
1 - 0	FISU	----->			
1 - 0	MSU	----->			
	(FIB + FSN = 80)				
		<-----	1 - 0	FISU	
				(BIB + BSN = 80)	
1 - 0	MSU	----->			
	(FIB + FSN = 80)				
1 - 0	FISU	----->			
	(FIB + FSN = 81)				
		<-----	1 - 0	FISU	
				(BIB + BSN = 00)	
1 - 0	MSU	----->			
	(FIB + FSN = 01)				
		<-----	1 - 0	FISU	
				(BIB + BSN = 01)	
TEST DESCRIPTION					
1.	Generate an MSU at B, check A receives the MSU correctly and returns a positive acknowledgement.				
2.	Duplicate the FSN at B, check that A responds with a negative acknowledgement.				
3.	Retransmit the MSU with correct FSN, check that A replies with a positive acknowledgement.				

MTP, LEVEL 2

TEST NUMBER: 8.6			PAGE: 1 OF 1																																																																	
REFERENCE: 5.2/Q.703 STD: Fig. 14																																																																				
TITLE: Transmission and reception control (Basic)																																																																				
SUBTITLE: Erroneous retransmission – Single MSU																																																																				
PURPOSE: To test the reception control response to retransmission of a single MSU																																																																				
PRE-TEST CONDITIONS: Link in service																																																																				
CONFIGURATION: 1			TYPE OF TEST: VAT																																																																	
EXPECTED SIGNAL UNIT SEQUENCE:																																																																				
<table><thead><tr><th>Link</th><th>SP</th><th>B</th><th></th><th>Link</th><th>SP</th><th>A</th></tr></thead><tbody><tr><td></td><td></td><td></td><td><-----</td><td>1 – 0</td><td></td><td>FISU (BIB + BSN = FF)</td></tr><tr><td>1 – 0</td><td>FISU (FIB + FSN = FF)</td><td></td><td>-----></td><td></td><td></td><td></td></tr><tr><td>1 – 0</td><td>MSU (FIB + FSN = 00)</td><td></td><td>-----></td><td></td><td></td><td></td></tr><tr><td>1 – 0</td><td>FISU (FIB + FSN = 80)</td><td></td><td>-----></td><td></td><td></td><td></td></tr><tr><td>1 – 0</td><td>FISU (FIB + FSN = 80)</td><td></td><td>-----></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td><-----</td><td>1 – 0</td><td></td><td>FISU (BIB + BSN = 7F)</td></tr><tr><td>1 – 0</td><td>MSU (FIB + FSN = 00)</td><td></td><td>-----></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td><-----</td><td>1 – 0</td><td></td><td>FISU (BIB + BSN = 00)</td></tr></tbody></table>						Link	SP	B		Link	SP	A				<-----	1 – 0		FISU (BIB + BSN = FF)	1 – 0	FISU (FIB + FSN = FF)		----->				1 – 0	MSU (FIB + FSN = 00)		----->				1 – 0	FISU (FIB + FSN = 80)		----->				1 – 0	FISU (FIB + FSN = 80)		----->							<-----	1 – 0		FISU (BIB + BSN = 7F)	1 – 0	MSU (FIB + FSN = 00)		----->							<-----	1 – 0		FISU (BIB + BSN = 00)
Link	SP	B		Link	SP	A																																																														
			<-----	1 – 0		FISU (BIB + BSN = FF)																																																														
1 – 0	FISU (FIB + FSN = FF)		----->																																																																	
1 – 0	MSU (FIB + FSN = 00)		----->																																																																	
1 – 0	FISU (FIB + FSN = 80)		----->																																																																	
1 – 0	FISU (FIB + FSN = 80)		----->																																																																	
			<-----	1 – 0		FISU (BIB + BSN = 7F)																																																														
1 – 0	MSU (FIB + FSN = 00)		----->																																																																	
			<-----	1 – 0		FISU (BIB + BSN = 00)																																																														
TEST DESCRIPTION																																																																				
1.	A single MSU with FIB inverted in error is sent to A, followed by FISUs with correct FIBs.																																																																			
2.	Check that A returns a negative acknowledgement for the MSU.																																																																			
3.	Retransmit the MSU correctly.																																																																			
4.	Check that A receives the MSU correctly and returns a positive acknowledgement.																																																																			

MTP, LEVEL 2

TEST NUMBER: 8.7			PAGE: 1 OF 1																																																																										
REFERENCE: 5.3/Q.703 STD: Fig. 14																																																																													
TITLE: Transmission and reception control (Basic)																																																																													
SUBTITLE: Erroneous retransmission – Multiple FISUs																																																																													
PURPOSE: To test reception control response to retransmission of multiple FISUs																																																																													
PRE-TEST CONDITIONS: Link in service																																																																													
CONFIGURATION: 1			TYPE OF TEST: VAT																																																																										
EXPECTED SIGNAL UNIT SEQUENCE:																																																																													
<table><tr><td></td><td>SP</td><td>B</td><td></td><td>SP</td><td>A</td></tr><tr><td>Link</td><td></td><td></td><td></td><td>Link</td><td></td></tr><tr><td></td><td></td><td></td><td><-----</td><td>1 – 0</td><td>FISU</td></tr><tr><td>1 – 0</td><td>FISU</td><td></td><td>-----></td><td></td><td></td></tr><tr><td></td><td>(FIB + FSN = FF)</td><td></td><td></td><td></td><td></td></tr><tr><td>1 – 0</td><td>FISU</td><td></td><td>-----></td><td></td><td></td></tr><tr><td></td><td>(FIB + FSN = 7F)</td><td></td><td></td><td></td><td></td></tr><tr><td>1 – 0</td><td>FISU</td><td></td><td>-----></td><td></td><td></td></tr><tr><td></td><td>(FIB + FSN = FF)</td><td></td><td></td><td></td><td></td></tr><tr><td>1 – 0</td><td>FISU</td><td></td><td>-----></td><td></td><td></td></tr><tr><td></td><td>(FIB + FSN = 7F)</td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td><-----</td><td>1 – 0</td><td>SIOS</td></tr></table>							SP	B		SP	A	Link				Link					<-----	1 – 0	FISU	1 – 0	FISU		----->				(FIB + FSN = FF)					1 – 0	FISU		----->				(FIB + FSN = 7F)					1 – 0	FISU		----->				(FIB + FSN = FF)					1 – 0	FISU		----->				(FIB + FSN = 7F)								<-----	1 – 0	SIOS
	SP	B		SP	A																																																																								
Link				Link																																																																									
			<-----	1 – 0	FISU																																																																								
1 – 0	FISU		----->																																																																										
	(FIB + FSN = FF)																																																																												
1 – 0	FISU		----->																																																																										
	(FIB + FSN = 7F)																																																																												
1 – 0	FISU		----->																																																																										
	(FIB + FSN = FF)																																																																												
1 – 0	FISU		----->																																																																										
	(FIB + FSN = 7F)																																																																												
			<-----	1 – 0	SIOS																																																																								
TEST DESCRIPTION																																																																													
1.	Generate FISUs with the FIB inverted at B.																																																																												
2.	Check that A responds with link out of service.																																																																												

MTP, LEVEL 2

TEST NUMBER: 8.8			PAGE: 1 OF 1		
REFERENCE: 5.3/Q.703 STD: Fig. 14					
TITLE: Transmission and reception control (Basic)					
SUBTITLE: Single FISU with corrupt FIB					
PURPOSE: To test the response to receive an FISU with a corrupt FIB					
PRE-TEST CONDITIONS: Link in service					
CONFIGURATION: 1			TYPE OF TEST: VAT		
EXPECTED SIGNAL UNIT SEQUENCE:					
SP B			SP A		
Link			Link		
		<-----	1 – 0	FISU	
1 – 0	FISU	----->			
	(FIB + FSN = FF)				
1 – 0	FISU	----->			
	(FIB + FSN = 7F)				
		<-----	1 – 0	FISU	
1 – 0	FISU	----->			
	(FIB + FSN = FF)				
		<-----	1 – 0	FISU	
TEST DESCRIPTION					
1.	Generate one FISU with a corrupt FIB at B, and check that the link status remains in service.				

MTP, LEVEL 2

TEST NUMBER: 8.9			PAGE: 1 OF 1		
REFERENCE: 5.2/Q.703 STD: Fig. 10; Fig. 14					
TITLE: Transmission and reception control (Basic)					
SUBTITLE: Single FISU prior to RPO being set					
PURPOSE: To test the response to RPO while in the abnormal FIB state					
PRE-TEST CONDITIONS: Link in service					
CONFIGURATION: 1			TYPE OF TEST: VAT		
EXPECTED SIGNAL UNIT SEQUENCE:					
SP B			SP A		
Link			Link		
		<-----	1 – 0	FISU	
1 – 0	FISU	----->			
1 – 0	FISU (one only)	----->			
	(FIB + FSN = 7F)				
1 – 0	SIPO	----->			
1 – 0	MSU	----->			
	(FIB + FSN = 80)				
1 – 0	FISU	-----> (Note)			
	(FIB + FSN = 80)				
1 – 0	FISU	----->			
	(FIB + FSN = 80)				
		<-----	1 – 0	FISU	
				(BIB + BSN = 7F)	
1 – 0	MSU	----->			
	(FIB + FSN = 00)				
		<-----	1 – 0	FISU	
				(BIB + BSN = 00)	
NOTE – RPO at A has recovered, but this FISU is discarded.					
TEST DESCRIPTION					
1.	Generate one FISU at B with abnormal FIB.				
2.	Send SIPO from B, followed by an MSU.				
3.	Check A responds correctly with negative acknowledgement and a retransmission is received correctly.				

MTP, LEVEL 2

TEST NUMBER: 8.10				PAGE: 1 OF 1			
REFERENCE: 5.3/Q.703 STD: Fig. 14							
TITLE: Transmission and reception control (Basic)							
SUBTITLE: Abnormal BSN – Single MSU							
PURPOSE: To test the response to an abnormal BSN							
PRE-TEST CONDITIONS: Link in service							
CONFIGURATION: 1				TYPE OF TEST: VAT			
EXPECTED SIGNAL UNIT SEQUENCE:							
		SP	B			SP	A
Link				Link			
			<-----	1 – 0		FISU	
1 – 0	FISU		----->				
	(FIB + FSN = FF)						
	(BIB + BSN = FF)						
1 – 0	MSU		----->				
	(FIB + FSN = 80)						
	(BIB + BSN = BF)						
1 – 0	FISU		-----> (Note)				
	(FIB + FSN = 80)						
	(BIB + BSN = FF)						
1 – 0	FISU		----->				
	(FIB + FSN = 80)						
	(BIB + BSN = FF)						
			<-----	1 – 0		FISU	
						(BIB + BSN = 7F)	
1 – 0	MSU		----->				
	(FIB + FSN = 00)						
	(BIB + BSN = FF)						
			<-----	1 – 0		FISU	
						(BIB + BSN = 00)	
NOTE – Though UNB: =1, abnormal BSNR is not cancelled.							
TEST DESCRIPTION							
1.	Generate a single MSU with abnormal BSN at B, followed by FISUs with correct BSN.						
2.	Check that A responds with a negative acknowledgement.						
3.	Retransmit the MSU correctly at B.						
4.	Check that the MSU is received correctly and positive acknowledgement is given.						

MTP, LEVEL 2

TEST NUMBER: 8.11			PAGE: 1 OF 1																																																																										
REFERENCE: 5.3/Q.703 STD: Fig. 14																																																																													
TITLE: Transmission and reception control (Basic)																																																																													
SUBTITLE: Abnormal BSN – Two consecutive FISUs																																																																													
PURPOSE: To test the response to abnormal BSNs in two consecutive FISUs																																																																													
PRE-TEST CONDITIONS: Link in service																																																																													
CONFIGURATION: 1			TYPE OF TEST: VAT																																																																										
EXPECTED SIGNAL UNIT SEQUENCE:																																																																													
<table><tr><td></td><td>SP</td><td>B</td><td></td><td>SP</td><td>A</td></tr><tr><td>Link</td><td></td><td></td><td>Link</td><td></td><td></td></tr><tr><td></td><td></td><td><-----</td><td>1 – 0</td><td>FISU</td><td></td></tr><tr><td>1 – 0</td><td>FISU</td><td>-----></td><td></td><td></td><td></td></tr><tr><td></td><td>(BIB + BSN = FF)</td><td></td><td></td><td></td><td></td></tr><tr><td>1 – 0</td><td>FISU</td><td>-----></td><td></td><td></td><td></td></tr><tr><td></td><td>(BIB + BSN = BF)</td><td></td><td></td><td></td><td></td></tr><tr><td>1 – 0</td><td>FISU</td><td>-----></td><td></td><td></td><td></td></tr><tr><td></td><td>(BIB + BSN = BF)</td><td></td><td></td><td></td><td></td></tr><tr><td>1 – 0</td><td>FISU</td><td>-----></td><td></td><td></td><td></td></tr><tr><td></td><td>(BIB + BSN = FF)</td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td><-----</td><td>1 – 0</td><td>SIOS</td><td></td></tr></table>							SP	B		SP	A	Link			Link					<-----	1 – 0	FISU		1 – 0	FISU	----->					(BIB + BSN = FF)					1 – 0	FISU	----->					(BIB + BSN = BF)					1 – 0	FISU	----->					(BIB + BSN = BF)					1 – 0	FISU	----->					(BIB + BSN = FF)							<-----	1 – 0	SIOS	
	SP	B		SP	A																																																																								
Link			Link																																																																										
		<-----	1 – 0	FISU																																																																									
1 – 0	FISU	----->																																																																											
	(BIB + BSN = FF)																																																																												
1 – 0	FISU	----->																																																																											
	(BIB + BSN = BF)																																																																												
1 – 0	FISU	----->																																																																											
	(BIB + BSN = BF)																																																																												
1 – 0	FISU	----->																																																																											
	(BIB + BSN = FF)																																																																												
		<-----	1 – 0	SIOS																																																																									
TEST DESCRIPTION																																																																													
1.	Generate two consecutive FISUs at B with abnormal BSNs.																																																																												
2.	Check that A responds by taking the link out of service.																																																																												

MTP, LEVEL 2

TEST NUMBER: 8.12		PAGE: 1 OF 1	
REFERENCE: 5.3/Q.703 STD: Fig. 14			
TITLE: Transmission and reception control (Basic)			
SUBTITLE: Excessive delay of acknowledgement			
PURPOSE: To test the transmission control response to the expiration of EDA timer T7			
PRE-TEST CONDITIONS: Link in service			
CONFIGURATION: 1		TYPE OF TEST: VAT	
EXPECTED SIGNAL UNIT SEQUENCE:			
<div><div>SP</div><div>B</div><div>Link</div><div>1 - 0</div><div>FISU</div><div>(BIB + BSN = FF)</div></div>		<div><div>SP</div><div>A</div><div>Link</div><div>1 - 0</div><div>FISU</div><div>1 - 0</div><div>MSU</div><div>(FIB + FSN = 80)</div><div>T7</div><div>1 - 0</div><div>SIOS</div></div>	
TEST DESCRIPTION			
1.	Generate an MSU at A.		
2.	Discard the received MSU at B and send no acknowledgement to A for more than T7 period.		
3.	Check that the link is taken out of service by SIOS generated at A after T7 has expired.		
4.	Timer T7 shall be in the range 0.5 secs to 2.0 secs.		

MTP, LEVEL 2

TEST NUMBER: 8.13		PAGE: 1 OF 1																															
REFERENCE: Clause 7/Q.703 STD: Fig. 14																																	
TITLE: Transmission and reception control (Basic)																																	
SUBTITLE: Level 3 Stop command																																	
PURPOSE: To test the response to a Stop command																																	
PRE-TEST CONDITIONS: Link in service																																	
CONFIGURATION: 1		TYPE OF TEST: VAT																															
<div>EXPECTED SIGNAL UNIT SEQUENCE:</div> <table><tr><td>SP</td><td>B</td><td></td><td>SP</td><td>A</td></tr><tr><td>Link</td><td></td><td></td><td>Link</td><td></td></tr><tr><td></td><td></td><td><-----</td><td>1 – 0</td><td>FISU</td></tr><tr><td>1 – 0</td><td>FISU</td><td>-----></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td><td>: stop</td></tr><tr><td></td><td></td><td><-----</td><td>1 – 0</td><td>SIOS</td></tr></table>				SP	B		SP	A	Link			Link				<-----	1 – 0	FISU	1 – 0	FISU	----->							: stop			<-----	1 – 0	SIOS
SP	B		SP	A																													
Link			Link																														
		<-----	1 – 0	FISU																													
1 – 0	FISU	----->																															
				: stop																													
		<-----	1 – 0	SIOS																													
TEST DESCRIPTION																																	
1.	Give Stop command at A.																																
2.	Check that A responds with link out of service.																																

MTP, LEVEL 2

TEST NUMBER: 9.1		PAGE: 1 OF 1	
REFERENCE: 6.2/Q.703 STD: Fig. 15; Fig. 16			
TITLE: Transmission and reception control (PCR)			
SUBTITLE: MSU transmission and reception			
PURPOSE: To check basic MSU transmission and reception			
PRE-TEST CONDITIONS: Link in service			
CONFIGURATION: 1		TYPE OF TEST: VAT, CPT	
EXPECTED SIGNAL UNIT SEQUENCE:			
SP B		SP A	
Link		Link	
	<-----	1 - 0	FISU (FSN = 7F, BSN = 7F)
1 - 0	FISU (FSN = 7F, BSN = 7F) ----->		
	<-----	1 - 0	MSU (FSN = 0, BSN = 7F)
	<-----	1 - 0	MSU (FSN = 0, BSN = 7F)
			• •
1 - 0	FISU (FSN = 7F, BSN = 0) ----->		
	<-----	1 - 0	FISU (FSN = 0, BSN = 7F)
1 - 0	MSU (FSN = 0, BSN = 0) ----->		
	<-----	1 - 0	FISU (FSN = 0, BSN = 0)
TEST DESCRIPTION			
1.	Generate an MSU at A.		
2.	Check that B receives the MSU correctly.		
3.	Check that A sends FISUs after receiving an FISU with a positive acknowledgement.		
4.	Generate an MSU at B.		
5.	Check that A receives the MSU correctly and returns a positive acknowledgement.		

MTP, LEVEL 2

TEST NUMBER: 9.2				PAGE: 1 OF 1	
REFERENCE: 6.3/Q.703 STD: Fig. 15; Fig. 16					
TITLE: Transmission and reception control (PCR)					
SUBTITLE: Priority control					
PURPOSE: To check the preventive retransmission procedure					
PRE-TEST CONDITIONS: Link in service					
CONFIGURATION: 1				TYPE OF TEST: VAT	
EXPECTED SIGNAL UNIT SEQUENCE:					
SP B			SP A		
Link			Link		
		<-----	1 – 0	FISU	
				(FSN = 7F, BSN = 7F)	
1 – 0	FISU	----->			
	(FSN = 7F, BSN = 7F)				
		<-----	1 – 0	MSU	
				(FSN = 0, BSN = 7F)	
		<-----	1 – 0	MSU	
				(FSN = 1, BSN = 7F)	
				•	
				•	
		<-----	1 – 0	MSU	
				(FSN = 2, BSN = 7F)	
				•	
				•	
		<-----	1 – 0	MSU	
				(FSN = 0, BSN = 7F)	
		<-----	1 – 0	MSU	
				(FSN = 1, BSN = 7F)	
		<-----	1 – 0	MSU	
				(FSN = 2, BSN = 7F)	
				•	
				•	
1 – 0	FISU	----->			
	(FSN = 7F, BSN = 0)				
1 – 0	FISU	----->			
	(FSN = 7F, BSN = 1)				
1 – 0	FISU	----->			
	(FSN = 7F, BSN = 2)				
		<-----	1 – 0	FISU	
				(FSN = 2, BSN = 7F)	
TEST DESCRIPTION					
1.	Generate two MSUs at A.				
2.	No positive acknowledgement is sent from B.				
3.	Check that MSUs are retransmitted at A.				
4.	Generate another MSU at A.				
5.	Check that B receives MSUs correctly.				
6.	Reply with positive acknowledgement at B.				
7.	Check that A stops retransmission after receiving the positive acknowledgement for the last MSU in RTB and sends FISU.				

MTP, LEVEL 2

TEST NUMBER: 9.3				PAGE: 1 OF 1	
REFERENCE: 6.4/Q.703 STD: Fig. 15					
TITLE: Transmission and reception control (PCR)					
SUBTITLE: Forced retransmission with the value N ₁					
PURPOSE: To check that "RTB full" is detected by N ₁ and forced retransmission occurs					
PRE-TEST CONDITIONS: Link in service					
CONFIGURATION: 1				TYPE OF TEST: VAT	
EXPECTED SIGNAL UNIT SEQUENCE:					
SP B			SP A		
Link			Link		
		<-----	1 – 0	FISU	
				(FSN = 7F, BSN = 7F)	
1 – 0	FISU	----->			
	(FSN = 7F, BSN = 7F)				
		<-----	1 – 0	MSU	
				(FSN = 0, BSN = 7F)	
				•	
				•	
		<-----	1 – 0	MSU	
				(FSN = 7E, BSN = 7F)	
		<-----	1 – 0	MSU	
				(FSN = 0, BSN = 7F)	
				•	
				•	
		<-----	1 – 0	MSU	
				(FSN = X, BSN = 7F)	
1 – 0	FISU	----->			
	(FSN = 7F, BSN = 0)				
		<-----	1 – 0	MSU	
				(FSN = X + 1, BSN = 7F)	
				•	
				•	
		<-----	1 – 0	MSU	
				(FSN = 7F, BSN = 7F)	
TEST DESCRIPTION					
1.	Generate 128 MSUs at A, at a rate of 100 per second, in order to fill the RTB before the EDA timer T7 expires.				
2.	No positive acknowledgement is sent from B until a forced retransmission starts at A.				
3.	Reply with a positive acknowledgement with BSN = 0 before T7 expires at A.				
4.	Check that the forced retransmission is cancelled after the transmission of the last MSU in RTB.				
	NOTE – N ₁ is the maximum number of MSUs which are available for retransmission. (The value of N ₁ is normally 127.)				

MTP, LEVEL 2

TEST NUMBER: 9.4				PAGE: 1 OF 1	
REFERENCE: 6.4/Q.703 STD: Fig. 15					
TITLE: Transmission and reception control (PCR)					
SUBTITLE: Forced retransmission with the value N ₂					
PURPOSE: To check that "RTB full" is detected by N ₂ and forced retransmission starts					
PRE-TEST CONDITIONS: Link in service					
CONFIGURATION: 1				TYPE OF TEST: VAT	
EXPECTED SIGNAL UNIT SEQUENCE:					
SP B			SP A		
Link			Link		
		<-----	1 – 0	FISU	
				(FSN = 7F, BSN = 7F)	
1 – 0	FISU	----->			
	(FSN = 7F, BSN = 7F)				
		<-----	1 – 0	MSU	
				(FSN = 0, BSN = 7F)	
				•	
				•	
		<-----	1 – 0	MSU	
				(FSN = N – 1, BSN = 7F)	
		<-----	1 – 0	MSU	
				(FSN = 0, BSN = 7F)	
				•	
				•	
		<-----	1 – 0	MSU	
				(FSN = X, BSN = 7F)	
1 – 0	FISU	----->			
	(FSN = 7F, BSN = a – 1)				
		<-----	1 – 0	MSU	
				(FSN = a, BSN = 7F)	
		<-----	1 – 0	MSU	
				(FSN = N, BSN = 7F)	
				(a > X)	
TEST DESCRIPTION					
1.	Generate N + 1 MSUs at A (the octet count of N MSUs is larger than N ₂).				
2.	Send no positive acknowledgement at B until a forced retransmission starts at A.				
3.	Check that B receives the MSUs with FSN = 0 up to FSN = N – 1 but does not receive the MSU with FSN = N.				
4.	Reply with a positive acknowledgement with BSN = a – 1 at B.				
5.	Check that the retransmission restarts from the next value of FSN which is acknowledged by B when the retransmission is interrupted.				
6.	Check that B receives the MSU with FSN = N.				
NOTE – N ₂ is the maximum number of octets which are available for retransmission.					

MTP, LEVEL 2

TEST NUMBER: 9.5				PAGE: 1 OF 1																																																							
REFERENCE: 6.4/Q.703 STD: Fig. 15																																																											
TITLE: Transmission and reception control (PCR)																																																											
SUBTITLE: Forced retransmission cancel																																																											
PURPOSE: To check that the forced retransmission is cancelled when BSN equal to FSNL is received																																																											
PRE-TEST CONDITIONS: Link in service																																																											
CONFIGURATION: 1				TYPE OF TEST: VAT																																																							
EXPECTED SIGNAL UNIT SEQUENCE:																																																											
<table><tr><td colspan="3">SP B</td><td colspan="3">SP A</td></tr><tr><td>Link</td><td></td><td><-----</td><td>Link</td><td>1 - 0</td><td>FISU (FSN = 7F, BSN = 7F)</td></tr><tr><td>1 - 0</td><td>FISU (FSN = 7F, BSN = 7F)</td><td>-----></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td><-----</td><td>1 - 0</td><td>MSU (FSN = 0, BSN = 7F)</td><td>• •</td></tr><tr><td></td><td></td><td><-----</td><td>1 - 0</td><td>MSU (FSN = 7E, BSN = 7F)</td><td></td></tr><tr><td></td><td></td><td><-----</td><td>1 - 0</td><td>MSU (FSN = 0, BSN = 7F)</td><td>• •</td></tr><tr><td></td><td></td><td><-----</td><td>1 - 0</td><td>MSU (FSN = X, BSN = 7F)</td><td></td></tr><tr><td>1 - 0</td><td>FISU (FSN = 7F, BSN = 7E)</td><td>-----></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td><-----</td><td>1 - 0</td><td>MSU (FSN = 7F, BSN = 7F)</td><td></td></tr></table>						SP B			SP A			Link		<-----	Link	1 - 0	FISU (FSN = 7F, BSN = 7F)	1 - 0	FISU (FSN = 7F, BSN = 7F)	----->						<-----	1 - 0	MSU (FSN = 0, BSN = 7F)	• •			<-----	1 - 0	MSU (FSN = 7E, BSN = 7F)				<-----	1 - 0	MSU (FSN = 0, BSN = 7F)	• •			<-----	1 - 0	MSU (FSN = X, BSN = 7F)		1 - 0	FISU (FSN = 7F, BSN = 7E)	----->						<-----	1 - 0	MSU (FSN = 7F, BSN = 7F)	
SP B			SP A																																																								
Link		<-----	Link	1 - 0	FISU (FSN = 7F, BSN = 7F)																																																						
1 - 0	FISU (FSN = 7F, BSN = 7F)	----->																																																									
		<-----	1 - 0	MSU (FSN = 0, BSN = 7F)	• •																																																						
		<-----	1 - 0	MSU (FSN = 7E, BSN = 7F)																																																							
		<-----	1 - 0	MSU (FSN = 0, BSN = 7F)	• •																																																						
		<-----	1 - 0	MSU (FSN = X, BSN = 7F)																																																							
1 - 0	FISU (FSN = 7F, BSN = 7E)	----->																																																									
		<-----	1 - 0	MSU (FSN = 7F, BSN = 7F)																																																							
TEST DESCRIPTION																																																											
1.	Generate N ₁ + 1 MSUs at A (e.g. 128).																																																										
2.	Send no positive acknowledgement at B until a retransmission occurs at A.																																																										
3.	Reply with a positive acknowledgement with BSN = 7E at B.																																																										
4.	Check that a forced retransmission is cancelled and the MSU with FSN = 7F is sent at A.																																																										
	NOTE 1 – FSNL is the FSN of the last MSU in RTB.																																																										
	NOTE 2 – Alternatively, the number of octets threshold (N ₂), instead of the number of MSUs threshold (N ₁), could be used to start forced retransmission.																																																										

MTP, LEVEL 2

TEST NUMBER: 9.6		PAGE: 1 OF 1	
REFERENCE: 6.4/Q.703 STD: Fig. 15			
TITLE: Transmission and reception control (PCR)			
SUBTITLE: Repetition of forced retransmission			
PURPOSE: To check that the forced retransmission repeats when "RTB full" is still detected after finishing a forced retransmission			
PRE-TEST CONDITIONS: Link in service			
CONFIGURATION: 1		TYPE OF TEST: VAT	
EXPECTED SIGNAL UNIT SEQUENCE:			
SP B		SP A	
Link		Link	
	<-----	1 - 0	FISU (FSN = 7F, BSN = 7F)
1 - 0	FISU (FSN = 7F, BSN = 7F)		
	----->		
	<-----	1 - 0	MSU (FSN = 0, BSN = 7F)
			• •
	<-----	1 - 0	MSU (FSN = 7E, BSN = 7F)
	<-----	1 - 0	MSU (FSN = 0, BSN = 7F)
			• •
	<-----	1 - 0	MSU (FSN = 7E, BSN = 7F)
	<-----	1 - 0	MSU (FSN = 0, BSN = 7F)
			•
TEST DESCRIPTION			
1.	Generate MSUs at A at a rate of N per second, in order to make A repeat a forced retransmission. (N ≥ 127 + T, where T = lower limit of T7).		
2.	No acknowledgement is sent from B.		
3.	Check that A repeats a forced retransmission.		

MTP, LEVEL 2

TEST NUMBER: 9.7			PAGE: 1 OF 1		
REFERENCE: 6.2/Q.703 STD: Fig. 15					
TITLE: Transmission and reception control (PCR)					
SUBTITLE: MSU transmission while RPO set					
PURPOSE: To ensure correct performance while RPO is set					
PRE-TEST CONDITIONS: Link in service					
CONFIGURATION: 1			TYPE OF TEST: VAT		
EXPECTED SIGNAL UNIT SEQUENCE:					
SP B			SP A		
Link			Link		
		<-----	1 - 0	FISU	
				(FSN = 7F, BSN = 7F)	
1 - 0	FISU	----->			
	(FSN = 7F, BSN = 7F)				
		<-----	1 - 0	MSU	
				(FSN = 0, BSN = 7F)	
	: set LPO			:	
				:	
1 - 0	SIPO	----->			
	(FSN = 7F, BSN = 7F)				
		<-----	1 - 0	FISU	
				(FSN = 0, BSN = 7F)	
	: clear LPO			:	
				:	
1 - 0	MSU	----->			
	(FSN = 0, BSN = 7F)				
		<-----	1 - 0	FISU	
				(FSN = 7F, BSN = 0)	
1 - 0	MSU	----->			
	(FSN = 0, BSN = 7F)				
		<-----	1 - 0	FISU	
				(FSN = 7F, BSN = 0)	
TEST DESCRIPTION					
1.	Generate an MSU at A.				
2.	Instead of sending positive acknowledgement, set and keep PO at B for at least 1.2 s.				
3.	Check A stops a retransmission of the MSU and sends FISUs and does not detect link failure by the expiration of T7.				
4.	Cease PO after at least 1.2 s and send an MSU with no positive acknowledgement at B.				
5.	Check A flushed its buffer and no old MSU is sent.				
6.	Generate an MSU at B.				
7.	Check A receives the MSU and responds correctly.				

MTP, LEVEL 2

TEST NUMBER: 9.8			PAGE: 1 OF 1		
REFERENCE: 6.3/Q.703 STD: Fig. 16					
TITLE: Transmission and reception control (PCR)					
SUBTITLE: Abnormal BSN – Single MSU					
PURPOSE: To test the response to an abnormal BSN					
PRE-TEST CONDITIONS: Link in service					
CONFIGURATION: 1			TYPE OF TEST: VAT		
EXPECTED SIGNAL UNIT SEQUENCE:					
SP B			SP A		
Link		<-----	Link	1 – 0	FISU (FSN = 7F, BSN = 7F)
1 – 0	FISU (FSN = 7F, BSN = 7F)	----->			
1 – 0	MSU (FSN = 0, BSN = 0)	----->			
1 – 0	MSU (FSN = 0, BSN = 7F)	----->			
1 – 0	MSU (FSN = 0, BSN = 7F)	----->			
		<-----	1 – 0		FISU (FSN = 7F, BSN = 0)
TEST DESCRIPTION					
1.	Generate a single MSU at B with abnormal BSN followed by retransmission of that MSU with normal BSN.				
2.	Check that A responds with a positive acknowledgement and not detect link failure.				

MTP, LEVEL 2

TEST NUMBER: 9.9				PAGE: 1 OF 1			
REFERENCE: 6.3/Q.703 STD: Fig. 16							
TITLE: Transmission and reception control (PCR)							
SUBTITLE: Abnormal BSN – Two MSUs							
PURPOSE: To test the response to two consecutive MSUs with an MSU having normal BSN between them							
PRE-TEST CONDITIONS: Link in service							
CONFIGURATION: 1				TYPE OF TEST: VAT			
EXPECTED SIGNAL UNIT SEQUENCE:							
<div>SP B</div> <div>Link</div> <div>1 – 0 FISU (FSN = 7F, BSN = 7F)</div> <div>1 – 0 MSU (FSN = 0, BSN = 7E)</div> <div>1 – 0 MSU (FSN = 0, BSN = 7F)</div> <div>1 – 0 MSU (FSN = 0, BSN = 7E)</div>				<div>SP A</div> <div>Link</div> <div>1 – 0 FISU (FSN = 7F, BSN = 7F)</div> <div>1 – 0 SIOS (FSN = 7F, BSN = 7F)</div>			
TEST DESCRIPTION							
1.	Generate two consecutive MSUs at B with abnormal BSN with an MSU having normal BSN between them.						
2.	Check that all MSUs are discarded at A.						
3.	Check that A responds by taking the link out of service.						

MTP, LEVEL 2

TEST NUMBER: 9.10		PAGE: 1 OF 1																																																		
REFERENCE: 6.2/Q.703 STD: Fig. 16																																																				
TITLE: Transmission and reception control (PCR)																																																				
SUBTITLE: Unexpected FSN																																																				
PURPOSE: To check the reception control response to an MSU with unexpected FSN																																																				
PRE-TEST CONDITIONS: Link in service																																																				
CONFIGURATION: 1		TYPE OF TEST: VAT																																																		
EXPECTED SIGNAL UNIT SEQUENCE:																																																				
<table><tr><td></td><td>SP</td><td>B</td><td></td><td></td><td>SP</td><td>A</td></tr><tr><td>Link</td><td></td><td></td><td><-----</td><td>Link</td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td><td>1 – 0</td><td></td><td>FISU (FSN = 7F, BSN = 7F)</td></tr><tr><td>1 – 0</td><td>FISU (FSN = 7F, BSN = 7F)</td><td></td><td>-----></td><td></td><td></td><td></td></tr><tr><td>1 – 0</td><td>MSU (FSN = 0, BSN = 7F)</td><td></td><td>-----></td><td></td><td></td><td></td></tr><tr><td>1 – 0</td><td>MSU (FSN = 2, BSN = 7F)</td><td></td><td>-----></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td><-----</td><td>1 – 0</td><td></td><td>FISU (FSN = 7F, BSN = 0)</td></tr></table>					SP	B			SP	A	Link			<-----	Link							1 – 0		FISU (FSN = 7F, BSN = 7F)	1 – 0	FISU (FSN = 7F, BSN = 7F)		----->				1 – 0	MSU (FSN = 0, BSN = 7F)		----->				1 – 0	MSU (FSN = 2, BSN = 7F)		----->							<-----	1 – 0		FISU (FSN = 7F, BSN = 0)
	SP	B			SP	A																																														
Link			<-----	Link																																																
				1 – 0		FISU (FSN = 7F, BSN = 7F)																																														
1 – 0	FISU (FSN = 7F, BSN = 7F)		----->																																																	
1 – 0	MSU (FSN = 0, BSN = 7F)		----->																																																	
1 – 0	MSU (FSN = 2, BSN = 7F)		----->																																																	
			<-----	1 – 0		FISU (FSN = 7F, BSN = 0)																																														
TEST DESCRIPTION																																																				
1.	Generate an MSU with unexpected FSN at B.																																																			
2.	Check A discards the MSU with unexpected FSN and does not send acknowledgement for that MSU.																																																			

MTP, LEVEL 2

TEST NUMBER: 9.11		PAGE: 1 OF 1																																																																															
REFERENCE: 6.3/Q.703 STD: Fig. 15																																																																																	
TITLE: Transmission and reception control (PCR)																																																																																	
SUBTITLE: Excessive delay of acknowledgement																																																																																	
PURPOSE: To test the transmission control response to the expiration of EDA timer T7																																																																																	
PRE-TEST CONDITIONS: Link in service																																																																																	
CONFIGURATION: 1		TYPE OF TEST: VAT																																																																															
EXPECTED SIGNAL UNIT SEQUENCE:																																																																																	
<table><tr><td></td><td>SP</td><td>B</td><td></td><td>SP</td><td>A</td></tr><tr><td>Link</td><td></td><td></td><td>Link</td><td></td><td></td></tr><tr><td></td><td></td><td><-----</td><td>1 - 0</td><td>FISU</td><td></td></tr><tr><td></td><td></td><td></td><td></td><td>(FSN = 7F, BSN = 7F)</td><td></td></tr><tr><td>1 - 0</td><td>FISU</td><td>-----></td><td></td><td></td><td></td></tr><tr><td></td><td>(FSN = 7F, BSN = 7F)</td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td><-----</td><td>1 - 0</td><td>MSU</td><td></td></tr><tr><td></td><td></td><td></td><td></td><td>(FSN = 0, BSN = 7F)</td><td></td></tr><tr><td></td><td></td><td></td><td></td><td>T7</td><td>•</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td>•</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td>•</td></tr><tr><td></td><td></td><td><-----</td><td>1 - 0</td><td>SIOS</td><td></td></tr><tr><td></td><td></td><td></td><td></td><td>(FSN = 0, BSN = 7F)</td><td></td></tr></table>					SP	B		SP	A	Link			Link					<-----	1 - 0	FISU						(FSN = 7F, BSN = 7F)		1 - 0	FISU	----->					(FSN = 7F, BSN = 7F)							<-----	1 - 0	MSU						(FSN = 0, BSN = 7F)						T7	•						•						•			<-----	1 - 0	SIOS						(FSN = 0, BSN = 7F)	
	SP	B		SP	A																																																																												
Link			Link																																																																														
		<-----	1 - 0	FISU																																																																													
				(FSN = 7F, BSN = 7F)																																																																													
1 - 0	FISU	----->																																																																															
	(FSN = 7F, BSN = 7F)																																																																																
		<-----	1 - 0	MSU																																																																													
				(FSN = 0, BSN = 7F)																																																																													
				T7	•																																																																												
					•																																																																												
					•																																																																												
		<-----	1 - 0	SIOS																																																																													
				(FSN = 0, BSN = 7F)																																																																													
TEST DESCRIPTION																																																																																	
1.	Generate an MSU at A.																																																																																
2.	Suspend sending positive acknowledgement at B for more than T7 period.																																																																																
3.	Check that A sends SIOSs instead of retransmission of MSU after T7 expires.																																																																																
4.	Timer T7 shall be in the range 0.5 secs to 2.0 secs.																																																																																

MTP, LEVEL 2

TEST NUMBER: 9.12				PAGE: 1 OF 1			
REFERENCE: 6.2/Q.703 STD: Fig. 16							
TITLE: Transmission and reception control (PCR)							
SUBTITLE: FISU with FSN expected for MSU							
PURPOSE: To check that the received FISU having FSN expected for MSU is discarded							
PRE-TEST CONDITIONS: Link in service							
CONFIGURATION: 1				TYPE OF TEST: VAT			
EXPECTED SIGNAL UNIT SEQUENCE:							
<div>SP B</div> <div>Link</div> <div>1 – 0 FISU (FSN = 7F, BSN = 7F)</div> <div>-----></div> <div><-----</div> <div>1 – 0 FISU (FSN = 0, BSN = 7F)</div> <div>-----></div> <div><-----</div>				<div>SP A</div> <div>Link</div> <div>1 – 0 FISU (FSN = 7F, BSN = 7F)</div> <div>1 – 0 FISU (FSN = 7F, BSN = 7F)</div>			
TEST DESCRIPTION							
1.	Generate an FISU with FSN expected for MSU at B.						
2.	Check that A discards the FISU and responds with an FISU with correct BSN.						

MTP, LEVEL 2

TEST NUMBER: 9.13		PAGE: 1 OF 1																															
REFERENCE: Clause 7/Q.703 STD: Fig. 16																																	
TITLE: Transmission and reception control (PCR)																																	
SUBTITLE: Level 3 Stop command																																	
PURPOSE: To test the response to a Stop command																																	
PRE-TEST CONDITIONS: Link in service																																	
CONFIGURATION: 1		TYPE OF TEST: VAT																															
<div>EXPECTED SIGNAL UNIT SEQUENCE:</div> <table><tr><td>SP</td><td>B</td><td></td><td>SP</td><td>A</td></tr><tr><td>Link</td><td></td><td></td><td>Link</td><td></td></tr><tr><td></td><td></td><td><-----</td><td>1 – 0</td><td>FISU</td></tr><tr><td>1 – 0</td><td>FISU</td><td>-----></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td><td>: stop</td></tr><tr><td></td><td></td><td><-----</td><td>1 – 0</td><td>SIOS</td></tr></table>				SP	B		SP	A	Link			Link				<-----	1 – 0	FISU	1 – 0	FISU	----->							: stop			<-----	1 – 0	SIOS
SP	B		SP	A																													
Link			Link																														
		<-----	1 – 0	FISU																													
1 – 0	FISU	----->																															
				: stop																													
		<-----	1 – 0	SIOS																													
TEST DESCRIPTION																																	
1.	Give Stop command at A.																																
2.	Check that A responds with link out of service.																																

MTP, LEVEL 2

TEST NUMBER: 10.1		PAGE: 1 OF 1	
REFERENCE: Clause 9/Q.703 STD: Fig. 19			
TITLE: Congestion Control			
SUBTITLE: Congestion abatement			
PURPOSE: To check the congestion abatement procedure			
PRE-TEST CONDITIONS: Link in service			
CONFIGURATION: 1		TYPE OF TEST: VAT	
EXPECTED SIGNAL UNIT SEQUENCE:			
SP B		SP A	
Link		Link	
			: make congestion state
	<-----	1 – 0	SIB
		T5	
	<-----	1 – 0	SIB
			•
			•
			: clear congestion state
	<-----	1 – 0	FISU
TEST DESCRIPTION			
1.	Make congestion state at A and check A sends SIB. (Implementation of congestion control is not specified.)		
2.	Check B receives SIBs at the interval of T5.		
3.	Clear congestion state at A and check A stops sending SIBs.		
4.	Timer T5 shall be in the range 80 ms to 120 ms.		

MTP, LEVEL 2

TEST NUMBER: 10.2				PAGE: 1 OF 1																																																					
REFERENCE: 9.2/Q.703 STD: Fig. 19																																																									
TITLE: Congestion Control																																																									
SUBTITLE: Timer T7																																																									
PURPOSE: To check timer T7 is restarted at the reception of SIB (without expiring of T6)																																																									
PRE-TEST CONDITIONS: Link in service																																																									
CONFIGURATION: 1				TYPE OF TEST: VAT																																																					
EXPECTED SIGNAL UNIT SEQUENCE:																																																									
<table><tr><td></td><td>SP</td><td>B</td><td></td><td>SP</td><td>A</td></tr><tr><td>Link</td><td></td><td></td><td></td><td>Link</td><td></td></tr><tr><td></td><td></td><td></td><td><-----</td><td>1 – 0</td><td>MSU</td></tr><tr><td>1 – 0</td><td>SIB</td><td rowspan="3">Ct</td><td>-----></td><td></td><td></td></tr><tr><td>1 – 0</td><td>SIB</td><td>-----></td><td></td><td></td></tr><tr><td></td><td>•</td><td></td><td></td><td></td></tr><tr><td></td><td>•</td><td></td><td></td><td></td><td></td></tr><tr><td>1 – 0</td><td>SIB</td><td>Bt</td><td>-----></td><td></td><td>T6</td></tr><tr><td>1 – 0</td><td>FISU</td><td></td><td>-----></td><td></td><td></td></tr></table>							SP	B		SP	A	Link				Link					<-----	1 – 0	MSU	1 – 0	SIB	Ct	----->			1 – 0	SIB	----->				•					•					1 – 0	SIB	Bt	----->		T6	1 – 0	FISU		----->		
	SP	B		SP	A																																																				
Link				Link																																																					
			<-----	1 – 0	MSU																																																				
1 – 0	SIB	Ct	----->																																																						
1 – 0	SIB		----->																																																						
	•																																																								
	•																																																								
1 – 0	SIB	Bt	----->		T6																																																				
1 – 0	FISU		----->																																																						
TEST DESCRIPTION																																																									
1.	Generate an MSU at A.																																																								
2.	Generate SIBs at B with the time intervals of T5 for Ct, instead of positive acknowledgement.																																																								
3.	Check that link remains in service during Ct.																																																								
4.	Send FISU with positive acknowledgement from B after Bt expires.																																																								
5.	Check that link remains in service.																																																								
6.	Ct = more than T7 and less than T6.																																																								
7.	Bt = less than T7.																																																								
8.	(Ct + Bt) is less than T6.																																																								

MTP, LEVEL 2

TEST NUMBER: 10.3				PAGE: 1 OF 1																																																																									
REFERENCE: 9.3/Q.703 STD: Fig. 19																																																																													
TITLE: Congestion Control																																																																													
SUBTITLE: Timer T6																																																																													
PURPOSE: To check "Remote Congestion" Timer T6																																																																													
PRE-TEST CONDITIONS: Link in service																																																																													
CONFIGURATION: 1				TYPE OF TEST: VAT																																																																									
EXPECTED SIGNAL UNIT SEQUENCE:																																																																													
<table><tr><td></td><td>SP</td><td>B</td><td></td><td>SP</td><td>A</td></tr><tr><td>Link</td><td></td><td></td><td></td><td>Link</td><td></td></tr><tr><td></td><td></td><td></td><td><-----</td><td>1 - 0</td><td>MSU</td></tr><tr><td>1 - 0</td><td>SIB</td><td></td><td>-----></td><td></td><td></td></tr><tr><td>1 - 0</td><td>SIB</td><td></td><td>-----></td><td></td><td></td></tr><tr><td></td><td>•</td><td></td><td></td><td></td><td></td></tr><tr><td></td><td>•</td><td></td><td></td><td></td><td></td></tr><tr><td>1 - 0</td><td>SIB</td><td></td><td>-----></td><td></td><td>T6</td></tr><tr><td></td><td>•</td><td></td><td></td><td></td><td></td></tr><tr><td></td><td>•</td><td></td><td></td><td></td><td></td></tr><tr><td>1 - 0</td><td>SIB</td><td></td><td>-----></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td><-----</td><td>1 - 0</td><td>SIOS</td></tr></table>							SP	B		SP	A	Link				Link					<-----	1 - 0	MSU	1 - 0	SIB		----->			1 - 0	SIB		----->				•						•					1 - 0	SIB		----->		T6		•						•					1 - 0	SIB		----->						<-----	1 - 0	SIOS
	SP	B		SP	A																																																																								
Link				Link																																																																									
			<-----	1 - 0	MSU																																																																								
1 - 0	SIB		----->																																																																										
1 - 0	SIB		----->																																																																										
	•																																																																												
	•																																																																												
1 - 0	SIB		----->		T6																																																																								
	•																																																																												
	•																																																																												
1 - 0	SIB		----->																																																																										
			<-----	1 - 0	SIOS																																																																								
TEST DESCRIPTION																																																																													
1.	Generate an MSU at A.																																																																												
2.	Generate SIB at B until Timer T6 expires.																																																																												
3.	Check link becomes out of service.																																																																												
4.	Timer T6 shall be in the range 3 secs to 6 secs (8 to 12 secs for 4.8 kbit/s).																																																																												

MTP, LEVEL 2

TEST NUMBER: 10.4	PAGE: 1 OF 1		
REFERENCE: 9.3/Q.703 STD: Fig. 19			
TITLE: Congestion Control			
SUBTITLE: Congestion and RTB empty			
PURPOSE: Check first receipt of LSSU with SI "B" does not start Timer T6 or T7 if RTB empty (i.e. does not cause link failure)			
PRE-TEST CONDITIONS: Link in service			
CONFIGURATION: 1	TYPE OF TEST: VAT		
<p>EXPECTED SIGNAL UNIT SEQUENCE:</p> <table style="width: 100%; border: none;"> <tr> <td style="width: 50%; vertical-align: top;"> <p style="text-align: center;">SP B</p> <p>Link</p> <p style="margin-left: 40px;">: make congestion state</p> <p>1 – 0 SIB -----></p> </td> <td style="width: 50%; vertical-align: top;"> <p style="text-align: center;">SP A</p> <p>Link</p> <p style="margin-left: 40px;">: make RTB empty</p> <p style="text-align: right; margin-top: 20px;">Check T6, T7 not started (i.e. link does not fail for period > T6 from receipt of first SIB)</p> </td> </tr> </table>		<p style="text-align: center;">SP B</p> <p>Link</p> <p style="margin-left: 40px;">: make congestion state</p> <p>1 – 0 SIB -----></p>	<p style="text-align: center;">SP A</p> <p>Link</p> <p style="margin-left: 40px;">: make RTB empty</p> <p style="text-align: right; margin-top: 20px;">Check T6, T7 not started (i.e. link does not fail for period > T6 from receipt of first SIB)</p>
<p style="text-align: center;">SP B</p> <p>Link</p> <p style="margin-left: 40px;">: make congestion state</p> <p>1 – 0 SIB -----></p>	<p style="text-align: center;">SP A</p> <p>Link</p> <p style="margin-left: 40px;">: make RTB empty</p> <p style="text-align: right; margin-top: 20px;">Check T6, T7 not started (i.e. link does not fail for period > T6 from receipt of first SIB)</p>		
TEST DESCRIPTION			
1. 2. 3. 4.	Make RTB of A empty Make congestion state at B and ensure B sends at least one SIB (the multiple sending of SIB from SPB is not critical to this test). Check A receives SIB Confirm T6, T7 are not started on receipt of SIB (i.e. link stays in service for period > T6)		

SERIES OF ITU-T RECOMMENDATIONS

Series A	Organization of the work of ITU-T
Series B	Means of expression: definitions, symbols, classification
Series C	General telecommunication statistics
Series D	General tariff principles
Series E	Overall network operation, telephone service, service operation and human factors
Series F	Non-telephone telecommunication services
Series G	Transmission systems and media, digital systems and networks
Series H	Audiovisual and multimedia systems
Series I	Integrated services digital network
Series J	Cable networks and transmission of television, sound programme and other multimedia signals
Series K	Protection against interference
Series L	Construction, installation and protection of cables and other elements of outside plant
Series M	TMN and network maintenance: international transmission systems, telephone circuits, telegraphy, facsimile and leased circuits
Series N	Maintenance: international sound programme and television transmission circuits
Series O	Specifications of measuring equipment
Series P	Telephone transmission quality, telephone installations, local line networks
Series Q	Switching and signalling
Series R	Telegraph transmission
Series S	Telegraph services terminal equipment
Series T	Terminals for telematic services
Series U	Telegraph switching
Series V	Data communication over the telephone network
Series X	Data networks and open system communications
Series Y	Global information infrastructure and Internet protocol aspects
Series Z	Languages and general software aspects for telecommunication systems