

I n t e r n a t i o n a l T e l e c o m m u n i c a t i o n U n i o n

ITU-T

TELECOMMUNICATION
STANDARDIZATION SECTOR
OF ITU

Q.850

Amendment 1

(04/2019)

SERIES Q: SWITCHING AND SIGNALLING, AND
ASSOCIATED MEASUREMENTS AND TESTS

Digital subscriber Signalling System No. 1 – General

Usage of cause and location in the Digital
Subscriber Signalling System No. 1 and the
Signalling System No. 7 ISDN user part

Amendment 1

Recommendation ITU-T Q.850 (2018) – Amendment 1

ITU-T



ITU-T Q-SERIES RECOMMENDATIONS
SWITCHING AND SIGNALLING, AND ASSOCIATED MEASUREMENTS AND TESTS

SIGNALLING IN THE INTERNATIONAL MANUAL SERVICE	Q.1–Q.3
INTERNATIONAL AUTOMATIC AND SEMI-AUTOMATIC WORKING	Q.4–Q.59
FUNCTIONS AND INFORMATION FLOWS FOR SERVICES IN THE ISDN	Q.60–Q.99
CLAUSES APPLICABLE TO ITU-T STANDARD SYSTEMS	Q.100–Q.119
SPECIFICATIONS OF SIGNALLING SYSTEMS No. 4, 5, 6, R1 AND R2	Q.120–Q.499
DIGITAL EXCHANGES	Q.500–Q.599
INTERWORKING OF SIGNALLING SYSTEMS	Q.600–Q.699
SPECIFICATIONS OF SIGNALLING SYSTEM No. 7	Q.700–Q.799
Q3 INTERFACE	Q.800–Q.849
DIGITAL SUBSCRIBER SIGNALLING SYSTEM No. 1	Q.850–Q.999
General	Q.850–Q.919
Data link layer	Q.920–Q.929
Network layer	Q.930–Q.939
User-network management	Q.940–Q.949
Stage 3 description for supplementary services using DSS1	Q.950–Q.959
PUBLIC LAND MOBILE NETWORK	Q.1000–Q.1099
INTERWORKING WITH SATELLITE MOBILE SYSTEMS	Q.1100–Q.1199
INTELLIGENT NETWORK	Q.1200–Q.1699
SIGNALLING REQUIREMENTS AND PROTOCOLS FOR IMT-2000	Q.1700–Q.1799
SPECIFICATIONS OF SIGNALLING RELATED TO BEARER INDEPENDENT CALL CONTROL (BICC)	Q.1900–Q.1999
BROADBAND ISDN	Q.2000–Q.2999
SIGNALLING REQUIREMENTS AND PROTOCOLS FOR THE NGN	Q.3000–Q.3709
SIGNALLING REQUIREMENTS AND PROTOCOLS FOR SDN	Q.3710–Q.3899
TESTING SPECIFICATIONS	Q.3900–Q.4099
SIGNALLING REQUIREMENTS AND PROTOCOLS FOR IMT-2020	Q.5000–Q.5049
COMBATING COUNTERFEITING AND STOLEN ICT DEVICES	Q.5050–Q.5069

For further details, please refer to the list of ITU-T Recommendations.

Recommendation ITU-T Q.850

Usage of cause and location in the Digital Subscriber Signalling System No. 1 and the Signalling System No. 7 ISDN user part

Amendment 1

Summary

Recommendation ITU-T Q.850 defines the format, encoding and semantics of cause information elements/parameters and the usage of the location field, in the Digital Subscriber Signalling System No. 1 and the Signalling System No. 7 ISDN User Part. Many cause values are applicable to both DSS 1 and SS No. 7 ISUP and this Recommendation specifies the use of each cause value in other Recommendations.

Amendment 1 incorporates modifications that had been involuntarily omitted during the approval of revised Recommendation ITU-T Q.850 in 2018. Amendment 1 and Addendum 1, issued in 2001 and 2000 respectively, had not been incorporated in the final text of the Recommendation.

This amendment:

- Adds a reference to clause 2
- Adds case values to Table 1
- Adds clauses 6.2.7.1.10 bis and 6.2.7.1.18 bis

History

Edition	Recommendation	Approval	Study Group	Unique ID*
1.0	ITU-T Q.850	1993-03-12	XI	11.1002/1000/2305
2.0	ITU-T Q.850	1998-05-15	11	11.1002/1000/4376
2.1	ITU-T Q.850 (1998) Add. 1	2000-06-15	11	11.1002/1000/5114
2.2	ITU-T Q.850 (1998) Amd. 1	2001-07-13	11	11.1002/1000/5493
3.0	ITU-T Q.850	2018-10-14	11	11.1002/1000/13695
3.1	ITU-T Q.850 (2018) Amd. 1	2019-04-29	11	11.1002/1000/13882

Keywords

Cause value, DSS1, ISUP, SIP-I.

* To access the Recommendation, type the URL <http://handle.itu.int/> in the address field of your web browser, followed by the Recommendation's unique ID. For example, <http://handle.itu.int/11.1002/1000/11830-en>.

FOREWORD

The International Telecommunication Union (ITU) is the United Nations specialized agency in the field of telecommunications, information and communication technologies (ICTs). The ITU Telecommunication Standardization Sector (ITU-T) is a permanent organ of ITU. ITU-T is responsible for studying technical, operating and tariff questions and issuing Recommendations on them with a view to standardizing telecommunications on a worldwide basis.

The World Telecommunication Standardization Assembly (WTSA), which meets every four years, establishes the topics for study by the ITU-T study groups which, in turn, produce Recommendations on these topics.

The approval of ITU-T Recommendations is covered by the procedure laid down in WTSA Resolution 1.

In some areas of information technology which fall within ITU-T's purview, the necessary standards are prepared on a collaborative basis with ISO and IEC.

NOTE

In this Recommendation, the expression "Administration" is used for conciseness to indicate both a telecommunication administration and a recognized operating agency.

Compliance with this Recommendation is voluntary. However, the Recommendation may contain certain mandatory provisions (to ensure, e.g., interoperability or applicability) and compliance with the Recommendation is achieved when all of these mandatory provisions are met. The words "shall" or some other obligatory language such as "must" and the negative equivalents are used to express requirements. The use of such words does not suggest that compliance with the Recommendation is required of any party.

INTELLECTUAL PROPERTY RIGHTS

ITU draws attention to the possibility that the practice or implementation of this Recommendation may involve the use of a claimed Intellectual Property Right. ITU takes no position concerning the evidence, validity or applicability of claimed Intellectual Property Rights, whether asserted by ITU members or others outside of the Recommendation development process.

As of the date of approval of this Recommendation, ITU had not received notice of intellectual property, protected by patents, which may be required to implement this Recommendation. However, implementers are cautioned that this may not represent the latest information and are therefore strongly urged to consult the TSB patent database at <http://www.itu.int/ITU-T/ipr/>.

© ITU 2019

All rights reserved. No part of this publication may be reproduced, by any means whatsoever, without the prior written permission of ITU.

Table of Contents

	Page
1 Scope.....	1
2 References.....	1
3 Definitions	2
4 Abbreviations and acronyms	2
5 Conventions	3
6 Cause.....	3
6.1 Format.....	3
6.2 Codes used in the subfield of the "Cause"	4
7 General rules for the handling of the location field.....	24
8 Handling of cause and location at the international interface.....	25
9 Procedures for the handling of location values reserved for national use (national option).....	26
Bibliography.....	28

Recommendation ITU-T Q.850

Usage of cause and location in the Digital Subscriber Signalling System No. 1 and the Signalling System No. 7 ISDN user part

Amendment 1

Editorial note: This is a complete-text publication. Modifications introduced by this amendment are shown in revision marks relative to Recommendation ITU-T Q.850 (2018).

1 Scope

This Recommendation defines the format, encoding and semantics of cause information elements/parameters and the usage of the location field, in the Digital Subscriber Signalling System No. 1 and the Signalling System No. 7 ISDN User Part. Many cause values are applicable to both DSS 1 and SS No. 7 ISUP and this Recommendation specifies the use of each cause value in other Recommendations.

2 References

The following ITU-T Recommendations and other references contain provisions which, through reference in this text, constitute provisions of this Recommendation. At the time of publication, the editions indicated were valid. All Recommendations and other references are subject to revision; users of this Recommendation are therefore encouraged to investigate the possibility of applying the most recent edition of the Recommendations and other references listed below. A list of the currently valid ITU-T Recommendations is regularly published. The reference to a document within this Recommendation does not give it, as a stand-alone document, the status of a Recommendation.

- [ITU-T E.180] Recommendation ITU-T E.180/Q.35 (1998), *Technical characteristics of tones for the telephone service.*
- [ITU-T Q.730] Recommendation ITU-T Q.730 (1999), *ISDN User Part supplementary services.*
- [ITU T Q.732.x] Recommendations ITU-T Q.732.2-5 (1999), *Stage 3 description for call offering supplementary services using Signalling System No. 7: Call diversion services: Call forwarding busy, Call forwarding no reply, Call forwarding unconditional, Call deflection.*
- [ITU-T Q.733.3] Recommendation ITU-T Q.733.3 (1997), *Stage 3 description for call completion supplementary services using Signalling System No. 7: Completion of calls to busy subscriber (CCBS).*
- [ITU-T Q.733.4] Recommendation ITU-T Q.733.4 (1993), *Stage 3 description for call completion supplementary services using Signalling System No. 7: Terminal portability (TP).*
- [ITU-T Q.735.1] Recommendation ITU-T Q.735.1 (1993), *Stage 3 description for community of interest supplementary services using Signalling System No. 7: Closed user group (CUG).*
- [ITU-T Q.735.3] Recommendation ITU-T Q.735.3 (1993), *Stage 3 description for community of interest supplementary services using Signalling System No. 7: Multi-level precedence and pre-emption.*

- [ITU-T Q.737.1] Recommendation ITU-T Q.737.1 (1997), *Stage 3 description for additional information transfer supplementary services using Signalling System No. 7: User-to-user signalling (UUS)*.
- [ITU-T Q.763] Recommendation ITU-T Q.763 (1999), *Signalling System No. 7 – ISDN User Part formats and codes*.
- [ITU-T Q.764] Recommendation ITU-T Q.764 (1999), *Signalling System No. 7 – ISDN User Part signalling procedures*.
- [\[ITU-T Q.769.1\]](#) [Recommendation ITU-T Q.769.1 \(1999\), Signalling system No. 7 – ISDN user part enhancements for the support of number portability.](#)
- [ITU-T Q.931] Recommendation ITU-T Q.931 (1998), *ISDN user-network interface layer 3 specification for basic call control*.
- [ITU-T Q.933] Recommendation ITU-T Q.933 (2003), *ISDN Digital Subscriber Signalling System No. 1 (DSS1) – Signalling specifications for frame mode switched and permanent virtual connection control and status monitoring*.
- [ITU-T Q.955.3] Recommendation ITU-T Q.955.3 (1993), *Stage 3 description for community of interest supplementary services using DSS 1: Multi-level precedence and preemption (MLPP)*.
- [ITU-T X.21] Recommendation ITU-T X.21 (1992), *Interface between Data Terminal Equipment and Data Circuit-terminating Equipment for synchronous operation on public data networks*.
- [ITU-T X.25] Recommendation ITU-T X.25 (1996), *Interface between Data Terminal Equipment (DTE) and Data Circuit-terminating Equipment (DCE) for terminals operating in the packet mode and connected to public data networks by dedicated circuit*.
- [ITU-T X.213] Recommendation ITU-T X.213 (2001), *Information technology – Open Systems Interconnection – Network service definition*.
- [ETSI TS 124 229] ETSI TS 124 229 V14.8.0 (2018-06), *Digital cellular telecommunications system (Phase 2+) (GSM); Universal Mobile Telecommunications System (UMTS); LTE; 5G; IP multimedia call control protocol based on Session Initiation Protocol (SIP) and Session Description Protocol (SDP); Stage 3 (3GPP TS 24.229 version 14.8.0 Release 14)*.
- [RFC 3326] IETF RFC 3326 (2002), *The Reason Header Field for the Session Initiation Protocol (SIP)*.

3 Definitions

None.

4 Abbreviations and acronyms

This Recommendation uses the following abbreviations and acronyms:

ANM	Answer Message
BI	Beyond Interworking point
CCBSindicator	Completion of Calls to Busy Subscriber
CGC	Circuit-Group-Congestion signal
CUG	Closed User Group

DSS 1	Digital Subscriber Signalling System No. 1 (DSS 1)
INTL	International Network
ISDN	Integrated Services Digital Network
ISUP	ISDN User Part
LN	Public Network serving the Local user
LPN	Private Network serving the Local user
MLPP	Multilevel Precedence and Pre-emption
NNC	National-Network-Congestion signal
NU	National Use
RLN	Public Network serving the Remote user
RPN	Private Network serving the Remote user
S-CSCF	Serving-Call Session Control Function
SIP	Session Initiation Protocol
SS No. 7	Signalling System No. 7
TMR	Transmission Medium Requirement
TN	Transit Network
U	User
UUS	User-to-User Signalling

5 Conventions

None.

6 Cause

6.1 Format

The format of the ITU-T Q.931 Cause information element or ITU-T Q.763/Q.730 Cause indicators parameters' content is shown in Figure 1.

	8	7	6	5	4	3	2	1	Octet (Note 3) Q.931 Q.763
ext. 0/1	Coding standard		Spare 0	Location					3 1
ext. 1	Recommendation (Notes 1 and 2)								3a*
ext. 1	Cause value								4 2
	Diagnostic(s) (if any)								5* 3*

NOTE 1 – If the default applies for the Recommendation field, octets including this field shall be omitted.

NOTE 2 – The Recommendation field is not supported by the ISUP. The default interpretation for ISUP is [ITU-T Q.763].

NOTE 3 – Optional octets are marked with asterisks (*).

Figure 1 – Format of "Cause"

6.2 Codes used in the subfield of the "Cause"

6.2.1 Extension indicator (ext.)

Bit

8

0 octet continues through to the next octet (e.g., octet 1 to 1a)

1 last octet

6.2.2 Coding standard

Bits

7 6

0 0 ITU-T standardized coding, as described below

0 1 ISO/IEC standard (See note.)

1 0 national standard (See note.)

1 1 standard specific to identified location (See note.)

NOTE – These other coding standards should be used only when the desired cause value cannot be represented with the ITU-T-standardized coding.

6.2.3 Location

Bits

4 3 2 1

0 0 0 0 user (U)

0 0 0 1 private network serving the local user (LPN)

0 0 1 0 public network serving the local user (LN)

0 0 1 1 transit network (TN)

0 1 0 0 public network serving the remote user (RLN)

0 1 0 1 private network serving the remote user (RPN)

0 1 1 1 international network (INTL)

1 0 1 0 network beyond interworking point (BI)

1 1 0 0 reserved for national use

1 1 0 1 reserved for national use

1 1 1 0 reserved for national use

1 1 1 1 reserved for national use

All other values are spare.

6.2.4 Recommendation

Bits

7 6 5 4 3 2 1

0 0 0 0 0 0 0 ITU-T Q.931

0 0 0 0 0 1 1 ITU-T X.21

0 0 0 0 1 0 0 ITU-T X.25

0 0 0 0 1 0 1 public land mobile networks, [b-ITU-T Q.1031]/[b-ITU-T Q.1051]
(obsolete)

All other values are reserved.

NOTE – If AN octet including this field is omitted, [ITU-T Q.931] is assumed.

6.2.5 Cause value (only applicable in the context of [ITU-T Q.763], [ITU-T Q.931] and [ETSI TS 124 229])

The cause value is divided into two fields, a class (bits 5 to 7) and a value within the class (bits 1 to 4).

- 1) The class indicates the general nature of the event.
 - Class (000): normal event
 - Class (001): normal event
 - Class (010): resource unavailable
 - Class (011): service or option not available
 - Class (100): service or option not implemented
 - Class (101): invalid message (e.g., parameter out of range)
 - Class (110): protocol error (e.g., unknown message)
 - Class (111): interworking
- 2) The cause values are listed in Table 1.

Table 1 – Cause information element/parameter

Cause			Definition	Diagnostics	Application (Note 1)	Reference (Note 2)	Location (Note 3)	Remarks
Class	Value	No.						
000	0001	1	Unallocated (unassigned) number	Condition	DSS 1, ISUP	[ITU-T Q.931]	U, RPN, LN	No route by digit analysis
							RLN, TN, INTL	
000	0010	2	No route to specified transit network	Transit network identify	DSS 1, ISUP(NU)	[ITU-T Q.931]	LN, TN	
000	0011	3	No route to destination	Condition	DSS 1, ISUP	[ITU-T Q.931]	U, RPN, LN	
000	0100	4	Send special information tone		ISUP			Clause 7 of [ITU-T E.180]
000	0101	5	Misdialled trunk prefix		ISUP(NU)			
000	0110	6	Channel unacceptable		DSS 1	[ITU-T Q.931]	LN	
000	0111	7	Call awarded and being delivered in an established channel		DSS 1	[ITU-T Q.931]	LN	
000	1000	8	Pre-emption		DSS 1, ISUP	[ITU-T Q.735.3] [ITU-T Q.955.3]		MLPP
000	1001	9	Pre-emption – circuit reserved for reuse		ISUP	[ITU-T Q.735.3]		MLPP
000	1101	13	Call completed elsewhere		SIP	[ETSI TS 124 229]		
000	1110	14	QoR: ported number		ISUP	[ITU-T Q.769.1]	LN	
001	0000	16	Normal call clearing	Condition	DSS 1, ISUP	[ITU-T Q.931], 2.3 of [ITU-T Q.764]	U, RPN	
001	0001	17	User busy	CCBS indicator	DSS 1, ISUP	[ITU-T Q.931], [ITU-T Q.732.x] [ITU-T Q.733.3]	U, RPN, RLN	Basic call and call diversion services
001	0010	18	No user responding		DSS 1, ISUP	[ITU-T Q.931], [ITU-T Q.732.x]	RLN	Call diversion services

Table 1 – Cause information element/parameter

Cause			Definition	Diagnostics	Application (Note 1)	Reference (Note 2)	Location (Note 3)	Remarks
Class	Value	No.						
001	0011	19	No answer from user (user alerted)		DSS 1, ISUP	[ITU-T Q.931]	RLN	
						2.1.4 of [ITU-T Q.764] 2.9.8.3 of [ITU-T Q.764]	RLN, TN, INTL	Expiry of waiting ANM timer (T9)
						[ITU-T Q.732.x]	RLN	Call diversion services
001	0100	20	Subscriber absent		DSS 1, ISUP			Mobile application
001	0101	21	Call rejected	Call rejected condition	DSS 1, ISUP	[ITU-T Q.931]	U, RPN	
						[ITU-T Q.732.x]	RLN	Call diversion services
001	0110	22	Number changed	New destination (DSS 1)/ Called party number (ISUP)	DSS 1, ISUP	[ITU-T Q.931]	U, RPN, LN	
001	0111	23	Redirection to new destination		ISUP			
001	1000	24	Call rejected due to feature at the destination		DSS1/ISUP		RLN	
001	1001	25	Exchange routing error		ISUP		LN, TN, RLN, ITNL	
001	1010	26	Non-selected user clearing		DSS 1	[ITU-T Q.931]	LN	
001	1011	27	Destination out of order		DSS 1, ISUP	[ITU-T Q.931]	RLN	
001	1100	28	Invalid number format (address incomplete)		DSS 1, ISUP	[ITU-T Q.931]	U, RPN, RLN, LN	
						2.1.1 of [ITU-T Q.764] 2.1.2 of [ITU-T Q.764] 2.9.8.3 of [ITU-T Q.764] 2.2.5 of [ITU-T Q.764]	TN, INTL	The called party number is not in a valid format or is not complete
						Annex A of [ITU-T Q.763]	TN, INTL, RLN, RPN	

Table 1 – Cause information element/parameter

Cause			Definition	Diagnostics	Application (Note 1)	Reference (Note 2)	Location (Note 3)	Remarks
Class	Value	No.						
001	1101	29	Facility rejected	Facility identification (DSS 1)/ Parameter name (ISUP)	DSS 1, ISUP	[ITU-T Q.931]	RLN, U, RPN, LN	
							TN, INTL	Inability to provide a request signalling capability
						[ITU-T Q.735.1]	INTL, RLN	CUG
						[ITU-T Q.737.1]	INTL, TN, RLN	UUS
001	1110	30	Response to STATUS ENQUIRY		DSS 1	[ITU-T Q.931]	U, LN	
001	1111	31	Normal, unspecified		DSS 1, ISUP	[ITU-T Q.931]	RLN	
						2.1.1 of [ITU-T Q.764] 2.1.2 of [ITU-T Q.764] 2.8.1 of [ITU-T Q.764] 2.8.2 of [ITU-T Q.764] 2.9.3 of [ITU-T Q.764] 2.9.6 of [ITU-T Q.764] 2.9.8.2 of [ITU-T Q.764] 2.9.8.3 of [ITU-T Q.764] 2.1.8 of [ITU-T Q.764] 2.2.4 of [ITU-T Q.764]	TN, INTL, RLN	Call failure information indicating the failure of a call due to the lapse of a timeout or a fault not covered by specific causes (examples: expiry of timers ITU-T Q.764 not covered by specific causes, release of interconnected circuit, etc.)
						2.1.6 of [ITU-T Q.764] 2.9.7 of [ITU-T Q.764]	RLN, TN	Expiry of waiting INF timer (T33)

Table 1 – Cause information element/parameter

Cause			Definition	Diagnostics	Application (Note 1)	Reference (Note 2)	Location (Note 3)	Remarks
Class	Value	No.						
						Annex A of [ITU-T Q.763]		
010	0010	34	No circuit/channel available	CCBS indicator	DSS 1, ISUP	[ITU-T Q.931], [ITU-T Q.733.3]	U, RPN, RLN, LN, TN	
							TN, INTL	Circuit congestion encountered in an exchange
010	0110	38	Network out of order		DSS 1, ISUP	[ITU-T Q.931]	U, RPN	
010	0111	39	Permanent frame mode connection out of service		DSS 1	[ITU-T Q.933]		
010	1000	40	Permanent frame mode connection operational		DSS 1	[ITU-T Q.933]		
010	1001	41	Temporary failure		DSS 1, ISUP	[ITU-T Q.931]	U, RPN, RLN, LN	
010	1010	42	Switching equipment congestion		DSS 1, ISUP		TN, RLN, INTL	
						2.9.9.1 of [ITU-T Q.764]	TN, RLN	Temporary trunk block (national use)
010	1011	43	Access information discarded	Discarded information element identifier(s) (Note 4)	DSS 1, ISUP	[ITU-T Q.931]	U, RPN, LN	
010	1100	44	Requested circuit/channel not available		DSS 1, ISUP	[ITU-T Q.931]	U, RPN, LN	
010	1110	46	Precedence call blocked		DSS 1, ISUP	[ITU-T Q.735.3] [ITU-T Q.955.3]		MLPP
010	1111	47	Resource unavailable, unspecified		DSS 1, ISUP	[ITU-T Q.931]	U, RPN	
						Annex A of [ITU-T Q.763]		
011	0001	49	Quality of service not available	Condition	DSS 1	[ITU-T Q.931]		
011	0010	50	Requested facility not subscribed	Facility identification (DSS 1)/ Parameter name (ISUP)	DSS 1, ISUP	[ITU-T Q.931], [ITU-T Q.735.1]	U, LN, RLN	
011	0101	53	Outgoing calls barred within CUG		ISUP	[ITU-T Q.735.1]		CUG
011	0111	55	Incoming calls barred within CUG		ISUP	[ITU-T Q.735.1]	RLN	CUG

Table 1 – Cause information element/parameter

Cause			Definition	Diagnostics	Application (Note 1)	Reference (Note 2)	Location (Note 3)	Remarks
Class	Value	No.						
011	1001	57	Bearer capability not authorized	Attribute identity	DSS 1, ISUP	[ITU-T Q.931]	LN	
011	1010	58	Bearer capability not presently available	Attribute identity	DSS 1, ISUP	[ITU-T Q.931]	LN	
011	1110	62	Inconsistency in designated outgoing access information and subscriber class		DSS 1, ISUP	[ITU-T Q.735.1]		
011	1111	63	Service or option not available, unspecified		DSS 1, ISUP	[ITU-T Q.931]	LN	
						Annex A of [ITU-T Q.763]		
100	0001	65	Bearer capability not implemented	Attribute identity	DSS 1, ISUP	[ITU-T Q.931]	LN	
						Annex A of [ITU-T Q.763]	TN, INTL	Inability to provide a requested TMR
100	0010	66	Channel type not implemented	Channel type	DSS 1	[ITU-T Q.931]		
100	0101	69	Requested facility not implemented	Facility identification (DSS 1)/Parameter name (ISUP)	DSS 1, ISUP	[ITU-T Q.931], [ITU-T Q.737.1]	U, RPN, LN, RLN	UUS
100	0110	70	Only restricted digital information bearer capability is available		DSS 1, ISUP (NU)	[ITU-T Q.931]		
100	1111	79	Service or option not implemented, unspecified		DSS 1, ISUP	[ITU-T Q.931]		
						Annex A of [ITU-T Q.763]		
101	0001	81	Invalid call reference value		DSS 1	[ITU-T Q.931]	U, LN	
101	0010	82	Identified channel does not exist	Channel identity	DSS 1	[ITU-T Q.931]		
101	0011	83	A suspended call exists, but this call identity does not		DSS 1	[ITU-T Q.931]	LN	
101	0100	84	Call identity in use		DSS 1	[ITU-T Q.931]	LN	
101	0101	85	No call suspended		DSS 1	[ITU-T Q.931]	LN	
101	0110	86	Call with the requested call identity has been cleared	Clearing cause	DSS 1	[ITU-T Q.931]	LN	
101	0111	87	User not member of CUG		ISUP, DSS 1	[ITU-T Q.735.1]	RLN	CUG

Table 1 – Cause information element/parameter

Cause			Definition	Diagnostics	Application (Note 1)	Reference (Note 2)	Location (Note 3)	Remarks
Class	Value	No.						
101	1000	88	Incompatible destination	Incompatible parameter (DSS 1)	DSS 1, ISUP	[ITU-T Q.931]	U, RPN	
				User-to-user indicators parameter name	ISUP	[ITU-T Q.737.1]	RLN	UUS 2
101	1010	90	Non-existent CUG		ISUP	[ITU-T Q.735.1]		CUG
101	1011	91	Invalid transit network selection		DSS 1, ISUP(NU)	[ITU-T Q.931]	LN, TN	
101	1111	95	Invalid message, unspecified		DSS 1, ISUP	[ITU-T Q.931]	LN	
						Annex A of ITU-T Q.763		
110	0000	96	Mandatory information element is missing	Information element identifier (Note 4)	DSS 1,	[ITU-T Q.931]	U, LN	
110	0001	97	Message type non-existent or not implemented	Message type	DSS 1, ISUP	[ITU-T Q.931]	U, LN	
						2.9.5.2 of [ITU-T Q.764] 2.9.5.3 of [ITU-T Q.764]	TN, INTL, RLN	
110	0010	98	Message not compatible with call state or message type non-existent or not implemented	Message type	DSS 1	[ITU-T Q.931]	U, LN	
110	0011	99	Information element /parameter non-existent or not implemented	Information element identifier(s) (DSS 1) (Note 4 and Note 5)/ Parameter names	DSS 1, ISUP	[ITU-T Q.931]	U, LN	
						2.9.5.2 of [ITU-T Q.764] 2.9.5.3 of [ITU-T Q.764] Annex A of [ITU-T Q.763]	TN, INTL, RLN	
110	0100	100	Invalid information element contents	Information element identifier(s) (Note 4)	DSS 1	[ITU-T Q.931]	U, LN	
110	0101	101	Message not compatible with call state	Message type	DSS 1	[ITU-T Q.931]	U, LN	

Table 1 – Cause information element/parameter

Cause			Definition	Diagnostics	Application (Note 1)	Reference (Note 2)	Location (Note 3)	Remarks
Class	Value	No.						
110	0110	102	Recovery on timer expiry	Timer number	DSS 1, ISUP	[ITU-T Q.931]		
						[ITU-T Q.733.4]	RLN	Terminal portability: expiry of waiting RES (user) timer
						2.4.3 of [ITU-T Q.764]	INTL	Expiry of waiting RES (network) timer (incoming international exchange)
110	0111	103	Parameter non-existent or not implemented, passed on	Parameter name(s)	ISUP(NU)			
110	1110	110	Message with unrecognized parameter, discarded	Parameter name(s), message name	ISUP	2.9.5.2 of [ITU-T Q.764] 2.9.5.3 of [ITU-T Q.764]		
110	1111	111	Protocol error, unspecified		DSS 1, ISUP	[ITU-T Q.931]	RLN	
						Annex A of [ITU-T Q.763]	RLN, TN, INTL	
						[ITU-T Q.735.1]	RLN	CUG
111	1111	127	Interworking, unspecified		DSS 1, ISUP	[ITU-T Q.931]		
						Annex A of [ITU-T Q.763]		

NOTE 1 – The application indicates that the cause value may be carried in DSS 1 and/or ISUP. Causes carried in ISUP which are not marked for national use (NU) are the minimum set of cause values that shall be supported over the international interface.

NOTE 2 – The references included are not exhaustive.

NOTE 3 – These are typical locations generated within the scope of the associated Recommendations. Other locations may be used depending upon network configuration.

NOTE 4 – Locking and non-locking shift procedures described in clause 4.5 of [ITU-T Q.931] are applied. In principle information element identifiers are ordered in the same order as the information element in the received message.

NOTE 5 – When only the locking shift information element is included and no variable length information element identifier follows, it means that the codeset in the locking shift itself is not implemented.

6.2.6 Diagnostics (only applicable in the context of [ITU-T Q.763] and [ITU-T Q.931]).

The diagnostics applicable to each cause value are given in Table 1. Diagnostic information is not available for every cause. In those cases in which the diagnostic is an ITU-T Q.931 information element, the coding of the diagnostic is the same as for the corresponding information element in clause 4 of [ITU-T Q.931].

6.2.6.1 Coding of condition

The condition diagnostic is coded as follows:

Bit 8:	1
Bits 7-5:	000
Bit 4:	Condition as follows: 0 – Network service – Provider 1 – Network service – User
Bit 3:	Condition as follows: 0 – Normal 1 – Abnormal
Bits 2-1:	Condition as follows: 00 – Unknown 01 – Permanent 10 – Transient

6.2.6.2 Coding of Transit network identity

The diagnostic field contains the entire transit network selection or network-specific facilities information element as applicable, including parameter name/information element identifier and length octet.

6.2.6.3 Coding of CCBS indicator

The CCBS indicator is coded as follows:

Bits 8-1:	00000000 – Spare
	00000001 – CCBS possible
	00000010 – CCBS not possible
	00000011
	to – Spare
	01111111
	10000000
	to – Spare for national use
	11111110
	11111111 – Reserved for extension

NOTE – Not used in [ITU-T Q.931].

6.2.6.4 Coding of Call rejected diagnostic

The format of the diagnostic field for cause No. 21 is as shown in Figure 2 and Table 2.

8	7	6	5	4	3	2	1	
ext. 1	Rejection reason					Condition		Octet x*
User-specific diagnostic								x + 1*etc. (Note 1)
IE type	Information element identifier							x + 2*etc. (Note 2)

NOTE 1 – This octet may be present only if octet x indicates user specific diagnostic.

NOTE 2 – This octet may be present only if octet x indicates information element missing or information element contents are not sufficient.

Figure 2 – Coding of diagnostic field for cause No. 21

Table 2 – Coding of diagnostic field for cause No. 21

<i>Rejection reason (octet x)</i>	
Bits	
<u>7 6 5 4 3</u>	
0 0 0 0 0	user specific
0 0 0 0 1	information element missing
0 0 0 1 0	information element contents are not sufficient
	All other values are reserved
<i>Condition (octet x)</i>	
Bits	
<u>2 1</u>	
0 0	unknown
0 1	permanent
1 0	transient
1 1	spare
<i>User specific diagnostic (octet x + 1)</i>	
Coded according to the user specification, subject to the maximum length of the Cause information element.	
+ 2)	
Bit	
<u>8</u>	
0	variable length information element
1	fixed length information element
<i>Information element identifier (octet x + 2)</i>	
Bits 7-1 encoded with the information element identifier of the missing or insufficient information element.	

6.2.6.5 Coding of New destination/Called party number (new)

New destination is formatted as the called party number information element, including the information element identifier. Transit network selection may also be included.

6.2.6.6 Coding of Facility identification/Rejected parameter

The coding of the facility identification is network dependent.

6.2.6.7 Coding of Attribute identity

The coding of the attribute identity diagnostic is shown in Figure 3, Table 3a and Table 3b.

NOTE – Not generated by ISUP.

8	7	6	5	4	3	2	1	
ext. 0/1	Attribute number							Octet x
ext. 0/1	Rejected attribute							x + 1
ext. 1	Available attribute							x + 2

NOTE 1 – When diagnostics information is provided, octet x and x + 1 shall be present. Octet x + 2 is optional.

NOTE 2 – Octets x-x + 2 may be repeated to report multiple rejected attributes.

NOTE 3 – The extension bit (ext.) when coded 0, indicates that this diagnostic continues to the next octet.

Figure 3 – Coding of the diagnostic field for cause Nos. 57, 58 and 65 (Attribute identity)

Table 3a – Coding of attribute number field for cause Nos. 57, 58 and 65

<i>Attribute number (octet x)</i>		
Bits	No.	
<u>7 6 5 4 3 2 1</u>		
0 1 1 0 0 0 1	1	Information transfer capability
0 1 1 0 0 1 0	2	Information transfer mode
0 1 1 0 0 1 1	3	Information transfer rate
0 1 1 0 1 0 0	4	Structure
0 1 1 0 1 0 1	5	Configuration
0 1 1 0 1 1 0	6	Establishment
0 1 1 0 1 1 1	7	Symmetry
0 1 1 1 0 0 0	8	Information transfer rate (dest. → orig.)
0 1 1 1 0 0 1	9	Layer identification

Table 3b – Coding of the rejected attribute field for cause Nos. 57, 58 and 65

<p><i>Rejected attribute (octet x + 1)</i></p> <p>Attribute No.</p> <p>1. Information transfer capability: Bits 7-6: 00 Bits 5-1: according to Table 4-6 of [ITU-T Q.931], octet 3</p> <p>2. Information transfer mode Bits 7-6: according to Table 4-6 of [ITU-T Q.931], octet 4 Bits 5-1: 00000</p> <p>3. Information transfer rate Bits 7-6: 00 Bits 5-1 according to Table 4-6 of [ITU-T Q.931], octet 4</p> <p>4. Structure (Note 1) Bits 7-5: according to Table 4-6 of [ITU-T Q.931], octet 4a Bits 4-1: 0000</p> <p>5. Configuration (Note 1) Bits 7-4: 000 Bits 4-3: according to Table 4-6 of [ITU-T Q.931], octet 4a Bits 2-1: 00</p> <p>6. Establishment (Note 1) Bits 7-3: 00000 Bits 2-1: according to Table 4-6 of [ITU-T Q.931], octet 4a</p> <p>7. Symmetry (Note 1) Bits 7-6: according to Table 4-6 of [ITU-T Q.931], octet 4b Bits 5-1: 00000</p> <p>8. Information transfer rate (dest. → orig.): (Note 1) Bits 7-6: 00 Bits 5-1: according to Table 4-6 of [ITU-T Q.931], octet 4b</p> <p>9. Layer identification: Bits <u>7 6</u> 0 1 (layer 1) Bits 5-1 according to Table 4-6 of [ITU-T Q.931], octet 5 1 0 (layer 2) Bits 5-1 according to Table 4-6 of [ITU-T Q.931], octet 6 1 1 (layer 3) Bits 5-1 according to Table 4-6 of [ITU-T Q.931], octet 7</p> <p>10. Rate multiplier: Bit 8: 1 Bits 7-1 according to Table 4-6 of [ITU-T Q.931], octet 4.1</p> <p><i>Available attributes (octet x + 2)</i> The same coding as octet x + 1</p> <p>NOTE 1 – These values were defined in [ITU-T Q.931] (1988). NOTE 2 – A description of Table 4-6 of [ITU-T Q.931] is found in 3.57 of [ITU-T Q.763].</p>
--

6.2.6.8 Coding of Channel type

The channel type is coded as follows:

Bit 8: Extension bit

Bits 7-5: spare

Bits 4-1: according to the Table 4-15 of [ITU-T Q.931] octet 3.2, channel type.

NOTE – Not generated by ISUP.

6.2.6.9 Coding of Incompatible parameter

Incompatible parameter is composed of the incompatible information element identifier.

6.2.6.10 Coding of Timer number

NOTE – Not generated by ISUP.

The timer number is coded in IA5 characters, e.g., T308 is coded as "3" "0" "8". The following coding is used in each octet:

Bit 8: Spare "0"
Bits 7-1: IA5 character.

6.2.6.11 Coding of Message type

Message type is coded as specified in Table 4 of [ITU-T Q.763] and Table 4-2 of [ITU-T Q.931], respectively.

6.2.6.12 Coding of Parameter name

Parameter name is coded as specified in Table 5 of [ITU-T Q.763].

6.2.7 Cause definitions

6.2.7.1 Normal class

6.2.7.1.1 Cause No. 1 – Unallocated (unassigned) number

This cause indicates that the called party cannot be reached because, although the called party number is in a valid format, it is not currently allocated (assigned).

6.2.7.1.2 Cause No. 2 – No route to specified transit network (national use)

This cause indicates that the equipment sending this cause has received a request to route the call through a particular transit network which it does not recognize. The equipment sending this cause does not recognize the transit network either because the transit network does not exist or because that particular transit network, while it does exist, does not serve the equipment which is sending this cause.

This cause is supported on a network-dependent basis.

6.2.7.1.3 Cause No. 3 – No route to destination

This cause indicates that the called party cannot be reached because the network through which the call has been routed does not serve the destination desired.

This cause is supported on a network-dependent basis.

6.2.7.1.4 Cause No. 4 – Send special information tone

This cause indicates that the called party cannot be reached for reasons that are of a long-term nature and that the special information tone should be returned to the calling party.

6.2.7.1.5 Cause No. 5 – Misdialed trunk prefix (national use)

This cause indicates the erroneous inclusion of a trunk prefix in the called party number.

6.2.7.1.6 Cause No. 6 – Channel unacceptable

This cause indicates that the channel most recently identified is not acceptable to the sending entity for use in this call.

6.2.7.1.7 Cause No. 7 – Call awarded and being delivered in an established channel

This cause indicates that the user has been awarded the incoming call, and that the incoming call is being connected to a channel already established to that user for similar calls (e.g., packet-mode ITU-T X.25 virtual calls).

6.2.7.1.8 Cause No. 8 – Pre-emption

This cause indicates that the call is being pre-empted.

6.2.7.1.9 Cause No. 9 – Pre-emption – circuit reserved for reuse

This cause indicates that the call is being pre-empted and the circuit is reserved for reuse by the pre-empting exchange.

6.2.7.1.10 Cause No. 13 – Call completed elsewhere

When the S-CSCF has forked an initial INVITE request, and it has received a 2xx response associated with one of the early dialogues, the S-CSCF shall in each CANCEL request it generates insert a Reason header field with a "SIP" protocol header field parameter value, a "200" cause header field parameter value, and a "Call completed elsewhere" text header field parameter value, as specified in [RFC 3326].

6.2.7.1.10 bis Cause No. 14 – QoR: ported number

This cause indicates that an exchange detected that the called number was ported out (see Annex C of [ITU-T Q.769.1]).

6.2.7.1.11 Cause No. 16 – Normal call clearing

This cause indicates that the call is being cleared because one of the users involved in the call has requested that the call be cleared.

Under normal situations, the source of this cause is not the network.

6.2.7.1.12 Cause No. 17 – User busy

This cause is used to indicate that the called party is unable to accept another call because the user busy condition has been encountered. This cause value may be generated by the called user or by the network. In the case of user determine user busy, it is noted that the user equipment is compatible with the call.

6.2.7.1.13 Cause No. 18 – No user responding

This cause is used when a called party does not respond to a call establishment message with either an alerting or connect indication within the prescribed period of time allocated.

6.2.7.1.14 Cause No. 19 – No answer from user (user alerted)

This cause is used when the called party has been alerted but does not respond with a connect indication within a prescribed period of time.

NOTE – This cause is not necessarily generated by ITU-T Q.931 procedures but may be generated by internal network timers.

6.2.7.1.15 Cause No. 20 – Subscriber absent

This cause value is used when a mobile station has logged off, radio contact is not obtained with a mobile station or if a personal telecommunication user is temporarily not addressable at any user-network interface.

6.2.7.1.16 Cause No. 21 – Call rejected

This cause indicates that the equipment sending this cause does not wish to accept this call, although it could have accepted the call because the equipment sending this cause is neither busy nor incompatible.

This cause may also be generated by the network, indicating that the call was cleared due to a supplementary service constraint. The diagnostic field may contain additional information about the supplementary service and reason for rejection.

6.2.7.1.17 Cause No. 22 – Number changed

This cause is returned to a calling party when the called party number indicated by the calling party is no longer assigned. The new called party number may optionally be included in the diagnostic field. If a network does not support this cause value, cause No. 1, Unallocated (unassigned) number, shall be used.

6.2.7.1.18 Cause No. 23 – Redirection to new destination

This cause is used by a general ISUP protocol mechanism that can be invoked by an exchange that decides that the call should be set up to a different called number. Such an exchange can invoke a redirection mechanism, by use of this cause value, to request a preceding exchange involved in the call to route the call to the new number.

6.2.7.1.18 bis Cause No. 24 – Call rejected due to feature at the destination

This cause indicates that the call has been rejected due to feature at the destination.

6.2.7.1.19 Cause No. 25 – Exchange – routing error

This cause indicates that the destination indicated by the user cannot be reached, because an intermediate exchange has released the call due to reaching a limit in executing the hop counter procedure.

This cause is generated by an intermediate node, which when decrementing the hop counter value, gives the result 0.

6.2.7.1.20 Cause No. 26 – Non-selected user clearing

This cause indicates that the user has not been awarded the incoming call.

6.2.7.1.21 Cause No. 27 – Destination out of order

This cause indicates that the destination indicated by the user cannot be reached because the interface to the destination is not functioning correctly. The term "not functioning correctly" indicates that a signalling message was unable to be delivered to the remote party; e.g., a physical layer or data link layer failure at the remote party, or user equipment offline.

6.2.7.1.22 Cause No. 28 – Invalid number format (address incomplete)

This cause indicates that the called party cannot be reached because the called party number is not in a valid format or is not complete.

NOTE – This condition may be determined:

- immediately after reception of an end of pulsing (ST) signal; or
- on time-out after the last received digit.

6.2.7.1.23 Cause No. 29 – Facility rejected

This cause is returned when a supplementary service requested by the user cannot be provided by the network.

6.2.7.1.24 Cause No. 30 – Response to STATUS ENQUIRY

This cause is included in the STATUS message when the reason for generating the STATUS message was the prior receipt of a STATUS ENQUIRY message.

6.2.7.1.25 Cause No. 31 – Normal, unspecified

This cause is used to report a normal event only when no other cause in the normal class applies.

6.2.7.2 Resource unavailable class

6.2.7.2.1 Cause No. 34 – No circuit/channel available

This cause indicates that there is no appropriate circuit/channel presently available to handle the call.

6.2.7.2.2 Cause No. 38 – Network out of order

This cause indicates that the network is not functioning correctly and that the condition is likely to last a relatively long period of time; e.g., immediately re-attempting the call is not likely to be successful.

6.2.7.2.3 Cause No. 39 – Permanent frame mode connection out of service

This cause is included in a STATUS message to indicate that a permanently established frame mode connection is out of service (e.g., due to equipment or section failure) (see Annex A of [ITU-T Q.933]).

6.2.7.2.4 Cause No. 40 – Permanent frame mode connection operational

This cause is included in a STATUS message to indicate that a permanently established frame mode connection is operational and capable of carrying user information (see Annex A of [ITU-T Q.933]).

6.2.7.2.5 Cause No. 41 – Temporary failure

This cause indicates that the network is not functioning correctly and that the condition is not likely to last a long period of time; e.g., the user may wish to try another call attempt almost immediately.

6.2.7.2.6 Cause No. 42 – Switching equipment congestion

This cause indicates that the switching equipment generating this cause is experiencing a period of high traffic.

6.2.7.2.7 Cause No. 43 – Access information discarded

This cause indicates that the network could not deliver access information to the remote user as requested, i.e., user-to-user information, low layer compatibility, high layer compatibility, or sub-address, as indicated in the diagnostic.

It is noted that the particular type of access information discarded is optionally included in the diagnostic.

6.2.7.2.8 Cause No. 44 – Requested circuit/channel not available

This cause is returned when the circuit or channel indicated by the requesting entity cannot be provided by the other side of the interface.

6.2.7.2.9 Cause No. 46 – Precedence call blocked

This cause indicates that there are no pre-emptable circuits or that the called user is busy with a call of equal or higher pre-emptable level.

6.2.7.2.10 Cause No. 47 – Resource unavailable, unspecified

This cause is used to report a resource unavailable event only when no other cause in the resource unavailable class applies.

6.2.7.3 Service or option unavailable class

6.2.7.3.1 Cause No. 49 – Quality of service not available

This cause is used to report that the requested Quality of service, as defined in [ITU-T X.213], cannot be provided (e.g., throughput or transit delay cannot be supported).

6.2.7.3.2 Cause No. 50 – Requested facility not subscribed

This cause indicates that the user has requested a supplementary service which is implemented by the equipment which generated this cause, but which the user is not authorized to use.

6.2.7.3.3 Cause No. 53 – Outgoing calls barred within CUG

This cause indicates that although the calling party is a member of the CUG for the outgoing CUG call, outgoing calls are not allowed for this member of the CUG.

6.2.7.3.4 Cause No. 55 – Incoming calls barred within CUG

This cause indicates that although the called party is a member of the CUG for the incoming CUG call, incoming calls are not allowed to this member of the CUG.

6.2.7.3.5 Cause No. 57 – Bearer capability not authorized

This cause indicates that the user has requested a bearer capability which is implemented by the equipment which generated this cause but the user is not authorized to use.

6.2.7.3.6 Cause No. 58 – Bearer capability not presently available

This cause indicates that the user has requested a bearer capability which is implemented by the equipment which generated this cause but which is not available at this time.

6.2.7.3.7 Cause No. 62 – Inconsistency in designated outgoing access information and subscriber class

This cause indicates that there is an inconsistency in the designated outgoing access information and subscriber class.

6.2.7.3.8 Cause No. 63 – Service or option not available, unspecified

This cause is used to report a service or option not available event only when no other cause in the service or option not available class applies.

6.2.7.4 Service or option not implemented class

6.2.7.4.1 Cause No. 65 – Bearer capability not implemented

This cause indicates that the equipment sending this cause does not support the bearer capability requested.

6.2.7.4.2 Cause No. 66 – Channel type not implemented

This cause indicates that the equipment sending this cause does not support the channel type requested.

6.2.7.4.3 Cause No. 69 – Requested facility not implemented

This cause indicates that the equipment sending this cause does not support the requested supplementary service.

6.2.7.4.4 Cause No. 70 – Only restricted digital information bearer capability is available (national use)

This cause indicates that the calling party has requested an unrestricted bearer service but that the equipment sending this cause only supports the restricted version of the requested bearer capability.

6.2.7.4.5 Cause No. 79 – Service or option not implemented, unspecified

This cause is used to report a service or option not implemented event only when no other cause in the service or option not implemented class applies.

6.2.7.5 Invalid message (e.g., parameter out of range) class

6.2.7.5.1 Cause No. 81 – Invalid call reference value

This cause indicates that the equipment sending this cause has received a message with a call reference which is not currently in use on the user-network interface.

6.2.7.5.2 Cause No. 82 – Identified channel does not exist

This cause indicates that the equipment sending this cause has received a request to use a channel not activated on the interface for a call. For example, if a user has subscribed to those channels on a primary rate interface numbered from 1 to 12 and the user equipment or the network attempts to use channels 13 to 23, this cause is generated.

6.2.7.5.3 Cause No. 83 – A suspended call exists, but this call identity does not

This cause indicates that a call resume has been attempted with a call identity which differs from that in use for any presently suspended call(s).

6.2.7.5.4 Cause No. 84 – Call identity in use

This cause indicates that the network has received a call suspended request containing a call identity (including the null call identity) which is already in use for a suspended call within the domain of interfaces over which the call might be resumed.

6.2.7.5.5 Cause No. 85 – No call suspended

This cause indicates that the network has received a call resume request containing a call identity information element which presently does not indicate any suspended call within the domain of interfaces over which calls may be resumed.

6.2.7.5.6 Cause No. 86 – Call with the requested call identity has been cleared

This cause indicates that the network has received a call resume request containing a call identity information element indicating a suspended call that has in the meantime been cleared while suspended (either by network timeout or by the remote user).

6.2.7.5.7 Cause No. 87 – User not member of CUG

This cause indicates that the called user for the incoming CUG call is not a member of the specified CUG or that the calling user is an ordinary subscriber calling a CUG subscriber.

6.2.7.5.8 Cause No. 88 – Incompatible destination

This cause indicates that the equipment sending this cause has received a request to establish a call which has low layer compatibility, high layer compatibility, or other compatibility attributes (e.g., data rate) which cannot be accommodated.

6.2.7.5.9 Cause No. 90 – Non-existent CUG

This cause indicates that the specified CUG does not exist.

6.2.7.5.10 Cause No. 91 – Invalid transit network selection (national use)

This cause indicates that a transit network identification was received which is of an incorrect format as defined in Annex C of [ITU-T Q.931].

6.2.7.5.11 Cause No. 95 – Invalid message, unspecified

This cause is used to report an invalid message event only when no other cause in the invalid message class applies.

6.2.7.6 Protocol error (e.g., unknown message) class

6.2.7.6.1 Cause No. 96 – Mandatory information element is missing

This cause indicates that the equipment sending this cause has received a message which is missing an information element which must be present in the message before that message can be processed.

6.2.7.6.2 Cause No. 97 – Message type non-existent or not implemented

This cause indicates that the equipment sending this cause has received a message with a message type it does not recognize either because this is a message not defined or defined but not implemented by the equipment sending this cause.

6.2.7.6.3 Cause No. 98 – Message not compatible with call state or message type non-existent or not implemented

This cause indicates that the equipment sending this cause has received a message so that the procedures do not indicate that this is a permissible message to receive while in the call state, or a STATUS message was received indicating an incompatible call state.

6.2.7.6.4 Cause No. 99 – Information element/parameter non-existent or not implemented

This cause indicates that the equipment sending this cause has received a message which includes information element(s)/parameter(s) not recognized because the information element identifier(s)/parameter name(s) is not defined or defined but not implemented by the equipment sending the cause. This cause indicates that the information element(s)/parameter(s) has been discarded. However, the information element is not required to be present in the message in order for the equipment sending the cause to process the message.

6.2.7.6.5 Cause No. 100 – Invalid information element contents

This cause indicates that the equipment sending this cause has received an information element which it has implemented; however, one or more fields in the information element are coded in such a way which has not been implemented by the equipment sending this cause.

6.2.7.6.6 Cause No. 101 – Message not compatible with call state

This cause indicates that a message has been received which is incompatible with the call state.

6.2.7.6.7 Cause No. 102 – Recovery on timer expiry

This cause indicates that a procedure has been initiated by the expiry of a timer in association with error handling procedures.

6.2.7.6.8 Cause No. 103 – Parameter non-existent or not implemented – passed on (national use)

This cause indicates that the equipment sending this cause has received a message which includes parameters not recognized because the parameters are not defined or are defined but not implemented by the equipment sending the cause. The cause indicates that the parameter(s) was ignored. In addition, if the equipment sending this cause is an intermediate point, then this cause indicates that the parameter(s) was passed on unchanged.

6.2.7.6.9 Cause No. 110 – Message with unrecognized parameter discarded

This cause indicates that the equipment sending this cause has discarded a received message which includes a parameter that is not recognized.

6.2.7.6.10 Cause No. 111 – Protocol error, unspecified

This cause is used to report a protocol error event only when no other cause in the protocol error class applies.

6.2.7.7 Interworking class

6.2.7.7.1 Cause No. 127 – Interworking, unspecified

This cause indicates that there has been interworking with a network which does not provide causes for actions it takes. Thus, the precise cause for a message which is being sent cannot be ascertained.

7 General rules for the handling of the location field

This clause specifies the rules for the handling of the location field in the Cause and the Progress indicator information elements/parameters.

Figure 4 shows the reference configuration which is used to identify various nodes where the location field may be generated.

Table 4 shows the setting of the location field to be generated by a node in the reference configuration and the location field information expected by user A in each case.

The handling of the location field shall be according to the following rules:

- i) If the event causing the generation of the location field takes place in an international exchange (i.e., incoming or outgoing or international transit exchange), the location shall be set to *International network*.
- ii) If the event causing the generation of the location field takes place in a national transit network, the location shall be set to *Transit network*.
- iii) If the event causing the generation of the location field takes place in the public network serving the user, the location shall be set to *Public network serving the local user* or *Public network serving the remote user* on the basis of network configuration.

NOTE – Locations *User* and *Private network serving the local user* shall not be generated in public networks.

- iv) If the event causing the generation of the location field takes place in the private network, the location shall be set to *Private network serving the local user* or *Private network serving the remote user* on the basis of network configuration.
- v) If interworking with a signalling system which cannot convey location information is encountered, and if a message containing a location field is sent because of the receipt of information from such a signalling system, the location shall be set to *Network beyond interworking point*.

As a consequence of these rules:

- The location *Public network serving the local user* can be sent over a transit network or can be converted to *Public network serving the remote user* according to the structure of the national network and/or agreements between the network operators involved in the call. In any case the location *Public network serving the local user* shall not be sent over the international network.
- The location *Private network serving the local user* shall not be sent over the public network. The conversion from *Private network serving the local user* to *Private network serving the remote user*, if required, shall take place in the private network initially generating the location information.

In addition, the network may optionally check and, if necessary, change the location when it crosses a network boundary. The definition of the boundaries between transit networks and public networks serving the local/remote users is dependent on network structure and is subject to agreement between network operators or to national regulations.

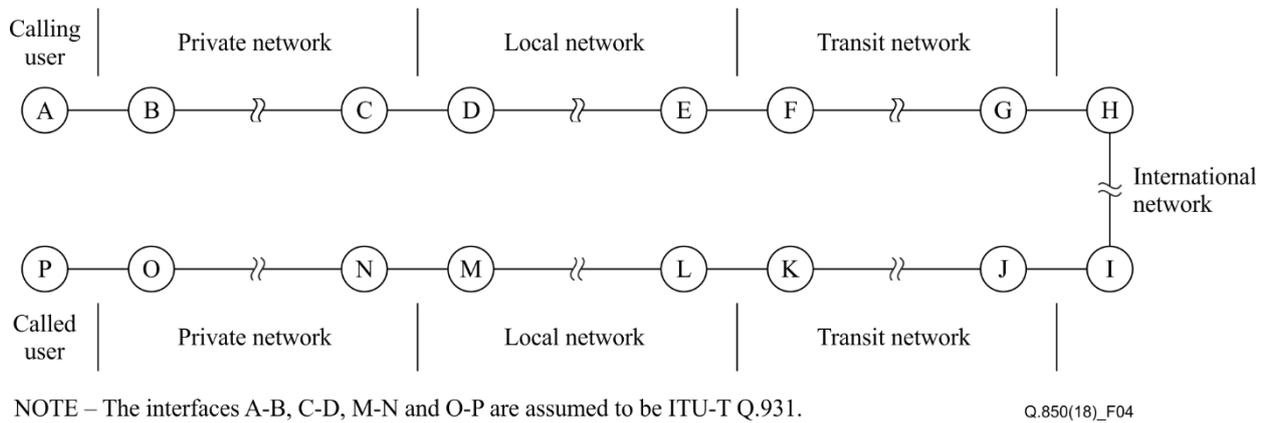


Figure 4 – Reference configuration for location field generation

Table 4 – The setting of location fields by events at nodes of the reference configuration and values expected to be received by user A

Node generating location field	Location field setting, in the direction towards user A	Location setting expected by user A
B	LPN	LPN
C	LPN	LPN
D	LN	LN
E	LN	LN
F	TN	TN
G	TN	TN
H	INTL	INTL
I	INTL	INTL
J	TN	TN
K	TN	TN
L	LN or RLN	RLN
M	LN or RLN	RLN
N	RPN	RPN
O	LPN or RPN	RPN
P	U	U

LPN	Private network serving the local user
LN	Public network serving the local user
TN	Transit network
INTL	International network
RLN	Public network serving the remote user
RPN	Private network serving the remote user
U	User

8 Handling of cause and location at the international interface

This clause contains clarification of the usage of cause values and the handling of location indicators on the international interface.

a) *Usage of causes*

Setting Cause values Nos. 18 and 19, and using location "public or private network serving the remote user" or any other cause with location "user or private network serving the remote user" should imply that the call has reached the called party, i.e., end-to-end fields have been transmitted.

National networks should make sure, to avoid public network misuse, that the following locations are not generated on the access:

- Public;
- International;
- Transit network;
- Beyond an interworking point.

The cause value sent is the one of the latest occurred event (e.g., retransmitting of the release message).

b) *Handling of location indicators*

If the event causing the sending of the cause indicators parameter takes place in the international exchange (i.e., incoming, outgoing or intermediate international exchange), the location will be set to "0111 International network".

If interworking is encountered in the international exchange and if a message containing the cause indicators parameter is sent because of the receipt of a message of the other signalling system, the location will be set to "1010 Beyond an interworking point" (BI).

The location "public network serving the local user" or "private network serving the local user" should not be sent on the international section. The conversion from "public network serving the local user" to "public network serving the remote user" or "private network serving the local user" to "private network serving the remote user" shall take place in the national network generating the cause.

For the handling of locations reserved for national use, see clause 9.

In all other cases the international exchange will pass on the received location.

By using this solution, it is impossible to distinguish a national location "transit network" from a location "transit network beyond the international boundary".

The real location where the event was generated is lost when interworking: for example, CGC and NNC in Telephone User Part are coded "34,BI". In spite of that, the limitations of this solution are accepted because they are considered as acceptable for this ISDN User Part version.

9 Procedures for the handling of location values reserved for national use (national option)

The values 1100, 1101, 1110 and 1111 of the location field are reserved for national use and can be sent over a national network.

If a network generates one of these values:

- If the call is an international call, before sending the value of the location over the international network, the national network shall convert this value to *Public network serving the remote user* or *Transit network* or *Network beyond interworking point* according to the structure of the national network and/or agreements between the network operators involved in the call. In any case, a value of the location reserved for national use shall not be sent over the international network.
- Before sending a value of the location reserved for national use to an ISDN user, the national network shall convert this value to *Public network serving the remote user* or *Transit network*

or *Public network serving the local user* or *Network beyond interworking point* according to the structure of the national network and/or agreements between the network operators involved in the call. In any case, a value of the location reserved for national use shall not be sent to an ISDN user.

An ISDN user shall not generate a location value reserved for national use.

Bibliography

- [b-ITU-T Q.1031] Recommendation ITU-T Q.1031 (1988), *General signalling requirements on interworking between the ISDN or PSTN and the PLMN.*
<<http://handle.itu.int/11.1002/1000/1786>>
- [b-ITU-T Q.1051] Recommendation ITU-T Q.1051 (1988), *Mobile application Part.*
<<http://handle.itu.int/11.1002/1000/1791>>

SERIES OF ITU-T RECOMMENDATIONS

Series A	Organization of the work of ITU-T
Series D	Tariff and accounting principles and international telecommunication/ICT economic and policy issues
Series E	Overall network operation, telephone service, service operation and human factors
Series F	Non-telephone telecommunication services
Series G	Transmission systems and media, digital systems and networks
Series H	Audiovisual and multimedia systems
Series I	Integrated services digital network
Series J	Cable networks and transmission of television, sound programme and other multimedia signals
Series K	Protection against interference
Series L	Environment and ICTs, climate change, e-waste, energy efficiency; construction, installation and protection of cables and other elements of outside plant
Series M	Telecommunication management, including TMN and network maintenance
Series N	Maintenance: international sound-programme and television-transmission circuits
Series O	Specifications of measuring equipment
Series P	Telephone transmission quality, telephone installations, local line networks
Series Q	Switching and signalling, and associated measurements and tests
Series R	Telegraph transmission
Series S	Telegraph services terminal equipment
Series T	Terminals for telematic services
Series U	Telegraph switching
Series V	Data communication over the telephone network
Series X	Data networks, open system communications and security
Series Y	Global information infrastructure, Internet protocol aspects, next-generation networks, Internet of Things and smart cities
Series Z	Languages and general software aspects for telecommunication systems