

International Telecommunication Union

ITU-T

TELECOMMUNICATION
STANDARDIZATION SECTOR
OF ITU

K.35

(01/2018)

SERIES K: PROTECTION AGAINST INTERFERENCE

**Bonding configurations and earthing at remote
electronic sites**

Recommendation ITU-T K.35

ITU-T



Recommendation ITU-T K.35

Bonding configurations and earthing at remote electronic sites

Summary

Recommendation ITU-T K.35 proposes bonding configurations, earthing and the type of power distribution for equipment located at remote electronic sites, with the intention of promoting harmony of installation and equipment configurations while providing for personnel safety and electromagnetic compatibility.

History

Edition	Recommendation	Approval	Study Group	Unique ID*
1.0	ITU-T K.35	1996-05-08	5	11.1002/1000/3346
2.0	ITU-T K.35	2018-01-13	5	11.1002/1000/13443

Keywords

Bonding, earthing, EEE, EEC, electronic equipment cabinet, electronic equipment enclosure, safety.

* To access the Recommendation, type the URL <http://handle.itu.int/> in the address field of your web browser, followed by the Recommendation's unique ID. For example, <http://handle.itu.int/11.1002/1000/11830-en>.

FOREWORD

The International Telecommunication Union (ITU) is the United Nations specialized agency in the field of telecommunications, information and communication technologies (ICTs). The ITU Telecommunication Standardization Sector (ITU-T) is a permanent organ of ITU. ITU-T is responsible for studying technical, operating and tariff questions and issuing Recommendations on them with a view to standardizing telecommunications on a worldwide basis.

The World Telecommunication Standardization Assembly (WTSA), which meets every four years, establishes the topics for study by the ITU-T study groups which, in turn, produce Recommendations on these topics.

The approval of ITU-T Recommendations is covered by the procedure laid down in WTSA Resolution 1.

In some areas of information technology which fall within ITU-T's purview, the necessary standards are prepared on a collaborative basis with ISO and IEC.

NOTE

In this Recommendation, the expression "Administration" is used for conciseness to indicate both a telecommunication administration and a recognized operating agency.

Compliance with this Recommendation is voluntary. However, the Recommendation may contain certain mandatory provisions (to ensure, e.g., interoperability or applicability) and compliance with the Recommendation is achieved when all of these mandatory provisions are met. The words "shall" or some other obligatory language such as "must" and the negative equivalents are used to express requirements. The use of such words does not suggest that compliance with the Recommendation is required of any party.

INTELLECTUAL PROPERTY RIGHTS

ITU draws attention to the possibility that the practice or implementation of this Recommendation may involve the use of a claimed Intellectual Property Right. ITU takes no position concerning the evidence, validity or applicability of claimed Intellectual Property Rights, whether asserted by ITU members or others outside of the Recommendation development process.

As of the date of approval of this Recommendation, ITU had not received notice of intellectual property, protected by patents, which may be required to implement this Recommendation. However, implementers are cautioned that this may not represent the latest information and are therefore strongly urged to consult the TSB patent database at <http://www.itu.int/ITU-T/ipr/>.

© ITU 2018

All rights reserved. No part of this publication may be reproduced, by any means whatsoever, without the prior written permission of ITU.

Table of Contents

	Page
1 Scope.....	1
2 References.....	1
3 Definitions	2
3.1 Terms defined elsewhere	2
3.2 Terms defined in this Recommendation.....	2
4 Abbreviations and acronyms	3
5 Conventions	3
6 Earthing network for electronic equipment enclosures (EEEs).....	3
6.1 Earthing ring for above ground and below ground EEEs.....	3
6.2 Earthing ring for EEC.....	3
6.3 Concrete-encased earth electrode	4
7 a.c. power distribution	4
7.1 a.c. power line surge protective device	4
8 d.c. power distribution	6
9 Bonding configuration	6
9.1 Main earthing terminal	6
9.2 Interior bonding-bus	7
9.3 Outside-plant cable entrance	7
9.4 Equipment framework	8
9.5 Surge protectors on communication pairs	8
9.6 Metallic walls	8
Appendix I – Example of bonding configurations and earthing of EEEs by use of ring bonding-bus	9

Introduction

Electronic equipment enclosures remotely located from telecommunication buildings are increasingly being used to contain a variety of telecommunication equipment. Differences such as size, shape and local environmental stresses give rise to the need for electromagnetic compatibility measures that differ from those at telecommunication buildings [ITU-T K.27] or at customer premises [ITU-T K.66].

The nomenclature and measures of this Recommendation are intended to promote harmony of installation and equipment configurations while providing for personnel safety and electromagnetic compatibility.

Although the bonding configurations and earthing measures of this Recommendation contribute to the reduction of electrical surge energy that reaches installed equipment, surge protectors, as described in [ITU-T K.11], may be needed on the conductors of wire-line cables. Furthermore, the equipment must be capable of resisting the residual surges that reach it; equipment resistibility is described in [ITU-T K.20].

Recommendation ITU-T K.35

Bonding configurations and earthing at remote electronic sites

1 Scope

This Recommendation covers bonding configurations and earthing for equipment located at remote electronic sites such as switching or transmission huts, cabinets or controlled environmental vaults with only one level, a need for a.c. mains power service and a floor space of about 100 m² without an antenna tower on the roof of the building as well as nearby; but which are more substantial than small electronic housings, such as carrier repeaters or distribution terminals. Experience in the operation of electronic equipment enclosures shows that the use of a bonding configuration and earthing that are coordinated with equipment capability and with electrical protection devices has the following attributes:

- promotes personnel safety and reduces fire hazards;
- enables signalling with earth return (functional earthing);
- minimizes service interruptions and equipment damage caused by lightning, exposures to power lines and faults in internal d.c. power supplies;
- minimizes radiated and conducted emissions and susceptibility;
- improves system tolerance to discharge of electrostatic energy.

Within this framework, this Recommendation:

- a) is a guide to bonding configurations and earthing of telecommunication equipment in electronic equipment enclosures;
- b) is intended to comply with safety requirements imposed by [IEC 60364 series] or national standardizing bodies on a.c. power installations;
- c) is intended for installation of new electronic equipment enclosures;
- d) treats coordination with electrical protection devices, but does not provide details of protective measures specific to electronic equipment enclosures;
- e) utilizes the shielding contribution of effective elements of the structure and its contents;
- f) addresses the bonding of cable shields;
- g) is intended to facilitate electromagnetic compatibility of telecommunication equipment;
- h) does not include protection against lightning electromagnetic pulses (LEMPs).

2 References

The following ITU-T Recommendations and other references contain provisions which, through reference in this text, constitute provisions of this Recommendation. At the time of publication, the editions indicated were valid. All Recommendations and other references are subject to revision; users of this Recommendation are therefore encouraged to investigate the possibility of applying the most recent edition of the Recommendations and other references listed below. A list of the currently valid ITU-T Recommendations is regularly published. The reference to a document within this Recommendation does not give it, as a stand-alone document, the status of a Recommendation.

- [ITU-T K.11] Recommendation ITU-T K.11 (2009), *Principles of protection against overvoltages and overcurrents*.

- [ITU-T K.20] Recommendation ITU-T K.20 (2017), *Resistibility of telecommunication equipment installed in a telecommunication centre to overvoltages and overcurrents.*
- [ITU-T K.27] Recommendation ITU-T K.27 (2015), *Bonding configurations and earthing inside a telecommunication building.*
- [ITU-T K.66] Recommendation ITU-T K.66 (2011), *Protection of customer premises from overvoltages.*
- [IEC 60364-4-44] IEC 60364-4-44:2007, *Low-voltage electrical installations – Part 4-44: Protection for safety – Protection against voltage disturbances and electromagnetic disturbances.*
- [IEC 60364-5-54] IEC 60364-5-54:2011, *Low-voltage electrical installations – Part 5-54: Selection and erection of electrical equipment – Earthing arrangements and protective conductors.*
- [IEC 60364 series] IEC 60364 series, *Electrical installations of buildings.*
- [IEV 826] IEC 60050-826:2004, *International Electrotechnical Vocabulary – Part 826: Electrical installations.*

3 Definitions

3.1 Terms defined elsewhere

In this Recommendation, definitions with respect to bonding configurations and earthing already introduced by [IEV 826] and [ITU-T K.27] are used to maintain conformity.

3.2 Terms defined in this Recommendation

This Recommendation defines the following additional terms for remote electronic sites:

3.2.1 above-ground electronic equipment enclosure (AG/EEE): An EEE that is wholly or partially above ground level. Installed equipment is fully accessible from the interior area. The AG/EEE subcategory includes transportable structures as well as structures partially or fully constructed or assembled on-site.

3.2.2 below-ground electronic equipment enclosure (BG/EEE): An EEE that is completely below ground level except possibly for an entryway, a.c. power service, and environmental control equipment. Installed equipment is fully accessible from the interior area.

3.2.3 bonding-bus: A conductor, or group of conductors, that serves as a common connection between the Main Earthing Terminal and metallic assemblies in the EEE. The bonding-bus may also be connected to other busbars or terminals connected to the Earthing Network or structural steel.

3.2.4 electronic equipment cabinet (EEC): An EEE for which all installed equipment can be fully accessed from the outside without having to enter an interior area.

3.2.5 electronic equipment enclosure (EEE): A structure that provides physical and environmental protection for electronic communication equipment, and that:

- has only one level;
- has a floor space of no more than about 100 m²;
- has a need for a.c. mains power service.

3.2.6 ring bonding-bus: A bonding-bus whose conductors form a closed, connected ring.

An example of bonding configurations and earthing of EEES by use of ring bonding-bus is shown in Appendix I.

4 Abbreviations and acronyms

This Recommendation uses the following abbreviations and acronyms:

AG/EEE	Above-Ground Electronic Equipment Enclosure
BG/EEE	Below-Ground Electronic Equipment Enclosure
CBN	Common Bonding Network
EEC	Electronic Equipment Cabinet
EEE	Electronic Equipment Enclosure
LEMP	Lightning Electromagnetic Pulse

5 Conventions

None.

6 Earthing network for electronic equipment enclosures (EEEs)

6.1 Earthing ring for above ground and below ground EEEs

An above-ground electronic equipment enclosure (AG/EEE) or a below-ground electronic equipment enclosure (BG/EEE) should be provided with a buried exterior earthing ring that satisfies at least the following conditions:

- the ring should be uninsulated and buried at approximately 0.75 m;
- the ring should encircle the EEE with a spacing, where practical, of about 0.65 m or more from the exterior walls;
- one earthing conductor should connect the ring to the main earthing terminal.

NOTE – National safety rules may require additional rod electrodes and/or additional connections to the a.c. power service entrance.

An alternative to the foregoing attachments to the earthing ring is to connect the neutral busbar to a separate earthing network using a separate earthing conductor; the earthing conductor from the main earthing terminal to the earthing ring remains. The main earthing terminal and the neutral busbar are connected within the EEE. This alternative arrangement permits occasional isolation of the earthing ring to monitor its condition without disconnecting the earthing connection on the neutral conductor.

6.2 Earthing ring for EEC

The earthing network provides some voltage equalization in the earth near an EEC. Whenever feasible, the EEC should be provided with a buried exterior earthing ring that satisfies at least the following conditions:

- the ring should be uninsulated, buried at a depth of 0.3-0.5 m;
- the ring should encircle the foundation pad of the EEC, or be located below the perimeter of the pad;
- one uninsulated earthing conductor should connect the ring to the main earthing terminal.

Otherwise, clause 542.2 of [IEC 60364-5-54] should be met.

NOTE – National safety rules may require additional rod electrodes and/or additional connections to the a.c. power service entrance.

6.3 Concrete-encased earth electrode

An EEE often rests on a foundation earth electrode, or is itself constructed of concrete. In this case, the reinforcement or conductor may be used in place of the earthing ring of clauses 6.1 and 6.2.

7 a.c. power distribution

It is recommended that the indoor mains installation within a telecommunication building be of type TN-S as specified by the [IEC 60364 series] in order to improve the EMC performance of the telecommunication installation. This requires that there shall be no PEN conductor within the building. Consequently, a three phase network within a telecommunication building is, physically, a five-wire installation (L1, L2, L3, N, PE).

Depending on the type of outdoor mains distribution network serving a telecommunication building, one of the following requirements shall apply:

- a) Service by a TN-S section of the outdoor mains distribution network:
 - 1) solely the protective conductor (PE) shall be connected to the main earthing terminal (see Figure 1, mode 1).
- b) Service by a TN-C section of the outdoor mains distribution network:
 - 1) the PEN conductor shall be connected to the main earthing terminal only;
 - 2) from the main earthing terminal to and within customer locations inside the building, the neutral conductor (N) shall be treated as a live conductor;
 - 3) a dedicated PE shall be provided (see Figure 1, mode 2).
- c) Service by a TT or IT section of the outdoor mains distribution network:
 - 1) the PE shall be derived via the main earthing terminal from the earthing network;
 - 2) the dimensioning of the PE shall follow the rules of the TN-S system.

If the outdoor mains distribution is of type IT or TT, a separation transformer dedicated to that building allows for the recommended TN-S installation. In this case the indoor mains installation must conform to mode 1, Figure 1.

7.1 a.c. power line surge protective device

The a.c. mains input to the EEE should be equipped with a surge protective device. A specification for a low-voltage surge protective device is in advanced stages of preparation by IEC Subcommittee 37A.

The surge protective device should be connected to the mains conductors on the load side of the circuit breaker.

The surge protective device should be located where the leads for connection to the mains conductors, including the earthed (neutral) conductor, are as short as possible. Lead lengths that are less than 0.5 m are recommended.

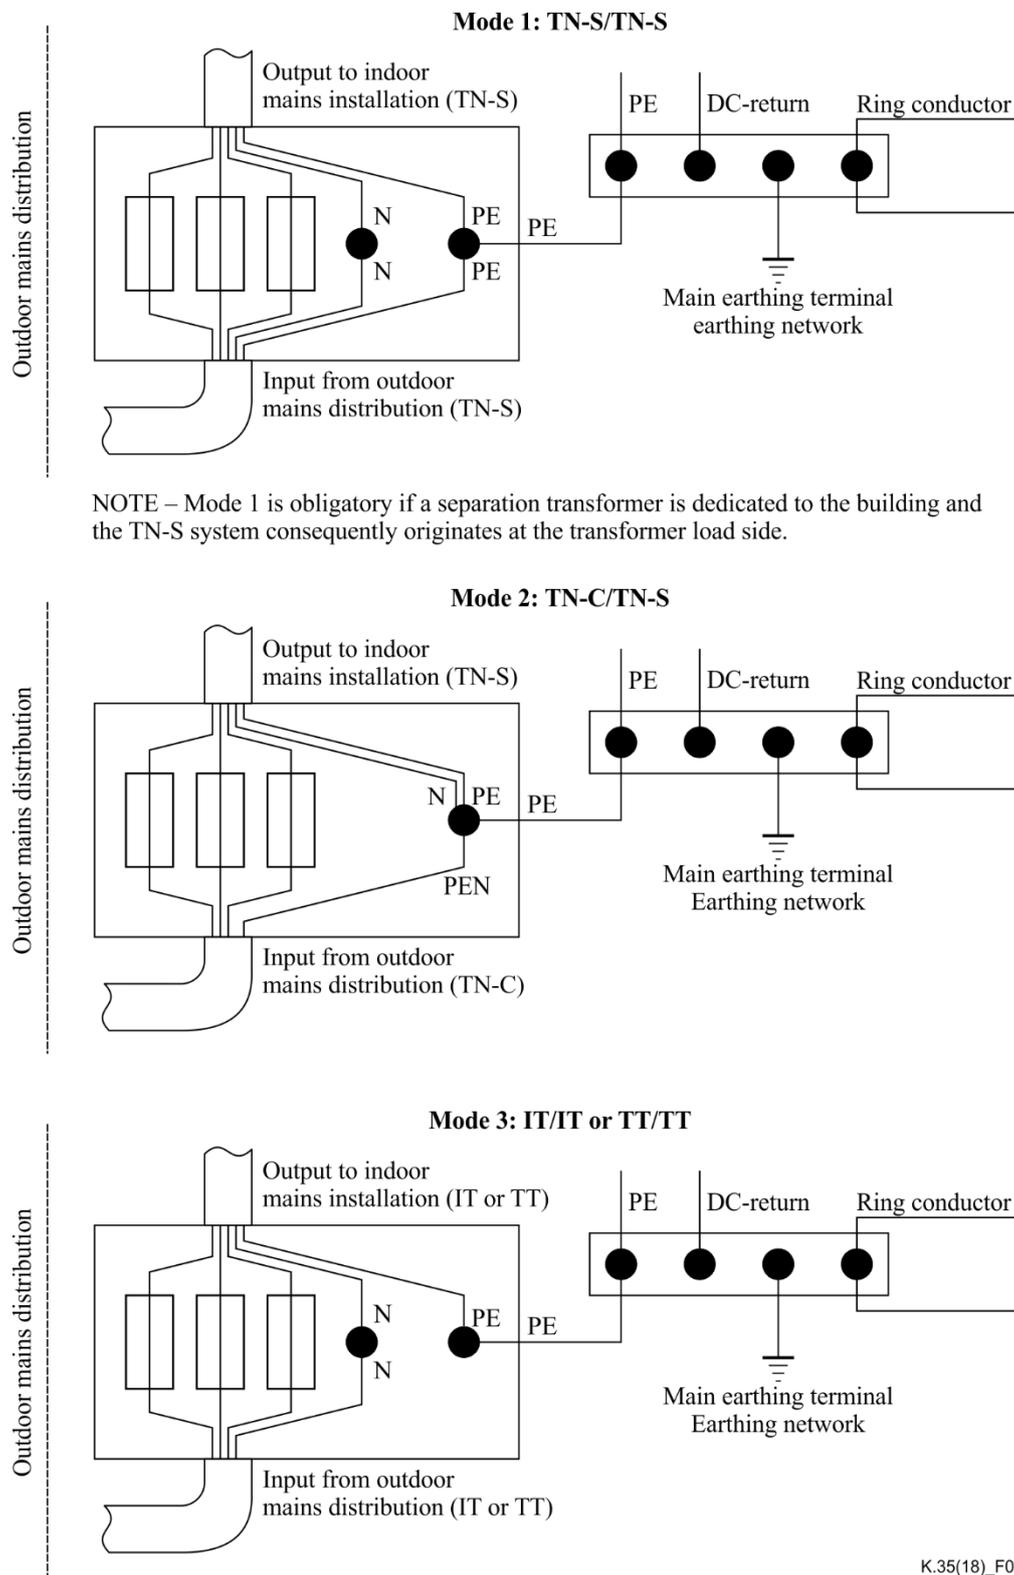


Figure 1 – Arrangements for the transition from the outdoor mains distribution network to the indoor mains

8 d.c. power distribution

In many EEEs, d.c. power is generally distributed from a centralized d.c. power plant (bulk power plant), with the positive terminal connected to the common bonding network of the structure. This polarity is chosen to minimize corrosion in the outside cable plant, but there may be exceptions for specific transmission systems.

The return conductor of the d.c. distribution system may be connected to the common bonding network (CBN) in either of two manners. It may be connected at only one location as an isolated d.c. return system (dc-I). Or the d.c. return may connect to the CBN at several locations (in which case some d.c. current is conducted by the CBN), as a d.c. return common to a CBN (dc C-CBN). Because of the small size of an EEE, the common-mode voltages (and the conversion to transverse mode voltage) supported by either of these two distribution systems should be comparable.

NOTE – The CBN of an EEE comprises the bonding-bus conductors, a.c. power conduit, PE conductors, structural steel, and cable and racks.

The bonding conductor that connects the return side of the d.c. power source to the interior bonding-bus should be capable of conducting the maximum fault current of the power system. Rapid operation of overcurrent protective devices is aided by connecting cable racks to the bonding-bus and providing electrical continuity between rack sections.

Because of the close proximity of equipment in an EEE, it is important that equipment not be sensitive to voltage surges on the d.c. power caused by short-circuits in other equipment.

9 Bonding configuration

The bonding configuration in the EEE makes use of a CBN that includes all available metallic structural components and metallic cable trays and supports, augmented by an interior ring bonding-bus. The interconnected CBN reduces the magnitude of external surge current that is conducted on the framework of the enclosed equipment.

This Recommendation covers the case where equipment is connected to the CBN in a mesh-BN configuration. This bonding configuration helps provide an equipotential environment for personnel in the close confines of the EEE. It also assures the presence of many parallel current paths to help de-energize a short-circuit in the d.c. supply and to mitigate the effects of surge currents. (Equipment can be connected to the CBN using other bonding configurations, but such cases are not covered in this Recommendation.)

NOTE – This Recommendation requires minimum earthing and bonding configurations for remote electronic sites. Additional bonding network may be installed to improve the EMC performance.

9.1 Main earthing terminal

The principal location for the interconnection of earthing and bonding conductors of an EEE should be a busbar (or equivalent) that is within 2 m of the neutral terminal in the disconnecting apparatus of the power mains. This busbar serves as the main earthing terminal.

Bonds should be placed between the main earthing terminal and:

- the terminal used by the protective earth conductor in the entrance cabinet containing disconnecting apparatus for the power mains;
- the exterior earthing ring;
- the terminal, if present, connected to reinforcement bars or other concrete-encased conductors.

9.2 Interior bonding-bus

The common bonding network of an EEE should include an interior bonding-bus composed of copper conductors. This bonding-bus provides potential equalization within the EEE and serves as a common connection between the main earthing terminal and metallic assemblies, such as equipment enclosures and frames.

9.2.1 Ring bonding-bus for AG/EEE and BG/EEE

For AG/EEEs and BG/EEEs, the interior bonding-bus should form a closed ring. The conductors of the ring bonding-bus should be attached to the walls or along the exterior of cable racks near the walls. The ring bonding-bus should be at a height that is accessible for visual inspection and for connection of equipment assemblies.

The interior ring bonding-bus should be connected to the main earthing terminal, and should also be connected to any terminals in the EEE that attach to structural steel.

A supplementary bonding-bus (Figure I.1) should be bridged across the ring for the bonding of equipment installed away from the walls. Both ends of the supplementary bonding-bus should be connected to the ring.

Metallic wall sheathing should be used as a ring bonding-bus only if the metallic wall panels are designed for this purpose, continuity can be assured and terminals are provided for attachment of bonding conductors.

9.2.2 Bonding-bus for EEC

It is not necessary for the bonding-bus in an EEC to form a closed ring. The bonding-bus conductors can alternatively be provided by low-impedance structural components. The structural components and their interconnections should be capable of conducting fault currents from the d.c. power supply, and should be protected against corrosion.

The bonding-bus should be connected to the main earthing terminal of the EEC.

9.3 Outside-plant cable entrance

9.3.1 Location of entry ports

The separation of incoming services at their entry into the EEE and the entry of the mains power should be as small as possible. A separation of less than 4 m is recommended. The separation between the entry ports of the outside-plant cables and the main earthing terminal should also be less than 4 m (measured along walls). To avoid interference caused by magnetic field due to currents on power cables, it is usual practice to separate telecommunications cable from parallel unshielded power cables at least 10 cm, unless other shielding measures are taken. For an EEC, it is recommended that the cable entry ports be adjacent to the disconnecting apparatus of the power mains.

9.3.2 Bonding of metallic components

Metallic screens or other metallic structural components of the outside-plant cables should be bonded to the interior bonding-bus or directly to the main earthing terminal. The connection of the bonding conductor to the metallic components of the cables should be as close as practical to the cable entry port; the distance along the cable from the entry port to the bond connection should not exceed 2 m. If the outside-plant cables extend into the EEE beyond the bond connection, a second bond to the bonding-bus should be placed at the termination of the cables where they are spliced to internal cables.

NOTE – If it is not possible to locate the entry port of the outside-plant cables within 4 m (measured along walls) of the main earthing terminal, an additional connection to the outside-plant cables is needed from at least one of the following:

- a conductor directly connected to the exterior earthing ring;
- a conductor directly connected to a foundation earth electrode or to the steel reinforcing members of the structure;
- second interior ring bonding-bus. One ring bonding-bus should be near the ceiling, and the other near the floor.

This additional connection to the outside-plant cables should be as close as practical to the entry ports, and not beyond 2 m.

Metallic components of outside-plant optical cables should not extend into the EEE beyond the connection to the bonding-bus without interruption of electrical continuity. If such components are interrupted and extended into the EEE, they should be connected to the bonding-bus at the terminating equipment.

In an EEC, the bond between the metallic components of an outside-plant cable and the bonding-bus should be as close to the entry port as practical.

9.4 Equipment framework

All frames, racks and metallic enclosures in an EEE should be bonded to the interior bonding-bus. Metallic hardware, such as framing channels, air ducts, and permanently installed access ladders, should also be bonded together as well as to the bonding-bus.

9.5 Surge protectors on communication pairs

If surge protectors are used on communication pairs, the common terminals of the protectors should be connected to the main earthing terminal. The metallic screens of cables entering the protector frames should be bonded to the common terminals of the protectors.

9.6 Metallic walls


Metallic walls of an EEE should be bonded to the interior bonding-bus.

Appendix I

Example of bonding configurations and earthing of EEEs by use of ring bonding-bus

(This appendix does not form an integral part of this Recommendation.)

Figure I.1 gives an example of bonding configurations and earthing of EEEs by use of a ring bonding-bus.

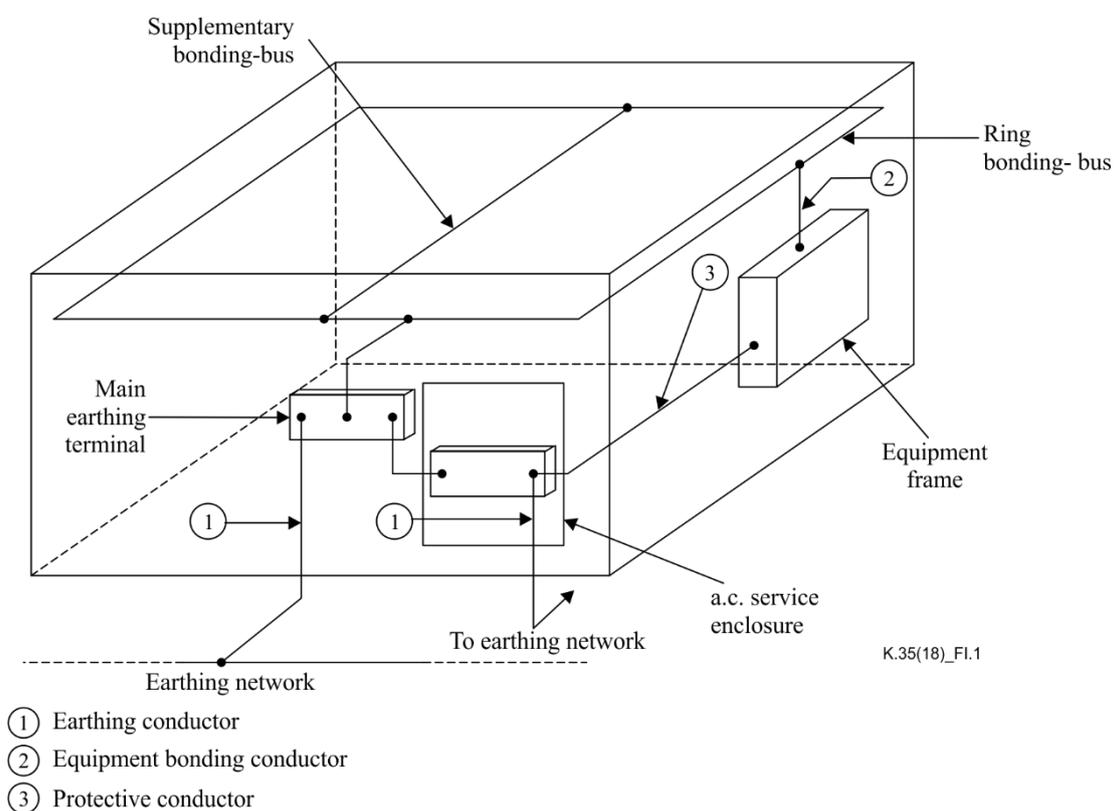

**Figure I.1 – Example of bonding configurations and earthing of EEEs
by use of ring bonding-bus**

SERIES OF ITU-T RECOMMENDATIONS

Series A	Organization of the work of ITU-T
Series D	Tariff and accounting principles and international telecommunication/ICT economic and policy issues
Series E	Overall network operation, telephone service, service operation and human factors
Series F	Non-telephone telecommunication services
Series G	Transmission systems and media, digital systems and networks
Series H	Audiovisual and multimedia systems
Series I	Integrated services digital network
Series J	Cable networks and transmission of television, sound programme and other multimedia signals
Series K	Protection against interference
Series L	Environment and ICTs, climate change, e-waste, energy efficiency; construction, installation and protection of cables and other elements of outside plant
Series M	Telecommunication management, including TMN and network maintenance
Series N	Maintenance: international sound programme and television transmission circuits
Series O	Specifications of measuring equipment
Series P	Telephone transmission quality, telephone installations, local line networks
Series Q	Switching and signalling, and associated measurements and tests
Series R	Telegraph transmission
Series S	Telegraph services terminal equipment
Series T	Terminals for telematic services
Series U	Telegraph switching
Series V	Data communication over the telephone network
Series X	Data networks, open system communications and security
Series Y	Global information infrastructure, Internet protocol aspects, next-generation networks, Internet of Things and smart cities
Series Z	Languages and general software aspects for telecommunication systems