



INTERNATIONAL TELECOMMUNICATION UNION

CCITT

THE INTERNATIONAL
TELEGRAPH AND TELEPHONE
CONSULTATIVE COMMITTEE

M.761

(11/1988)

SERIES M: GENERAL MAINTENANCE PRINCIPLES

Maintenance of international transmission systems and
telephone circuits – Common channel signalling systems

**SETTING UP AND LINING UP A TRANSFER
LINK FOR COMMON CHANNEL SIGNALLING
SYSTEM No. 6 (ANALOGUE VERSION)**

Reedition of CCITT Recommendation M.761 published in
the Blue Book, Fascicle IV.1 (1988)

NOTES

1 CCITT Recommendation M.761 was published in Fascicle IV.1 of the *Blue Book*. This file is an extract from the *Blue Book*. While the presentation and layout of the text might be slightly different from the *Blue Book* version, the contents of the file are identical to the *Blue Book* version and copyright conditions remain unchanged (see below).

2 In this Recommendation, the expression “Administration” is used for conciseness to indicate both a telecommunication administration and a recognized operating agency.

Recommendation M.761

SETTING UP AND LINING UP A TRANSFER LINK FOR COMMON CHANNEL SIGNALLING SYSTEM No. 6 (ANALOGUE VERSION)¹

1 Setting up and lining up a transfer link

1.1 The method to be used and procedure to be followed in setting up and lining up a transfer link are similar to those given in Recommendation M.1050 [1] in so far as it applies. However, in this context, any reference to national sections in Recommendation M.1050 should be ignored since a transfer link exists between terminal international centres and does not include national sections.

1.2 Routing restrictions may be necessary to achieve the loss/frequency and group-delay distortion limits specified below if the need to insert equalizers is to be avoided. Factors that may contribute to difficulties in meeting these limits are the number of through-group filters in group links, the use of edge band channels in group links, etc.

In addition, the number of channel translating equipments should be minimized in order that equalization, if required, may be more easily achieved, and that the effect of other parameters, such as noise, may be minimized.

2 Transmission characteristics of a transfer link

2.1 *General*

The transmission characteristics of the circuit to be used as the signalling data link are based on those for international leased circuits conforming to Recommendation M.1020 [2]. Optionally, the relaxed overall loss/frequency characteristic and group-delay distortion limits specified in the Recommendation cited in [3] may be applied where agreed between the Administrations involved and if tests confirm suitability.

2.2 *Overall loss at reference frequency*

The overall loss at reference frequency of the channels of a transfer link is not specified.

The channels of a transfer link should be set up so that when a test signal at a level of -10 dBm0 is connected to the input of the transfer channel, the level received at the output of the transfer channel at the distant end is as close as possible to -10 dBm0.

2.3 *Variation with time of the overall loss at reference frequency*

The variation with time of the overall loss at reference frequency should be as small as possible but should not exceed the following limits:


- short-term variation (over a period of a few seconds): ± 3 dB;
- long-term variation (over long periods including daily and seasonal variations): ± 4 dB.

2.4 *Loss/frequency distortion²*

The variation of overall loss with frequency relative to the loss at reference frequency should not exceed the limits shown in Figure 1/M.761.

¹ A general description of the transfer link for the common channel Signalling System No. 6 may be found in Recommendation M.760.

² Provisionally the limits of Recommendation M.1020 [2] have been chosen for the loss/frequency characteristics although these limits are appropriate for a leased circuit extending over national plant including local lines to customers' premises. However, transfer links will only extend between international centres and their routing will not involve any audio line plant with its inherent increasing attenuation with frequency. Therefore, further study is needed concerning the possible need to change the frequency (3000 Hz), from which the zero gain restriction extends, to some higher frequency.

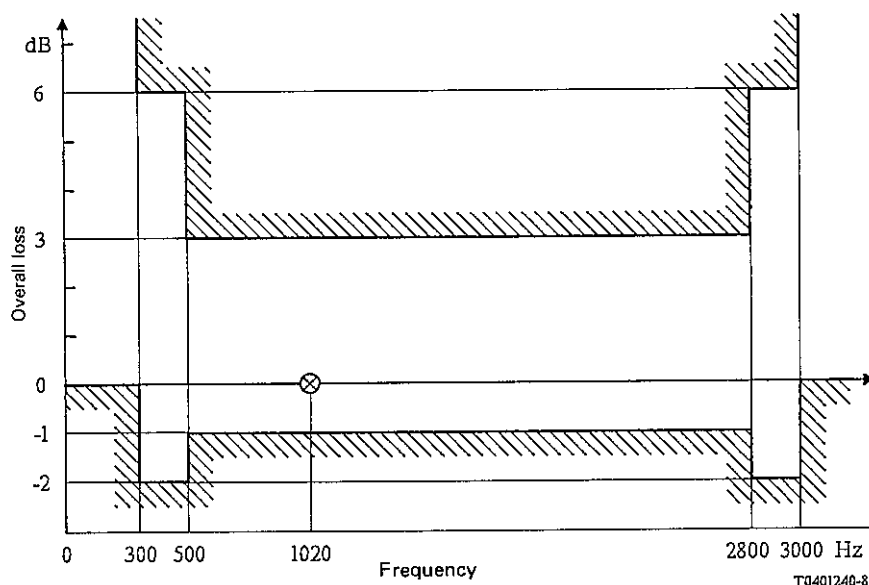

Note — Below 300 Hz and above 3000 Hz the loss shall not be less than 0.0 dB but is otherwise unspecified.

FIGURE 1/M.761

Limits for overall loss of the transfer link relative to that at reference frequency

2.5 *Group-delay distortion*

The group-delay distortion relative to the minimum delay, should not exceed the limits shown in Figure 2/M.761.

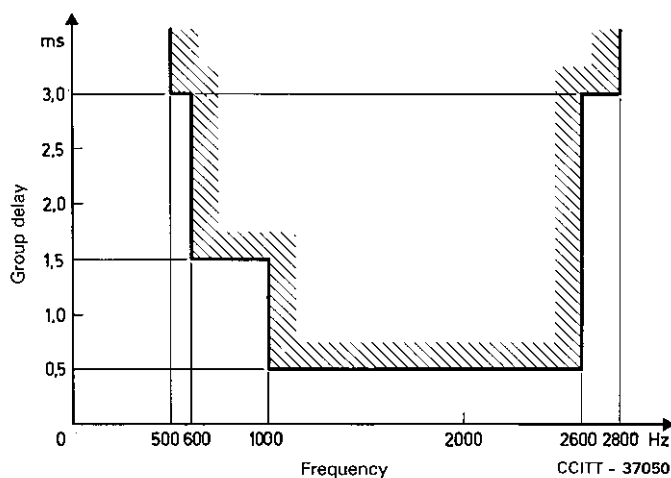


FIGURE 2/M.761

Limits for group delay relative to the minimum measured group delay in the 500-2800 Hz band

Note 1 — It is believed that in many cases the limits specified in §§ 2.4 and 2.5 may be achieved without the addition of equalizing equipment.

Note 2 — The overall loss/frequency characteristic and group-delay distortion limits are currently under study for the feasibility of more relaxed limits. However, initial experience indicates that the limits specified in §§ 2.4 and 2.5 are necessary for reliable operation of the signalling system data link.

2.6 *Random noise*

The level of the psophometric noise power at the receiving terminal international centre depends upon the actual length and constitution of the transfer link. The provisional limit for transfer links of distances greater than

10 000 km is -38 dBm0p. However, transfer links of shorter length will have substantially less random noise, as shown in Figure 3/M.761.

Figure 3/M.761 displays random noise versus length and is presented as a guide to the random noise performance which may be found on a transfer link.

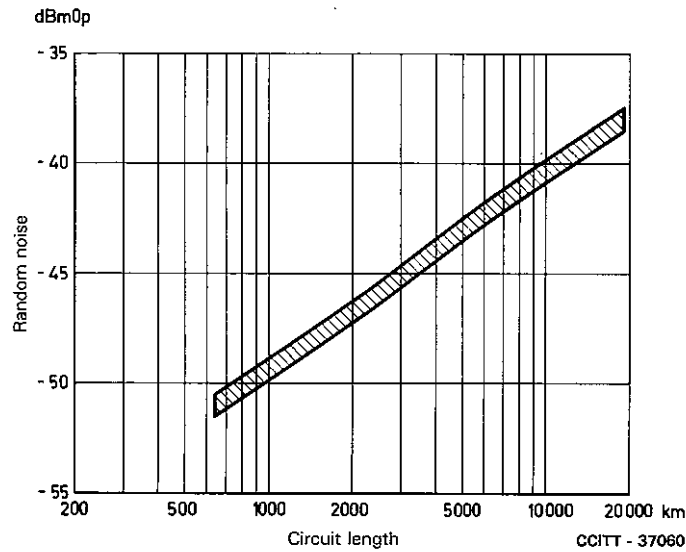


FIGURE 3/M.761

Random noise performance

Note – For transfer links routed via satellite, the satellite section (between earth stations) will contribute approximately 10 000 pW0p (-50 dBm0p) to the overall circuit noise. Therefore, for the purpose of determining the noise limits for the Signalling System No. 6 transfer link, the section of the transfer link provided by the satellite may be considered to be equivalent to a length of 1000 km. The effective noise length of such a transfer link will be 1000 km plus the total length of the terminal routings.

2.7 *Impulsive noise*

Impulsive noise should be measured with an instrument complying with Recommendation O.71 [4]. As a provisional limit, the number of impulsive noise peaks exceeding -21 dBm0 should not be more than 18 in 15 minutes.

2.8 *Phase jitter*

The value of phase jitter depends upon the actual constitution of the transfer link (for example, upon the number of modulation equipments involved). It is expected that any measurement of phase jitter using an instrument complying with Recommendation O.91 [5] will not normally exceed 10 peak-to-peak. However, for transfer links of necessarily complex constitution, and where 10 peak-to-peak cannot be met, a limit of up to 15 peak-to-peak is permitted. These limits are provisional and subject to further study.

2.9 *Quantizing noise*

If any section of the transfer link is routed over a pulse code modulation system or through a digital exchange, the signal will be accompanied by quantizing noise. The minimum ratio of signal-to-quantizing noise normally expected is 22 dB.

2.10 *Single tone interference*

The level of single tone interference in the band 300-3400 Hz shall not exceed a value which is 3 dB below the circuit noise objective indicated in Figure 3/M.761. This limit is provisional pending further study.

2.11 *Frequency error*

The frequency error introduced by the transfer link must not exceed ± 5 Hz. It is expected that in actual practice the frequency errors encountered will be less than 5 Hz.

2.12 *Harmonic distortion*

When a 700-Hz test frequency at -13 dBm0 is injected at the transmit end of the transfer link, the level of any individual harmonic frequency at the receiving end shall provisionally be at least 25 dB below the received level of the fundamental frequency.

3 **Recording of results**

All measurements made in completing the line-up of the transfer link are valuable as references. These final measurements should be recorded using an appropriate form.

If subsequent realignment or adjustment is necessary these records should be updated.

References

- [1] CCITT Recommendation *Lining up an international point-to-point leased circuit*, Vol. IV, Rec. M.1050.
- [2] CCITT Recommendation *Characteristics of special quality international leased circuits with special bandwidth conditioning*, Vol. IV, Rec. M.1020.
- [3] CCITT Recommendation *Requirements for the signalling data link*, Vol. VI, Rec. Q.272, Annex.
- [4] CCITT Recommendation *Impulsive noise measuring equipment for telephone-type circuits*, Vol. IV, Rec. O.71.
- [5] CCITT Recommendation *Phase jitter measuring equipment for telephone circuits*, Vol. IV, Rec. O.91.

ITU-T RECOMMENDATIONS SERIES

Series A	Organization of the work of the ITU-T
Series B	Means of expression: definitions, symbols, classification
Series C	General telecommunication statistics
Series D	General tariff principles
Series E	Overall network operation, telephone service, service operation and human factors
Series F	Non-telephone telecommunication services
Series G	Transmission systems and media, digital systems and networks
Series H	Audiovisual and multimedia systems
Series I	Integrated services digital network
Series J	Transmission of television, sound programme and other multimedia signals
Series K	Protection against interference
Series L	Construction, installation and protection of cables and other elements of outside plant
Series M	TMN and network maintenance: international transmission systems, telephone circuits, telegraphy, facsimile and leased circuits
Series N	Maintenance: international sound programme and television transmission circuits
Series O	Specifications of measuring equipment
Series P	Telephone transmission quality, telephone installations, local line networks
Series Q	Switching and signalling
Series R	Telegraph transmission
Series S	Telegraph services terminal equipment
Series T	Terminals for telematic services
Series U	Telegraph switching
Series V	Data communication over the telephone network
Series X	Data networks and open system communications
Series Y	Global information infrastructure and Internet protocol aspects
Series Z	Languages and general software aspects for telecommunication systems