

SYSTEMS FOR DISSEMINATION AND COMPARISON

RECOMMENDATION ITU-R TF.768-2

STANDARD FREQUENCIES AND TIME SIGNALS

(Question ITU-R 106/7)

(1992-1994-1995)

The ITU Radiocommunication Assembly,

considering

- a) the continuing need in all parts of the world for readily available standard frequency and time reference signals that are internationally coordinated;
- b) the advantages offered by radio broadcasts of standard time and frequency signals in terms of wide coverage, ease and reliability of reception, achievable level of accuracy as received, and the wide availability of relatively inexpensive receiving equipment;
- c) that Article 33 of the Radio Regulations (RR) is considering the coordination of the establishment and operation of services of standard-frequency and time-signal dissemination on a worldwide basis;
- d) that a number of stations are now regularly emitting standard frequencies and time signals in the bands allocated by this Conference and that additional stations provide similar services using other frequency bands;
- e) that these services operate in accordance with Recommendation ITU-R TF.460 which establishes the internationally coordinated UTC time system;
- f) that other broadcasts exist which, although designed primarily for other functions such as navigation or communications, emit highly stabilized carrier frequencies and/or precise time signals that can be very useful in time and frequency applications,

recommends

- 1 that, for applications requiring stable and accurate time and frequency reference signals that are traceable to the internationally coordinated UTC system, serious consideration be given to the use of one or more of the broadcast services listed and described in Annex 1;
- 2 that administrations responsible for the various broadcast services included in Annex 2 make every effort to update the information given whenever changes occur. (Administrations are also requested to send such information to the Bureau international des poids et mesures (BIPM).)

ANNEX 1

**Characteristics of standard-frequency and time-signal emissions in allocated bands
and characteristics of stations emitting with regular schedules with
stabilized frequencies, outside of allocated bands**

- 1 The characteristics of stations appearing in the following tables are valid as of November, 1991 for Tables 1 and 2 and as of April, 1993 for Table 3. For information concerning changes which may have occurred since that date, reference may be made to the Annual Report of the time section of the Bureau international des poids et mesures (BIPM) or directly to the respective authority for each service as listed in Annex 1.

TABLE 1

Characteristics of standard-frequency and time-signal emissions in the allocated bands, valid as of November, 1991

| Station | | | Type of antenna(s) | Carrier power (kW) | Number of simultaneous transmissions | Period of operation | | Standard frequencies used | | Duration of emission | | Uncertainty of frequency and time intervals (parts in 10^{12}) ⁽¹⁾ | Method of DUT1 indication |
|--------------------|--|-------------------------|---------------------------------|--------------------|--------------------------------------|---------------------|-------------------|---------------------------|---|---------------------------|------------------------|--|------------------------------------|
| Call sign | Approximate location | Latitude Longitude | | | | Days/week | Hours/day | Carrier (MHz) | Modulation (Hz) | Time signal (min) | Audio-modulation (min) | | |
| ATA | New Delhi, India | 28° 34' N 77° 19' E | Horizontal folded dipole | 8 (PEP) | 3 | 7 | 24 ⁽²⁾ | 5, 10, 15 | 1, 1 000 | continuous | 4/15 | ± 10 | |
| BPM ⁽³⁾ | Pucheng, China | 35° 00' N 109° 31' E | Omnidirectional | 10-20 | 2 | 7 | 24 ⁽⁴⁾ | 2.5, 5, 10, 15 | 1, 1 000 | 20/30 (UTC) 4/30 (UT1) | nil | ± 10 | Direct emission of UT1 time signal |
| HLA | Taejon, Taedok Science Town, Republic of Korea | 36° 23' N 127° 22' E | Vertical (conical monopole) | 2 | 1 | 5 ⁽⁵⁾ | 7 ⁽⁶⁾ | 5 | 1 | continuous | continuous | ± 10 | CCIR code by double pulse |
| IAM ⁽⁷⁾ | Roma, Italy | 41° 47' N 12° 27' E | Vertical $\lambda/4$ | 1 | 1 | 6 | 2 | 5 | 1 | continuous | nil | ± 10 | CCIR code by double pulse |
| JJY ⁽⁷⁾ | Sanwa, Sashima, Ibaraki, Japan | 36° 11' N 139° 51' E | ⁽⁸⁾ | 2 | 5 | 7 | 24 ⁽⁹⁾ | 2.5, 5, 8, 10, 15 | 1 ⁽¹⁰⁾ , 1 000 ⁽¹¹⁾ | continuous | 30/60 | ± 10 | CCIR code by lengthening |
| LOL ⁽⁷⁾ | Buenos Aires, Argentina | 34° 37' S 58° 21' W | Horizontal 3-wire folded dipole | 2 | 3 | 7 | 5 | 5, 10, 15 | 1, 440, 1 000 | continuous | 3/5 | ± 20 | CCIR code by lengthening |
| OMA ⁽⁷⁾ | Prague, Czech and Slovak Federal Republic | 50° 07' N 14° 35' E | T | 1 | 1 | 7 | 24 | 2.5 | 1, 1 000 ⁽¹²⁾ | 15/30 | 4/15 | ± 1 000 | |

TABLE 1 (continued)

| Station | | | Type of antenna(s) | Carrier power (kW) | Number of simultaneous transmissions | Period of operation | | Standard frequencies used | | Duration of emission | | Uncertainty of frequency and time intervals (parts in 10 ¹²) ⁽¹⁾ | Method of DUT1 indication |
|---------------------|---|-------------------------|------------------------------------|--------------------|--------------------------------------|---------------------|-----------|---|--------------------------|----------------------------|----------------------------|---|--|
| Call sign | Approximate location | Latitude Longitude | | | | Days/week | Hours/day | Carrier (MHz) | Modulation (Hz) | Time signal (min) | Audio-modulation (min) | | |
| RCH ⁽⁷⁾ | Tashkent | 41° 19' N 69° 15' E | Horizontal dipole | 1 | 2 | 7 | 21 | 2.5, 5, 10 | 1, 10 | 40/60 | nil | ± 50 | CCIR code by double pulse, additional information dUT1 ⁽¹³⁾ |
| RID ⁽⁷⁾ | Irkutsk | 52° 26' N 104° 02' E | Horizontal dipole | 1 1 1 | 3 | 7 | 24 | 5.004, 10.004, 15.004 | 1, 10 | 40/60 | nil | ± 50 | CCIR code by double pulse, additional information dUT1 ⁽¹³⁾ |
| RWM ⁽⁷⁾ | Moscow | 55° 48' N 38° 18' E | Horizontal dipole | 5 5 8 | 3 | 7 | 24 | 4.996, 9.996, 14.996 | 1, 10 | 40/60 | nil | ± 50 | CCIR code by double pulse, additional information dUT1 ⁽¹³⁾ |
| VNG | Llandilo, New South Wales, Australia | 33° 43' S 150° 48' E | Omni-directional | 10 | 1 | 7 | 24 | 5, 2.5 | 1, 1 000 ⁽¹⁴⁾ | continuous | nil | ± 100 | CCIR code by 45 cycles of 900 Hz immediately following the normal second markers |
| WWV ⁽⁷⁾ | Fort Collins, Colorado, United States | 40° 41' N 105° 02' W | Vertical $\lambda/2$ dipoles | 2.5-10 | 5 | 7 | 24 | 2.5, 5, 10, 15, 20 ⁽¹⁵⁾ | 1, 440, 500, 600 | continuous ⁽¹⁶⁾ | continuous ⁽¹⁷⁾ | ± 10 | CCIR code by double pulse, additional information on UT1 corrections |
| WWVH ⁽⁷⁾ | Kekaha, Kauai, Hawaii, United States | 21° 59' N 159° 46' W | Vertical $\lambda/2$ dipole arrays | 2.5-10 | 4 | 7 | 24 | 2.5, 5, 10, 15 ⁽¹⁵⁾ | 1, 440, 500, 600 | continuous ⁽¹⁶⁾ | continuous ⁽¹⁷⁾ | ± 10 | CCIR code by double pulse, additional information on UT1 corrections |

Notes to Table 1:

The daily transmission schedule and hourly modulation schedule is given, where appropriate, in the form of Figs. 1 and 2 supplemented by the following Notes:

- (1) This value applies at the transmitter; to realize the quoted uncertainty at the point of reception it could be necessary to observe the received phase time frequency over a sufficiently long period in order to eliminate noise and random effects.
- (2) 5 MHz: 1800-0900 h UTC; 10 MHz: 24 hours; 15 MHz: 0900-1800 h UTC.
- (3) Call sign in Morse and language.
- (4) 2.5 MHz: 0730-0100 h UTC; 15 MHz: 0100-0900 h UTC; 5 MHz and 10 MHz: continuous.
- (5) Monday to Friday (except national holidays in Korea).
- (6) 0100 to 0800 h UTC. Pulses of 9 cycles of 1 800 Hz modulation. 59th and 29th second pulses omitted. Hour identified by 0.8 s long 1 500 Hz tone. Beginning of each minute, identified by a 0.8 s long 1 800 Hz tone, voice announcement of hours and minutes each minute following 52nd second pulse. BCD time code given on 100 Hz sub-carrier.
- (7) These stations have indicated that they follow the UTC system as specified in Recommendation ITU-R TF.460. Since 1 January 1972 the frequency offset has been eliminated and the time signals remain within about 0.8 s of UT1 by means of occasional 1 s steps as directed by the International Earth Rotation Service.
- (8) Vertical $\lambda/4$ for 2.5 MHz, horizontal $\lambda/2$ dipole for 5 and 8 MHz, and vertical $\lambda/2$ dipoles for 10 and 15 MHz.
- (9) Interrupted from 35 to 39 minutes of each hour.
- (10) Pulse consists of 8 cycles of 1 600 Hz tone. First pulse of each minute preceded by 655 ms of 600 Hz tone.
- (11) 1 000 Hz tone modulation between the minutes of 0-5, 10-15, 20-25, 30-35, 40-45, 50-55 except 40 ms before and after each second's pulse.
- (12) In the period from 1800-0600 h UTC, audio-frequency modulation is replaced by time signals.
- (13) The additional information about the value of the difference UT1 – UTC is transmitted by code dUT1. It provides more precisely the difference UT1 – UTC in multiples of 0.02 s. The total value of the correction is DUT1 + dUT1. Possible values of dUT1 are transmitted by marking of p second pulses between the 21st and 24th seconds of the minute, so that $dUT1 = + 0.02 s \times p$. Negative values of dUT1 are transmitted by marking of q second pulses between the 31st and 34th second of the minute, so that $dUT1 = - 0.02 s \times q$.
- (14) Pulses of 50 cycles of 1 000 Hz tone, shortened to 5 cycles from the 55th to the 58th second; the 59th pulse is omitted; the minute marker is 500 cycles. At the 5th, 10th, 15th, etc. minutes, pulses from the 50th to the 58th second are shortened to 5 cycles. Voice identification on 5 000 kHz between the 20th and 50th seconds in the 15th, 30th, 45th and 60th minutes. A BCD time incorporating time of day and day number of the year is transmitted between the 20th and 46th second with a binary "0" represented by 100 cycles and a binary "1" by 200 cycles of 1 000 Hz tone. The minute information for the next minute is given from the 21st to the 28th second, hour information from the 29th to the 35th second and day of the year from the 36th to the 46th second; parity bits are included at the end of each code sequence.
- (15) As of 1 February 1977 transmissions on 25 MHz from WWV and 20 MHz from WWVH were discontinued, but may be resumed at a later date.
- (16) In addition to other timing signals and time announcements, a modified IRIG-H time code is produced at a 1-pps rate and radiated continuously on a 100 Hz sub-carrier on all frequencies. A complete code frame is 1 min. The 100 Hz sub-carrier is synchronous with the code pulses, so that 10 ms resolution is obtained. The code contains DUT1 values; UTC time expressed in year, day of year, hour and minute; and status indicators relating to impending leap seconds and Daylight Saving Time.
- (17) Except for voice announcement periods and the 5 min semi-silent period each hour.

FIGURE 1
Hourly modulation schedule


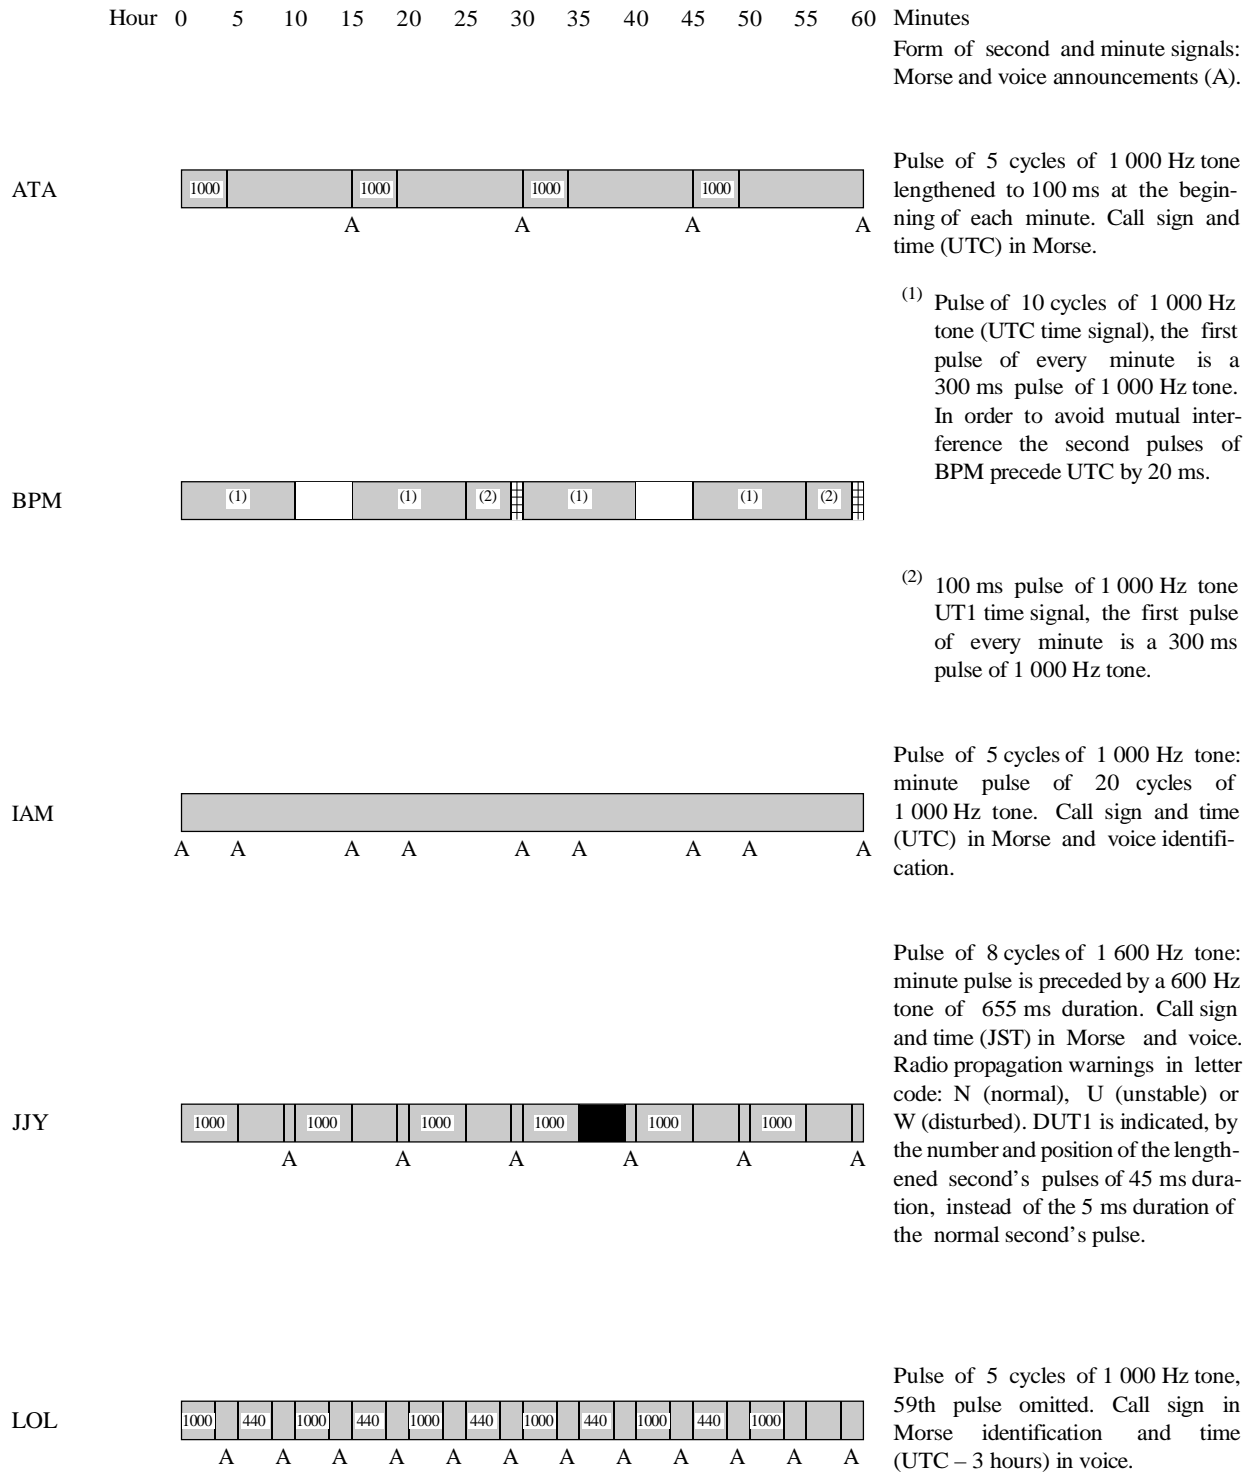


FIGURE 1 (continued)

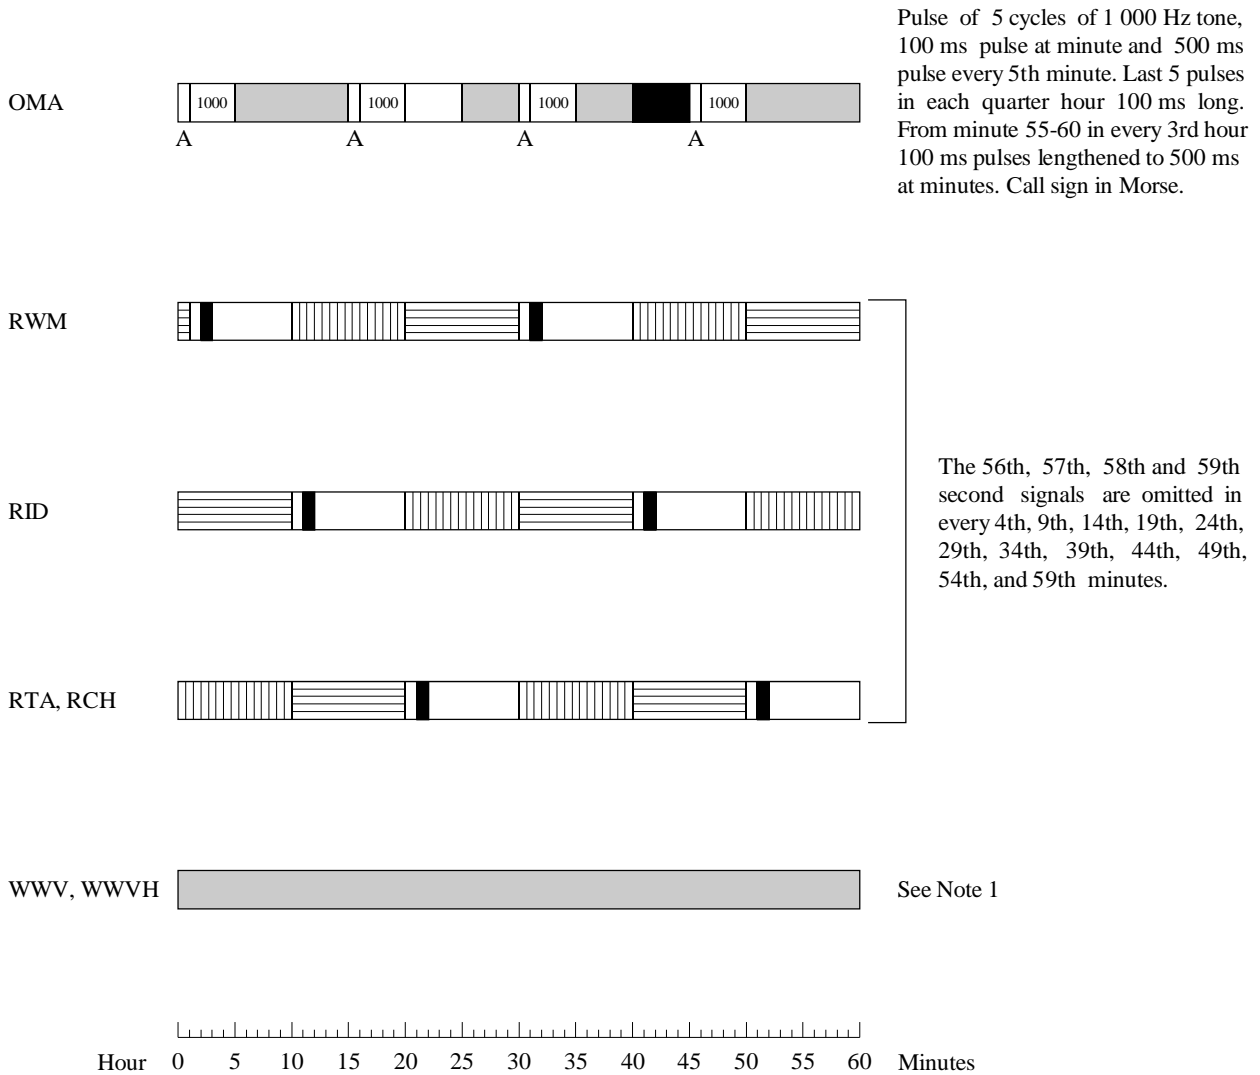

Note 1 – Pulse of 5 cycles of 1 000 Hz (WWV) or 6 cycles of 1 200 Hz (WWVH) tone, lengthened to 0.8 s at the beginning of each minute. An 0.8 s pulse of 1 500 Hz begins each hour at both stations. 29th and 59th pulses each minute are omitted. Voice time announcements preceding each minute. 45-second audio tones alternating between 500 and 600 Hz each minute, except when special announcements or station identification messages are given in voice. One 45-second segment of 440 Hz is included each hour at 1 minute (WWVH) or 2 minutes (WWV) past the hour. A modified IRIG-H time code, giving the year, day of year, hour, minute, DUT1 value, and information on impending leap seconds and Daylight Saving Time, is broadcast continuously on a 100 Hz sub-carrier. DUT1 information is provided by the number and position of doubled second pulses each minute. All modulations interrupted for 40 ms around each second's pulse.

- Carrier only
 Second pulses
 440 Audio frequency (Hz)
 No emission
 Second pulses and time scale difference information
- Call sign
 10 Hz pulses
 A: announcements

TABLE 2

Characteristics of standard-frequency and time-signal emissions in additional bands, valid as of November, 1991

| Station | | | Type of antenna(s) | Carrier power (kW) | Number of simultaneous transmissions | Period of operation | | Standard frequencies used | | Duration of emission | | Uncertainty of frequency and time intervals (parts in 10 ¹²) ⁽¹⁾ | Method of DUT1 indication |
|------------------------------|--------------------------------|-------------------------|--------------------|--------------------|--------------------------------------|---------------------|--------------------|---------------------------|-------------------|----------------------------|----------------------------|---|---------------------------|
| Call sign | Approximate location | Latitude Longitude | | | | Days/week | Hours/day | Carrier (MHz) | Modulation (Hz) | Time signal (min) | Audio-modulation (min) | | |
| | Allouis, France | 47° 10' N 02° 12' E | Omnidirectional | 1 000 to 2 000 | 1 | 7 | 24 | 162 | 1 ⁽²⁾ | continuous | A3E broadcast continuously | ± 2 | No DUT1 transmission |
| CHU ⁽³⁾ | Ottawa, Canada | 45° 18' N 75° 45' W | Omnidirectional | 3, 10, 3 | 3 | 7 | 24 | 3 330, 7 335, 14 670 | 1 ⁽⁴⁾ | continuous | nil | ± 5 | CCIR code by split pulses |
| | Donebach, F.R. of Germany | 49° 34' N 09° 11' E | Omnidirectional | 250 | 1 | 7 | 24 | 153 | nil | nil | A3E broadcast continuously | ± 2 | |
| DCF77 ⁽³⁾ | Mainflingen, F.R. of Germany | 50° 01' N 09° 00' E | Omnidirectional | 20 ⁽⁵⁾ | 1 | 7 | 24 | 77.5 | 1 | continuous ⁽⁶⁾ | continuous ⁽⁷⁾ | ± 0.5 | No DUT1 transmission |
| | Droitwich, United Kingdom | 52° 16' N 02° 09' W | T | 400 | 1 | 7 | 22 | 198 ⁽⁸⁾ | nil | nil | A3E broadcast continuously | ± 20 | |
| | Westerglen, United Kingdom | 55° 58' N 03° 50' W | T | 50 | 1 | 7 | 22 | 198 ⁽⁸⁾ | nil | nil | A3E broadcast continuously | ± 20 | |
| | Burghead, United Kingdom | 57° 42' N 03° 28' W | T | 50 | 1 | 7 | 22 | 198 ⁽⁸⁾ | nil | nil | A3E broadcast continuously | ± 20 | |
| HBG ⁽⁹⁾ | Prangins, Switzerland | 46° 24' N 06° 15' E | Omnidirectional | 20 | 1 | 7 | 24 | 75 | 1 ⁽¹⁰⁾ | continuous | nil | ± 1 | No DUT1 transmission |
| JJF2 ⁽³⁾ JG2AS | Sanwa, Sashima, Ibaraki, Japan | 36° 11' N 139° 51' E | Omnidirectional | 10 | 1 | 7 | 24 ⁽¹¹⁾ | 40 | 1 ⁽¹²⁾ | continuous ⁽¹³⁾ | nil | ± 10 | |

TABLE 2 (continued)

| Station | | | Type of antenna(s) | Carrier power (kW) | Number of simultaneous transmissions | Period of operation | | Standard frequencies used | | Duration of emission | | Uncertainty of frequency and time intervals (parts in 10 ¹²) ⁽¹⁾ | Method of DUT1 indication |
|---------------------|--|-------------------------|--------------------|----------------------|--------------------------------------|---------------------|--------------------|---------------------------|-------------------|----------------------------------|----------------------------|---|---------------------------|
| Call sign | Approximate location | Latitude Longitude | | | | Days/week | Hours/day | Carrier (MHz) | Modulation (Hz) | Time signal (min) | Audio-modulation (min) | | |
| MSF | Rugby, United Kingdom | 52° 22' N 01° 11' W | Omni-directional | 25 ⁽⁵⁾ | 1 | 7 | 24 ⁽¹⁴⁾ | 60 | 1 ⁽¹⁵⁾ | continuous | nil | ± 2 | CCIR code by double pulse |
| | Milano, Italy | 45° 20' N 09° 12' E | Omni-directional | 600 | 1 | 7 | 24 | 900 | nil | nil | A3E broadcast continuously | ± 2 | |
| NAA (3)(16)(17) | Cutler, Maine, United States | 44° 39' N 67° 17' W | Omni-directional | 1 000 ⁽⁵⁾ | 1 | 7 | 24 ⁽¹⁸⁾ | 24.0 ⁽¹⁹⁾ | nil | nil | nil | ± 10 | |
| NAU (3)(16)(17) | Aguada, Puerto Rico | 18° 23' N 67° 11' W | Omni-directional | 100 ⁽²⁰⁾ | 1 | 7 | 24 | 28.5 | nil | nil | nil | ± 10 | |
| NTD (3)(16)(17)) | Yosami, Japan | 34° 58' N 137° 01' E | Omni-directional | 50 ⁽⁵⁾ | 1 | 7 | 24 ⁽²¹⁾ | 17.4 | nil | nil | nil | ± 10 | |
| NLK (3)(16)(17) | Jim Creek, Washington, United States | 48° 12' N 121° 55' W | Omni-directional | 125 ⁽⁵⁾ | 1 | 7 | 24 ⁽²²⁾ | 24.8 | nil | nil | nil | ± 10 | |
| NPM (3)(16)(17) | Lualualei, Hawaii, United States | 21° 25' N 158° 09' W | Omni-directional | 600 ⁽⁵⁾ | 1 | 7 | 24 ⁽²³⁾ | 23.4 | nil | nil | nil | ± 10 | |
| NSS (3)(16)(17) | Annapolis, Maryland, United States | 38° 59' N 76° 27' W | Omni-directional | 400 ⁽⁵⁾ | 1 | 7 | 24 ⁽²⁴⁾ | 21.4 | nil | nil | nil | ± 10 | |
| NWC (3)(16)(17) | Exmouth, Australia | 21° 49' S 114° 10' E | Omni-directional | 1 000 ⁽⁵⁾ | 1 | 7 | 24 ⁽²⁵⁾ | 22.3 | nil | nil | nil | ± 10 | |
| OMA | Podebrady, Czech and Slovak Federal Republic | 50° 08' N 15° 08' E | T | 5 | 1 | 7 | 24 | 50 | 1 ⁽²⁶⁾ | 23 hours per day ⁽²⁷⁾ | nil | ± 1 000 | No DUT1 transmission |

TABLE 2 (continued)

| Station | | | Type of antenna(s) | Carrier power (kW) | Number of simultaneous transmissions | Period of operation | | Standard frequencies used | | Duration of emission | | Uncertainty of frequency and time intervals (parts in 10 ¹²) ⁽¹⁾ | Method of DUT1 indication |
|--------------------|----------------------|-------------------------|--------------------|--------------------|--------------------------------------|---------------------|-----------|--|--|---|----------------------------|---|---|
| Call sign | Approximate location | Latitude Longitude | | | | Days/week | Hours/day | Carrier (MHz) | Modulation (Hz) | Time signal (min) | Audio-modulation (min) | | |
| RAB-99 | Khabarovsk | 48° 30' N 134° 50' E | Omni-directional | 300 | 1 | 7 | 2 | 25.0, 25.1, 25.5, 23.0, 20.5 | 1/60, 1/10, 1/10, 40 ⁽²⁸⁾ | 40 min 3 times per day ⁽²⁹⁾ | nil | ± 5 | |
| RBU ⁽³⁾ | Moskva | 55° 48' N 38° 18' E | Omni-directional | 10 | 1 | 7 | 24 | 662/3 | 10, 100, 312.5 | continuous DXXXXW ⁽³⁰⁾ | continuous ⁽³¹⁾ | ± 5 | CCIR code by double pulse ⁽³²⁾ |
| RJH-63 | Krasnodar | 44° 46' N 39° 34' E | Omni-directional | 300 | 1 | 7 | 2 | 25.5, 25.1, 25.0, 23.0, 20.5 | 1/60, 1/10, 1, 10, 40 ⁽²⁸⁾ ^(28a) | 34 min twice per day ⁽³³⁾ | nil | ± 5 | |
| RJH-69 | Holodechno | 54° 28' N 26° 47' E | Omni-directional | 300 | 1 | 7 | 2 | 25.5, 25.1, 25.0, 23.0, 20.5 | 1/60, 1/10, 1, 10, 40 ⁽²⁸⁾ | 40 min twice per day ⁽³⁴⁾ | nil | ± 5 | |
| RJH-77 | Arkhangelsk | 64° 22' N 41° 35' E | Omni-directional | 300 | 1 | 7 | 2 | 25.5, 25.1, 25.0, 23.0, 20.5 | 1/60, 1/10, 1, 10, 40 ⁽²⁸⁾ | 40 min twice per day ⁽³⁵⁾ | nil | ± 5 | |
| RJH-86 | Beshkeck | 43° 03' N 73° 37' E | Omni-directional | 300 | 1 | 7 | 3 | 25.5, 25.1, 25.0, 23.0, 20.5 | 1/60, 1/10, 1/10, 40 ⁽²⁸⁾ | 40 min twice per day ⁽³⁶⁾ | nil | ± 5 | |
| RJH-90 | Nizhni Novgorod | 56° 11' N 43° 57' E | Omni-directional | 300 | 1 | 7 | 2 | 25.0, 25.1, 25.5, 23.0, 20.5 | 1/60, 1/10, 1, 10, 40 ⁽²⁸⁾ | 40 min twice per day ⁽³⁷⁾ | nil | ± 5 | |

TABLE 2 (continued)

| Station | | | Type of antenna(s) | Carrier power (kW) | Number of simultaneous transmissions | Period of operation | | Standard frequencies used | | Duration of emission | | Uncertainty of frequency and time intervals (parts in 10 ¹²) ⁽¹⁾ | Method of DUT1 indication |
|--------------------|----------------------|-------------------------|--------------------|--------------------|--------------------------------------|---------------------|-------------------|------------------------------|---------------------------|--|----------------------------|---|---|
| Call sign | Approximate location | Latitude Longitude | | | | Days/week | Hours/day | Carrier (MHz) | Modulation (Hz) | Time signal (min) | Audio-modulation (min) | | |
| RTZ ⁽³⁾ | Irkutsk | 52° 26' N 104° 02' E | Omni-directional | 10 | 1 | 7 | 23 | 50 | 1, 10 | 6/60 | nil | ± 5 | CCIR code by double pulse ⁽³²⁾ |
| RW-166 | Irkutsk | 52° 18' N 104° 18' E | Omni-directional | 40 | 1 | 7 | 23 | 198 | | nil | A3E broadcast continuously | ± 5 | |
| SAJ | Stockholm, Sweden | 59° 15' N 18° 06' E | Omni-directional | 0.02 (e.r.p.) | 1 | 3 ⁽³⁸⁾ | 2 ⁽³⁹⁾ | 150 000 | nil | 10 ⁽⁴⁰⁾ | | ± 2 | |
| UNW3 | Molodechno | 54° 26' N 26° 48' E | Omni-directional | – | 1 | 7 | 2 | 25.5, 25.1, 25.0, 23.0, 20.5 | 1, 10, 40 ⁽²⁸⁾ | 40 min twice per day ⁽²⁹⁾ | nil | ± 10 | |
| UPD8 | Arkhangelsk | 64° 24' N 41° 32' E | Omni-directional | – | 1 | 7 | 2 | 25.5, 25.1, 25.0, 23.0, 20.5 | 1, 10, 40 ⁽²⁸⁾ | 40 min twice per day ⁽³³⁾ | nil | ± 10 | |
| UQC3 | Khabarovsk | 48° 30' N 134° 51' E | Omni-directional | 300 | 1 | 7 | 2 | 25.0, 25.1, 25.5, 23.0, 20.5 | 1, 10, 40 ⁽²⁸⁾ | 40 min 3 times per day ⁽³⁴⁾ | nil | ± 10 | |
| USB2 | Beshkeck | 43° 04' N 73° 39' E | Omni-directional | – | 1 | 7 | 3 | 25.5, 25.1, 25.0, 23.0, 20.5 | 1, 10, 40 ⁽²⁸⁾ | 40 min 3 times per day ⁽³⁵⁾ | nil | ± 10 | |

TABLE 2 (continued)

| Station | | | Type of antenna(s) | Carrier power (kW) | Number of simultaneous transmissions | Period of operation | | Standard frequencies used | | Duration of emission | | Uncertainty of frequency and time intervals (parts in 10 ¹²) ⁽¹⁾ | Method of DUT1 indication |
|---------------------|---------------------------------------|-------------------------|---------------------|--------------------|--------------------------------------|---------------------|--------------------|--|------------------------------|---|------------------------|---|--|
| Call sign | Approximate location | Latitude Longitude | | | | Days/week | Hours/day | Carrier (MHz) | Modulation (Hz) | Time signal (min) | Audio-modulation (min) | | |
| UTR3 | Nizhni Novgorod | 56° 11' N 43° 58' E | Omni-directional | 300 | 1 | 7 | 2 | 25.0, 25.1, 25.5, 23.0, 20.5 | 1, 10, 40 ⁽²⁸⁾ | 40 min 3 times per day ⁽³⁶⁾ | nil | ± 10 | |
| VNG | Llandilo, New South Wales, Australia | 33° 43' S 150° 48' E | Omni-directional | 10 10 5 | 2-3 | 7 | 24 ⁽⁴¹⁾ | 8 638 12 984 16 000 | 1 100 ⁽⁴²⁾ | continuous | nil | ± 100 | CCIR code by 45 cycles of 900 Hz immediately following the normal second markers |
| WWVB ⁽³⁾ | Fort Collins, Colorado, United States | 40° 40' N 105° 03' W | Top-loaded vertical | 13 ⁽⁵⁾ | 1 | 7 | 24 | 60 | 1 ⁽⁴³⁾ | continuous | nil | ± 10 | No CCIR code |
| EBC | San Fernando, Cadiz, Spain | 36° 28' N 6° 12' W | Omni-directional | 1 | 1 | 7 | 1 | 12 008 6 840 | ⁽⁴⁴⁾ | 10 | ⁽⁴⁵⁾ | ± 100 | CCIR code by double pulse |

Notes to Table 2:

- (1) This value applies at the transmitter; to realize the quoted uncertainty at the point of reception it could be necessary to observe the received phase time frequency over a sufficiently long period in order to eliminate noise and random effects.
- (2) Phase modulation of the carrier by + and –1 radian in 0.1 s every second except the 59th second of each minute. This modulation is doubled to indicate binary 1. The numbers of the minute, hour, day of the month, day of the week, month and year are transmitted each minute from the 21st to the 58th second, in accordance with the French legal time scale. In addition, a binary 1 at the 17th second indicates that the local time is 2 hours ahead of UTC (summer time), a binary 1 at the 18th second indicates when the local time is one hour ahead of UTC (winter time); a binary 1 at the 14th second indicates the current day is a public holiday (Christmas, 14 July, etc.), a binary 1 at the 13th second indicates that the current day is the eve of a public holiday.
- (3) These stations have indicated that they follow one of the systems referred to in Recommendation ITU-R TF.460.
- (4) Pulses of 300 cycles of 1 000 Hz tone: the first pulse in each minute is prolonged.
- (5) Figures give the estimated radiated power.

Notes to Table 2 (continued):

- (6) At the beginning of each second (except the 59th second) the carrier amplitude is reduced to 25% for a duration of 0.1 or 0.2 s corresponding to “binary 0” or “binary 1”, respectively. The number of the minute, hour, day of the month, day of the week, month and year are transmitted in BCD code from the 21st to the 58th second. The time signals are generated by the Physikalisch-Technische Bundesanstalt (PTB) and are in accordance with the legal time of the Federal Republic of Germany which is UTC (PTB) + 1 h (Central European Time CET) or UTC (PTB) + 2 h (Central European Summer Time CEST). In addition, CET and CEST are indicated by a binary 1 at the 18th or 17th second, respectively. To achieve a more accurate time transfer and a better use of the frequency spectrum available an additional pseudo-random phase shift keying of the carrier is superimposed on the AM second markers.
- (7) Call sign is given by modulation of the carrier with 250 Hz tone three times every hour at the minutes 19, 39 and 59, without interruption of the time signal sequence.
- (8) No coherence between carrier frequency and time signals.
- (9) Coordinated time signals.
- (10) Interruption of the carrier during 100 ms at the beginning of each second; double pulse each minute; triple pulse each hour; quadruple pulse every 12 hours.
- (11) JF2: telegraph, JG2AS: in the absence of telegraph signals.
- (12) There are two types of formats: one is the transmission of the carrier frequency for 500 ms duration at the beginning of each second, except for the 59th second which is for 200 ms duration. The second format is generated in a slow time code (1 bit/s) which consists of a transmitted carrier frequency for 500 ms and 800 ms duration, corresponding to “binary 1” and “binary 0”, respectively. The duration of the “position mark” at each 9th second and that of the frame reference marker is 200 ms. The number of the minute, hour, day of the year and the time offset to DUT1 are transmitted in BCD code from the 1st through the 43rd second.
- (13) In absence of telegraphic traffic.
- (14) The transmission is interrupted during the maintenance period from 1000 to 1400 h UTC (on the first Tuesday of each month).
- (15) Carrier interrupted for 100 ms at each second and 500 ms at each minute; fast time code, 100 bit/s, BCD NRZ emitted during min-interruption giving month, day-of-month, hour and minute. Slow time code, 1 bit/s, BCD PWM emitted from seconds 17 to 51 giving year, month, day-of-month, day-of-week, hour and minute together with 8-bit identifier from 52 seconds to 59. CCIR DUT1 code by double pulse.
- (16) MSK (minimum shift keying) in use: a phase-stable carrier can be recovered after suitable multiplication and mixing in the receiver. It will be recalled that the use of minimum shift keying means that no discrete component exists at the respective carrier frequencies which are given in the table. The MSK signal can be expressed as:

$$S(t) = \cos [2\pi f_c t + a_n (\pi t / 2T) + \phi_n]$$

where $a_n = i(-1)$ for mark (space) and $\phi_n = 0, \pi$ (modulo 2π).

If the transmission is to be useful as a frequency reference it is necessary to recover a phase coherent carrier free from the $\pi/2$ increments introduced by the modulation. There are two approaches.

The MSK signal is considered as a continuous-phase frequency shift keying (CPFSK) with a modulation index of 0.5. Squaring the signal followed by band-pass filtering at centre frequency $2f_c$ produces a CPFSK signal with spectral components at $2f_c + 2f_b$ and $2f_c - 2f_b$, corresponding to mark and space, respectively. The components can be extracted by means of two phase-locked loops (PLL) and the reference carrier recovered by multiplication, division and filtering.

The other approach treats the MSK signal as a form of phase-shift keying (PSK), MSK being obtained by transformations from binary PSK (BPSK) or quadrature PSK (QPSK). The carrier recovery techniques available for PSK such as Costas-loop can thus be applied to MSK; such a demodulator has been realized in a single-chip form.

Notes to Table 2 (continued):

- (17) This station is primarily for communication purposes; while these data are subject to change, the changes are announced in advance to interested users by the US Naval Observatory, Washington, DC, USA.
- (18) From 1200 to 2000 h UTC each Sunday while NSS is off the air (until 15 July).
- (19) As of 23 January 1984, until further notice.
- (20) Became operational on 14 August 1984, 74 kW.
- (21) 2300 to 0900 h UTC just first Thursday-Friday, 2300 to 0700 h UTC all other Thursday-Fridays. Half power 2200 to 0200 h UTC each Monday and Friday.
- (22) Except from 1600 to 2400 h UTC each Thursday. During Daylight Saving Time 1500 to 2300 h UTC each Thursday.
- (23) 2.5 MHz: 0000-1000 h UTC; 5 MHz: 0900-0100 h UTC; 10 MHz: continuous; 15 MHz: 0100-0900 h UTC.
- (24) Off the air until 2100 h UTC on 15 July, except for 14 hours each Sunday to cover the period when NAA is off the air.
- (25) From 0000 to 0800 h, usually each Monday.
- (26) A1A telegraphy signals.
- (27) From 1000 to 1100 h UTC, transmission without keying except for call-sign OMA at the beginning of each quarter-hour.
- (28) Two types of signal are transmitted during a duty period:
- A1A signals with carrier frequency 25 kHz, duration 0.0125; 0.025; 0.1; 1 and 10 s with repetition periods of 0.025; 0.1; 1; 10 and 60 s respectively;
 - N0N signals with carrier frequencies 25.0; 25.1; 25.5; 23.0; 20.5 kHz. The phases of these signals are matched with the time markers of the transmitted scale.
- (29) From 0706 to 0747 h and 1306 to 1347 h UTC normal time.
From 0606 to 0647 h and 1206 to 1247 h UTC daylight time.
- (30) The standard frequencies and time signals are DXXXW type emissions and are made up of carrier sine-wave oscillations with the frequency of $66\frac{2}{3}$ kHz, which are interrupted for 5 ms every 100 ms; 10 ms after an interruption the carrier oscillations are narrow-band phase-modulated for 80 ms by sine-wave signals with sub-carriers of 100 or 312.5 Hz and a modulation index of 0.698. Amplitude-modulated signals with a repetition frequency of 10 Hz are used to transmit time markers. Signals with a sub-carrier of 312.5 Hz are used to indicate second and minute markers, and also "1's" in the binary code for the transmission of time-scale information; signals with a frequency of 100 Hz are used to indicate "0's" in the binary code.
- (31) N0N signals may be transmitted in individual cases.
- (32) The additional information about the value of the difference UT1 – UTC is transmitted by code dUT1. It provides more precisely the difference UT1 – UTC down to multiples of 0.02 s. The total value of the correction is DUT1 + dUT1. Possible values of dUT1 are transmitted by marking of p second pulses between the 21st and 24th seconds of the minute, so that $dUT1 = +0.02 s \times p$. Negative values of dUT1 are transmitted by marking of q second pulses between the 31st and 34th second of the minute, so that $dUT1 = -0.02 s \times q$.
- (33) From 2106 to 2147 h and 1106 to 1147 h UTC normal time.
From 0206 to 0247 h and 0806 to 0847 h UTC daylight time.
- (34) From 0206 to 0247 h, 0806 to 0847 h and 1406 to 1447 h UTC normal time.
From 0106 to 0147 h, 0706 to 0747 h and 1306 to 1347 h UTC daylight time.

Notes to Table 2 (continued):

- (35) From 0406 to 0447 h, 1006 to 1047 h and 1606 to 1647 h UTC normal time.
From 0306 to 0347 h, 0906 to 0947 h and 1506 to 1547 h UTC daylight time.
- (36) From 0506 to 0547 h and 1906 to 1947 h UTC normal time.
From 0406 to 0447 h and 1806 to 1847 h UTC daylight time.
- (37) From 0906 to 0940 h and 1706 to 1740 h UTC normal time.
From 2006 to 2040 h and 0806 to 0840 h UTC daylight time.
- (38) Each Monday, Wednesday and Friday.
- (39) From 0930 to 1130 h UTC. When Summer Time, add one hour to the times given.
- (40) Second pulses of 8 cycles of 1 kHz modulation during 5 min beginning at 1100 h UTC and 1125 h UTC. When Summer Time, add one hour to the instants given.
- (41) 8 638 kHz and 12 984 kHz continuous; 16 000 kHz from 2200 to 1000 h UTC.
- (42) Pulses of 50 cycles of 1 000 Hz tone, shortened to 5 cycles from the 55th to the 58th second; the 59th pulse is omitted; the minute marker is 500 cycles. At the 5th, 10th, 15th, etc. minutes, pulses from the 50th to the 58th second are shortened to 5 cycles. Voice identification on 5 000 kHz and 16 000 kHz between the 20th and 50th seconds in the 15th, 30th, 45th and 60th minutes. Morse identification "VNG" on 8 638 kHz and 12 984 kHz in the 15th, 30th, 45th and 60th minutes. A BCD time incorporating time of day and day number of the year is transmitted between the 20th and 46th second with a binary "0" represented by 100 cycles and a binary "1" by 200 cycles of 1 000 Hz tone. The minute information for the next minute is given from the 21st to the 28th second, hour information from the 29th to the 35th second and day of the year from the 36th to the 46th second; parity bits are included at the end of each code sequence.
- (43) Time code used which reduces carrier by 10 dB at the beginning of each second. The code contains information on the year, day of year, hour, minute, UT1 value and status indicators for impending leap seconds and Daylight Saving Time.
- (44) Seconds pulses of a duration of 0.1 s, modulated at 1 000 Hz.
Minutes pulses of a duration of 0.5 s, modulated at 1 250 Hz.
- (45) Minutes 00 to 10, 12 008 kHz, A2A.
15 to 25, 12 008 kHz, J3E.
30 to 40, 6 840 kHz, A2A.
45 to 55, 6 840 kHz, J3E.

During the minute immediately preceding each of the periods indicated, transmission of call sign in slow Morse twice.

TABLE 3

Characteristics of some navigational aids, valid as of April, 1993

| Station | | | Type of antenna(s) | Carrier power (kW) | Number of simultaneous transmissions | Period of operation | | Standard frequencies used | | Duration of emission | | Uncertainty of frequency and time intervals (parts in 10 ¹²) |
|---|--------------------------------------|----------------------------|--------------------|----------------------|--------------------------------------|---------------------|-----------|---------------------------|---------------------------------|---------------------------|------------------|--|
| Call sign | Approximate location | Latitude Longitude | | | | Days/week | Hours/day | Carrier (kHz) | Pulse repetition (µs) | Time signal | Audio-modulation | |
| Loran-C ⁽¹⁾ (7980-Z, 9960-Y) | Carolina Beach, NC, United States | 34° 03.8' N 77° 54.8' W | Omni-directional | 800 ⁽²⁾ | 1 | 7 | 24 | 100 | 79 800 ⁽³⁾ | continuous ⁽⁴⁾ | nil | ± 1 |
| Loran-C (7980-Y) | Jupiter, Florida, United States | 27° 02.0' N 80° 06.9' W | Omni-directional | 400 ⁽²⁾ | 1 | 7 | 24 | 100 | 79 800 ⁽³⁾ | continuous ⁽⁴⁾ | nil | ± 1 |
| Loran-C ⁽¹⁾ (5930-Y, 7930-W) | Cape Race, Newfoundland | 46° 46.5' N 53° 10.5' W | Omni-directional | 1 000 ⁽²⁾ | 1 | 7 | 24 | 100 | 79 300 59 300 ⁽³⁾ | continuous ⁽⁴⁾ | nil | ± 1 |
| Loran-C ⁽¹⁾ (5930-X, 9960-X) | Nantucket Island, United States | 41° 15.2' N 69° 58.6' W | Omni-directional | 400 | 1 | 7 | 24 | 100 | 59 300 ⁽³⁾ 99 600 | continuous ⁽⁴⁾ | nil | ± 1 |
| Loran-C ⁽¹⁾ (8970-M, 9960-Z) | Dana, Indiana, United States | 39° 51.1' N 87° 29.2' W | Omni-directional | 400 ⁽²⁾ | 1 | 7 | 24 | 100 | 89 700 ⁽³⁾ 99 600 | continuous ⁽⁴⁾ | nil | ± 1 |
| Loran-C ⁽¹⁾ (7930-X, 9980-W) | Angissoq, Greenland | 59° 59.3' N 45° 10.4' W | Omni-directional | 760 ⁽²⁾ | 1 | 7 | 24 | 100 | 79 300 ⁽³⁾ 99 800 | continuous ⁽⁴⁾ | nil | ± 1 |
| Loran-C ⁽¹⁾ (7970-M 9980-X) | Ejde, Faeroe Islands, Denmark | 62° 18.0' N 7° 04.4' W | Omni-directional | 325 ⁽²⁾ | 1 | 7 | 24 | 100 | 79 700 ⁽³⁾ 99 800 | continuous ⁽⁴⁾ | nil | ± 1 |
| Loran-C (7970-W) | Sylt, F.R. of Germany | 54° 48.5' N 8° 17.6' E | Omni-directional | 325 ⁽²⁾ | 1 | 7 | 24 | 100 | 79 700 ⁽³⁾ | continuous ⁽⁴⁾ | nil | ± 1 |
| Loran-C (7970-X) | Bo, Norway | 68° 38.1' N 14° 27.8' E | Omni-directional | 165 ⁽²⁾ | 1 | 7 | 24 | 100 | 79 700 ⁽³⁾ | continuous ⁽⁴⁾ | nil | ± 1 |

TABLE 3 (continued)

| Station | | | Type of antenna(s) | Carrier power (kW) | Number of simultaneous transmissions | Period of operation | | Standard frequencies used | | Duration of emission | | Uncertainty of frequency and time intervals (parts in 10 ¹²) |
|---|---|-----------------------------|--------------------|-----------------------------|--------------------------------------|---------------------|------------|---------------------------|---------------------------------|---------------------------|------------------|--|
| Call sign | Approximate location | Latitude Longitude | | | | Days/ week | Hours/ day | Carrier (kHz) | Pulse repetition (µs) | Time signal | Audio-modulation | |
| Loran-C ⁽¹⁾ (7970-Y, 9980-M) | Sandur, Iceland | 64° 54.4' N 23° 55.4' W | Omni-directional | 1 500 ⁽²⁾ | 1 | 7 | 24 | 100 | 79 700 99 800 | continuous ⁽⁴⁾ | nil | ± 1 |
| Loran-C (7970-Z) | Jan Mayen, Norway | 70° 54.9' N 8° 44.0' W | Omni-directional | 165 ⁽²⁾ | 1 | 7 | 24 | 100 | 79 700 ⁽³⁾ | continuous ⁽⁴⁾ | nil | ± 1 |
| Loran-C ⁽¹⁾ (5930-Z, 7930-M) | Fox Harbour, Canada | 52° 22.6' N 55° 42.5' W | Omni-directional | 800 ⁽²⁾ | 1 | 7 | 24 | 100 | 59 300 79 300 | continuous ⁽⁴⁾ | nil | ± 1 |
| Loran-C (7990-M) | Sellia Marina, Italy | 38° 52.3' N 16° 43.1' E | Omni-directional | 165 ⁽²⁾ | 1 | 7 | 24 | 100 | 79 900 ⁽³⁾ | continuous ⁽⁴⁾ | nil | ± 1 |
| Loran-C (7990-X) | Lampedusa, Italy | 35° 31.3' N 12° 31.5' E | Omni-directional | 325 ⁽²⁾ | 1 | 7 | 24 | 100 | 79 900 ⁽³⁾ | continuous ⁽⁴⁾ | nil | ± 1 |
| Loran-C (7990-Y) | Kargaburun, Turkey | 40° 58.3' N 27° 52.0' E | Omni-directional | 165 ⁽²⁾ | 1 | 7 | 24 | 100 | 79 900 ⁽³⁾ | continuous ⁽⁴⁾ | nil | ± 1 |
| Loran-C (7990-Z) | Estartit, Spain | 42° 03.6' N 3° 12.3' E | Omni-directional | 165 ⁽²⁾ | 1 | 7 | 24 | 100 | 79 900 ⁽³⁾ | continuous ⁽⁴⁾ | nil | ± 1 |
| Loran-C (8930-X) | Minami – Torishima, Japan | 24° 17.1' N 153° 58.9' E | Omni-directional | 1 100 ⁽²⁾ | 1 | 7 | 24 | 100 | 89 300 ⁽³⁾ | continuous ⁽⁴⁾ | nil | ± 1 |
| Loran-C ⁽¹⁾ (8930-Y, 5970-W) | Tokatibuto, Japan | 42° 44.6' N 143° 43.2' E | Omni-directional | 1 000 ⁽²⁾ 600 | 1 | 7 | 24 | 100 | 89 300 ⁽³⁾ 59 700 | continuous ⁽⁴⁾ | nil | ± 1 |
| Loran-C ⁽¹⁾ (8930-W, 5970-Y) | Gesashi, Japan | 26° 36.4' N 128° 08.9' E | Omni-directional | 1 000 ⁽²⁾ 600 | 1 | 7 | 24 | 100 | 89 300 ⁽³⁾ 59 700 | continuous ⁽⁴⁾ | nil | ± 1 |
| Loran-C (8930-M) | Nijjima, Japan | 34° 24.2' N 139° 16.3' E | Omni-directional | 1 000 ⁽²⁾ | 1 | 7 | 24 | 100 | 89 300 ⁽³⁾ | continuous ⁽⁴⁾ | nil | ± 1 |
| Loran-C (9990-M) | St. Paul, Pribiloff Islands, Alaska | 57° 09.2' N 170° 15.1' W | Omni-directional | 325 ⁽²⁾ | 1 | 7 | 24 | 100 | 99 900 ⁽³⁾ | continuous ⁽⁴⁾ | nil | ± 1 |

TABLE 3 (continued)

| Station | | | Type of antenna(s) | Carrier power (kW) | Number of simultaneous transmissions | Period of operation | | Standard frequencies used | | Duration of emission | | Uncertainty of frequency and time intervals (parts in 10 ¹²) |
|---|---------------------------------|-----------------------------|--------------------|----------------------|--------------------------------------|---------------------|------------|---------------------------|--|---------------------------|------------------|--|
| Call sign | Approximate location | Latitude Longitude | | | | Days/ week | Hours/ day | Carrier (kHz) | Pulse repetition (µs) | Time signal | Audio-modulation | |
| Loran-C (9990-X) | Attu, Alaska | 52° 49.7' N 173° 10.8' E | Omnidirectional | 625 ⁽²⁾ | 1 | 7 | 24 | 100 | 99 900 ⁽³⁾ | continuous ⁽⁴⁾ | nil | ± 1 |
| Loran-C ⁽¹⁾ (9960-M, 8970-X) | Seneca, NY, United States | 42° 42.8' N 76° 49.6' W | Omnidirectional | 800 ⁽²⁾ | 1 | 7 | 24 | 100 | 99 600 ⁽³⁾ 89 700 ⁽³⁾ | continuous ⁽⁴⁾ | nil | ± 1 |
| Loran-C ⁽¹⁾ (9960-W, 5930-M) | Caribou, ME, United States | 46° 48.5' N 67° 55.6' W | Omnidirectional | 800 ⁽²⁾ | 1 | 7 | 24 | 100 | 59 300 ⁽³⁾ 99 600 ⁽³⁾ | continuous ⁽⁴⁾ | nil | ± 1 |
| Loran-C ⁽¹⁾ (8970-W, 7980-M) | Malone, FL, United States | 30° 59.6' N 85° 10.1' W | Omnidirectional | 800 ⁽²⁾ | 1 | 7 | 24 | 100 | 89 700 ⁽³⁾ 79 800 ⁽³⁾ | continuous ⁽⁴⁾ | nil | ± 1 |
| Loran-C ⁽¹⁾ (8970-Y 8290-W) | Baudette, MN, United States | 48° 36.8' N 94° 33.3' W | Omnidirectional | 800 ⁽²⁾ | 1 | 7 | 24 | 100 | 89 700 ⁽³⁾ 82 900 | continuous ⁽⁴⁾ | nil | ± 1 |
| Loran-C ⁽¹⁾ (7980-W 9610-Z) | Grangeville, LA, United States | 30° 43.6' N 90° 49.7' W | Omnidirectional | 800 ⁽²⁾ | 1 | 7 | 24 | 100 | 79 800 ⁽³⁾ 96 100 | continuous ⁽⁴⁾ | nil | ± 1 |
| Loran-C ⁽¹⁾ (7980-X 9610-Y) | Raymondville, TX, United States | 26° 31.9' N 97° 50.0' W | Omnidirectional | 400 ⁽²⁾ | 1 | 7 | 24 | 100 | 79 800 ⁽³⁾ 96 100 | continuous ⁽⁴⁾ | nil | ± 1 |
| Loran-C ⁽¹⁾ (9990-Y 7960-Z) | Pt. Clarence, Alaska | 65° 14.7' N 166° 53.2' W | Omnidirectional | 1 000 ⁽²⁾ | 1 | 7 | 24 | 100 | 99 900 ⁽³⁾ 79 600 | continuous ⁽⁴⁾ | nil | ± 1 |
| Loran-C ⁽¹⁾ (9990-Z, 7960-X) | Narrow Cape, Alaska | 57° 26.3' N 152° 22.2' W | Omnidirectional | 400 ⁽²⁾ | 1 | 7 | 24 | 100 | 99 900 79 600 ⁽³⁾ | continuous ⁽⁴⁾ | nil | ± 1 |
| Loran-C (7960-M) | Tok, Alaska | 63° 19.7' N 142° 48.5' W | Omnidirectional | 540 ⁽²⁾ | 1 | 7 | 24 | 100 | 79 600 ⁽³⁾ | continuous ⁽⁴⁾ | nil | ± 1 |
| Loran-C ⁽¹⁾ (7960-Y, 5990-X) | Shoal Cove, Alaska | 55° 26.3' N 131° 15.3' W | Omnidirectional | 540 ⁽²⁾ | 1 | 7 | 24 | 100 | 79 600 59 900 ⁽³⁾ | continuous ⁽⁴⁾ | nil | ± 1 |

TABLE 3 (continued)

| Station | | | Type of antenna(s) | Carrier power (kW) | Number of simultaneous transmissions | Period of operation | | Standard frequencies used | | Duration of emission | | Uncertainty of frequency and time intervals (parts in 10 ¹²) |
|---|---|-----------------------------|--------------------|----------------------|--------------------------------------|---------------------|--------------------|---------------------------|---------------------------------|---------------------------|------------------|--|
| Call sign | Approximate location | Latitude Longitude | | | | Days/ week | Hours/ day | Carrier (kHz) | Pulse repetition (µs) | Time signal | Audio-modulation | |
| Loran-C ⁽¹⁾ (5990-M 8290-Y) | Williams Lake, BC, Canada | 51° 58.0' N 122° 22.0' W | Omni-directional | 400 ⁽²⁾ | 1 | 7 | 24 | 100 | 59 900 ⁽³⁾ 82 900 | continuous ⁽⁴⁾ | nil | ± 1 |
| Loran-C ⁽¹⁾ (5990-Y, 9940-W) | George, Washington, United States | 47° 03.8' N 119° 44.6' W | Omni-directional | 1 600 ⁽²⁾ | 1 | 7 | 24 | 100 | 59 900 99 400 ⁽³⁾ | continuous ⁽⁴⁾ | nil | ± 1 |
| Loran-C (9940-M) | Fallon, Nevada, United States | 39° 33.1' N 118° 49.9' W | Omni-directional | 400 ⁽²⁾ | 1 | 7 | 24 | 100 | 99 400 ⁽³⁾ | continuous ⁽⁴⁾ | nil | ± 1 |
| Loran-C (9940-X) | Middletown, California, United States | 38° 46.9' N 122° 29.7' W | Omni-directional | 400 ⁽²⁾ | 1 | 7 | 24 | 100 | 99 400 ⁽³⁾ | continuous ⁽⁴⁾ | nil | ± 1 |
| Loran-C ⁽¹⁾ (9940-Y 9610-W) | Searchlight, Nevada, United States | 35° 19.3' N 114° 48.3' W | Omni-directional | 540 ⁽²⁾ | 1 | 7 | 24 | 100 | 99 400 ⁽³⁾ 96 100 | continuous ⁽⁴⁾ | nil | ± 1 |
| Loran-C (5990-Z) | Port Hardy, BC, Canada | 50° 36.5' N 127° 21.5' W | Omni-directional | 400 ⁽²⁾ | 1 | 7 | 24 | 100 | 59 900 ⁽³⁾ | continuous | nil | ± 1 |
| (8000-M) | Briansk | 53° 08' N 34° 55' E | Omni-directional | 650 | 1 | 7 ⁽⁵⁾ | 10 ⁽⁶⁾ | 100 | 80 000 ⁽⁷⁾ | continuous | nil | ± 5 |
| (8000-4) | Syzran | 53° 18' N 49° 07' E | Omni-directional | 700 | 1 | 6 ⁽⁵⁾ | 10 ⁽⁶⁾ | 100 | 80 000 ⁽⁷⁾ | ⁽⁸⁾ | nil | ± 5 |
| (7950-M) | Aleksandrovsk, Sakhalinsky | 51° 05' N 142° 42' E | Omni-directional | 700 | 1 | 7 ⁽⁹⁾ | 12 ⁽¹⁰⁾ | 100 | 89 500 | continuous | nil | ± 5 |
| Loran-C (8290-M) | Havre, ND, United States | 48° 44.6' N 109° 58.9' W | Omni-directional | 400 ⁽²⁾ | 1 | 7 | 24 | 100 | 82 900 | continuous | nil | ± 1 |
| Loran-C ⁽¹⁾ (8290-X, 9610-V) | Gillette, WY, United States | 44° 00.2' N 105° 37.4' W | Omni-directional | 400 ⁽²⁾ | 1 | 7 | 24 | 100 | 82 900 96 100 | continuous | nil | ± 1 |
| Loran-C ⁽¹⁾ (8970-Z, 9610-M) | Boise City, ID, United States | 36° 30.3' N 102° 54.0' W | Omni-directional | 800 ⁽²⁾ | 1 | 7 | 24 | 100 | 89 700 96 100 | continuous | nil | ± 1 |

TABLE 3 (continued)

| Station | | | Type of antenna(s) | Carrier power (kW) | Number of simultaneous transmissions | Period of operation | | Standard frequencies used | | Duration of emission | | Uncertainty of frequency and time intervals (parts in 10 ¹²) |
|---|-------------------------------|-----------------------------|--------------------|--------------------|--------------------------------------|---------------------|------------|---------------------------|-----------------------|----------------------|------------------|--|
| Call sign | Approximate location | Latitude Longitude | | | | Days/ week | Hours/ day | Carrier (kHz) | Pulse repetition (µs) | Time signal | Audio-modulation | |
| Loran-C (9610-X) | Las Cruces, NM, United States | 32° 04.3' N 106° 52.1' W | Omni-directional | 400 ⁽²⁾ | 1 | 7 | 24 | 100 | 96 100 | continuous | nil | ± 1 |
| Loran-C (5970-M) | Pohang, Korea | 36° 11.1' N 129° 20.5' E | Omni-directional | 35 | 1 | 7 | 24 | 100 | 59 700 | continuous | nil | ± 1 |
| Loran-C (5970-X) | Kwangju, Korea | 35° 02.4' N 126° 32.5' E | Omni-directional | 35 | 1 | 7 | 24 | 100 | 59 700 | continuous | nil | ± 1 |
| Loran-C (7950-1) | Petropavlosk, CIS | 53° 07.8' N 157° 41.7' E | Omni-directional | 700 | 1 | 7 | 24 | 100 | 89 500 | continuous | nil | ± 1 |
| Loran-C (7950-2) | Ussuriysk, CIS | 44° 32.0' N 131° 38.4' E | Omni-directional | 700 | 1 | 7 | 24 | 100 | 89 500 | continuous | nil | ± 1 |
| Loran-C (8000-1) | Petrozavodsk, CIS | 61° 45.5' N 33° 41.7' E | Omni-directional | 700 | 1 | 7 | 24 | 100 | 80 000 | continuous | nil | ± 1 |
| Loran-C (8000-2) | Solnim, CIS | 53° 07.9' N 25° 23.8' E | Omni-directional | 450 | 1 | 7 | 24 | 100 | 80 000 | continuous | nil | ± 1 |
| Loran-C (8000-3) | Simferopol, CIS | 44° 53.3' N 33° 52.5' E | Omni-directional | 550 | 1 | 7 | 24 | 100 | 80 000 | continuous | nil | ± 1 |
| Loran-C (6930-M) | Xindu, China | 23° 58.1' N 111° 43.1' E | Omni-directional | 1 000 | 1 | 7 | 24 | 100 | 69 300 | continuous | nil | ± 1 |
| Loran-C (6930-1) | Xinhe, China | 22° 25.0' N 107° 21.0' E | Omni-directional | 1 000 | 1 | 7 | 24 | 100 | 69 300 | continuous | nil | ± 1 |
| Loran-C (6930-2) | Zhangxi, China | 23° 43.7' N 116° 53.8' E | Omni-directional | 1 000 | 1 | 7 | 24 | 100 | 69 300 | continuous | nil | ± 1 |
| Loran-C (7170-M) | Al Khamasin, Saudi Arabia | 20° 28.0' N 44° 34.9' E | Omni-directional | 800 | 1 | 7 | 24 | 100 | 71 700 | continuous | nil | ± 1 |
| Loran-C ⁽¹⁾ (7170-W, 8990-V) | Salwa, Saudi Arabia | 24° 50.0' N 50° 34.2' E | Omni-directional | 800 | 1 | 7 | 24 | 100 | 71 700 89 900 | continuous | nil | ± 1 |

TABLE 3 (continued)

| Station | | | Type of antenna(s) | Carrier power (kW) | Number of simultaneous transmissions | Period of operation | | Standard frequencies used | | Duration of emission | | Uncertainty of frequency and time intervals (parts in 10 ¹²) |
|---|--|----------------------------|--------------------|--------------------|--------------------------------------|---------------------|-----------|--|-----------------------|----------------------|------------------|--|
| Call sign | Approximate location | Latitude Longitude | | | | Days/week | Hours/day | Carrier (kHz) | Pulse repetition (µs) | Time signal | Audio-modulation | |
| Loran-C ⁽¹⁾ (7170-X, 8990-M) | Afif, Saudi Arabia | 23° 48.6' N 42° 51.3' E | Omni-directional | 800 | 1 | 7 | 24 | 100 | 71 700 89 900 | continuous | nil | ± 1 |
| Loran-C ⁽¹⁾ (7170-Y, 8990-Y) | Al Lith, Saudi Arabia | 20° 13.9' N 40° 12.5' E | Omni-directional | 200 | 1 | 7 | 24 | 100 | 71 700 89 900 | continuous | nil | ± 1 |
| Loran-C ⁽¹⁾ (7170-Z, 8990-Z) | Al Muwassam, Saudi Arabia | 16° 25.9' N 42° 48.1' E | Omni-directional | 800 | 1 | 7 | 24 | 100 | 71 700 89 900 | continuous | nil | ± 1 |
| Loran-C (8990-W) | Ar Ruqi, Saudi Arabia | 29° 01.1' N 46° 37.4' E | Omni-directional | 200 | 1 | 7 | 24 | 100 | 71 700 | continuous | nil | ± 1 |
| Loran-C (8990-X) | Ash Shaykh Humayd, Saudi Arabia | 28° 09.3' N 34° 45.9' E | Omni-directional | 400 | 1 | 7 | 24 | 100 | 71 700 | continuous | nil | ± 1 |
| Omega Ω/A | Aldra, Norway | 66° 25' N 13° 08' E | Omni-directional | 10 ⁽¹¹⁾ | 1 | 7 | 24 | 11.05-F ⁽¹²⁾ 10.2-A 11 ¹ / ₃ -C 13.6-B | nil | ⁽¹²⁾ | nil | ± 5 |
| Omega Ω/B | Monrovia, Liberia | 06° 18' N 10° 40' W | Omni-directional | 10 ⁽¹¹⁾ | 1 | 7 | 24 | 11.05-G ⁽¹²⁾ 10.2-B 11 ¹ / ₃ -D 13.6-C | nil | ⁽¹²⁾ | nil | ± 1 |
| Omega Ω/C | Haiku, Hawaii, United States | 21° 24' N 157° 50' W | Omni-directional | 10 ⁽¹¹⁾ | 1 | 7 | 24 | 11.05-H ⁽¹²⁾ 10.2-C 11 ¹ / ₃ -E 13.6-D | nil | ⁽¹²⁾ | nil | ± 1 |
| Omega Ω/D | Lamoure, North Dakota, United States | 46° 22' N 98° 20' W | Omni-directional | 10 ⁽¹¹⁾ | 1 | 7 | 24 | 11.05-A ⁽¹²⁾ 10.2-D 11 ¹ / ₃ -F 13.6-E | nil | ⁽¹²⁾ | nil | ± 1 |
| Omega Ω/E | La Reunion | 20° 58' S 55° 17' E | Omni-directional | 10 ⁽¹¹⁾ | 1 | 7 | 24 | 11.05-B ⁽¹²⁾ 10.2-E 11 ¹ / ₃ -G 13.6-F | nil | ⁽¹²⁾ | nil | ± 1 |

TABLE 3 (continued)

| Station | | | Type of antenna(s) | Carrier power (kW) | Number of simultaneous transmissions | Period of operation | | Standard frequencies used | | Duration of emission | | Uncertainty of frequency and time intervals (parts in 10 ¹²) |
|-----------|-------------------------------|-------------------------|--------------------|--------------------|--------------------------------------|---------------------|------------|--|-----------------------|----------------------|------------------|--|
| Call sign | Approximate location | Latitude Longitude | | | | Days/ week | Hours/ day | Carrier (kHz) | Pulse repetition (µs) | Time signal | Audio-modulation | |
| Omega Ω/F | Golfo Nuevo, Argentina | 43° 03' S 65° 11' W | Omni-directional | 10 ⁽¹¹⁾ | 1 | 7 | 24 | 11.05-C ⁽¹²⁾ 10.2-F 11 ¹ / ₃ -H 13.6-G | nil | ⁽¹²⁾ | nil | ± 1 |
| Omega Ω/G | Woodside, Victoria, Australia | 38° 29' S 146° 56' E | Omni-directional | 10 ⁽¹¹⁾ | 1 | 7 | 24 | 11.05-D ⁽¹²⁾ 10.2-G 11 ¹ / ₃ -A 13.6-H | nil | ⁽¹²⁾ | nil | ± 1 |
| Omega Ω/H | Tsushima Islands, Japan | 34° 37' N 129° 27' E | Omni-directional | 10 ⁽¹¹⁾ | 1 | 7 | 24 | 11.05-E ⁽¹²⁾ 10.2-H 11 ¹ / ₃ -B 13.6-A | nil | ⁽¹²⁾ | nil | ± 1 |

Notes to Table 3:

- (1) Dual-rated stations.
- (2) Peak radiated power.
- (3) Time pulses appear in groups of 9 for the master station (M) and groups of 8 for the secondary stations (W, X, Y, Z).
- (4) Maintained within ± 5 µs of UTC. Time of Coincidence (TOC) with the UTC second changes with the recurrence of leap-seconds and is designated in TOC Tables issued to interested users by the US Naval Observatory, Washington DC, USA.
- (5) No transmission on the 10th and 11th of each month.
- (6) From 0400 to 1000 h and 1400 to 1800 h UTC.
- (7) The signals of primary stations (A) are marked by the transmission of an additional ninth pulse in each group. Each pulse group coinciding with a UTC second marker is marked by the transmission of an additional (tenth) pulse. In the event of coincidence with the minute marker, the subsequent ten groups are additionally marked, and in the event of coincidence with the five-minute marker after 12 s, the subsequent 11 groups are also marked. The UTC second markers are accompanied by characteristic points situated at the leading edges of the eighth pulses at a level of 0.6 of the maximum signal value.
- (8) Generally operates without a second marker. In individual cases operates with a second marker shifted in relation to UTC.
- (9) No transmission on the 20th or 21st of each month.
- (10) From 2300 to 2400 h and 0000 to 1100 h UTC.
- (11) Figures give the estimated radiated power.
- (12) See Table 4.

TABLE 4
OMEGA signal format

| | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 |
|--------------------------------|--------------|------------|-----------|--------------|--------------|--------------|------------|-----------|---|---|----|
| Segment | A | B | C | D | E | F | G | H | | | |
| Duration | 0.9 | 1.0 | 1.1 | 1.2 | 1.1 | 0.9 | 1.2 | 1.0 | | | |
| kHz: | | | | | | | | | | | |
| 10.2 | Norway | Liberia | Hawaii | North Dakota | La Reunion | Argentina | Australia | Japan | | | |
| 11 ¹ / ₃ | Australia | Japan | Norway | Liberia | Hawaii | North Dakota | La Reunion | Argentina | | | |
| 13.6 | Japan | Norway | Liberia | Hawaii | North Dakota | La Reunion | Argentina | Australia | | | |
| 11.05 | North Dakota | La Reunion | Argentina | Australia | Japan | Norway | Liberia | Hawaii | | | |

Note 1 – Segment A does not begin at 0.0 s UTC. Time of segments changes with leap seconds. Segment A begins at second 44.0 in January, 1992.

Note 2 – The OMEGA stations are for general navigation purposes: while these data are subject to change, the changes are announced in advance to interested users by the United States Coast Guard Commandant*.

Note 3 – In addition to the navigational frequencies of 10.2 kHz, 13.6 kHz and 11¹/₃ kHz transmitted by all the stations, the stations transmit “unique frequencies”. These stations and their frequencies/segments are given in Table 5.

* United States Coast Guard Commandant (G-WAN-3/73), 400 Seventh Street, S.W., Washington, DC 20590.

TABLE 5

OMEGA radionavigation system signal transmission format

| Station \ Segment | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 |
|-------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|
| Norway (A) | 10.2 | 13.6 | 11 ^{1/3} | 12.1 ⁽¹⁾ | 12.1 ⁽¹⁾ | 11.05 | 12.1 ⁽¹⁾ | 12.1 ⁽¹⁾ |
| Liberia (B) | 12.0 ⁽¹⁾ | 10.2 | 13.6 | 11 ^{1/3} | 12.0 ⁽¹⁾ | 12.0 ⁽¹⁾ | 11.05 | 12.0 ⁽¹⁾ |
| Hawii (C) | 11.8 ⁽¹⁾ | 11.8 ⁽¹⁾ | 10.2 | 13.6 | 11 ^{1/3} | 11.8 ⁽¹⁾ | 11.8 ⁽¹⁾ | 11.05 |
| North Dakota (D) | 11.05 | 13.1 ⁽¹⁾ | 13.1 ⁽¹⁾ | 10.2 | 13.6 | 11 ^{1/3} | 13.1 ⁽¹⁾ | 13.1 ⁽¹⁾ |
| La Reunion (E) | 12.3 ⁽¹⁾ | 11.05 | 12.3 ⁽¹⁾ | 12.3 ⁽¹⁾ | 10.2 | 13.6 | 11 ^{1/3} | 12.3 ⁽¹⁾ |
| Argentina (F) | 12.9 ⁽¹⁾ | 12.9 ⁽¹⁾ | 11.05 | 12.9 ⁽¹⁾ | 12.9 ⁽¹⁾ | 10.2 | 13.6 | 11 ^{1/3} |
| Australia (G) | 11 ^{1/3} | 13.0 ⁽¹⁾ | 13.0 ⁽¹⁾ | 11.05 | 13.0 ⁽¹⁾ | 13.0 ⁽¹⁾ | 10.2 | 13.6 |
| Japan (H) | 13.6 | 11 ^{1/3} | 12.8 ⁽¹⁾ | 12.8 ⁽¹⁾ | 11.05 | 12.8 ⁽¹⁾ | 12.8 ⁽¹⁾ | 10.2 |

| | | | | | | | | | | | | | | | | |
|-----------------------|----------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| Transmission Interval | ← 0.9 | ← 0.2 | ← 1.0 | ← 0.2 | ← 1.1 | ← 0.2 | ← 1.2 | ← 0.2 | ← 1.1 | ← 0.2 | ← 0.9 | ← 0.2 | ← 1.2 | ← 0.2 | ← 1.0 | ← 0.2 |
| | ← 10 s → | | | | | | | | | | | | | | | |

Frequencies in kHz.

⁽¹⁾ is the unique frequency for the respective station.

ANNEX 2

Authorities responsible for stations appearing in Tables 1 and 2

| <i>Station</i> | <i>Authority</i> |
|----------------|---|
| ALLOUIS | Centre national d'Etudes des Télécommunications Département FRE 196, rue de Paris 92220 Bagneux, France |
| ATA | Time and Frequency Section National Physical Laboratory S. R. Krishnan Road New Delhi – 110012, India |
| BPM | Time and Frequency Division Shaanxi Astronomical Observatory Chinese Academy of Sciences Lington, Xian, China |
| CHU | National Research Council Time and Frequency Section Physics Division (m-36) Ottawa K1A OS1, Ontario, Canada |
| DCF77 | Physikalisch-Technische Bundesanstalt Lab. Zeiteinheit Bundesallee 100 3300 Braunschweig, Federal Republic of Germany |
| EBC | Instituto y Observatorio de Marina (Spanish Naval Observatory) San Fernando (Cádiz), Spain |
| HBG | Service horaire HBG Observatoire cantonal CH-2000 – Neuchâtel, Switzerland |
| HLA | Time and Frequency Laboratory Korea Standards Research Institute P.O. Box 3, Taedok Science Town Taejon, Ch'ungnam 300-31, Republic of Korea |
| IAM | Istituto Superiore Poste e Telecomunicazioni Viale Europa 00100 – Roma, Italy |
| IBF | Istituto Elettrotecnico Nazionale Galileo Ferraris Corso Massimo d'Azeglio, 42 10125 – Torino, Italy |
| JJY JG2AS | Standards and Measurements Division The Communications Research Laboratory Ministry of Posts and Telecommunications Nukui-Kitamachi, Koganei, Tokyo 184, Japan |
| LOL | Director Observatorio Naval Av. Costanera Sur, 2099 Buenos Aires, Argentine Republic |

Station Authority

| | |
|---|---|
| MSF | National Physical Laboratory Electrical Science Division Teddington, Middlesex, TW11 OLW, United Kingdom |
| NAA, NDT, NLK, NPM, NSS, NWC, NMO, NPN | Superintendent US Naval Observatory Washington, DC 20390, United States of America |
| OMA | 1. Time information Astronomický ústav CSAV, Budečská 6 12023 Praha 2 Vinohrady, Czech and Slovak Federal Republic 2. Standard frequency information Ústav radiotechniky a elektroniky CSAV Lumumbova 1 18088 Praha 8, Kobylišy Czech and Slovak Federal Republic |
| RAT, RCH, RID, RWM | State Committee of Standards Council of Ministers of the Russian Federation Lenisky Prospect 9 117049 Moscow, Russia |
| SAJ | Swedish Telecommunications Administration Radio Services S-123 86 Farsta, Sweden |
| VNG | VNG Users Consortium GPO Box 1090 Canberra ACT 2601, Australia |
| WWV, WWVH, WWVB | Time and Frequency Services Group Time and Frequency Division National Institute of Standards and Technology 325 Broadway Boulder, Colorado 80303, United States of America |
| ZUO | Time Standards Section Precise Physical Measurements Division National Physical Research Laboratory PO Box 395 0001 – Pretoria, South Africa |
