




# EMC standards

Presented by: Karim Loukil & Kaïs Siala  
[Karim.wakil@cert.mincom.tn](mailto:Karim.wakil@cert.mincom.tn)  
[Kais.siala@cert.mincom.tn](mailto:Kais.siala@cert.mincom.tn)



# Types of EMC measures

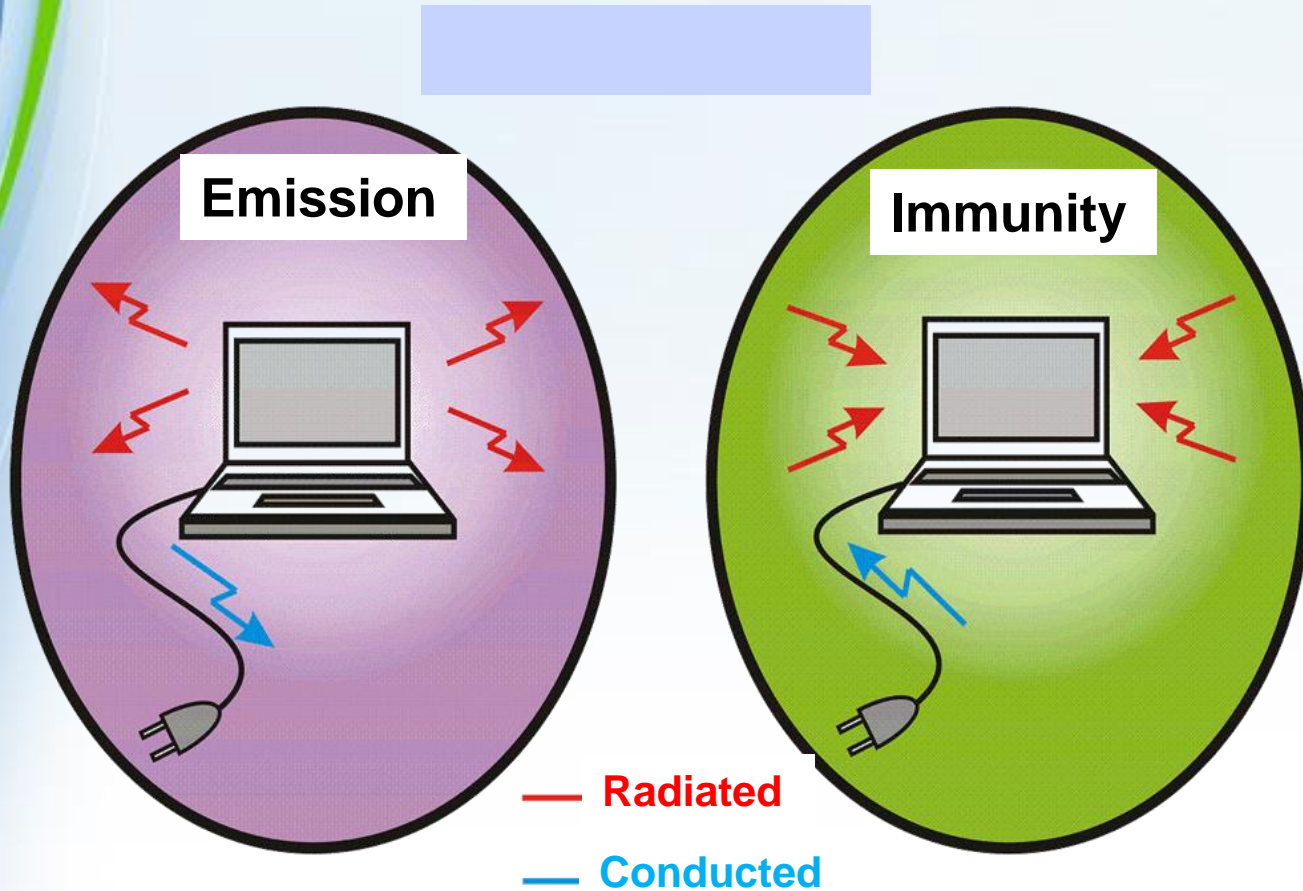



# Immunity tests



- The purpose of immunity tests is to subject a product to a controlled stress that represents the likely range which is mostly dedicated by practical aspects and experience of real-world problems.



# Immunity tests

1 – transient phenomena



# Performance Criteria for Immunity Tests



Results of immunity tests are classified into four categories:

Performance Criteria A – ‘Performance within specification limits’

Performance Criteria B – ‘Temporary degradation which is self-recoverable’


Performance Criteria C – ‘Temporary degradation which requires operator intervention’

- Performance Criteria D – ‘Loss of function which is not recoverable’



**ESD**  
**IEC 61000-4-2**

# Electrostatic Discharge ESD – IEC 61000-4-2

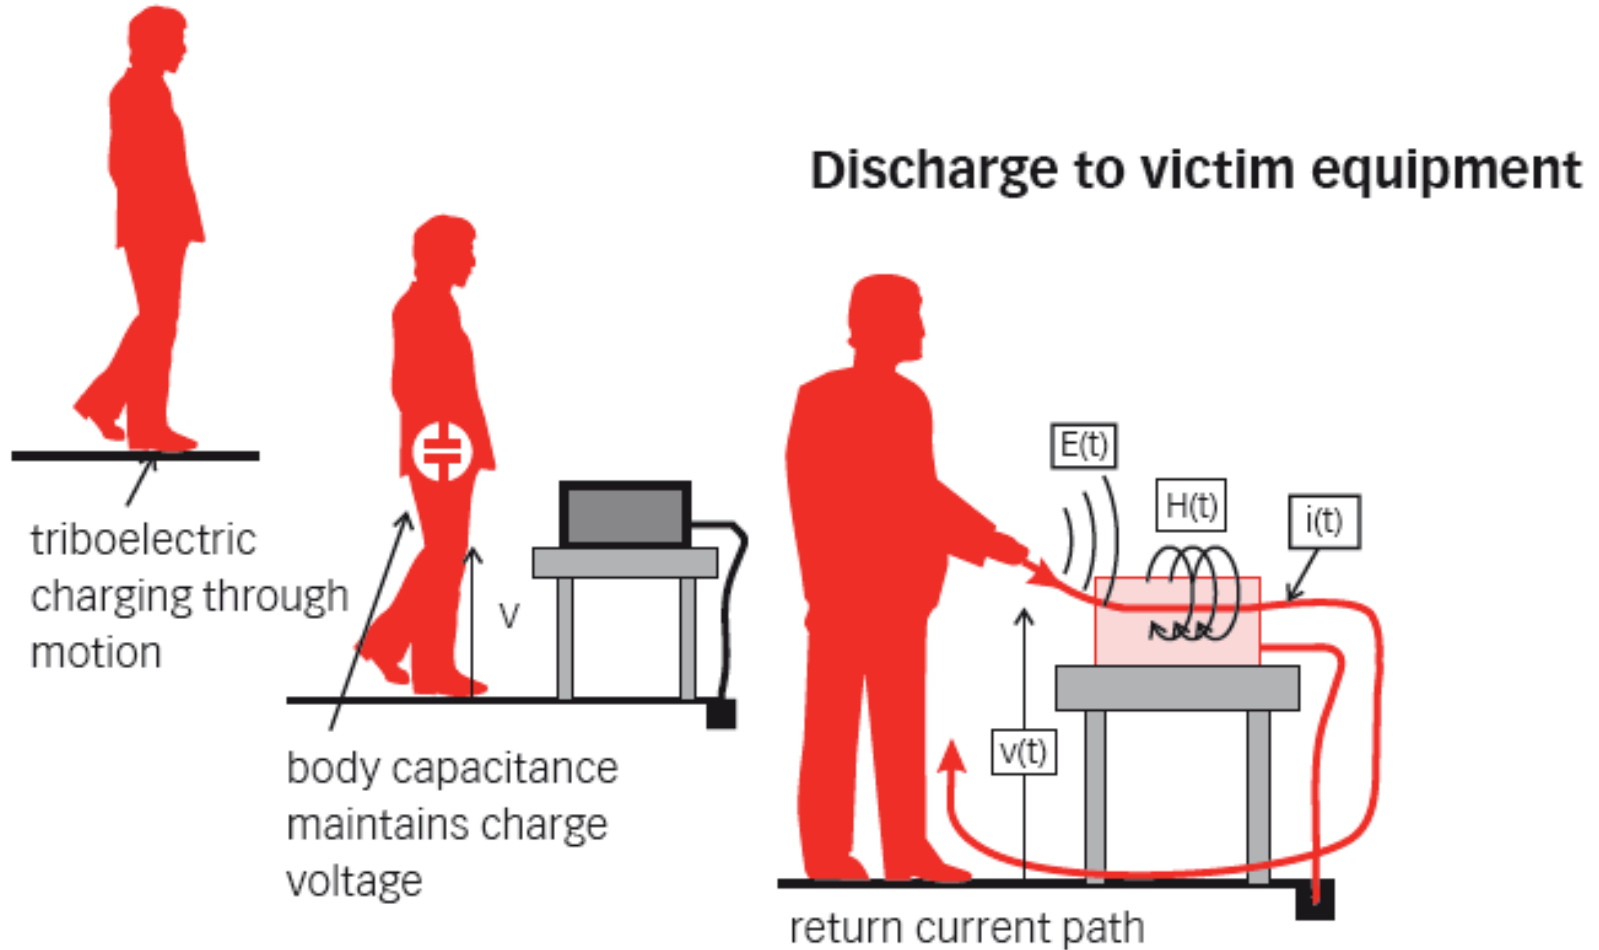



# Electrostatic discharge (IEC 61000-4-2)




- Test purpose
- Evaluate the performance of a device submitted to human electric discharge
- Needed instruments:
  - ✓ ESD generator
  - ✓ Ground plane (horizontal and vertical)
  - ✓ Isolant surface
  - ✓ 470 k $\Omega$  loads






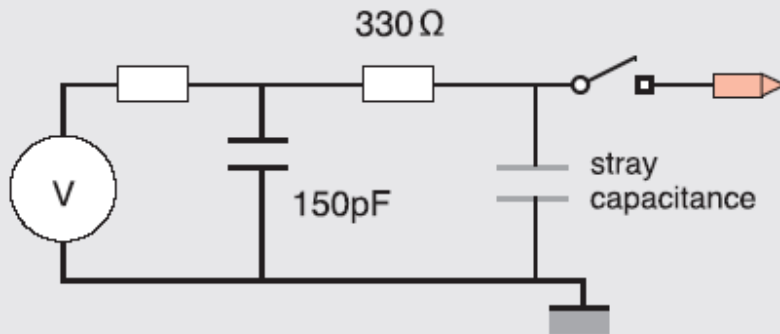
# ESD generator

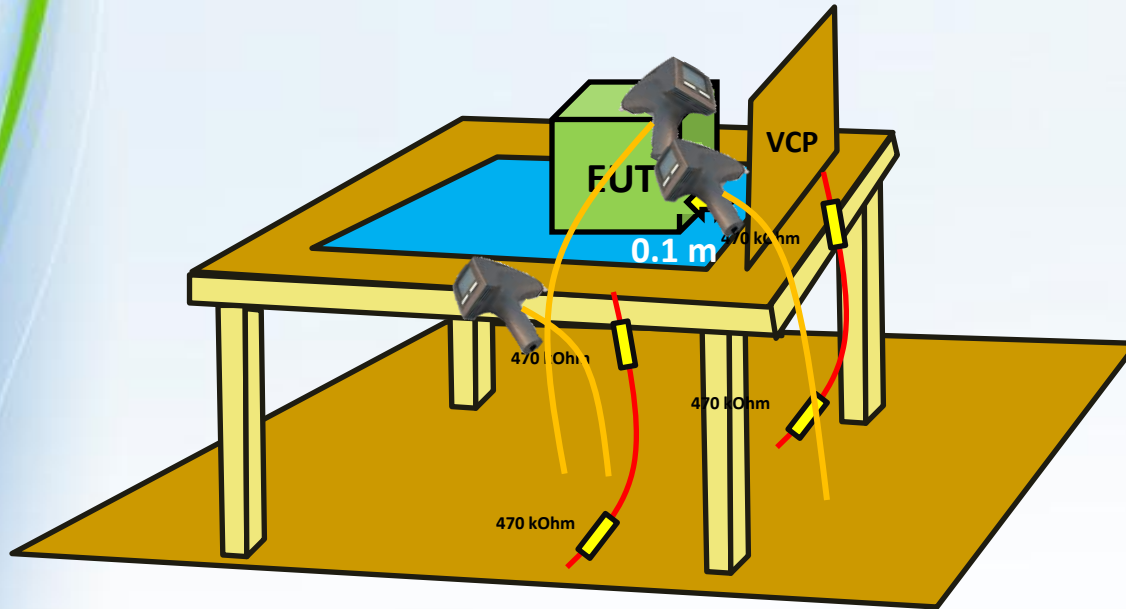


# ESD Test setup



-  Conducting surface
-  Dielectrical material
-  Isolating surface




Contact discharge

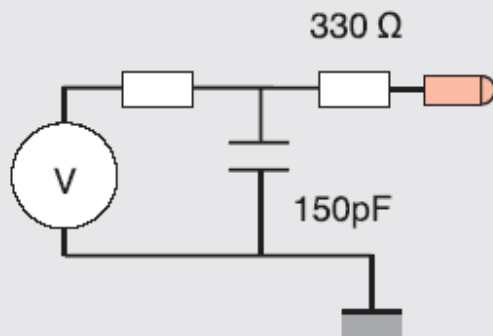

Air discharge

ESD generator equivalent circuit

Schaffner NSG 435

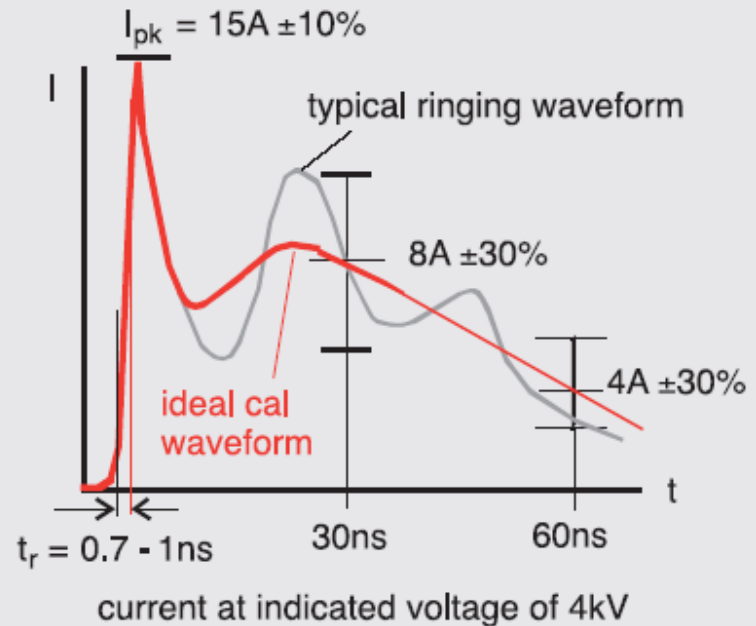

Calibration waveform

**Table 1 – Test levels**

1a – Contact discharge		1b – Air discharge	
Level	Test voltage kV	Level	Test voltage kV
1	2	1	2
2	4	2	4
3	6	3	8
4	8	4	15
x <sup>1)</sup>	Special	x <sup>1)</sup>	Special

1) "x" is an open level. The level has to be specified in the dedicated equipment specification. If higher voltages than those shown are specified, special test equipment may be needed.



# Performance Criteria for Immunity Tests



Results of immunity tests are classified into four categories:

Performance Criteria A – ‘Performance within specification limits’

Performance Criteria B – ‘Temporary degradation which is self-recoverable’

Performance Criteria C – ‘Temporary degradation which requires operator intervention’

- Performance Criteria D – ‘Loss of function which is not recoverable’



# Standards calls



Standard	Scope	ESD	EFT-burst	Surge
IEC/EN 61000-6-1: 2001	Residential, commercial & light industrial generic	4 kV contact, 8 kV air to IEC/EN 61000-4-2	1 kV AC power, 0.5 kV DC power > 10 m, signal and functional earth > 3 m to IEC/EN 61000-4-4	1 kV L-L, 2 kV L-E on AC power input; 0.5 kV L-L & L-E DC power > 10 m, to IEC/EN 61000-4-5
IEC/EN 61000-6-2: 2005	Industrial generic	4 kV contact, 8 kV air to IEC/EN 61000-4-2	2 kV AC power, DC power > 3 m, 1 kV signal and functional earth > 3 m to IEC/EN 61000-4-4	1 kV L-L, 2 kV L-E on AC power; 0.5 kV L-L & L-E DC power connected to a distribution network; 1 kV L-E signal > 30 m, to IEC/EN 61000-4-5
EN 55014-2: 1997 + A1: 2001	Household appliances etc.	4 kV contact, 8 kV air to IEC/EN 61000-4-2	1 kV AC power, 0.5 kV DC power, signal and control > 3 m to IEC/EN 61000-4-4	1 kV L-L, 2 kV L-E on AC mains, to IEC/EN 61000-4-5
EN 55020: 2002	Broadcast receivers etc.	4 kV contact, 8 kV air to IEC/EN 61000-4-2	1 kV AC power to IEC/EN 61000-4-4	Not required
EN 55024: 1998	Information technology equipment	4 kV contact, 8 kV air to IEC/EN 61000-4-2	1 kV AC power, 0.5 kV DC power, signal and telecom > 3 m to IEC/EN 61000-4-4	1 kV L-L, 2 kV L-E on AC mains, 0.5 kV L-E on DC power with outdoor cables, to IEC/EN 61000-4-5; 1.5 kV 10/700 $\mu$ s on signal/telecom ports with outdoor cables, to ITU-T K recs.






# Discharge Application



- Application of discharge:
  - ✓ Direct: on the surface of the device under test
  - ✓ Indirect: in the coupling planes
- Types of discharges:
  - ✓ In contact: the conductive surface (head pointed gun)
  - ✓ In air: on insulating surfaces (gun head rounded)
- Maximum 1 per second discharge

# Choice of discharge points

-  Air discharge
-  Contact discharge

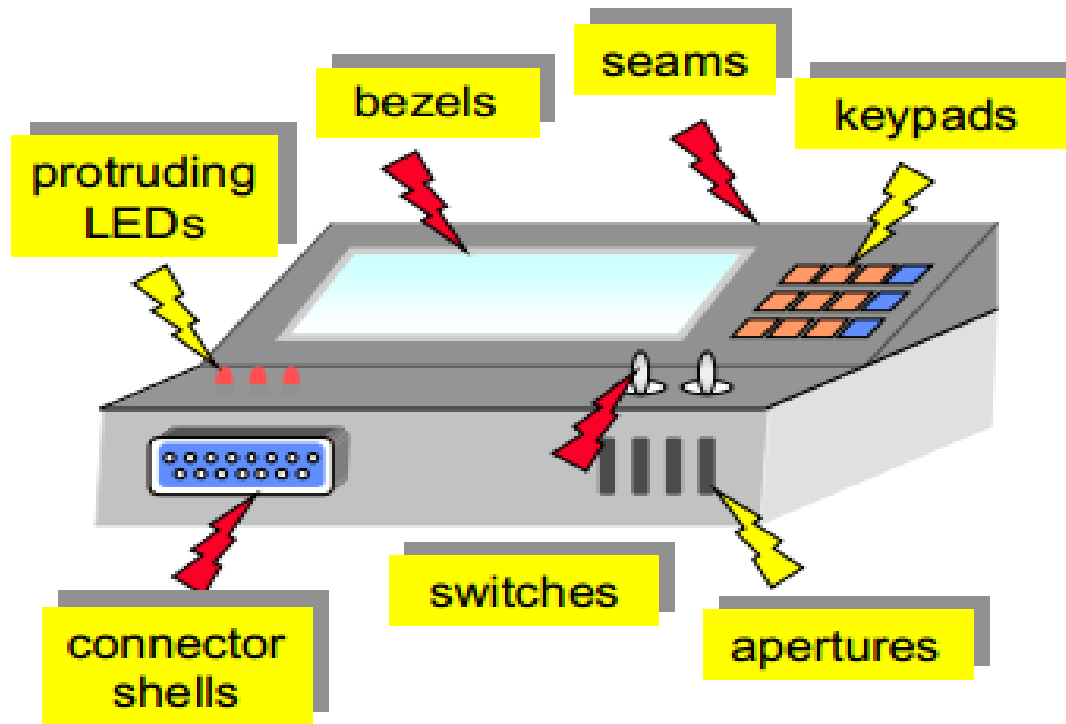



- The discharge return cable of the ESD generator shall be connected to the ground reference plane. The total length of this cable is in general 2 m.



# Fundamental Principals



- In the case of air discharge testing, the climatic conditions shall be within the following ranges:
  - ✓ ambient temperature: 15 °C to 35 °C;
  - ✓ relative humidity: 30 % to 60 %;
  - ✓ atmospheric pressure: 86 kPa (860 mbar) to 106 kPa (1 060 mbar).



# Execution of the test



The testing shall be performed by direct and indirect application

of discharges to the EUT according to a test plan. This should

include:

- ✓ representative operating conditions of the EUT;
- ✓ whether the EUT should be tested as table-top or floor-standing;

# Contact/air discharge

- In the case of contact discharges, the tip of the discharge electrode shall touch the EUT, before the discharge switch is operated.
- In the case of air discharges, the round discharge tip of the discharge electrode shall be approached as fast as possible (without causing mechanical damage) to touch the EUT.
- [Link to the standard IEC 61000-4-2](#)



# ESD design



Design to avoid ESD problems includes:

- choose circuit configurations that are unresponsive to short transients
- lay out the PCB to minimise induced voltages at critical nodes
- prevent unavoidable discharge transients from coupling into circuits and cables
- design enclosures as far as possible to




**EFT**  
**IEC 61000-4-4**



# The EFT phenomenon



- When a circuit is switched off, the current flowing through the switch is interrupted more or less instantaneously.
- At the moment of switching there is an infinite  $di/dt$ .
- All circuits have some stray inductance associated with the wiring; some types of load, such as motors or solenoids, have considerably more inductance

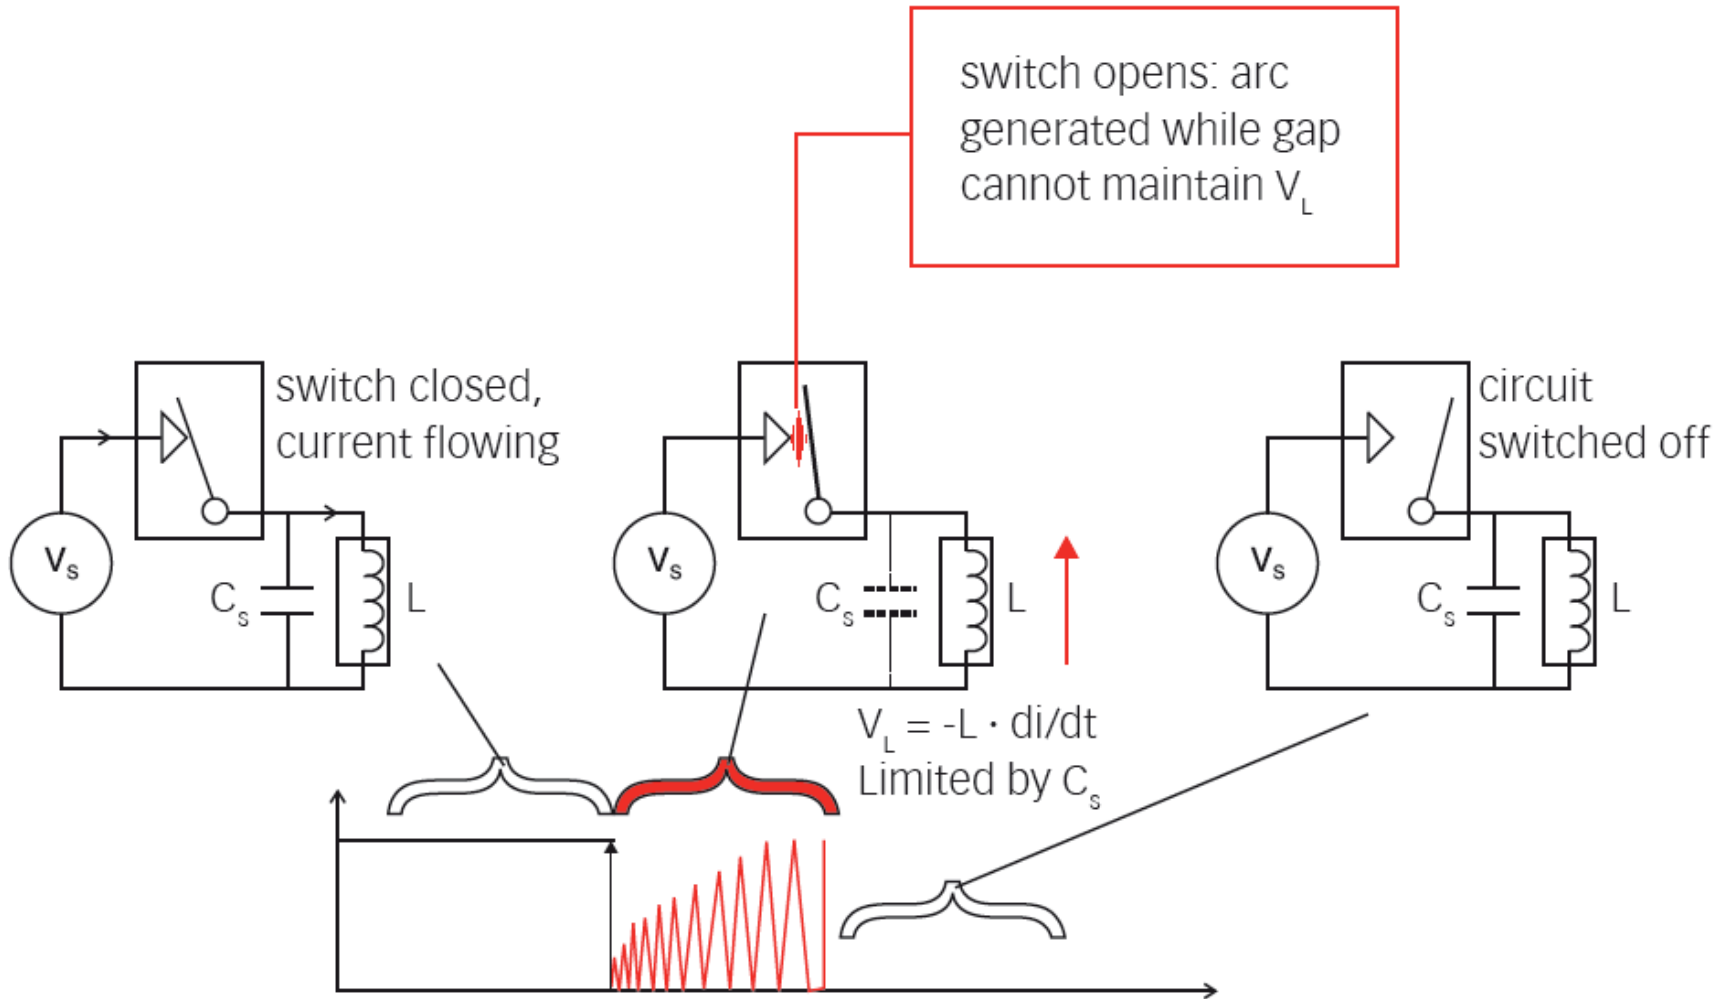





# Electrical fast transients

## IEC 61000-4-4



- Purpose of test:

Immunity test when subjected to transient disturbances like switching transients.

- Materials needed:


- ✓ EFT generator

- ✓ Coupling & decoupling device (internal or external)

- ✓ Capacitive coupling clamp for telecom line

# Electric Fast Transients

## EFT – Burst – EN 61000-4-4

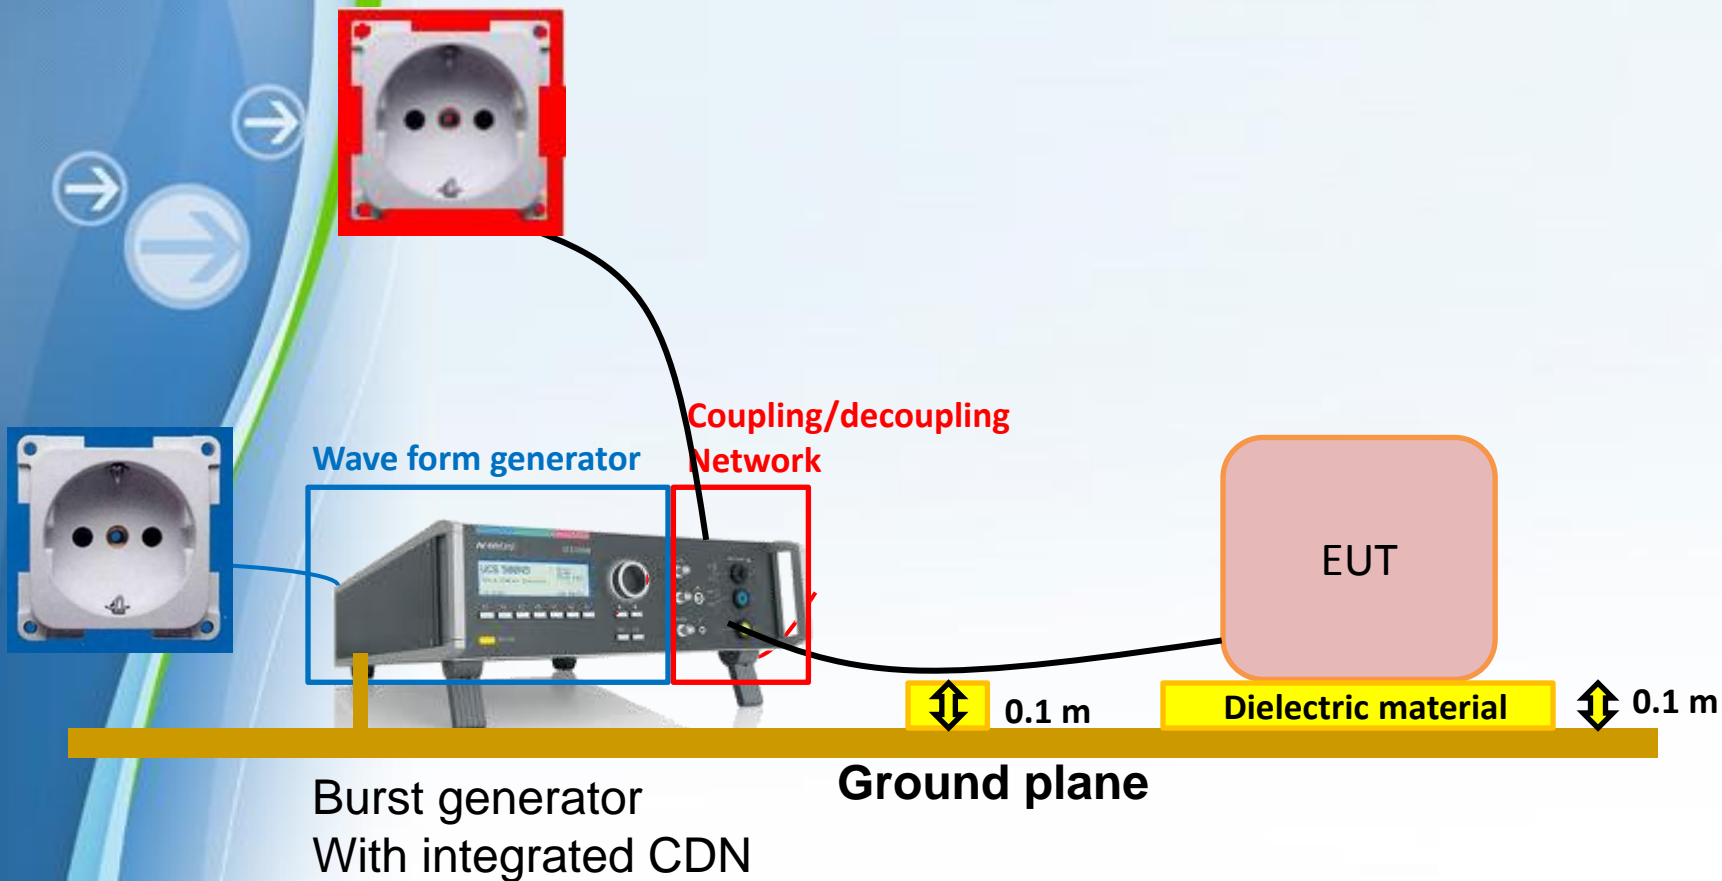

Open circuit output test voltage and repetition rate of the impulses				
Level	On power port, PE		On I/O (input/output) signal, data and control ports	
	Voltage peak kV	Repetition rate kHz	Voltage peak kV	Repetition rate kHz
1	0,5	5 or 100	0,25	5 or 100
2	1	5 or 100	0,5	5 or 100
3	2	5 or 100	1	5 or 100
4	4	5 or 100	2	5 or 100
X <sup>a</sup>	Special	Special	Special	Special

NOTE 1 Use of 5 kHz repetition rates is traditional; however, 100 kHz is closer to reality. Product committees should determine which frequencies are relevant for specific products or product types.

NOTE 2 With some products, there may be no clear distinction between power ports and I/O ports, in which case it is up to product committees to make this determination for test purposes.

<sup>a</sup> "X" is an open level. The level has to be specified in the dedicated equipment specification.



# Performance Criteria for Immunity Tests



Results of immunity tests are classified into four categories:

Performance Criteria A – ‘Performance within specification limits’

Performance Criteria B – ‘Temporary degradation which is self-recoverable’

Performance Criteria C – ‘Temporary degradation which requires operator intervention’


- Performance Criteria D – ‘Loss of function which is not recoverable’



# Standards calls



Standard	Scope	ESD	EFT-burst	Surge
IEC/EN 61000-6-1: 2001	Residential, commercial & light industrial generic	4 kV contact, 8 kV air to IEC/EN 61000-4-2	1 kV AC power, 0.5 kV DC power > 10 m, signal and functional earth > 3 m to IEC/EN 61000-4-4	1 kV L-L, 2 kV L-E on AC power input; 0.5 kV L-L & L-E DC power > 10 m, to IEC/EN 61000-4-5
IEC/EN 61000-6-2: 2005	Industrial generic	4 kV contact, 8 kV air to IEC/EN 61000-4-2	2 kV AC power, DC power > 3 m, 1 kV signal and functional earth > 3 m to IEC/EN 61000-4-4	1 kV L-L, 2 kV L-E on AC power; 0.5 kV L-L & L-E DC power connected to a distribution network; 1 kV L-E signal > 30 m, to IEC/EN 61000-4-5
EN 55014-2: 1997 + A1: 2001	Household appliances etc.	4 kV contact, 8 kV air to IEC/EN 61000-4-2	1 kV AC power, 0.5 kV DC power, signal and control > 3 m to IEC/EN 61000-4-4	1 kV L-L, 2 kV L-E on AC mains, to IEC/EN 61000-4-5
EN 55020: 2002	Broadcast receivers etc.	4 kV contact, 8 kV air to IEC/EN 61000-4-2	1 kV AC power to IEC/EN 61000-4-4	Not required
EN 55024: 1998	Information technology equipment	4 kV contact, 8 kV air to IEC/EN 61000-4-2	1 kV AC power, 0.5 kV DC power, signal and telecom > 3 m to IEC/EN 61000-4-4	1 kV L-L, 2 kV L-E on AC mains, 0.5 kV L-E on DC power with outdoor cables, to IEC/EN 61000-4-5; 1.5 kV 10/700 $\mu$ s on signal/telecom ports with outdoor cables, to ITU-T K recs.

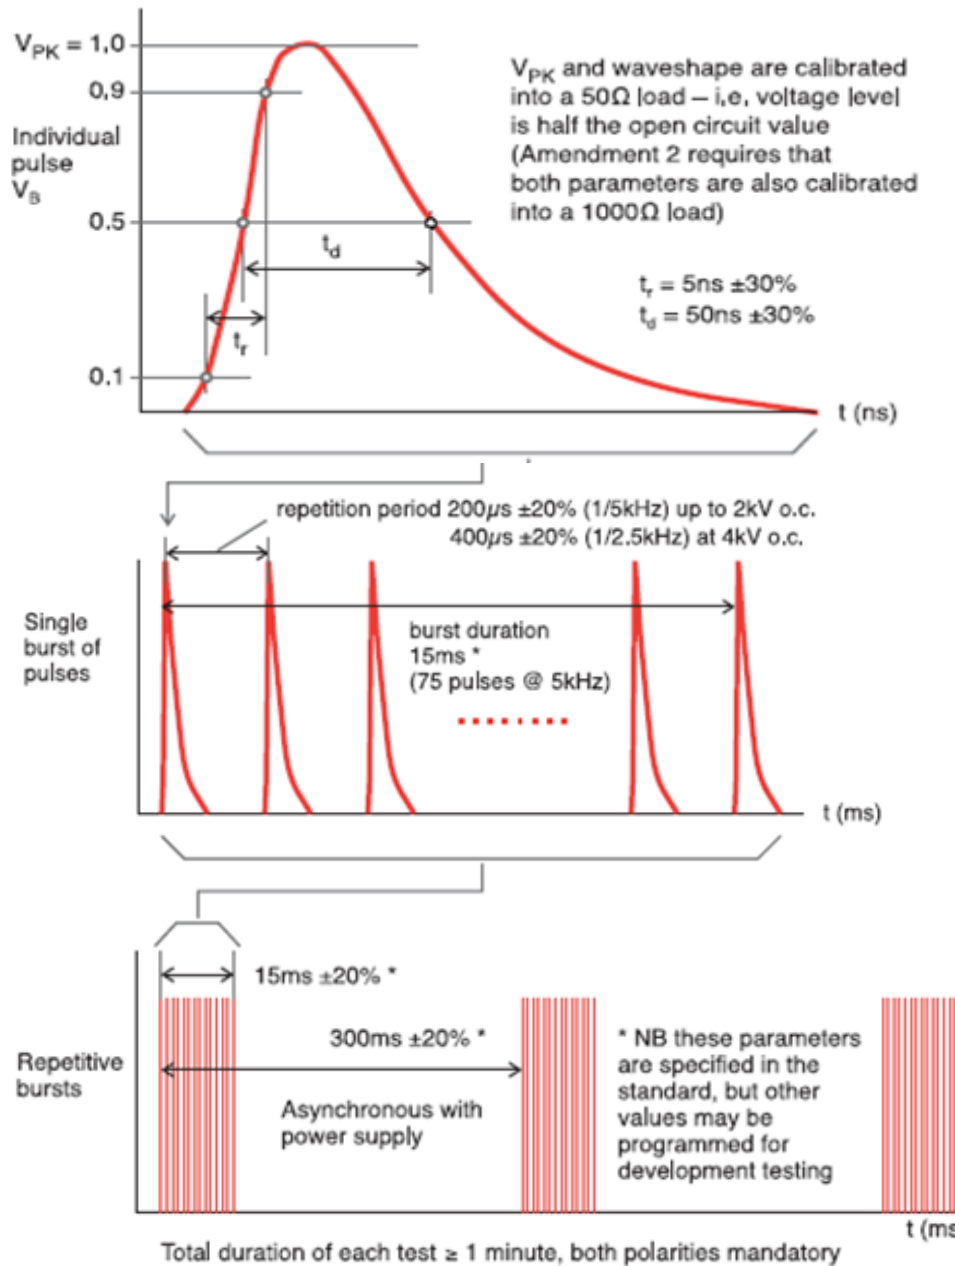

# EFT wave form



# EFT Application



- On each conductor
- • For at least 1 min
- polarity + And –
- Test levels and intermediate levels



# Test setup



- Table-top equipment : EUT located 0,1 m above the ground plane.
- The test generator and CDN placed directly on, and connected to, the ground plane.
- All cables connected to the EUT shall be placed on the insulation support 0,1 m above the ground reference plane.






# Test setup



- Either a direct coupling network or a capacitive clamp shall be used for the application of the test voltages.
- Decoupling networks shall be used to protect auxiliary equipment and public networks.

# Test procedure

- The test procedure includes:
  - ➔
  - the verification of the laboratory reference conditions;
  - the preliminary verification of the correct operation of the equipment;
  - the execution of the test;
  - the evaluation of the test results.

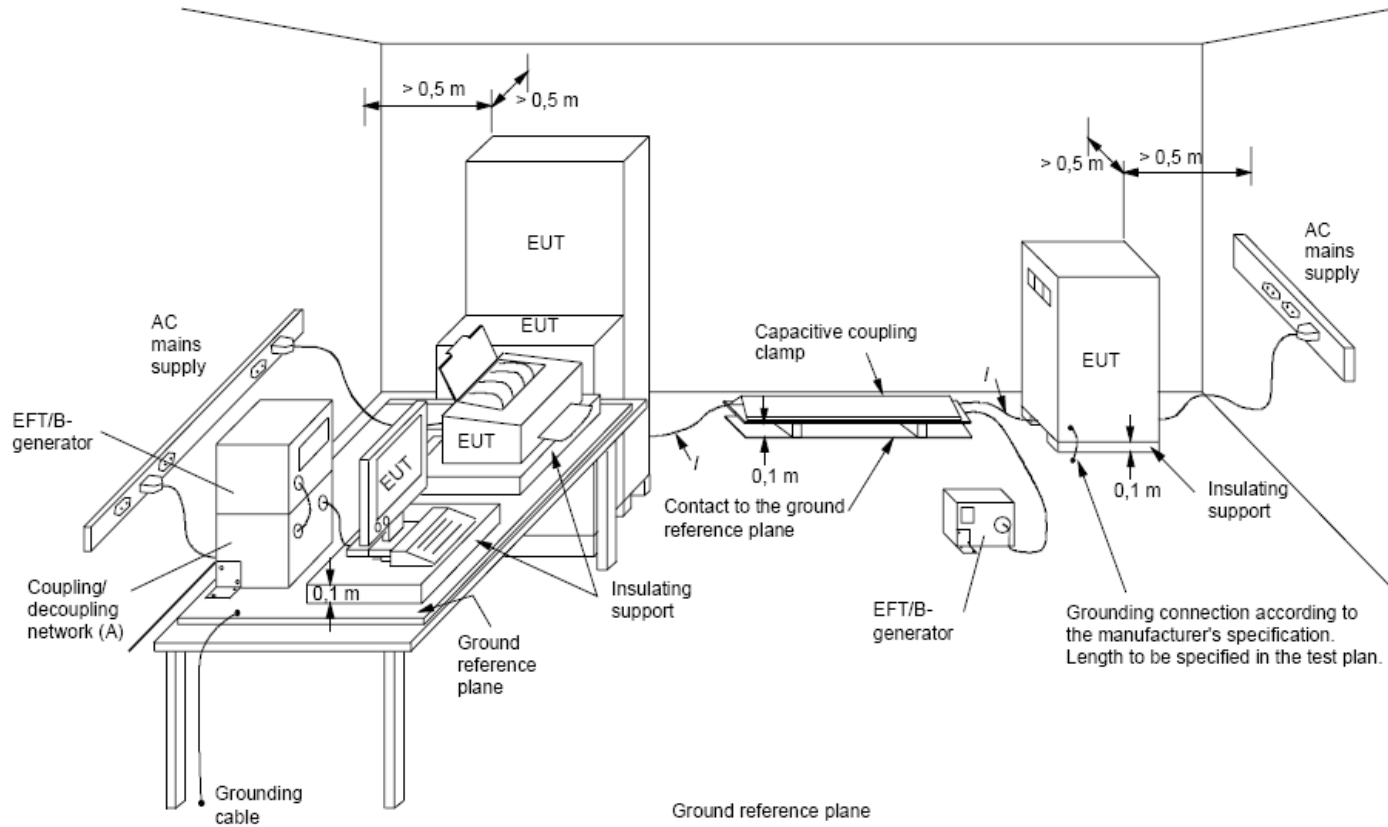


## Key

- l* length between clamp and the EUT to be tested (should be  $0,5\text{ m} \pm 0,05\text{ m}$ )
- (A) location for supply line coupling
- (B) location for signal lines coupling

IEC 901/04

# Capacitive coupling clamp

The Schaffner CDN 8014 - An example of a coupling clamp

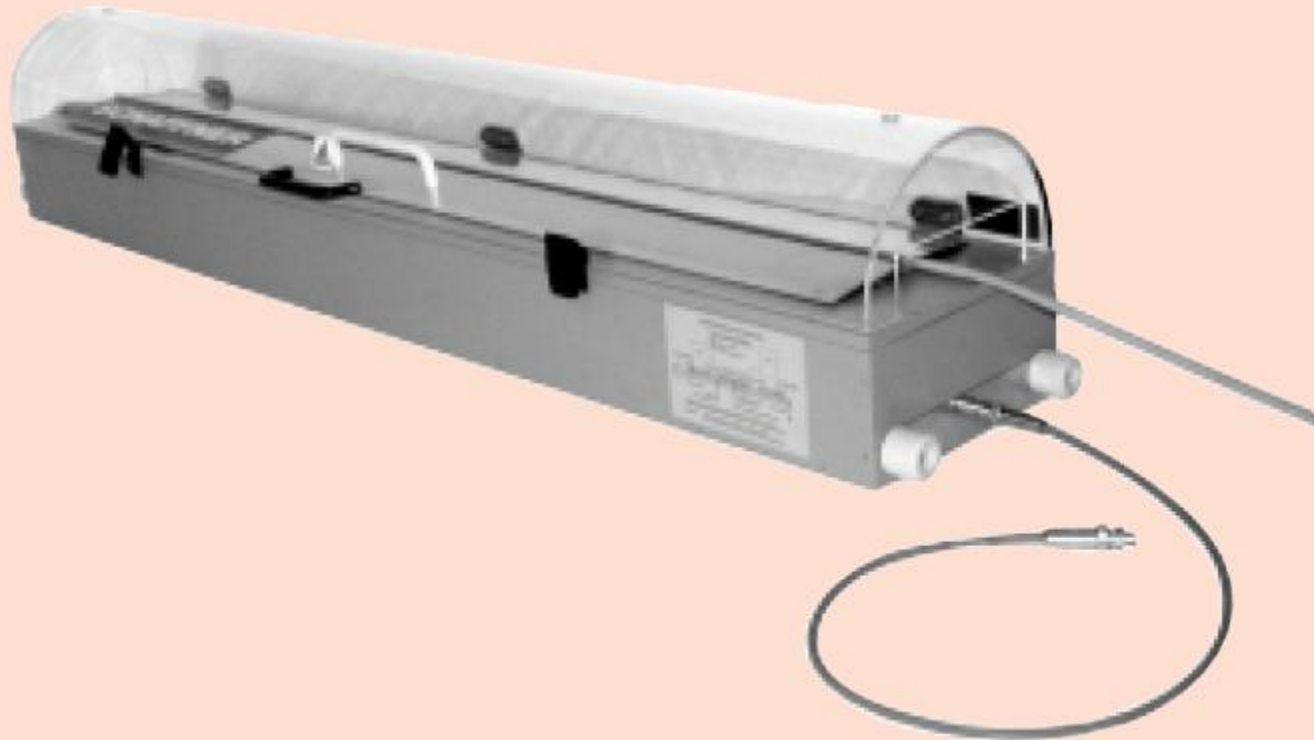


[Link to the standard IEC 61000-4-4](#)



# Surge

## IEC 61000-4-5

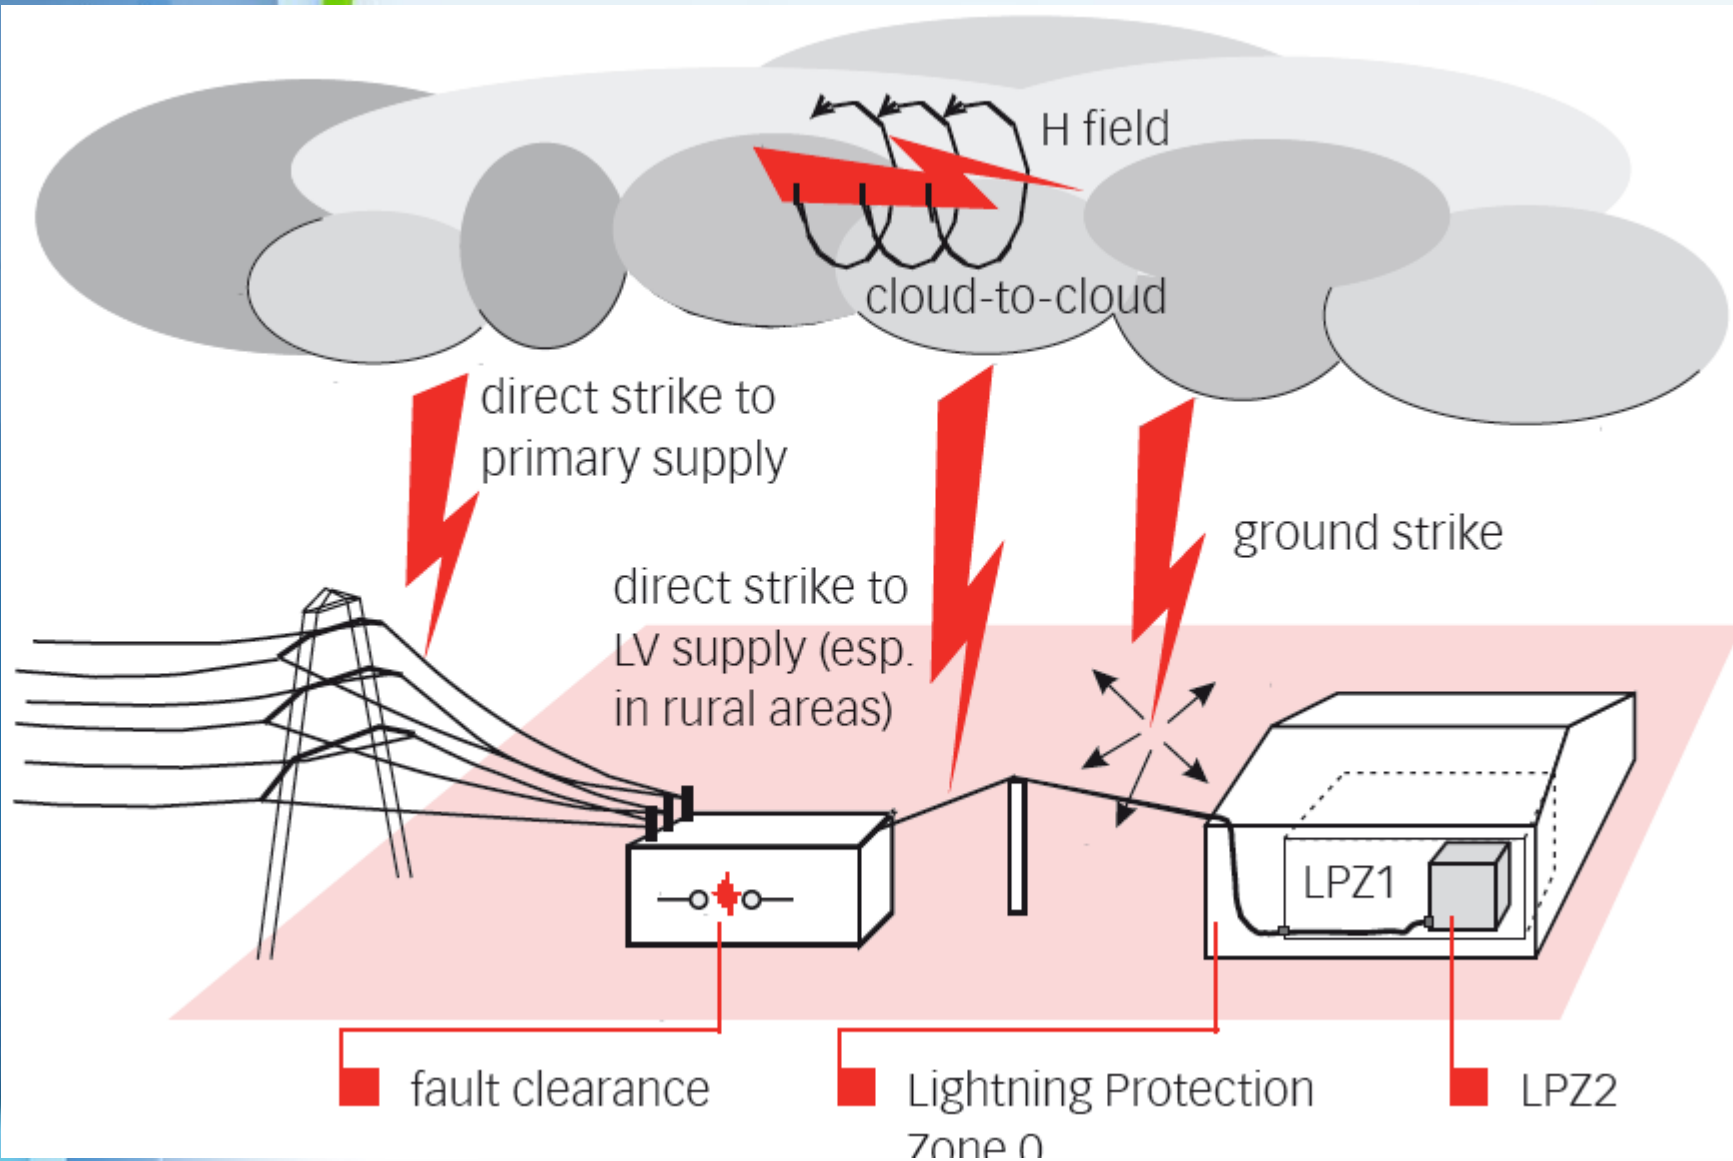




# Surge effects



- Surges impinging on electronic equipment may cause hardware damage and complete failure, or in lesser cases, operational upset.
- Below some level dependent on equipment design, no effect is observed.
- Above this level, a surge may cause the operation of the equipment to change state

# surge parameters vs equipments effects

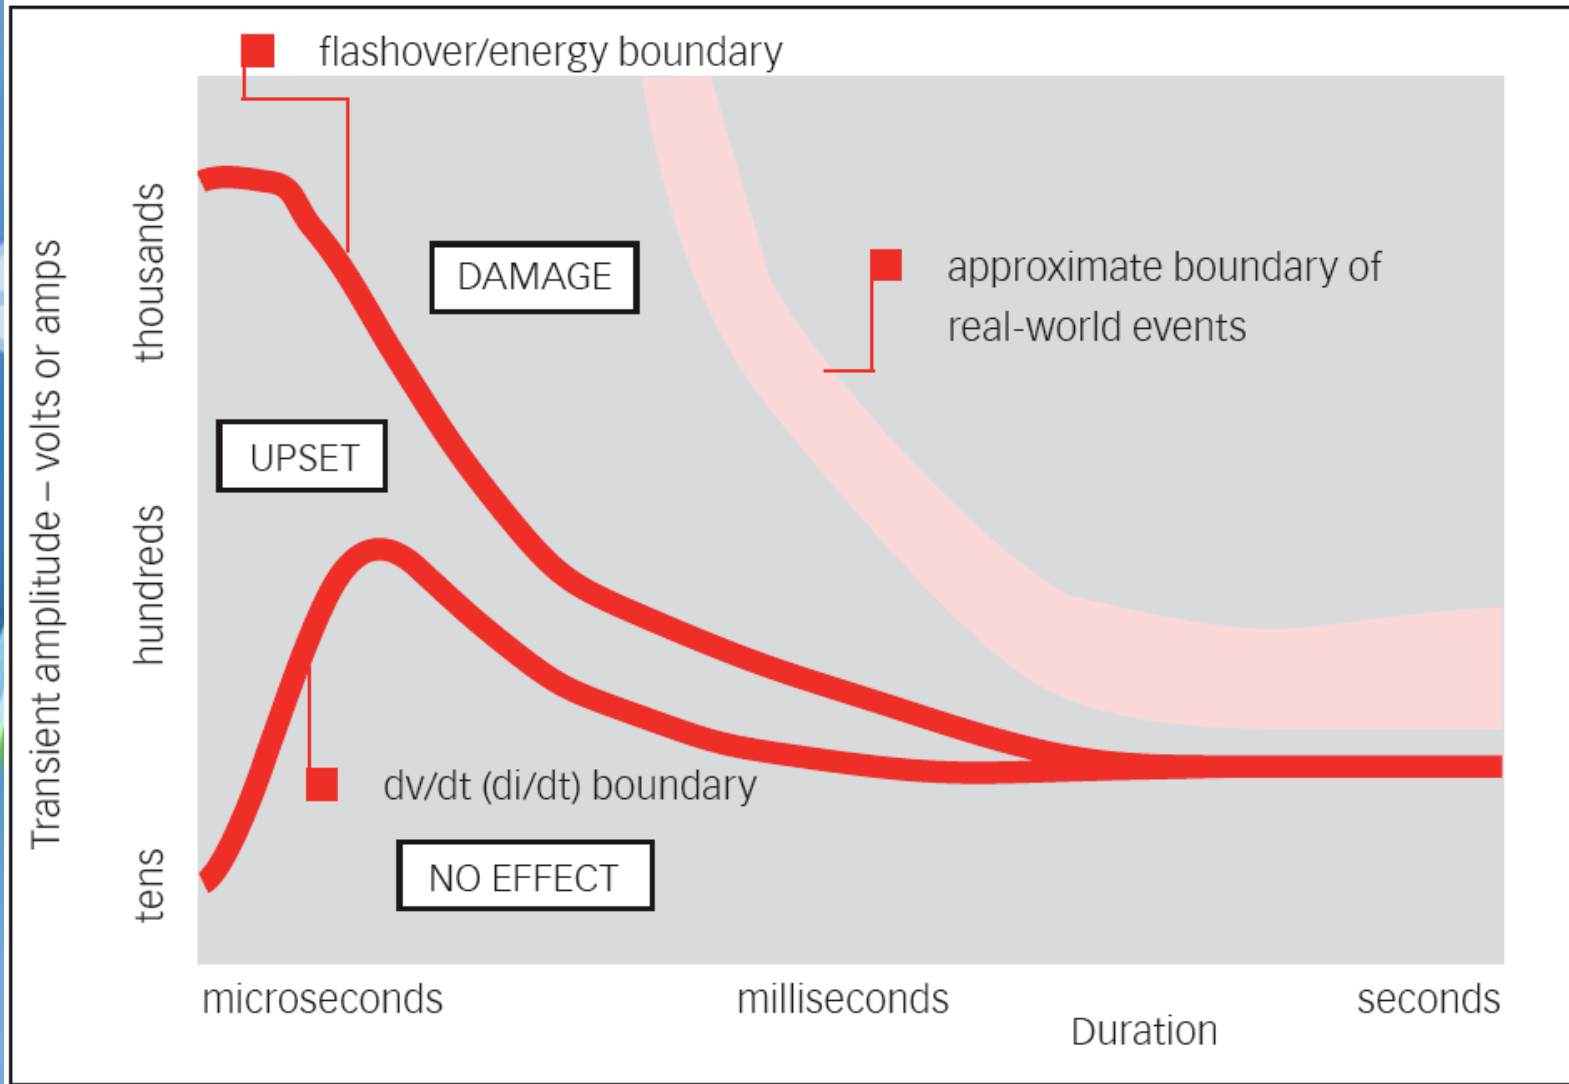






# Surge tests (IEC 61000-4-5)





- Purpose of test:
  - ✓ Evaluation the immunity of a device across shock waves caused by transient voltages induced by the residual or lightning impulse
- Materials needed:
  - ✓ Surge wave generator (1.2 / 50 microseconds),
  - ✓ Decoupling/coupling network (internal or external)
  - ✓ Ground plane

# Surge immunity – IEC 61000-4-5

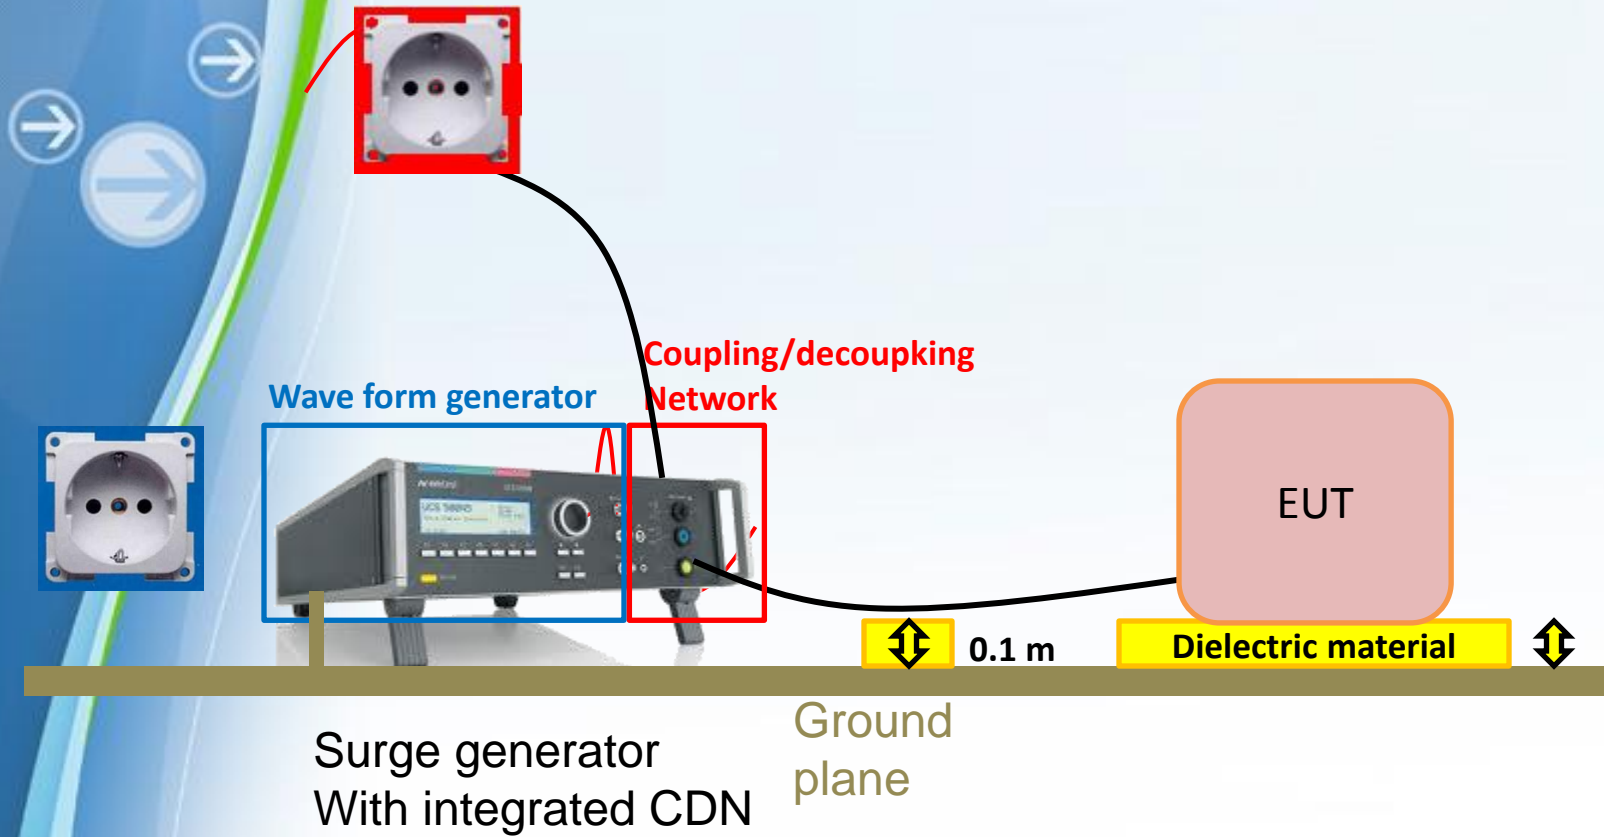



# Surge Waveform, 1.2/50 $\mu\text{s}$

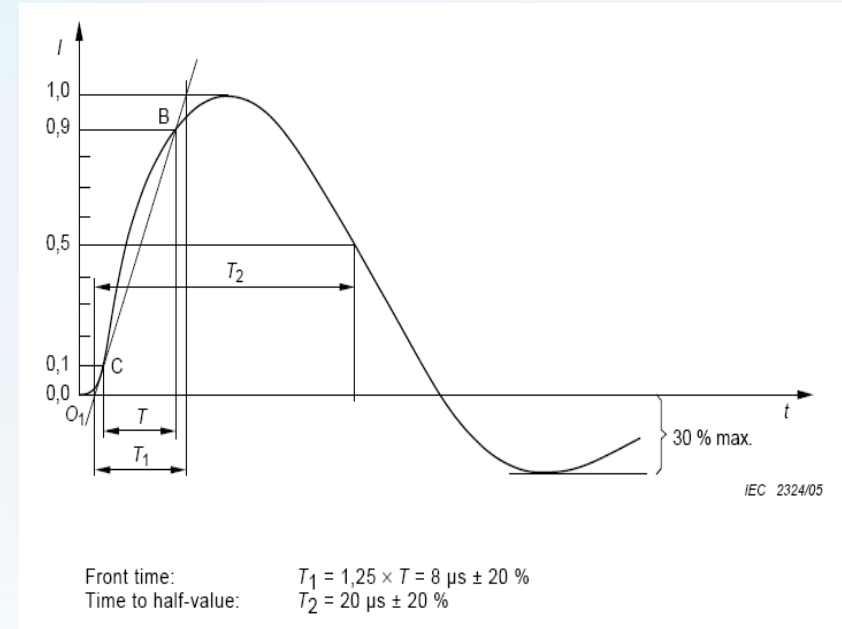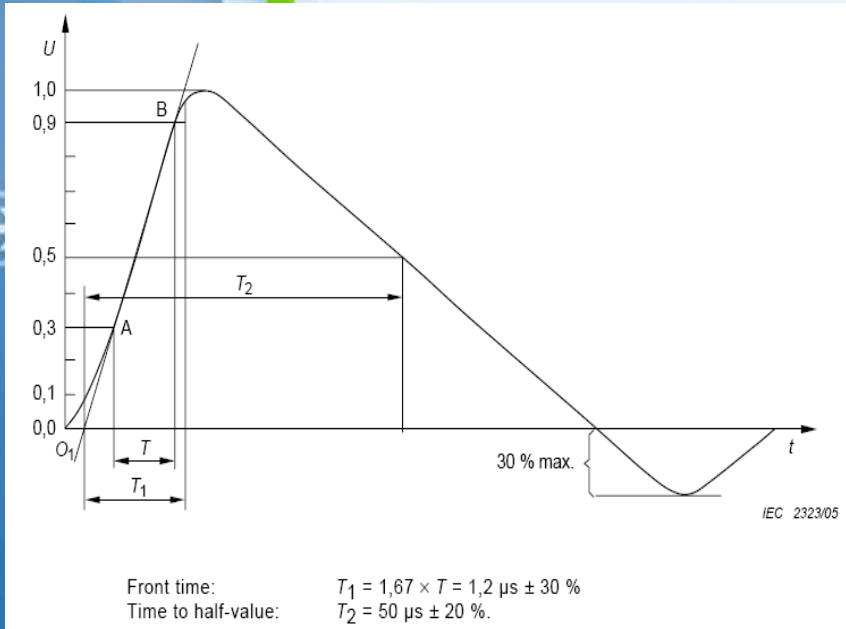

Waveform of **open-circuit voltage (1,2/50  $\mu\text{s}$ )** at the output of the generator with no CDN connected (waveform definition according to IEC 60060-1)

Waveform of **short-circuit current (8/20  $\mu\text{s}$ )** at the output of the generator with no CDN connected (waveform definition according to IEC 60060-1)


# Surge Waveform, 10/700 $\mu\text{s}$

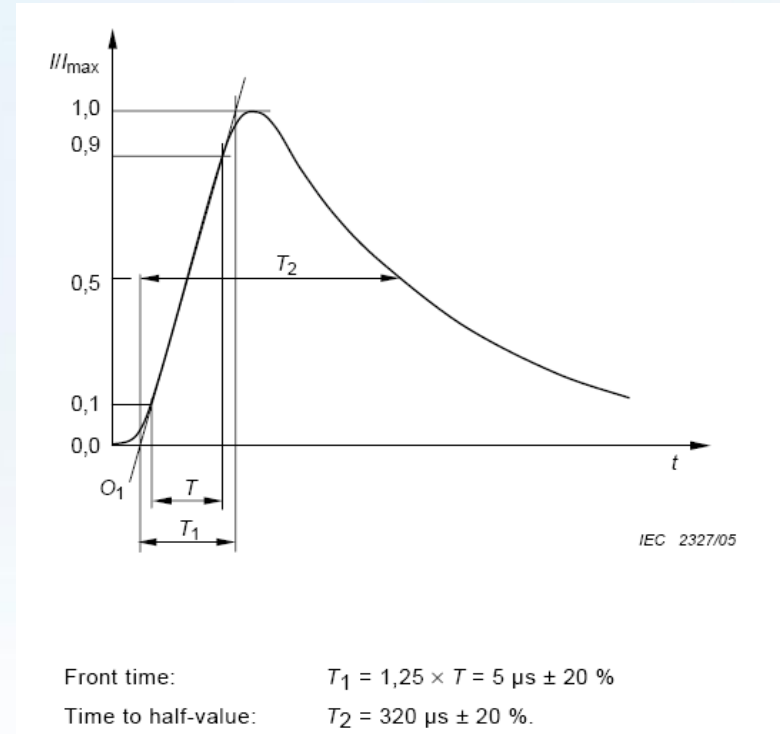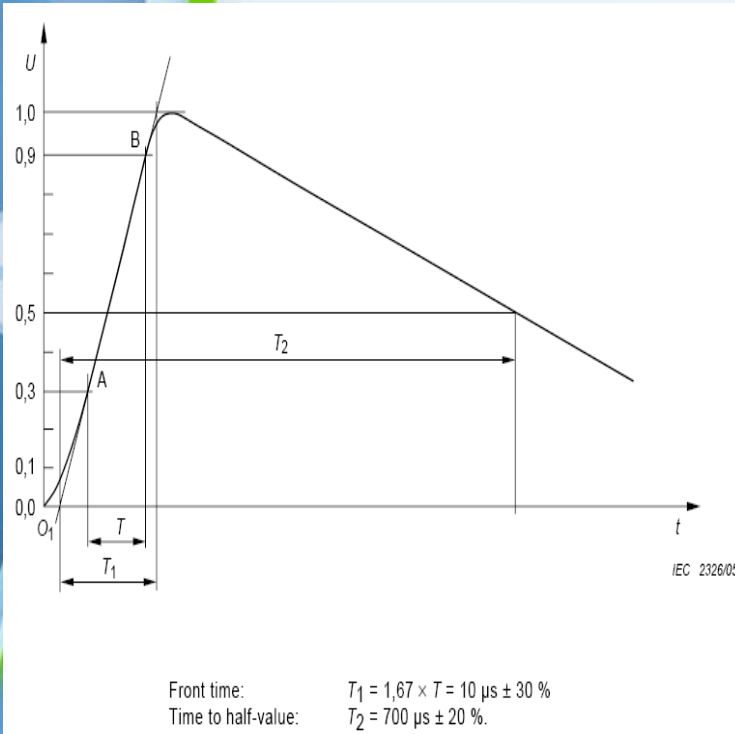


Waveform of **open-circuit voltage (10/700  $\mu\text{s}$ )**  
 (waveform definition according to **ITU-T K series**  
 and IEC 60060-1)

Waveform of the **5/320  $\mu\text{s}$  short-circuit current**  
 waveform (definition according to  
**ITU-T K series** and IEC 60060-1)

## Surge application

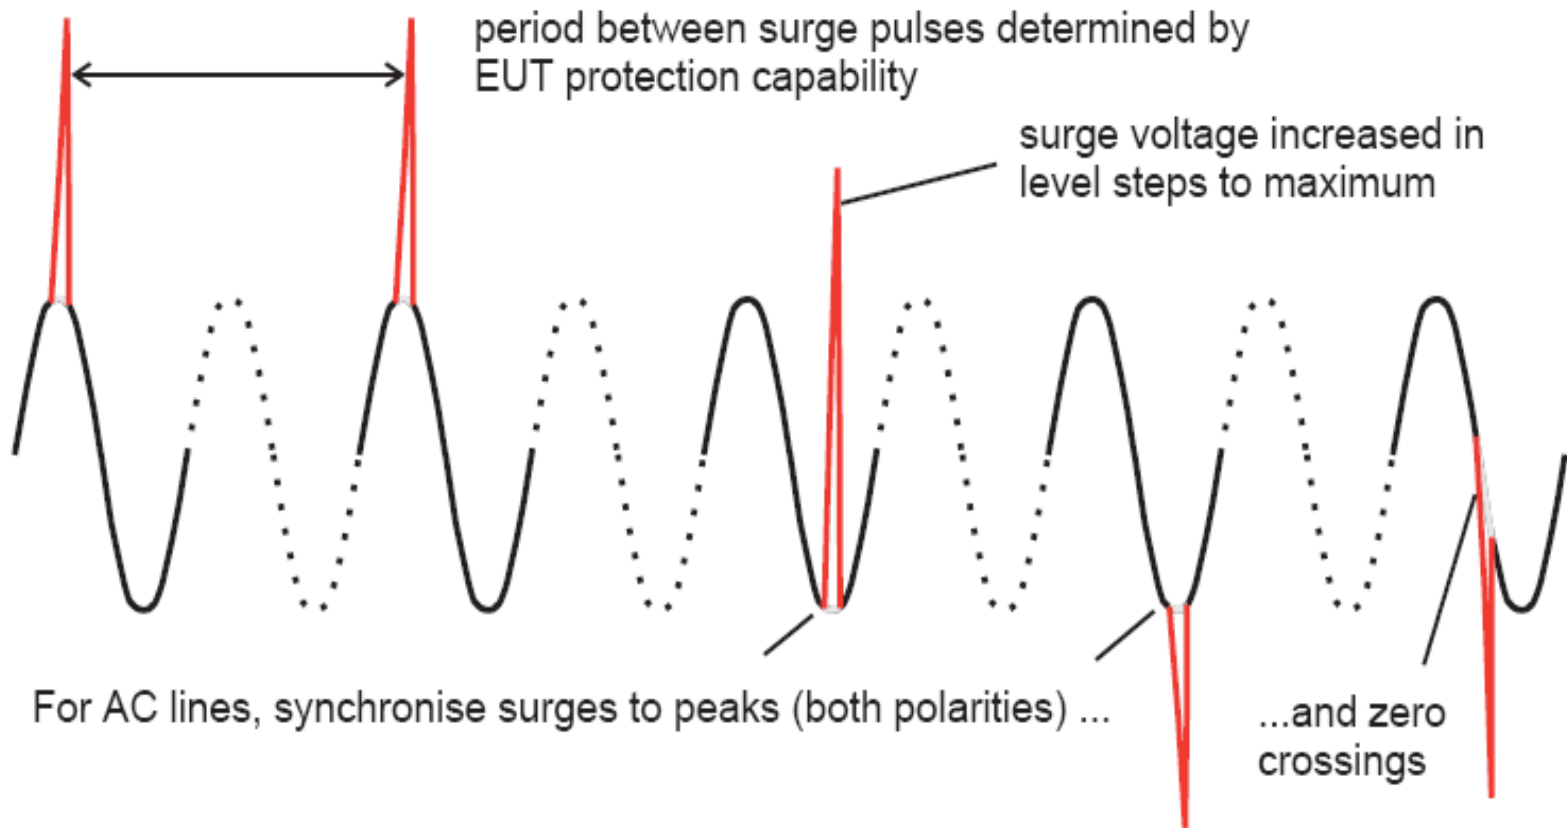

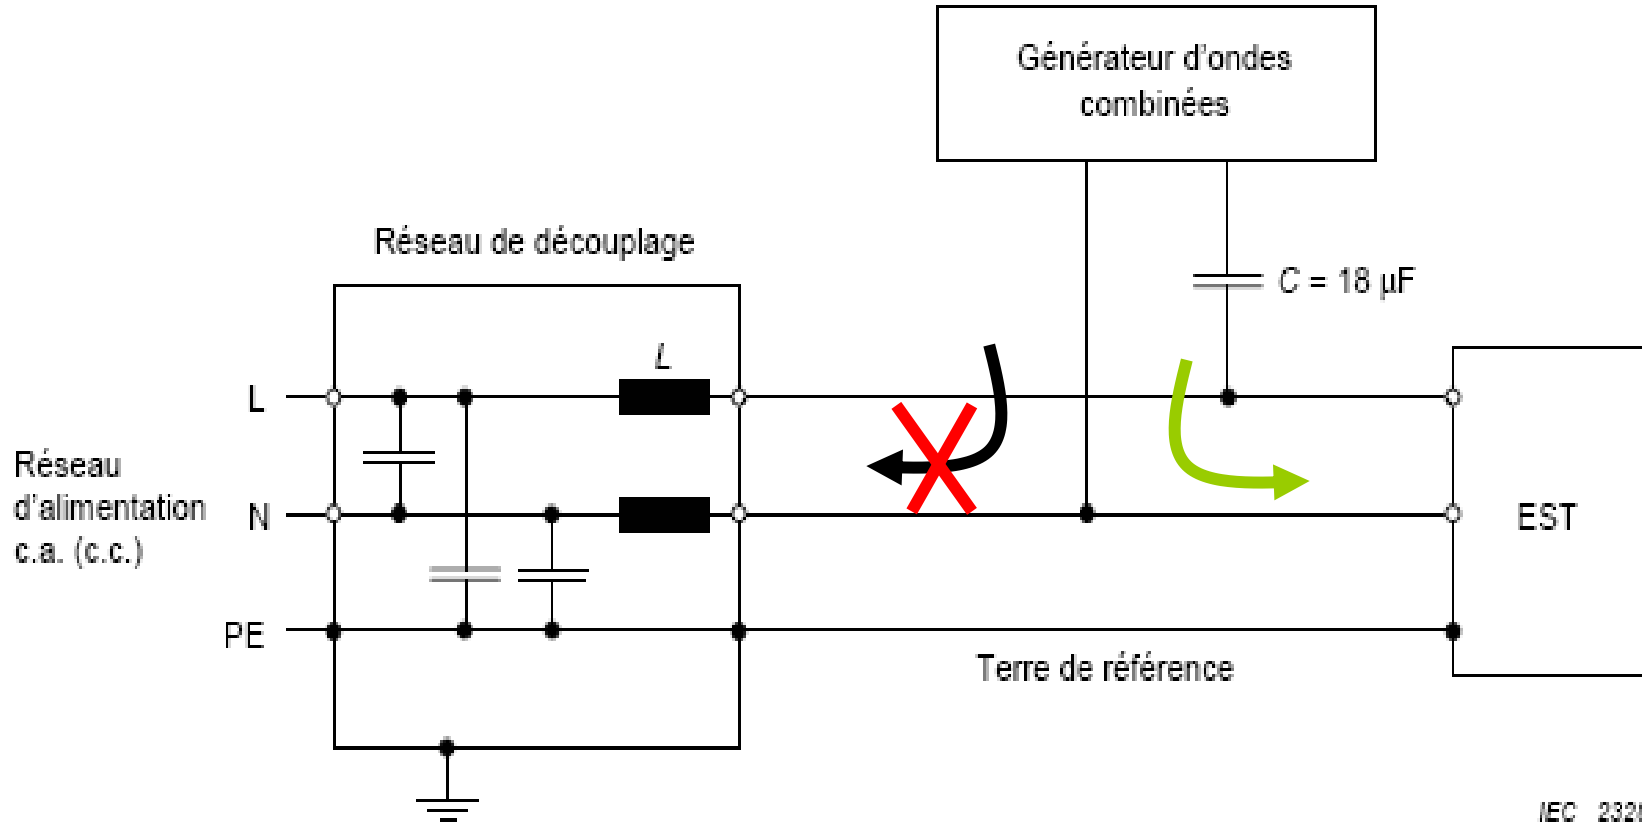



# Performance Criteria for Immunity Tests



Results of immunity tests are classified into four categories:

Performance Criteria A – ‘Performance within specification limits’

Performance Criteria B – ‘Temporary degradation which is self-recoverable’

Performance Criteria C – ‘Temporary degradation which requires operator intervention’

- Performance Criteria D – ‘Loss of function which is not recoverable’

# Test levels

Level	Open-circuit test voltage $\pm 10\%$ kV
1	0,5
2	1,0
3	2,0
4	4,0
X	Special

NOTE X can be any level, above, below or in between the other levels. This level can be specified in the product standard.





# Standards calls



Standard	Scope	ESD	EFT-burst	Surge
IEC/EN 61000-6-1: 2001	Residential, commercial & light industrial generic	4 kV contact, 8 kV air to IEC/EN 61000-4-2	1 kV AC power, 0.5 kV DC power > 10 m, signal and functional earth > 3 m to IEC/EN 61000-4-4	1 kV L-L, 2 kV L-E on AC power input; 0.5 kV L-L & L-E DC power > 10 m, to IEC/EN 61000-4-5
IEC/EN 61000-6-2: 2005	Industrial generic	4 kV contact, 8 kV air to IEC/EN 61000-4-2	2 kV AC power, DC power > 3 m, 1 kV signal and functional earth > 3 m to IEC/EN 61000-4-4	1 kV L-L, 2 kV L-E on AC power; 0.5 kV L-L & L-E DC power connected to a distribution network; 1 kV L-E signal > 30 m, to IEC/EN 61000-4-5
EN 55014-2: 1997 + A1: 2001	Household appliances etc.	4 kV contact, 8 kV air to IEC/EN 61000-4-2	1 kV AC power, 0.5 kV DC power, signal and control > 3 m to IEC/EN 61000-4-4	1 kV L-L, 2 kV L-E on AC mains, to IEC/EN 61000-4-5
EN 55020: 2002	Broadcast receivers etc.	4 kV contact, 8 kV air to IEC/EN 61000-4-2	1 kV AC power to IEC/EN 61000-4-4	Not required
EN 55024: 1998	Information technology equipment	4 kV contact, 8 kV air to IEC/EN 61000-4-2	1 kV AC power, 0.5 kV DC power, signal and telecom > 3 m to IEC/EN 61000-4-4	1 kV L-L, 2 kV L-E on AC mains, 0.5 kV L-E on DC power with outdoor cables, to IEC/EN 61000-4-5; 1.5 kV 10/700 $\mu$ s on signal/telecom ports with outdoor cables, to ITU-T K recs.



# Surge application



- Differential mode and common mode
- • In + and – polarity
- • Number of pulses: 5 (for each polarity)
- Phase angles 0 °, 90 ° and 270 °
- Test levels and intermediate levels




# Surge Procedure



- Apply at least five positive and five negative surges at each coupling point
- Wait for at least a minute between applying each surge, to allow time for any protection devices to recover
- For ac mains,
  - Apply the surges line to line (three combinations for 3-phase delta, six for 3-phase star, one for single phase) and line to

# Choice of coupling devices

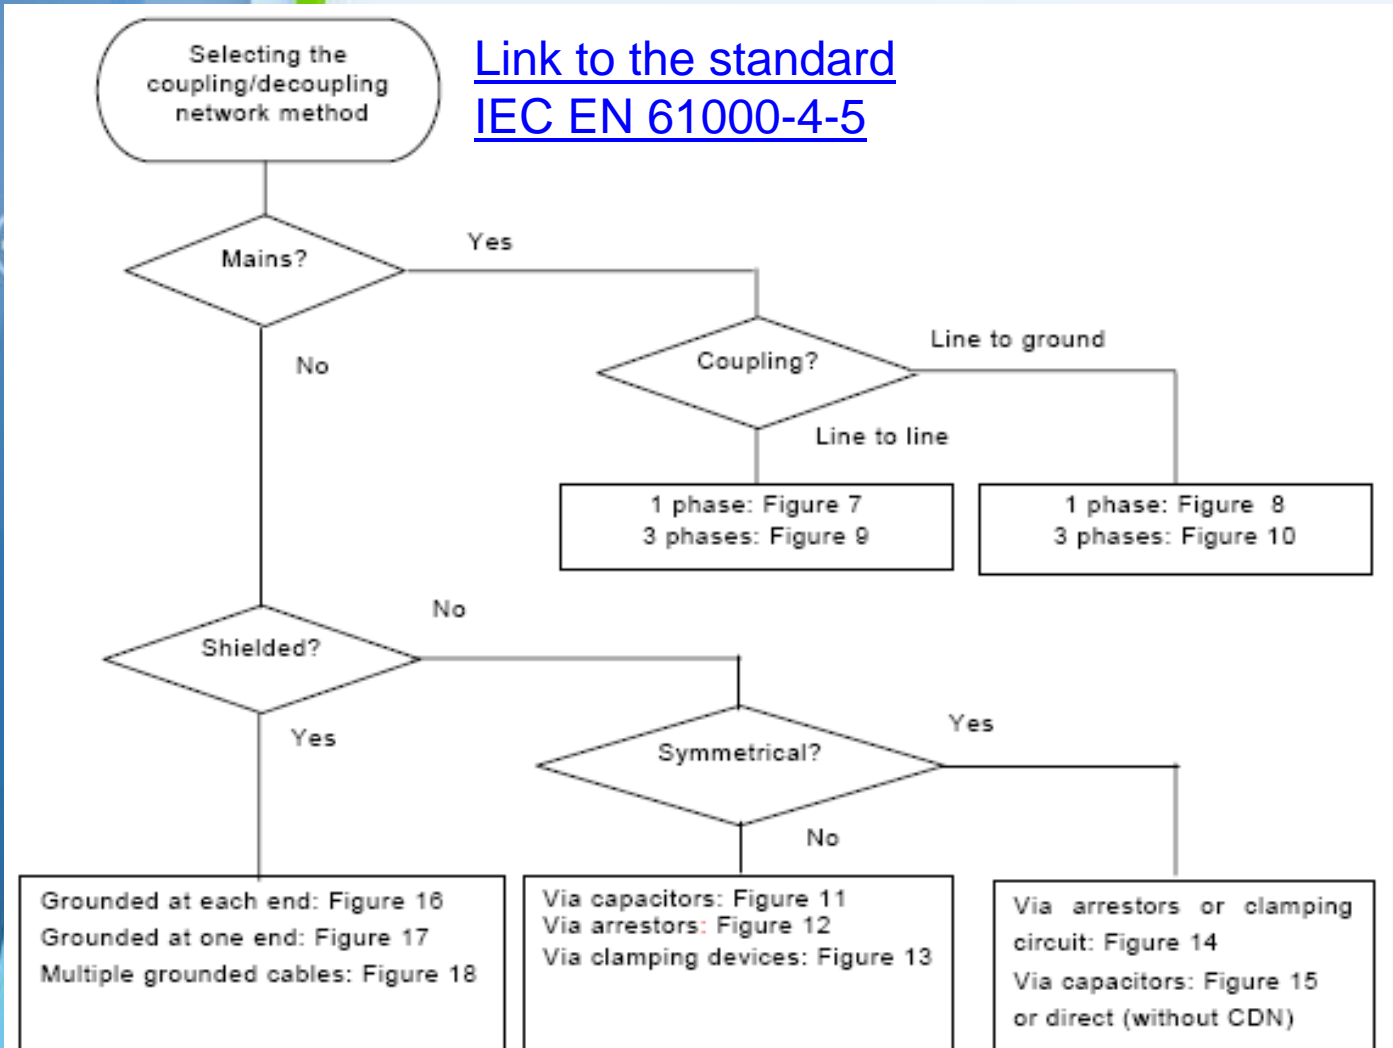



# Comparision between transient tests


# Comparison of transient standards

- The “energy measure” of a given waveform can be

desc

$$W = \frac{1}{R} \cdot \int_0^T \left( \frac{V(t)}{2} \right)^2 dt$$


$$W = R \cdot \int_0^T \left( \frac{I(t)}{2} \right)^2 dt$$

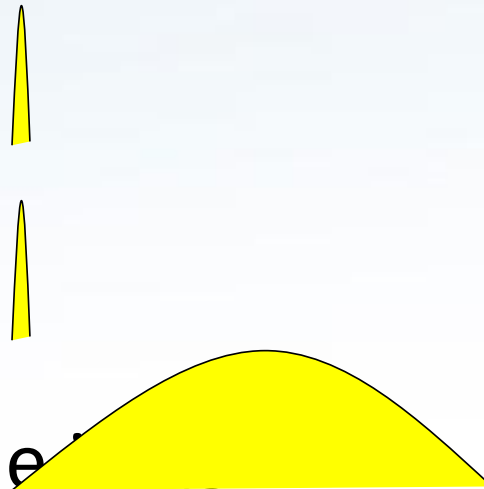

- ESD : waveform magnitude

➔ Surge test is more energetic than ESD and EFT

- EFT : waveform magnitude in ns

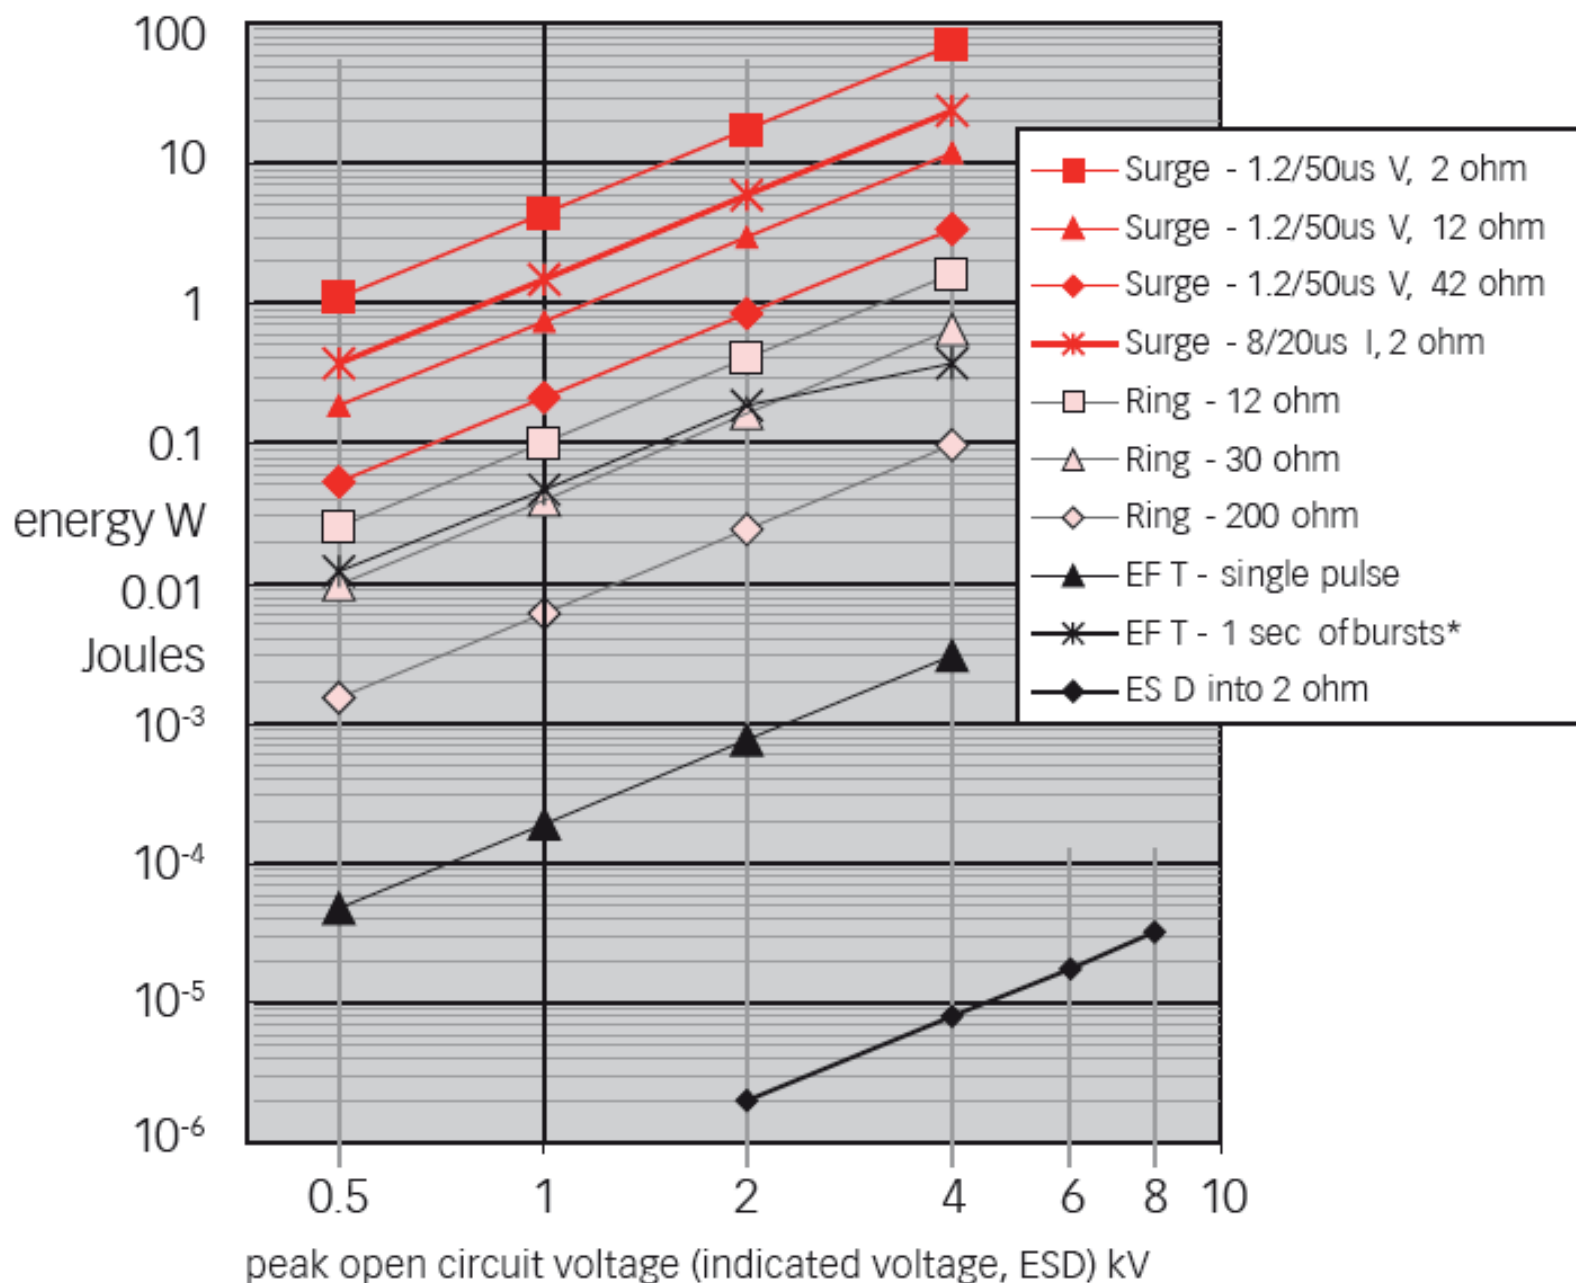



# Immunity tests


2 – LF and RF phenomena



# RF coupling phenomenon



RF emitters

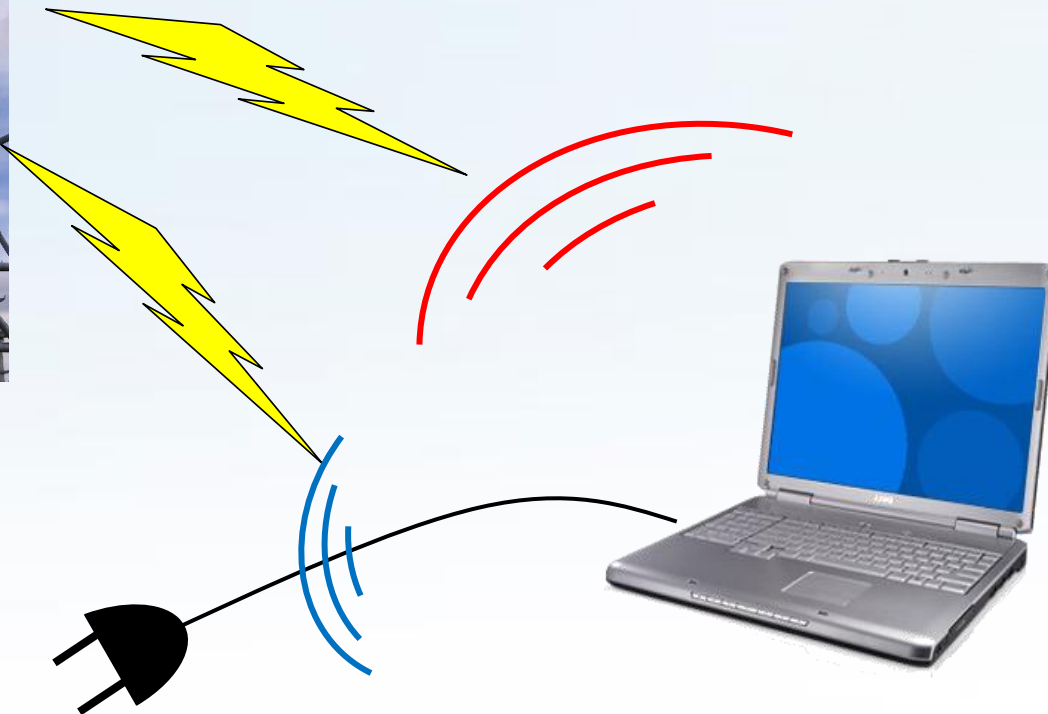



# Radiated immunity

## IEC 61000-4-3



# Radiated immunity (IEC 61000-4-3)



- Test purpose



Evaluate the performance of a device submitted to radiated RF field


- Needed instruments:

- ✓ RF generator
- ✓ Power amplifier
- ✓ Directional coupler
- ✓ Power meter
- ✓ Antenna(s)



## Overview

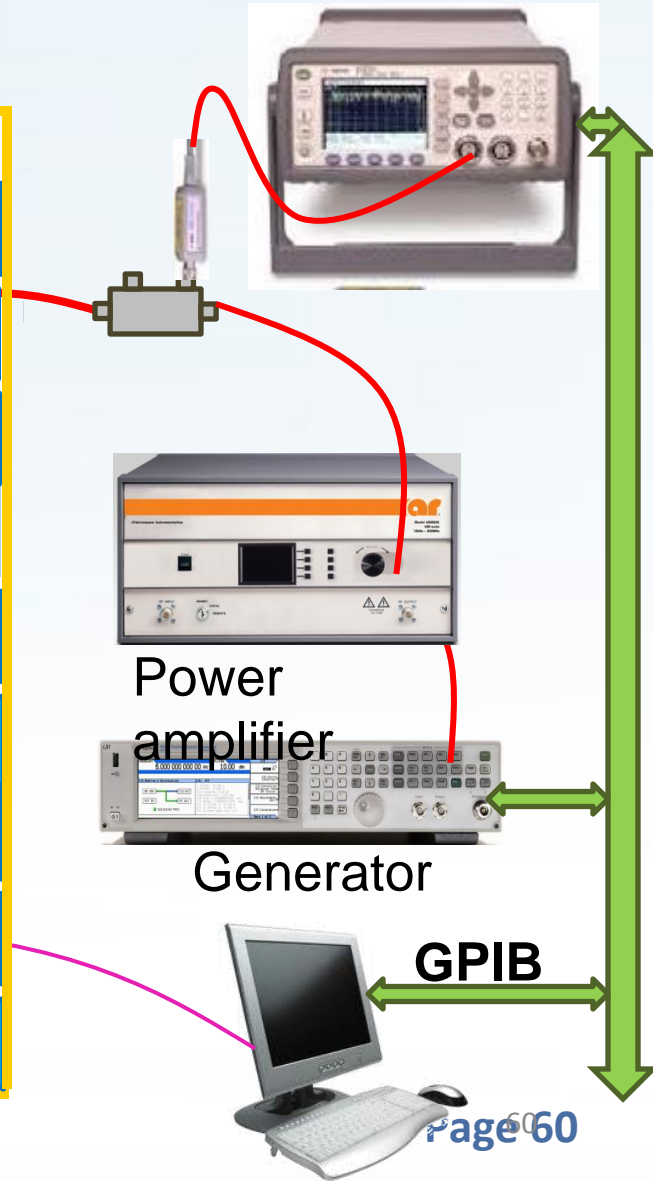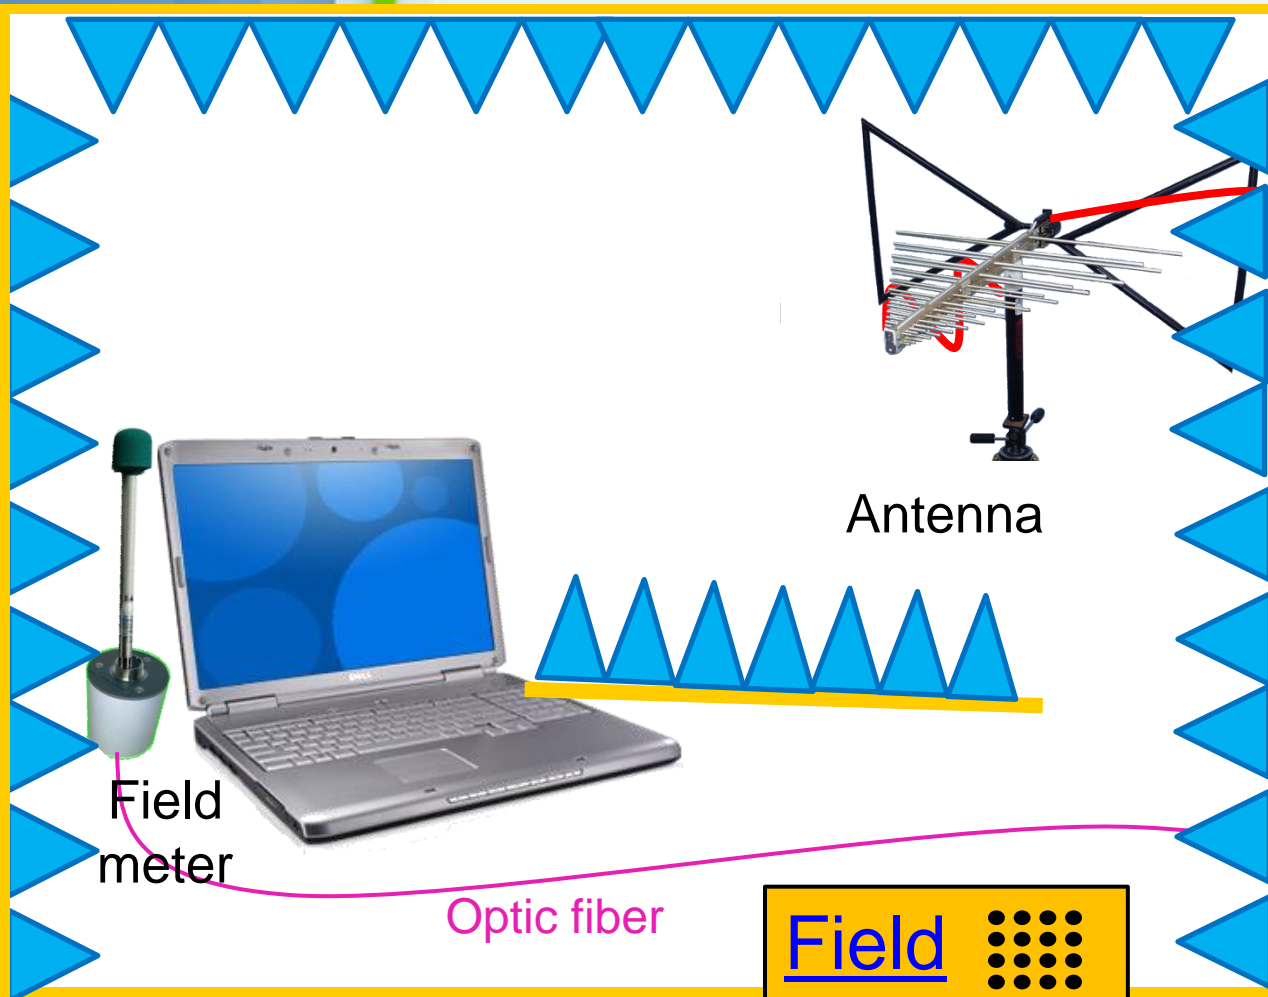

Field   
uniformity



# Performance Criteria for Immunity Tests



Results of immunity tests are classified into four categories:

Performance Criteria A – ‘Performance within specification limits’

Performance Criteria B – ‘Temporary degradation which is self-recoverable’

Performance Criteria C – ‘Temporary degradation which requires operator intervention’

- Performance Criteria D – ‘Loss of function which is not recoverable’



# Equipments



- *Anechoic chamber: of a size adequate to maintain a uniform field of sufficient dimensions with respect to the equipment under test (EUT). Additional absorbers may be used to damp reflections in chambers which are not fully lined.*
- *RF signal generator(s) capable of covering the frequency band of interest and of being*

# Equipments

- *Field generating antennas: biconical, log periodic, horn or any other linearly polarized antenna system capable of satisfying frequency requirements.*
- *An isotropic field sensor with adequate immunity of any head amplifier and optoelectronics to the field strength to be measured, and a fibre optic link to the indicator outside the chamber.*
- *Associated equipment to record the power*



# Frequency range



- The tests are normally performed without gaps in the frequency range 80 MHz to 1 000 MHz.
- Test levels related to the protection against RF emissions from digital radio telephones and other RF emitting devices
  - The tests are normally performed in the frequency ranges

800 MHz to 960 MHz and 1.4 GHz to 6.0 GHz






# Calibration of field



- The purpose of field calibration is to ensure that the uniformity of the field over the test sample is sufficient to ensure the validity of the test results.
- IEC 61000-4-3 uses the concept of a uniform field area, which is a hypothetical vertical plane of the field in which variations are acceptably small.
- A database for setting the required field

- A full field calibration process should be carried out annually and when changes have been made in the enclosure configuration.
- The UFA is subdivided into a grid with a grid spacing of 0,5 m (example an 1,5 m × 1,5 m UFA).
- At each frequency, a field is considered uniform if its magnitude measured at the grid points is within 0/+6 dB of the nominal value for not less than 75 % of all grid points

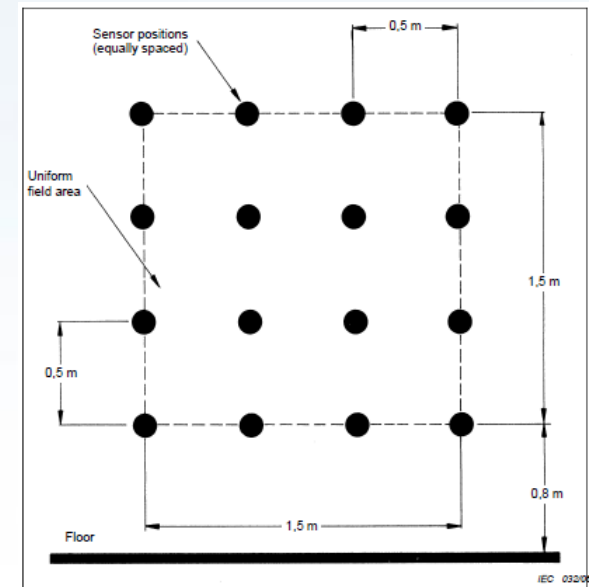




# Calibration of field



- Calibration is performed at 1.8 times the desired field strength.
- For testing at 10V/m the calibration is run at 18V/m
- The reason of running a test at 1.8x the level is to verify the RF amplifier has the ability to reach the required field when the 80% 1KHz Amplitude Modulation is applied.

# AM modulation

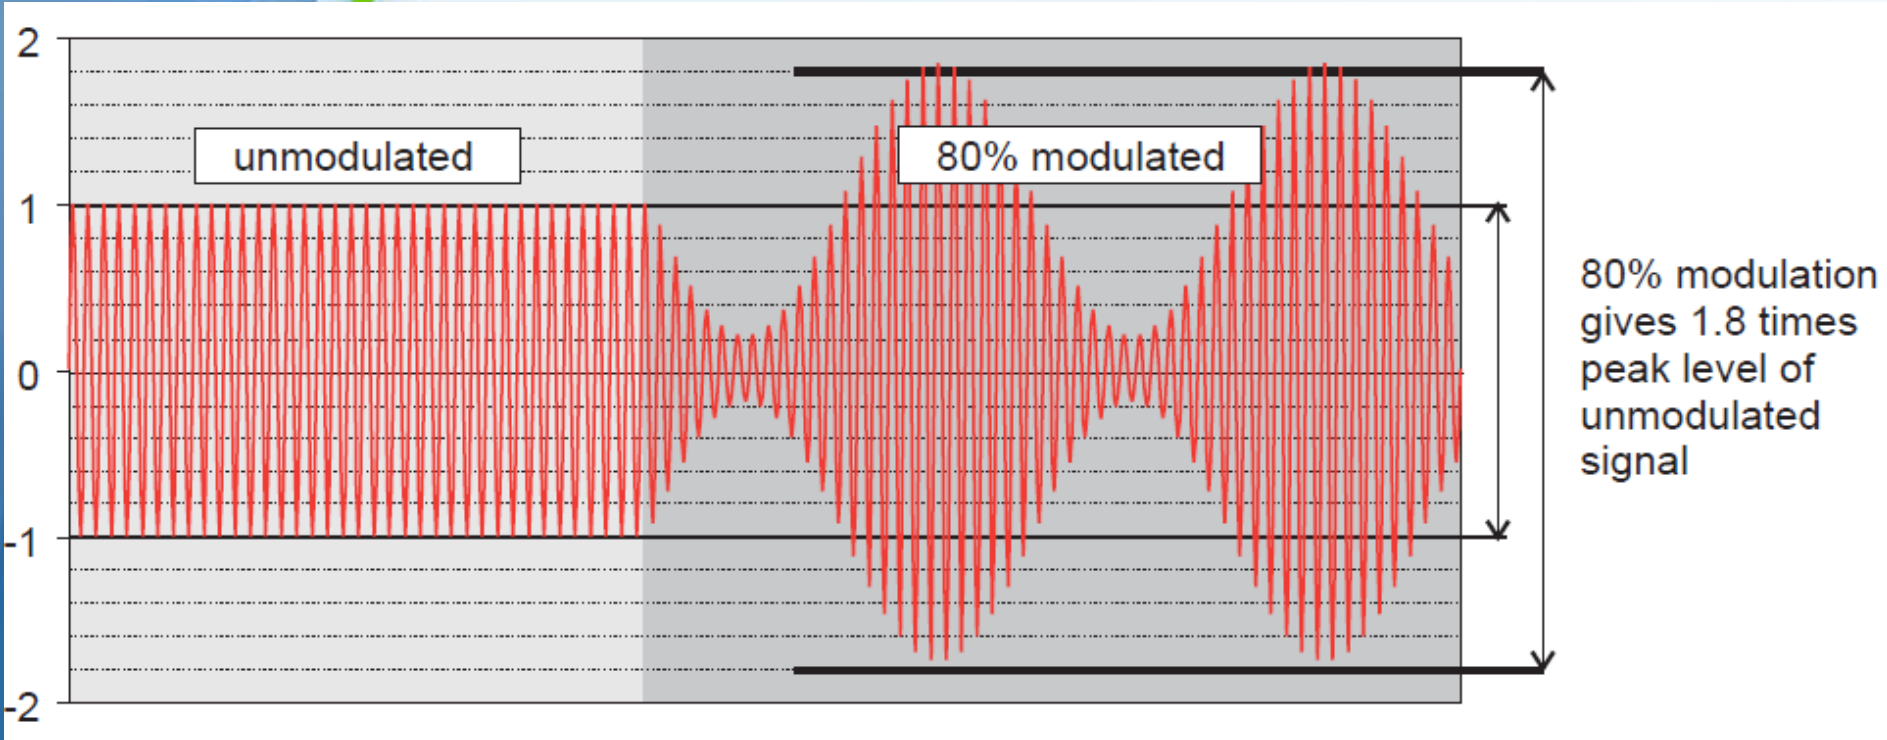



# Considerations for equipments choice



- Select an antenna to use.
  - - Frequency range
    - Power handling
    - Beam width & gain
- Select the correct amplifier
  - Use calculated power to select the correct amplifier
  - Needs to be selected at the 1dB compression point
  - Calculate power requirements



# Performance Criteria for Immunity Tests



Results of immunity tests are classified into four categories:

Performance Criteria A – ‘Performance within specification limits’

Performance Criteria B – ‘Temporary degradation which is self-recoverable’

Performance Criteria C – ‘Temporary degradation which requires operator intervention’

- Performance Criteria D – ‘Loss of function which is not recoverable’



# Test levels




Level	Test field strength V/m
1	1
2	3
3	10
4	30
x	Special

NOTE x is an open test level and the associated field strength may be any value. This level may be given in the product standard.

EN	EN 61000-6-1: 2001	EN 61000-6-2: 2001	EN 301 489-1: v1.4.1	EN 55014-2: 1997 + A1	EN 55020: 2002 + A1 + A2	EN 55024: 1998 + A1 + A2
<b>Related IEC</b>	IEC 61000-6-1	IEC 61000-6-2	-	CISPR 14-2	CISPR 20	CISPR 24
<b>Scope</b>	Residential, commercial, light industry generic	Industrial generic	Radio comms equipment: common requirements	Household appliances, electric tools and similar	Broadcast receivers and associated equipment	Information technology equipment
<b>Test</b>	Requirements					
<b>Radiated RF</b>	3 V/m 80% AM 80-1000 MHz to EN 61000-4-3	10 V/m 80% AM 80-1000 MHz to IEC 61000-4-3, except broadcast bands where level is 3 V/m (2005 version adds tests up to 2.7 GHz)	3 V/m 80% AM 80-1000 MHz to EN 61000-4-3, with exclusion band, disregarding narrowband responses	3 V/m 80% AM 80-1000 MHz to EN 61000-4-3, only category IV apparatus, and ride on toys with electronics in category III	125 dBmV/m (1.78 V/m) 80% AM 0.15-150 MHz in open stripline, reductions at some frequencies for receivers and VTRs; plus 900 MHz 3 V/m 200 Hz keyed carrier	3 V/m 80% AM ≤80-1000 MHz to EN 61000-4-3, extra spot frequency functional test for TTE
<b>Conducted RF</b>	3 V rms 80% AM 0.15-80 MHz to EN 61000-4-6 on AC power and functional earth ports, and all signal, control and DC power ports > 3m	10 V rms 80% AM 0.15-80 MHz to ENV 50141, except 47-68 MHz where level is 3 V rms: all ports except signal lines < 3 m	3 V rms 80% AM 0.15-80 MHz to EN 61000-4-6 on AC power, and signal, telecom, control and DC power ports > 3 m, with exclusion band, disregarding narrowband responses	3 V rms 80% AM 0.15-80 MHz to EN 61000-4-6 on AC power ports, 1 V rms on DC and signal ports > 3 m, category IV; extending to 230 MHz for cats. II and III	RF common mode 126 dBmV emf 26-30 MHz, antenna terminal; induced voltages at mains and audio terminals, 0.15-150 MHz 80% AM up to 130 dBmV emf	3 V rms 80% AM 0.15-80 MHz to EN 61000-4-6 on power and all signal cable ports > 3 m, extra spot frequency functional test for TTE
<b>LF magnetic field</b>	3 A/m to EN 61000-4-8, susceptible devices only	30 A/m to EN 61000-4-8, susceptible devices only	Not applicable	Not applicable	Not applicable	1 A/m to EN 61000-4-8, susceptible devices only





# Field strength

- The resultant field is computed as follows:

$$e = \frac{\sqrt{30p}}{d}$$

- p is the radiated power
- d is the distance between the antenna and the field measure




# Conducted immunity

## IEC 61000-4-6

# RF coupling phenomenon



RF emitters

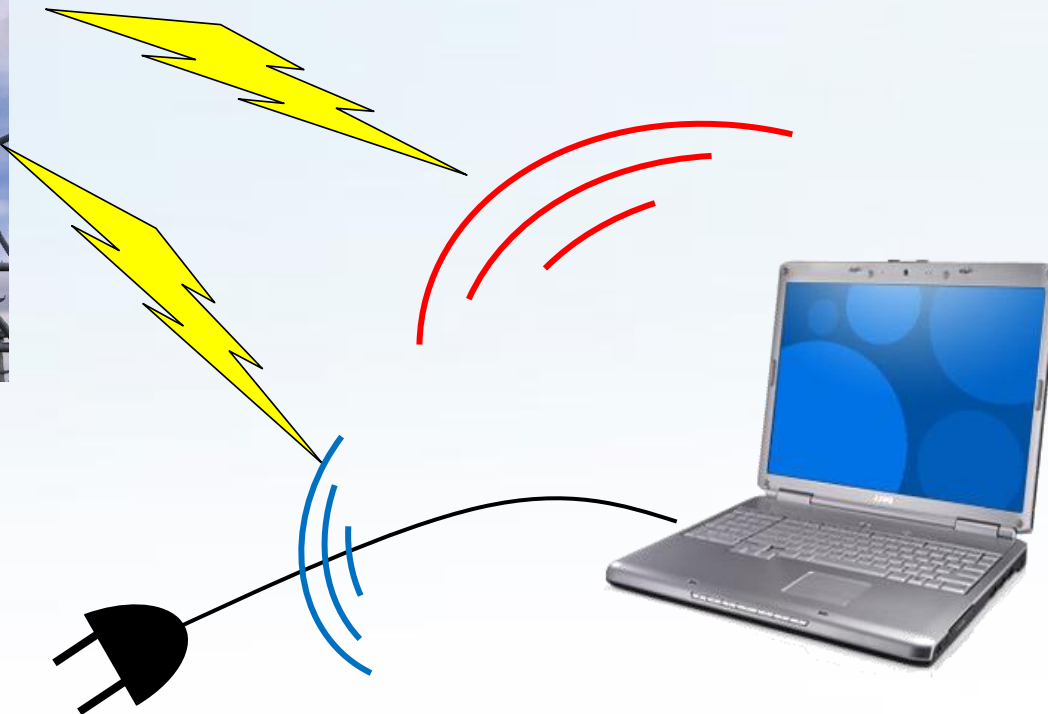



# Radiated immunity (IEC 61000-4-3)



- Test purpose

Evaluate the performance of a device submitted to conducted electromagnetic field

- Needed instruments:


- ✓ RF generator

- ✓ Power amplifier

- ✓ Directional coupler

- ✓ Dual power meter


- ✓ Coupling device (CDN, EM clamp, Current

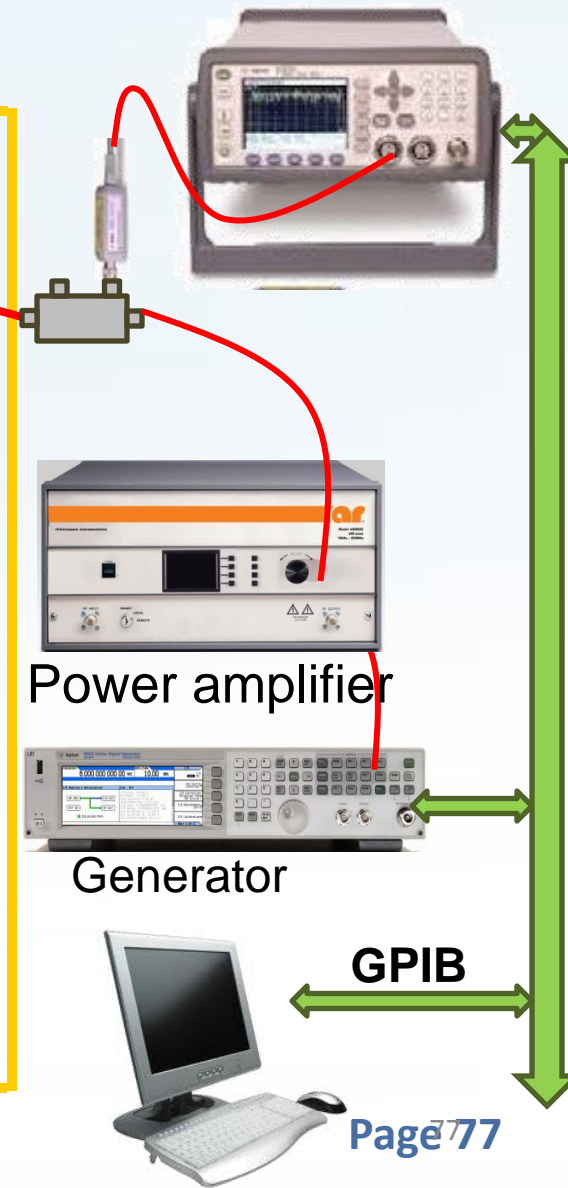


# Coupling devices



CDN

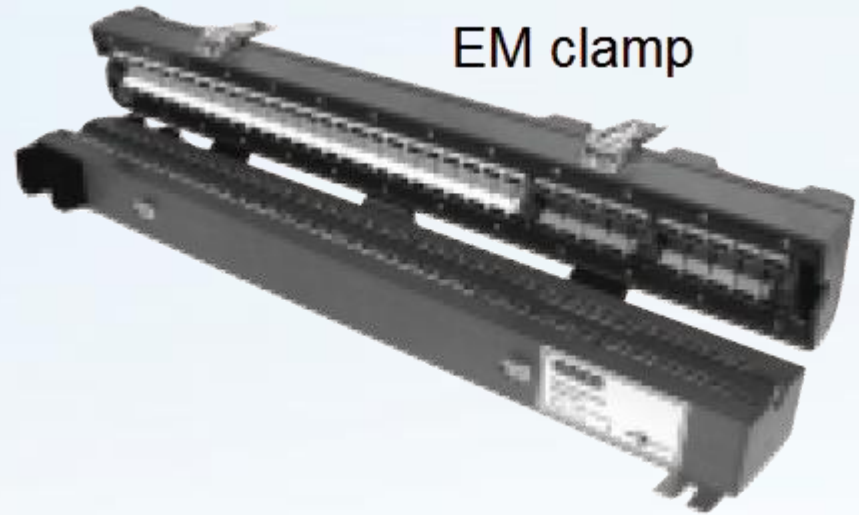

EM clamp

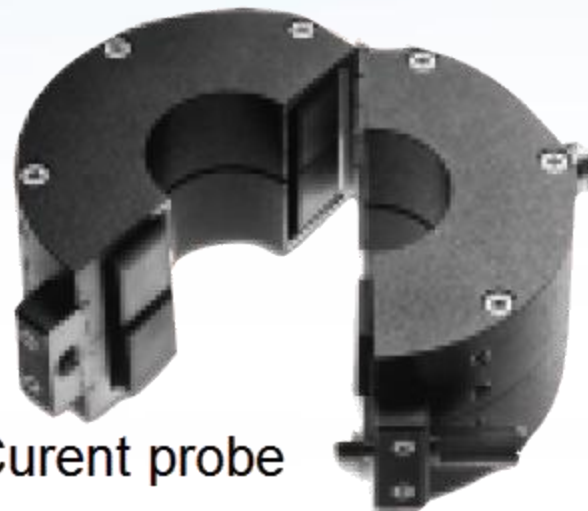


Current probe



# Coupling devices

- Coupling and decoupling devices shall be used for appropriate coupling of the disturbing signal to the various cables connected to the EUT and for preventing applied test signals from affecting other devices, equipment and systems that are not under test.
- The coupling and decoupling devices can be combined

# Rules for selecting the injection method

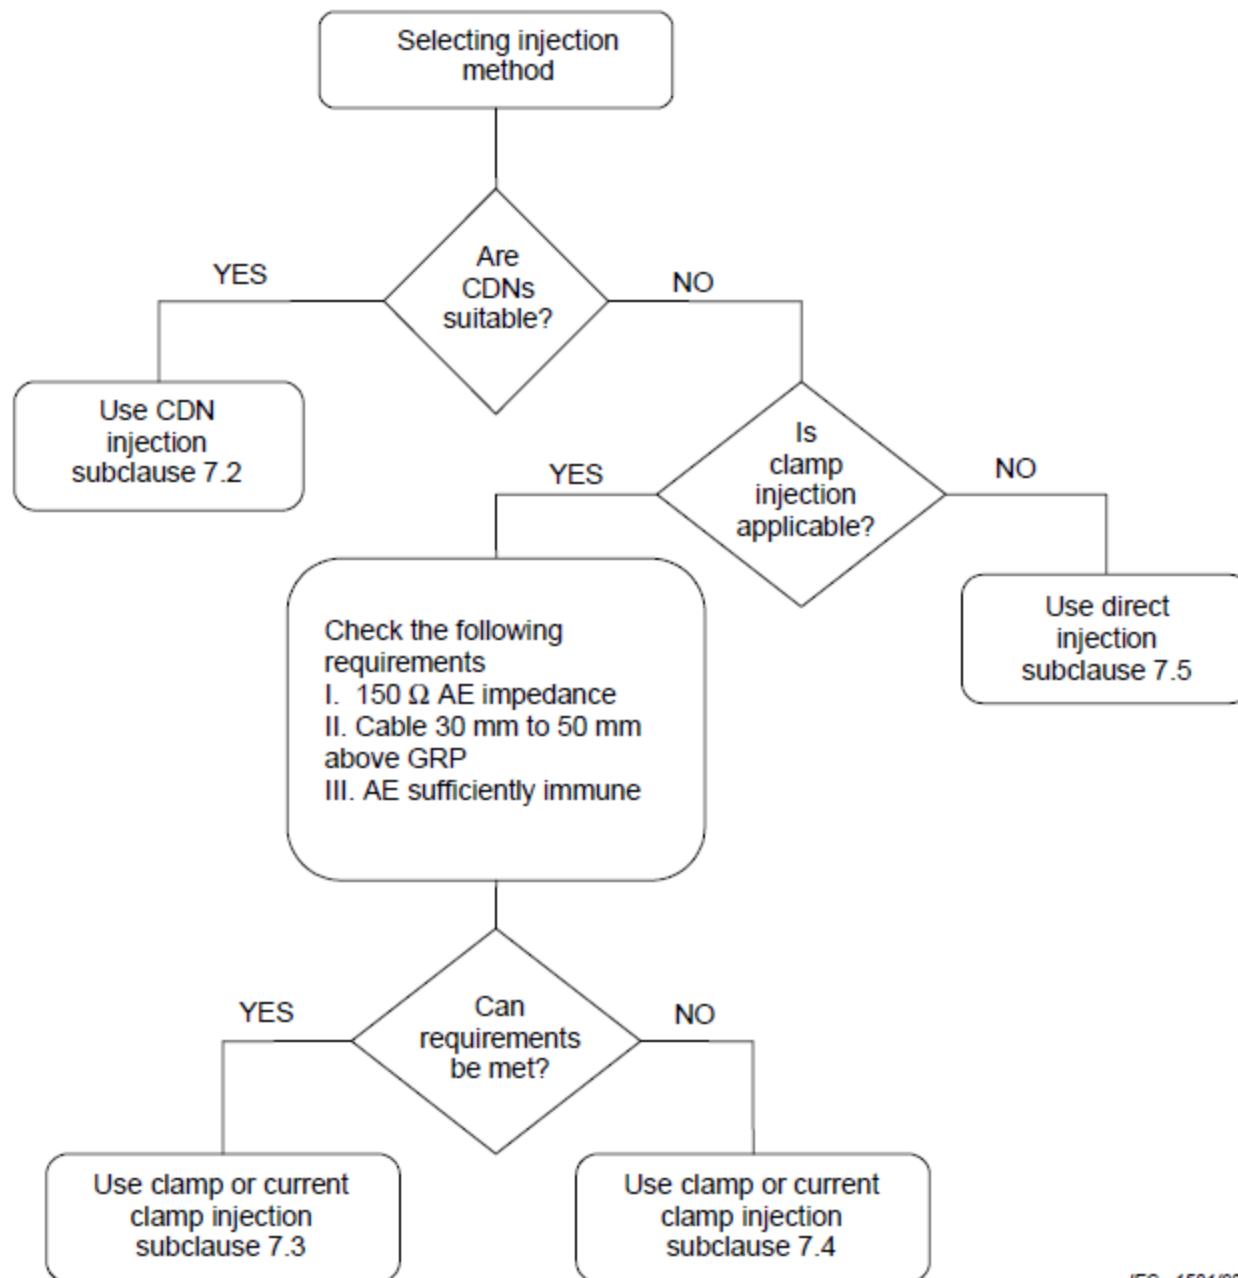



# Types of CDNs

<i>Typ</i>	<i>Interconnected lines</i>
M1, M2, M3, M4, M5, M2+M3	Unscreened supply (mains)
AF2, AF4, AF6, AF8	Unscreened nonbalanced lines
S1, S2, S9, S25	Screened lines
T2, T4, T8	Unscreened balanced lines
RJ11, RJ45	Unscreened data lines
RJ11/S, RJ45/S, USB	Screened data lines





# Performance Criteria for Immunity Tests



Results of immunity tests are classified into four categories:

Performance Criteria A – ‘Performance within specification limits’

Performance Criteria B – ‘Temporary degradation which is self-recoverable’

Performance Criteria C – ‘Temporary degradation which requires operator intervention’

- Performance Criteria D – ‘Loss of function which is not recoverable’

**Table 1 – Test levels**

Frequency range 150 kHz – 80 MHz		
Level	Voltage level (e.m.f.)	
	$U_0$ dB( $\mu$ V)	$U_0$ V
1	120	1
2	130	3
3	140	10
X <sup>a</sup>	Special	
<sup>a</sup> X is an open level.		

EN	EN 61000-6-1: 2001	EN 61000-6-2: 2001	EN 301 489-1: v1.4.1	EN 55014-2: 1997 + A1	EN 55020: 2002 + A1 + A2	EN 55024: 1998 + A1 + A2
<b>Related IEC</b>	IEC 61000-6-1	IEC 61000-6-2	-	CISPR 14-2	CISPR 20	CISPR 24
<b>Scope</b>	Residential, commercial, light industry generic	Industrial generic	Radio comms equipment: common requirements	Household appliances, electric tools and similar	Broadcast receivers and associated equipment	Information technology equipment
<b>Test</b>	Requirements					
<b>Radiated RF</b>	3 V/m 80% AM 80-1000 MHz to EN 61000-4-3	10 V/m 80% AM 80-1000 MHz to IEC 61000-4-3, except broadcast bands where level is 3 V/m (2005 version adds tests up to 2.7 GHz)	3 V/m 80% AM 80-1000 MHz to EN 61000-4-3, with exclusion band, disregarding narrowband responses	3 V/m 80% AM 80-1000 MHz to EN 61000-4-3, only category IV apparatus, and ride on toys with electronics in category III	125 dBmV/m (1.78 V/m) 80% AM 0.15-150 MHz in open stripline, reductions at some frequencies for receivers and VTRs; plus 900 MHz 3 V/m 200 Hz keyed carrier	3 V/m 80% AM ≤80-1000 MHz to EN 61000-4-3, extra spot frequency functional test for TTE
<b>Conducted RF</b>	3 V rms 80% AM 0.15-80 MHz to EN 61000-4-6 on AC power and functional earth ports, and all signal, control and DC power ports > 3m	10 V rms 80% AM 0.15-80 MHz to ENV 50141, except 47-68 MHz where level is 3 V rms: all ports except signal lines < 3 m	3 V rms 80% AM 0.15-80 MHz to EN 61000-4-6 on AC power, and signal, telecomm, control and DC power ports > 3 m, with exclusion band, disregarding narrowband responses	3 V rms 80% AM 0.15-80 MHz to EN 61000-4-6 on AC power ports, 1 V rms on DC and signal ports > 3 m, category IV; extending to 230 MHz for cats. II and III	RF common mode 126 dBmV emf 26-30 MHz, antenna terminal; induced voltages at mains and audio terminals, 0.15-150 MHz 80% AM up to 130 dBmV emf	3 V rms 80% AM 0.15-80 MHz to EN 61000-4-6 on power and all signal cable ports > 3 m, extra spot frequency functional test for TTE
<b>LF magnetic field</b>	3 A/m to EN 61000-4-8, susceptible devices only	30 A/m to EN 61000-4-8, susceptible devices only	Not applicable	Not applicable	Not applicable	1 A/m to EN 61000-4-8, susceptible devices only



# Calibrating the injected level



- substitution method
- The power required to give this same stress level is repeated in the actual test.
- For the 150 ohms systems, the required power :  $v_{\text{stress}}/6$  or  $V_{\text{stress}} - 15.6$  dB (resistive divider)


- For the 50 ohms systems, the required power :



# Immunity to magnetic fields

## IEC 61000-4-8

# Magnetic field immunity – IEC 61000-4-8

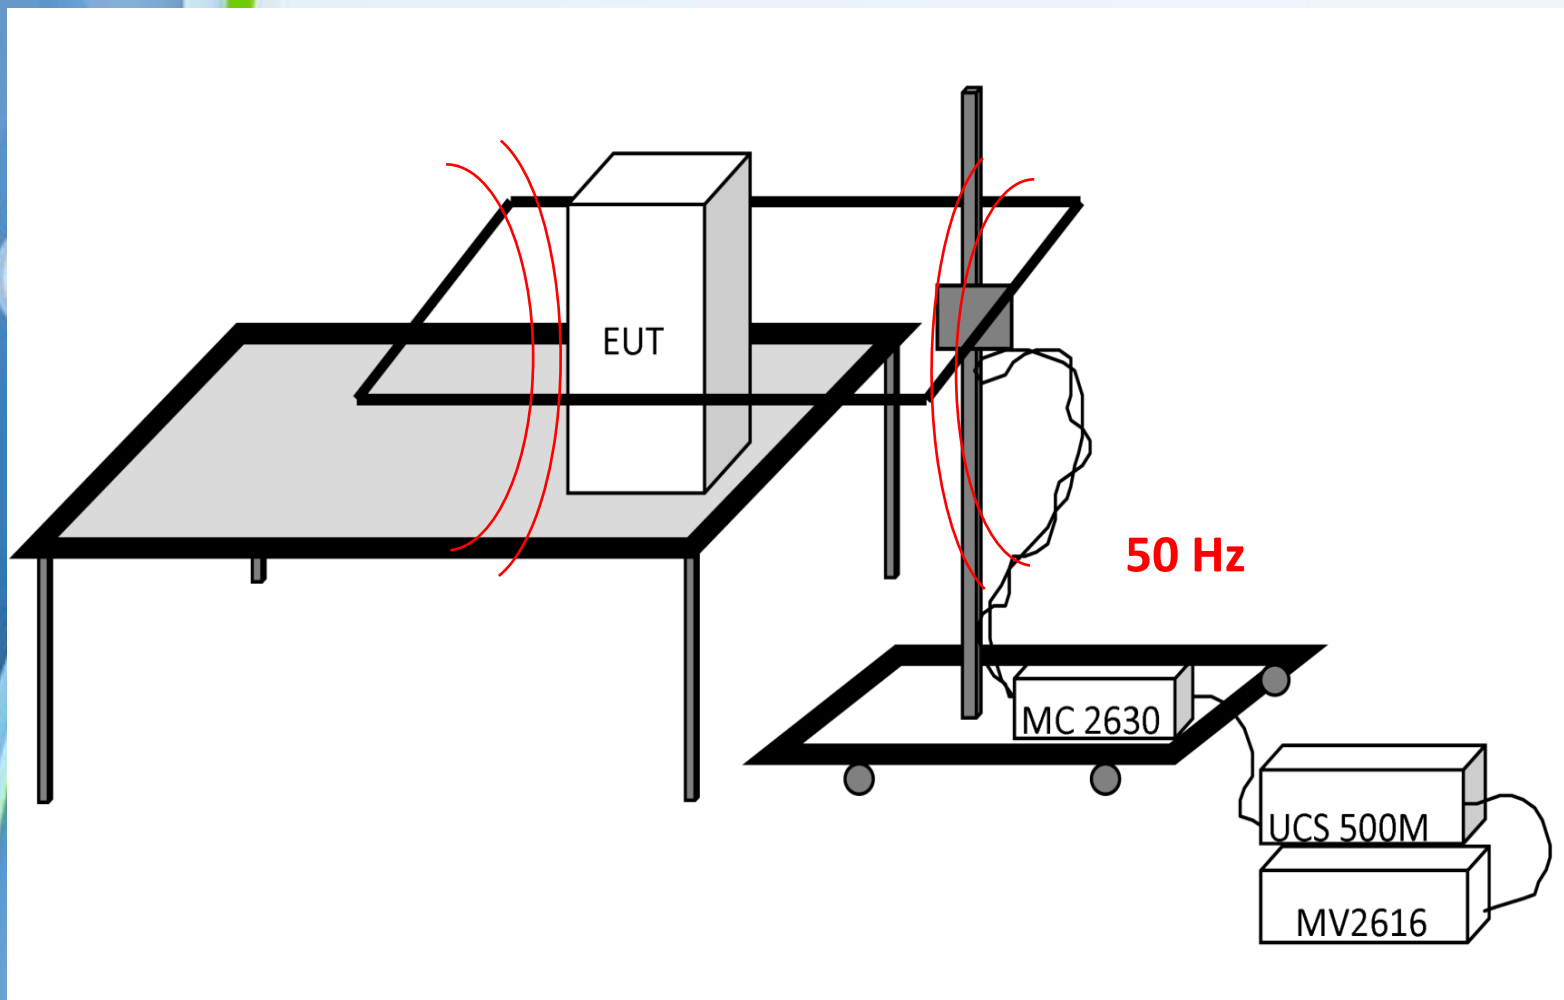



# Performance Criteria for Immunity Tests



Results of immunity tests are classified into four categories:

Performance Criteria A – ‘Performance within specification limits’

Performance Criteria B – ‘Temporary degradation which is self-recoverable’

Performance Criteria C – ‘Temporary degradation which requires operator intervention’

- Performance Criteria D – ‘Loss of function which is not recoverable’




EN	EN 61000-6-1: 2001	EN 61000-6-2: 2001	EN 301 489-1: v1.4.1	EN 55014-2: 1997 + A1	EN 55020: 2002 + A1 + A2	EN 55024: 1998 + A1 + A2
<b>Related IEC</b>	IEC 61000-6-1	IEC 61000-6-2	-	CISPR 14-2	CISPR 20	CISPR 24
<b>Scope</b>	Residential, commercial, light industry generic	Industrial generic	Radio comms equipment: common requirements	Household appliances, electric tools and similar	Broadcast receivers and associated equipment	Information technology equipment
<b>Test</b>	Requirements					
<b>Radiated RF</b>	3 V/m 80% AM 80-1000 MHz to EN 61000-4-3	10 V/m 80% AM 80-1000 MHz to IEC 61000-4-3, except broadcast bands where level is 3 V/m (2005 version adds tests up to 2.7 GHz)	3 V/m 80% AM 80-1000 MHz to EN 61000-4-3, with exclusion band, disregarding narrowband responses	3 V/m 80% AM 80-1000 MHz to EN 61000-4-3, only category IV apparatus, and ride on toys with electronics in category III	125 dBmV/m (1.78 V/m) 80% AM 0.15-150 MHz in open stripline, reductions at some frequencies for receivers and VTRs; plus 900 MHz 3 V/m 200 Hz keyed carrier	3 V/m 80% AM ≤80-1000 MHz to EN 61000-4-3, extra spot frequency functional test for TTE
<b>Conducted RF</b>	3 V rms 80% AM 0.15-80 MHz to EN 61000-4-6 on AC power and functional earth ports, and all signal, control and DC power ports > 3m	10 V rms 80% AM 0.15-80 MHz to ENV 50141, except 47-68 MHz where level is 3 V rms: all ports except signal lines < 3 m	3 V rms 80% AM 0.15-80 MHz to EN 61000-4-6 on AC power, and signal, telecom, control and DC power ports > 3 m, with exclusion band, disregarding narrowband responses	3 V rms 80% AM 0.15-80 MHz to EN 61000-4-6 on AC power ports, 1 V rms on DC and signal ports > 3 m, category IV; extending to 230 MHz for cats. II and III	RF common mode 126 dBmV emf 26-30 MHz, antenna terminal; induced voltages at mains and audio terminals, 0.15-150 MHz 80% AM up to 130 dBmV emf	3 V rms 80% AM 0.15-80 MHz to EN 61000-4-6 on power and all signal cable ports > 3 m, extra spot frequency functional test for TTE
<b>LF magnetic field</b>	3 A/m to EN 61000-4-8, susceptible devices only	30 A/m to EN 61000-4-8, susceptible devices only	Not applicable	Not applicable	Not applicable	1 A/m to EN 61000-4-8, susceptible devices only



# **Immunity to voltage dips and short interruptions IEC 61000-4-11**

# Voltage dips and short interruptions – IEC 61000-4-11

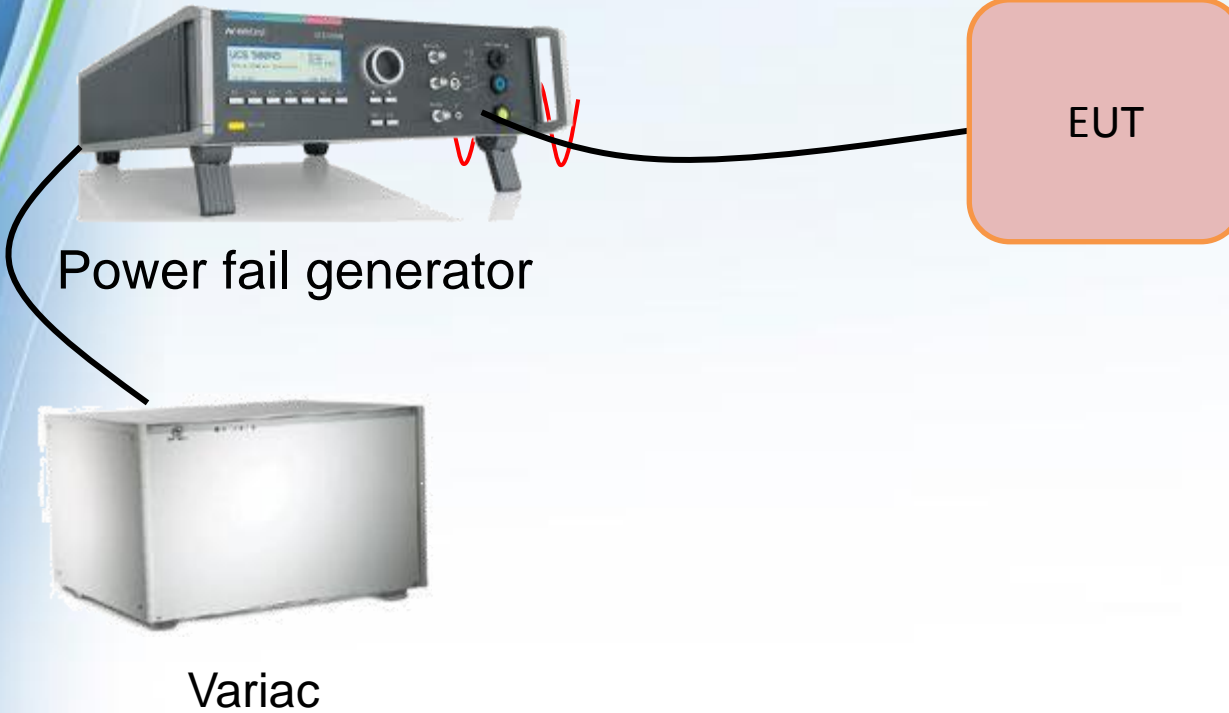



# Performance Criteria for Immunity Tests



Results of immunity tests are classified into four categories:

Performance Criteria A – ‘Performance within specification limits’

Performance Criteria B – ‘Temporary degradation which is self-recoverable’

Performance Criteria C – ‘Temporary degradation which requires operator intervention’

- Performance Criteria D – ‘Loss of function which is not recoverable’

## EN 61000-4-11 Overview

Figure 6M Example of a 'dip'

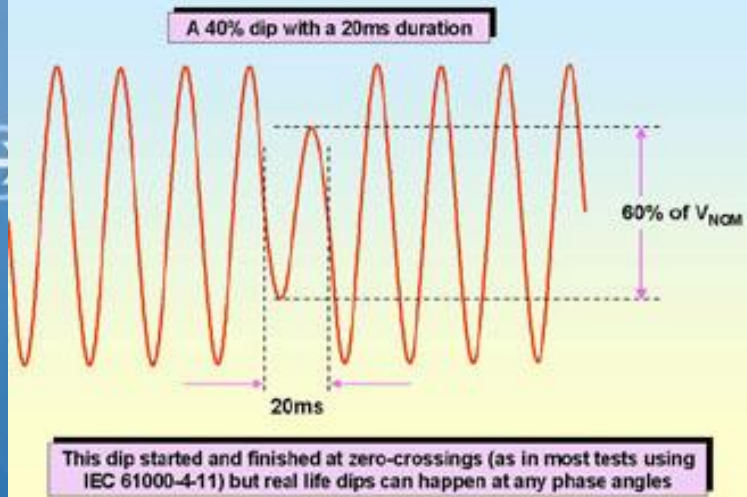


Figure 6N Example of a 'short interruption'


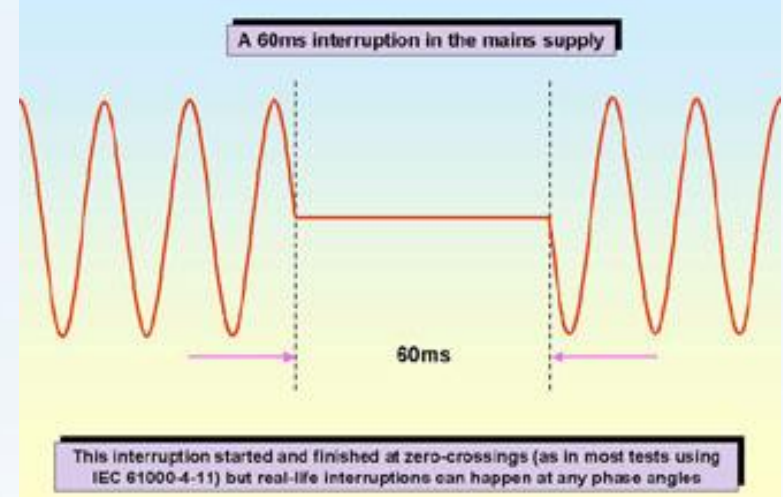


Figure 6S A typical 'sag' test  
(example of a 50% sag for 1 second)





# Emission tests

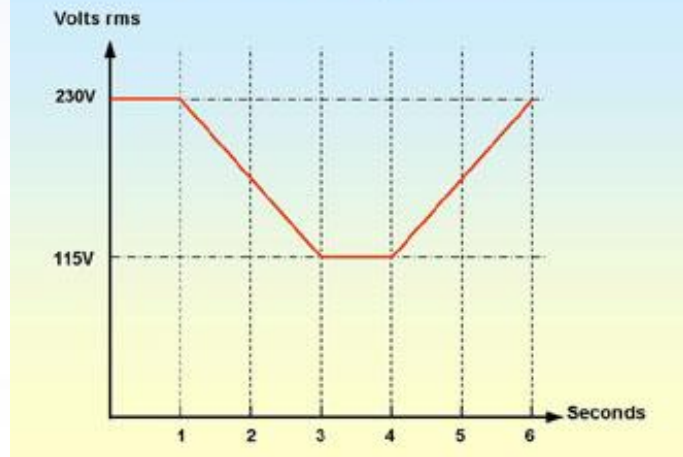

# Emission

## CISPR 22 / EN 55022



# ITE fonctionnalité



- **An ITE is able to perform:**
  - ✓ Receive data from an external source;
  - ✓ Perform treatments
  - ✓ Provide a result





# Equipements Classes (1)



- **The class B ITE is intended primarily for use in a residential area and may include:**

- ✓ the devices having no fixed location of use, such as portable battery powered or batteries incorporated;
- ✓ the telecommunication terminal equipment supplied by a telecommunications network;
- ✓ personal computers and auxiliary devices connected to them.



# Equipements Classes(2)



- **Class A consists of all other ATI complying with the limits of disturbance of class A but not those of class B.**
- **Can be used in commercial or industrial environment.**



# **Conducted emissions CISPR22/EN 55022**




# Required equipments



- For power supply lines:
  - LISN (Lines Impedance Stabilisation Network)
- For data lines:
  - ✓ ISN (Impedance Stabilisation Network)
- Transient limiter
- EMI receiver or spectrum analyser
- EMI software




# Conducted emission – CISPR22/ EN 55022

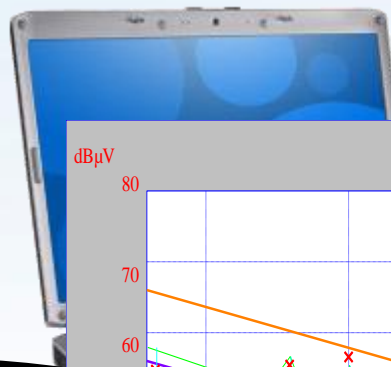


LISN

Trans

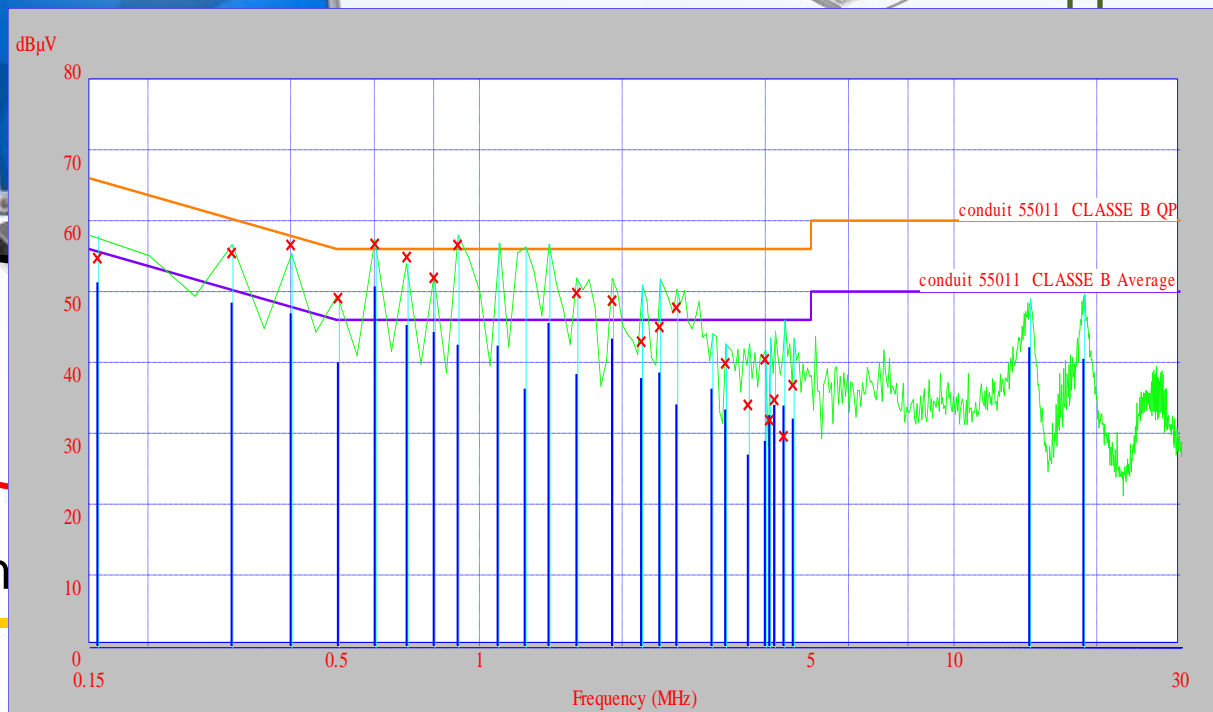

# Conducted emission test setup

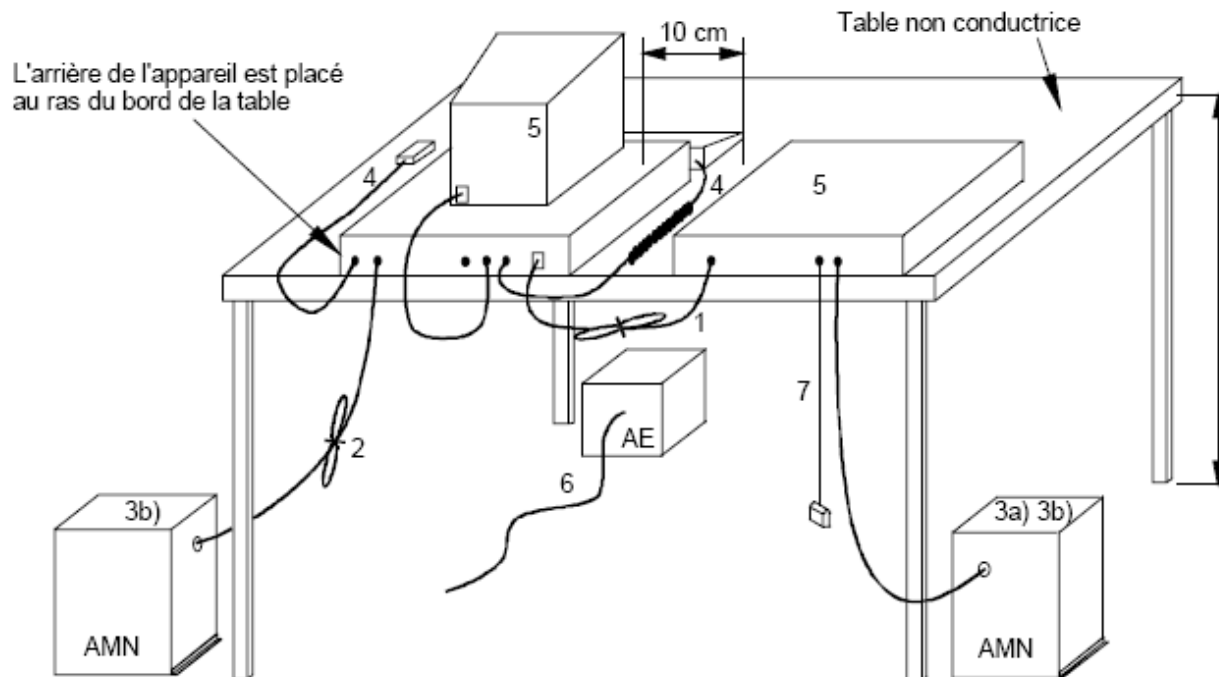

AMN = Réseau fictif  
 AE = Appareil auxiliaire  
 EUT = Appareil à l'essai  
 RSI = Réseau de stabilisation d'impédance



# Conducted emissions



Measurement of conducted electromagnetic disturbances must be made:


- by means of a measuring receiver
- with a peak detector
- in the frequency range 9 kHz to 30 MHz.

# Conducted limits


- The EUT shall respect the limits of Tables 1 and 2 which include limits on the **mean** value and limits on **quasi-peak** value
- A receiver is used to average value detection and a quasi-peak detector




# Decision tree

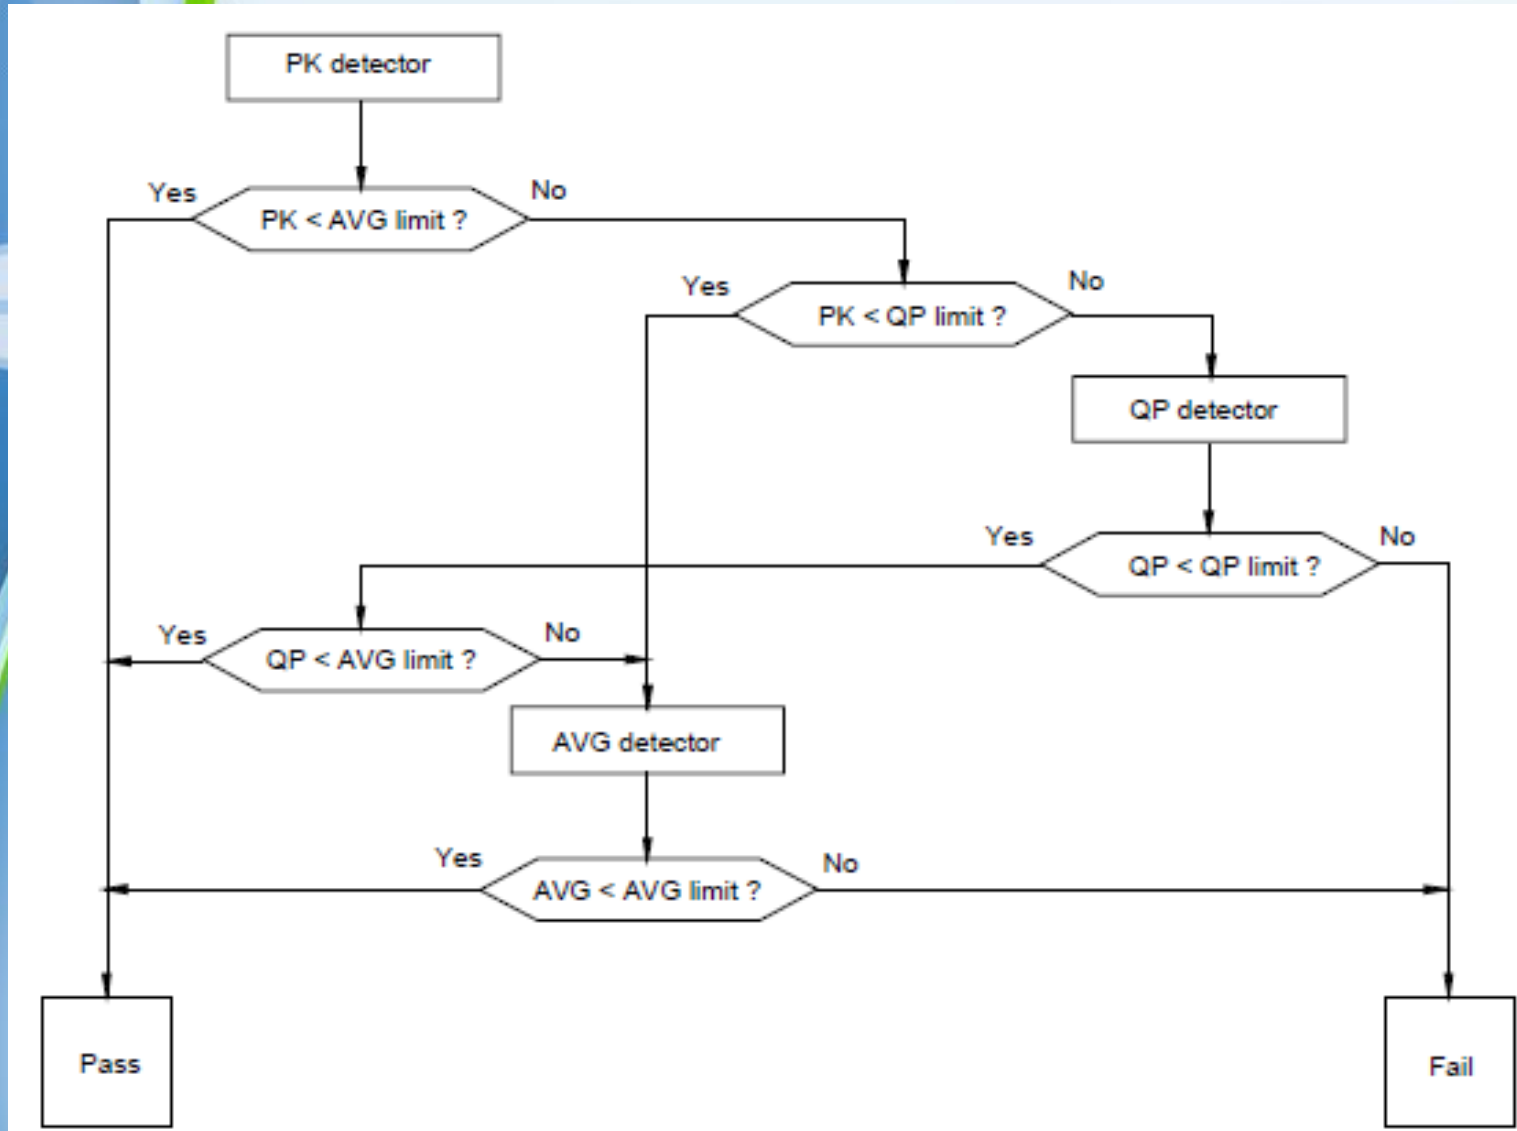

Example of reporting measurement uncertainty  
(EN 55022 QP Class B shown)

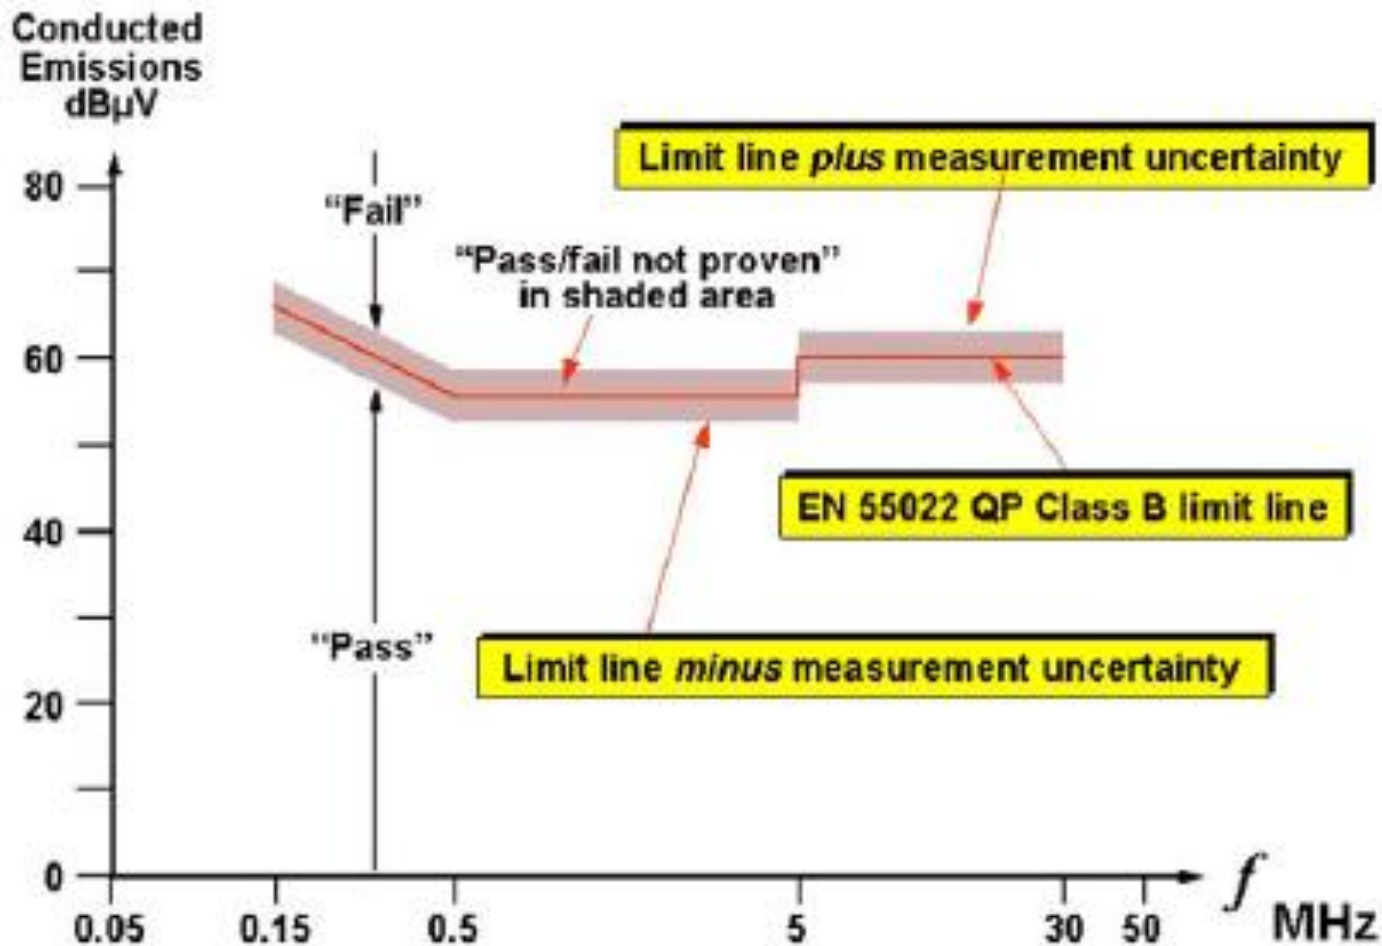

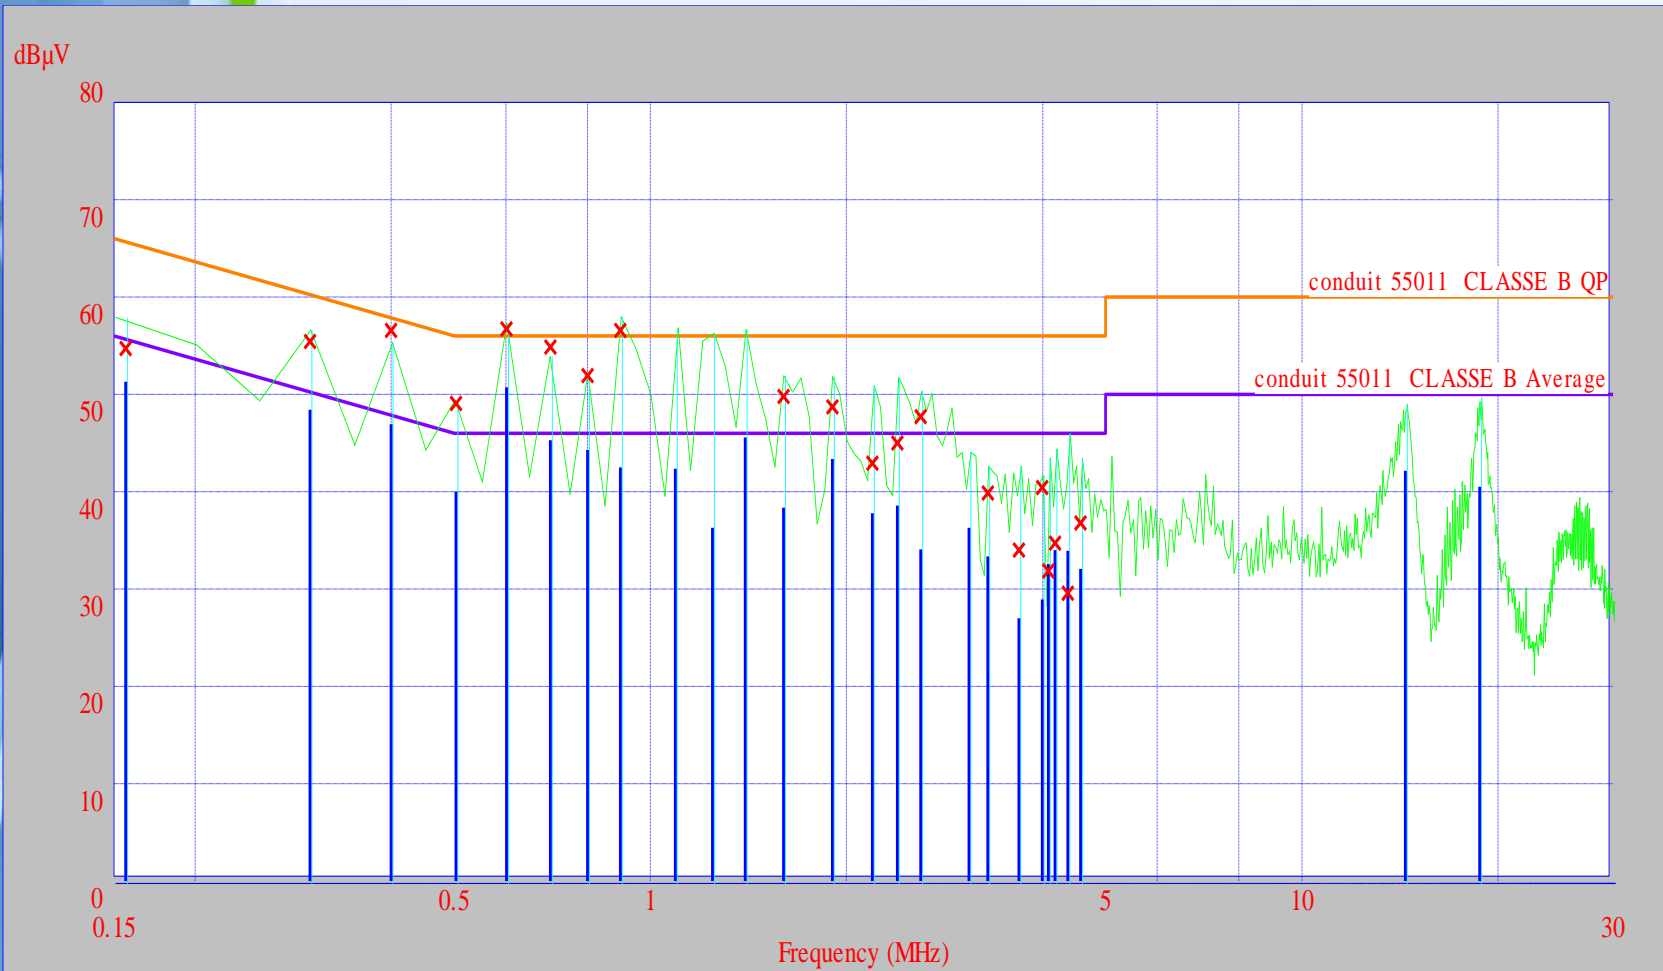



# **Radiated emissions**

## **CISPR22/EN 55022**




# Required equipments




- Receiving antennas
- EMI receiver or spectrum analyser
- EMI software



# Radiated emission - CISPR22/EN 55022

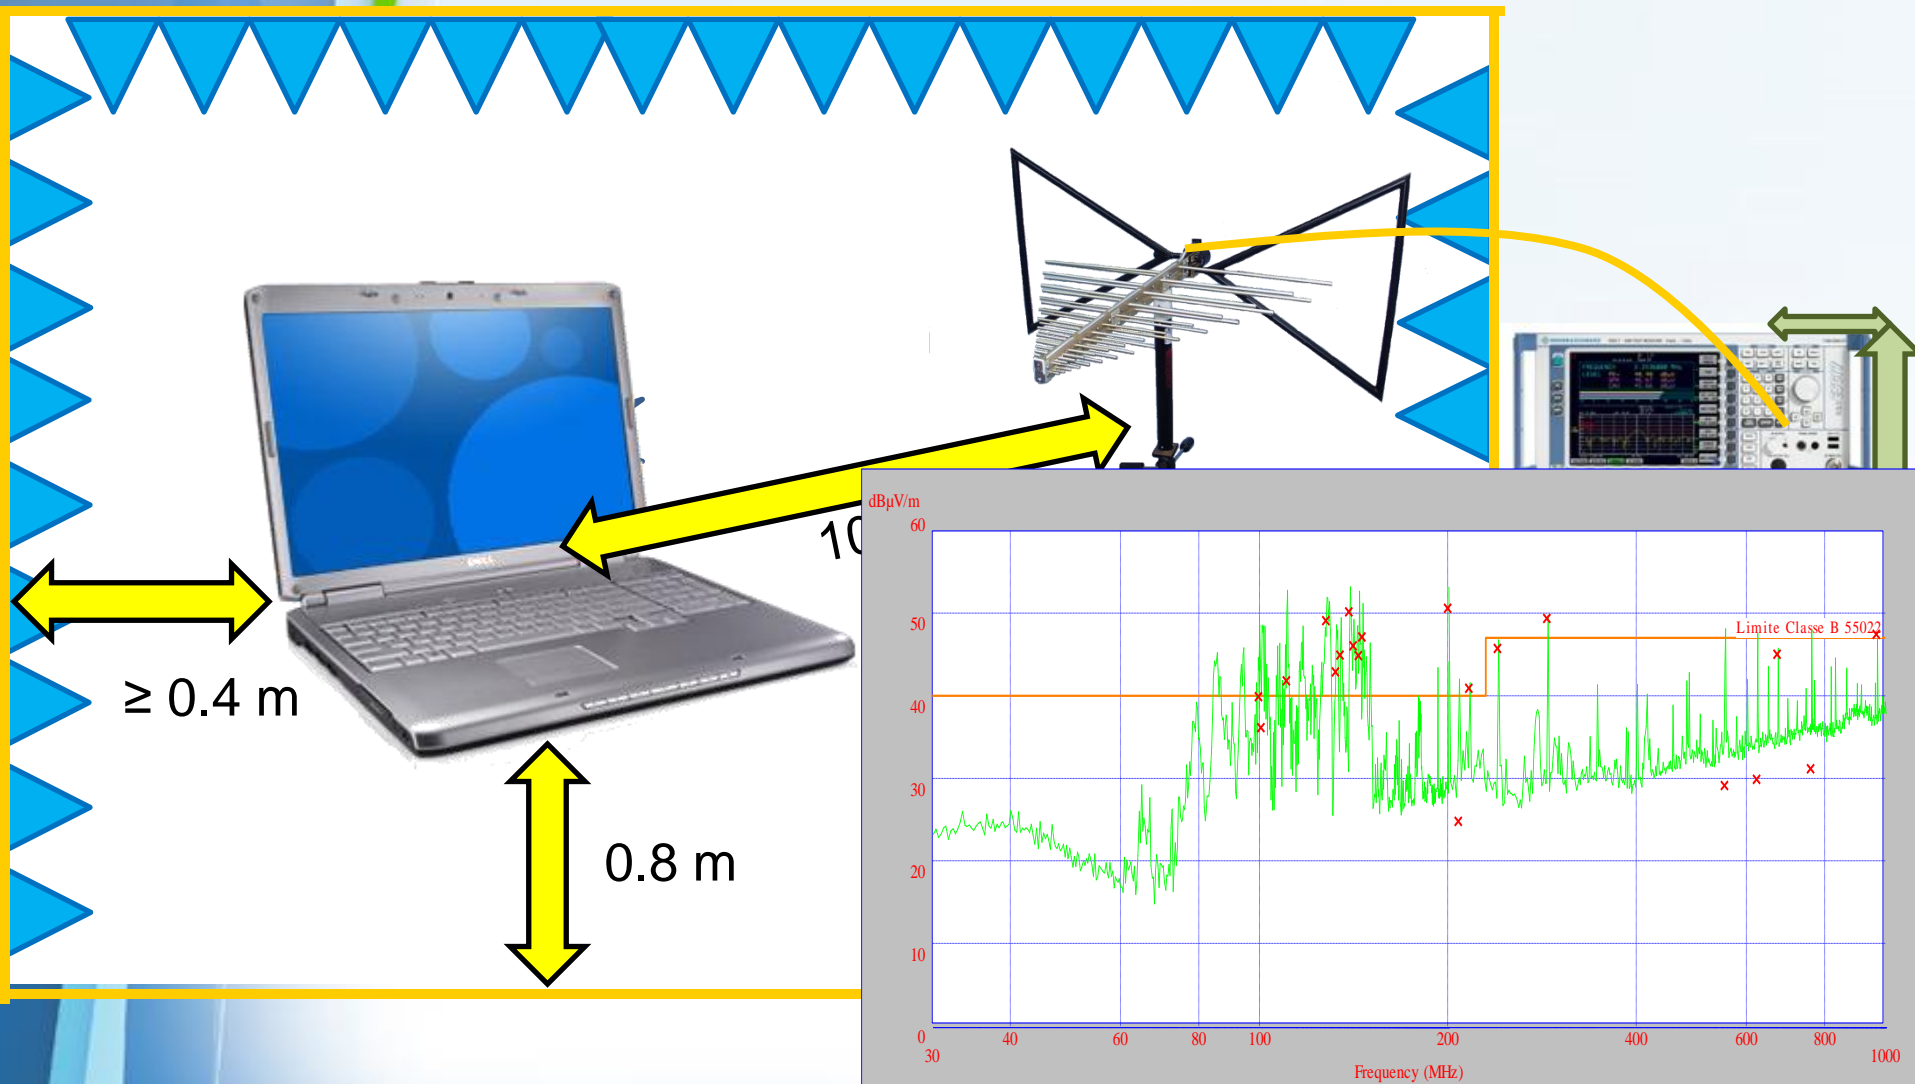

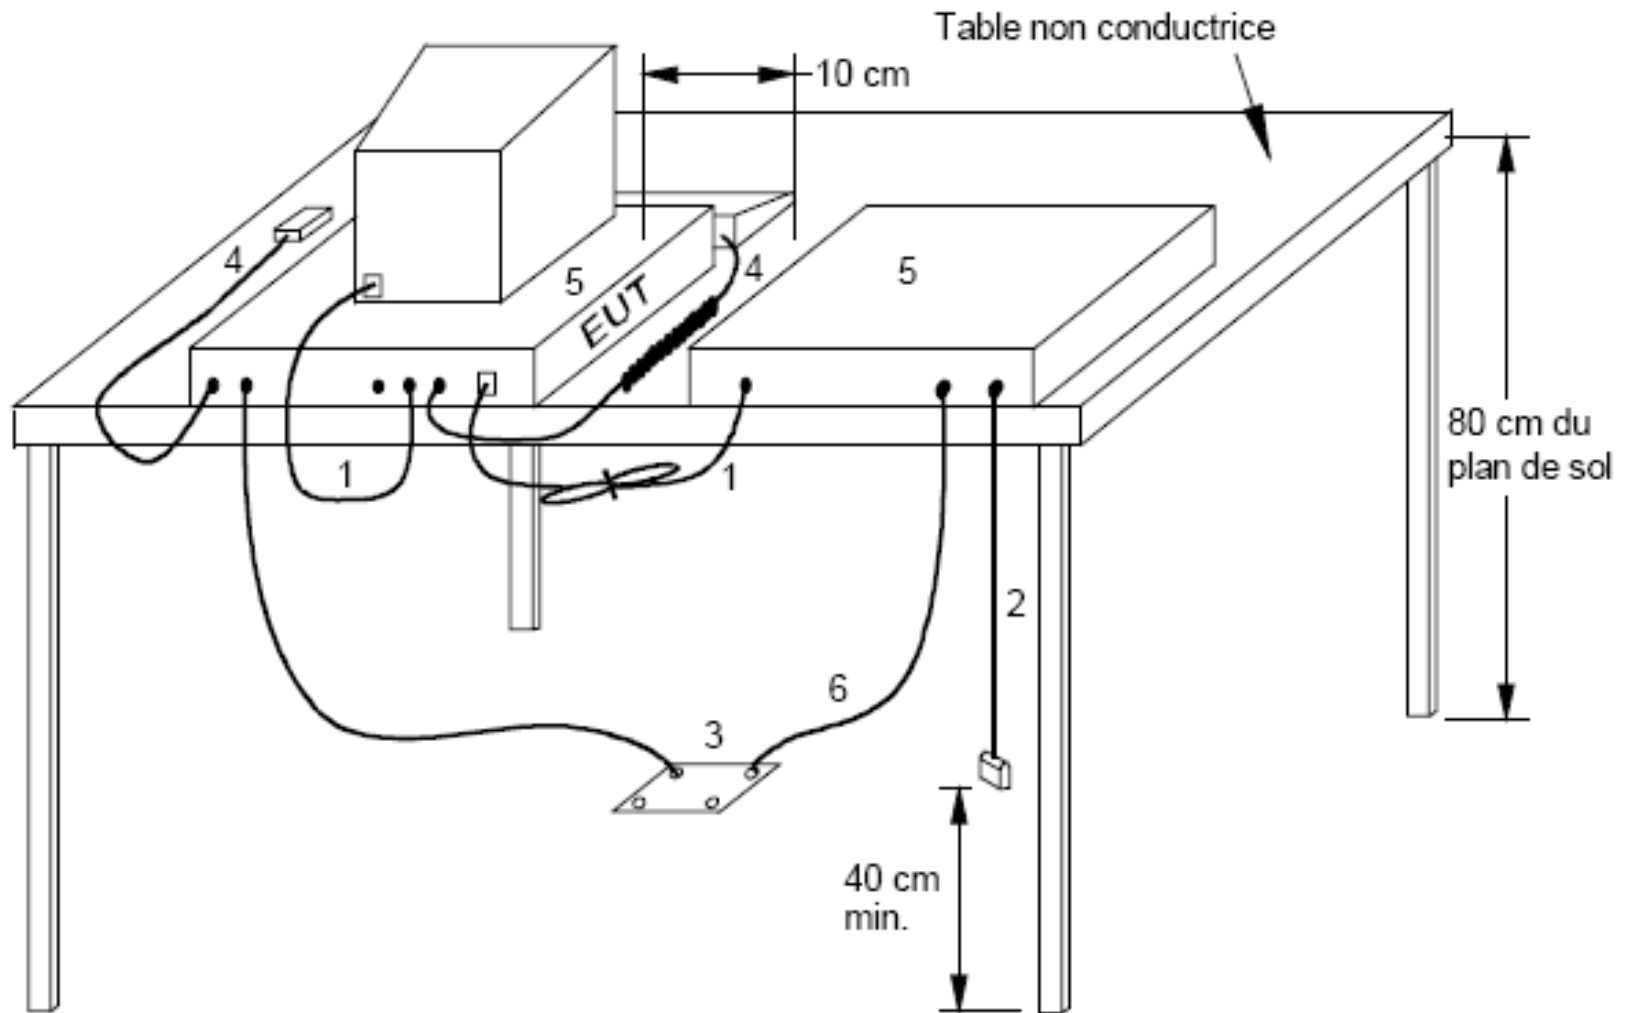

- The measurement of radiated electromagnetic disturbances must be performed by means of a measuring receiver equipped with a quasi-peak detector in the frequency range 30 MHz to 1 GHz or 6 GHz.

- A receiving antenna, associated with a measuring receiver, is placed at a specific






# Radiated EM field measure



- Peak measure to determine the most perturbing condition
- Determining antenna polarisation that most generate disturbances
- For every frequency :




# Radiated field measurement

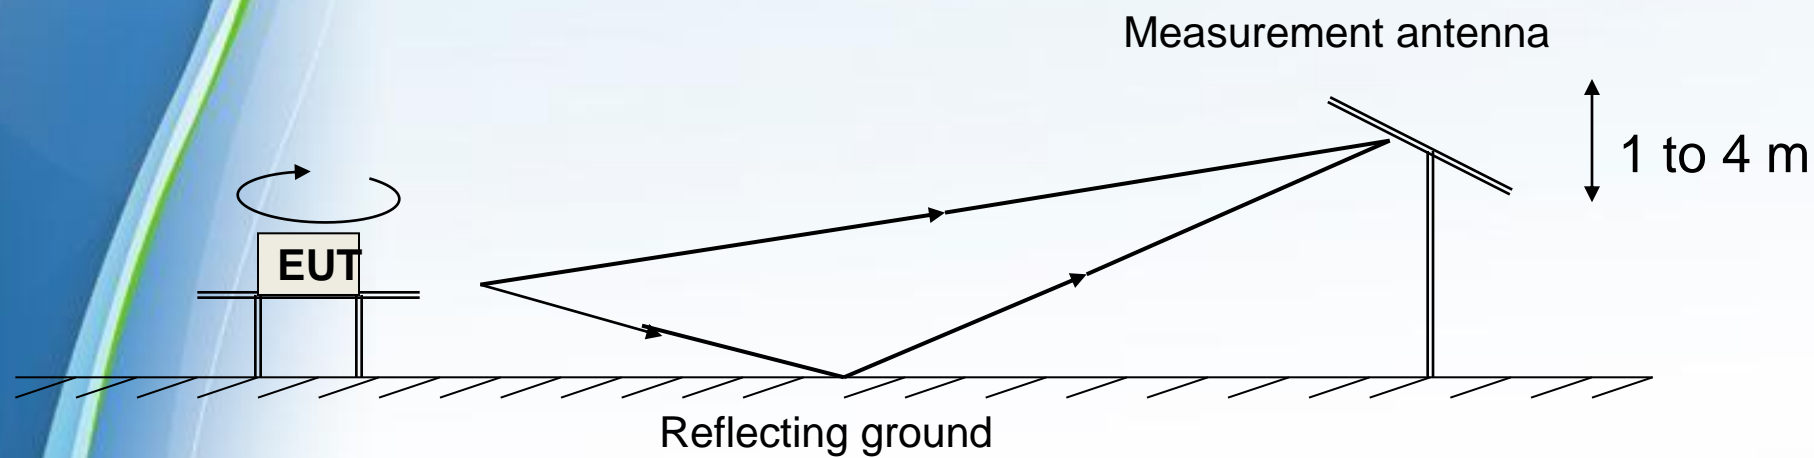

# Open area test site



Site de mesure en espace libre

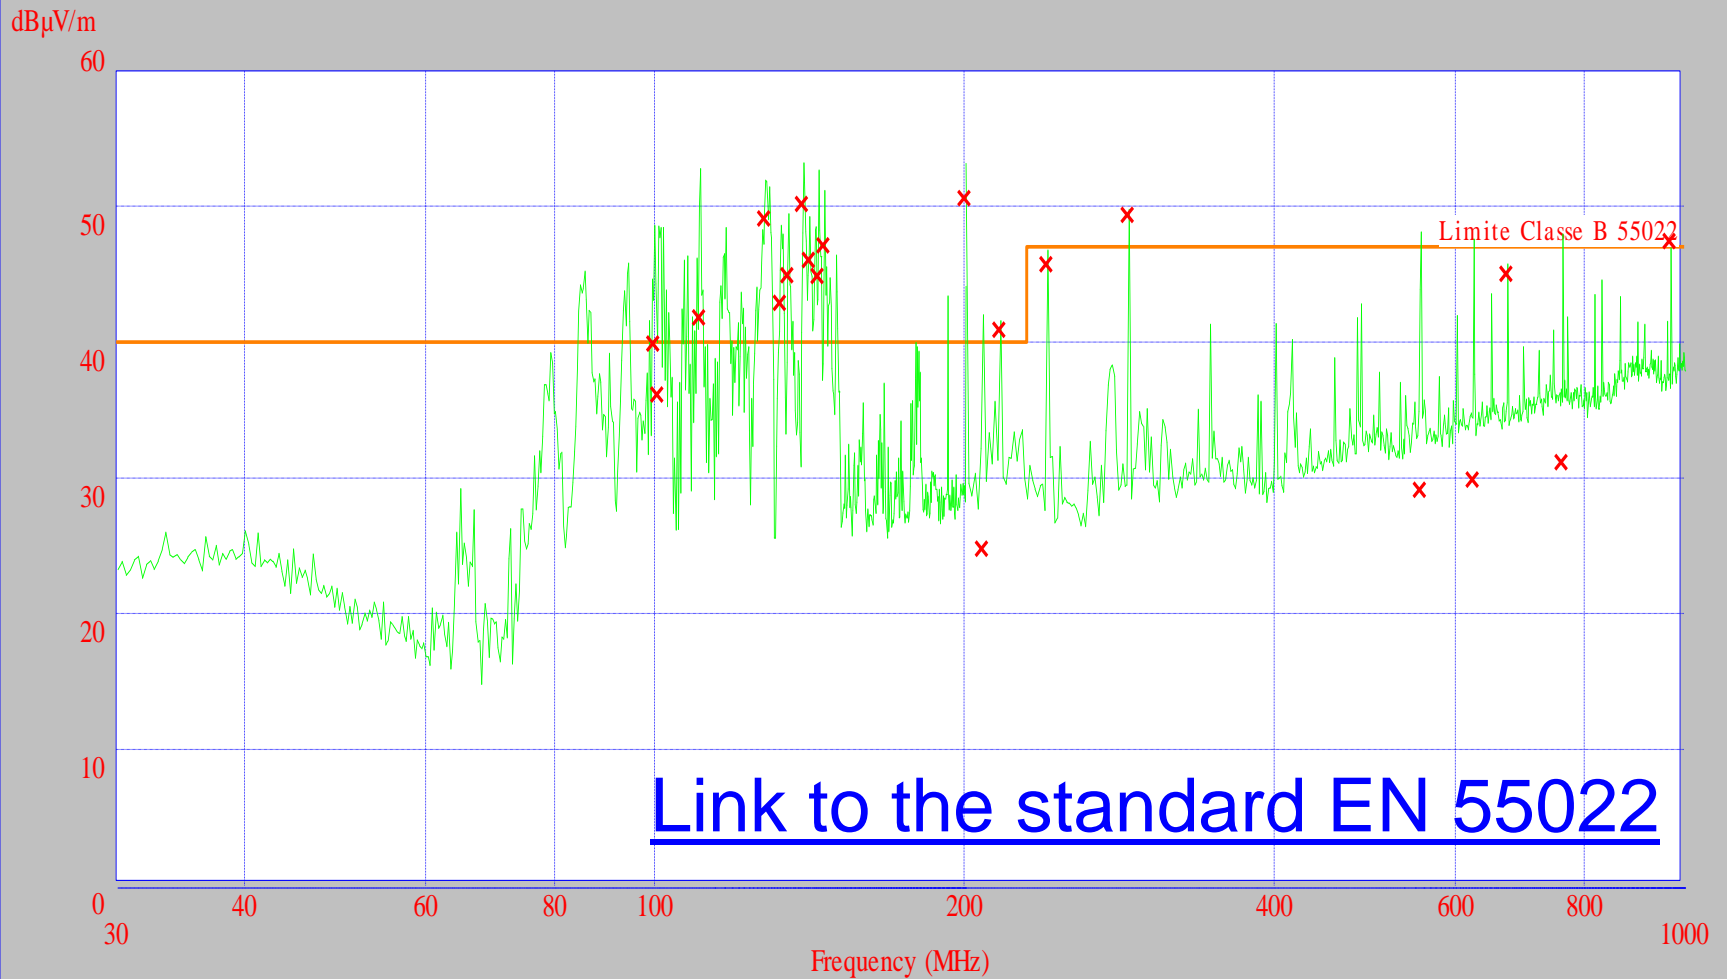



# Harmonics emission

## IEC 61000-3-2



# Harmonics emission




## Causes

- They are generated by devices that consume non-sinusoidal current, such as fluorescent lighting or power supplies (equipment components nonlinear diodes, thyristors ...)

## Effects



# Harmonics emission – IEC 61000-3-2

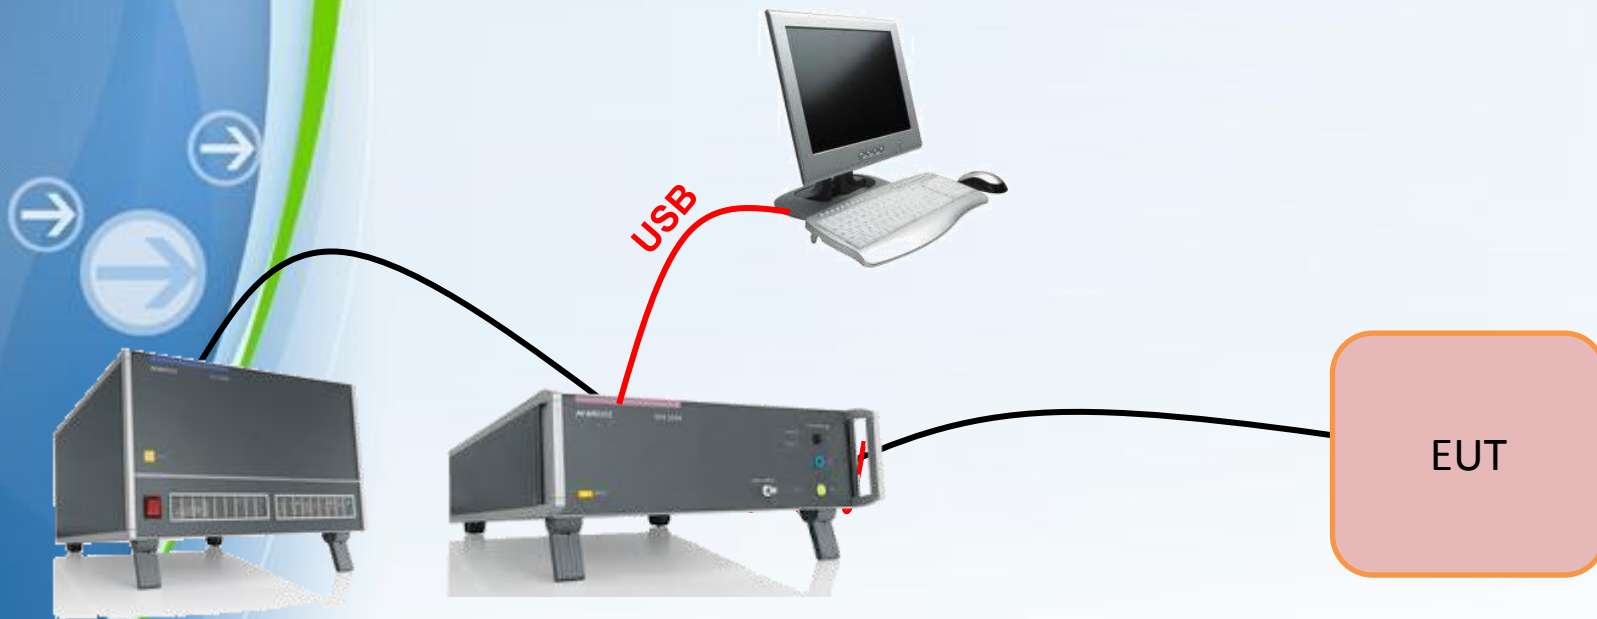


Stable source

Harmonics analyser

EUT


# DPA connection

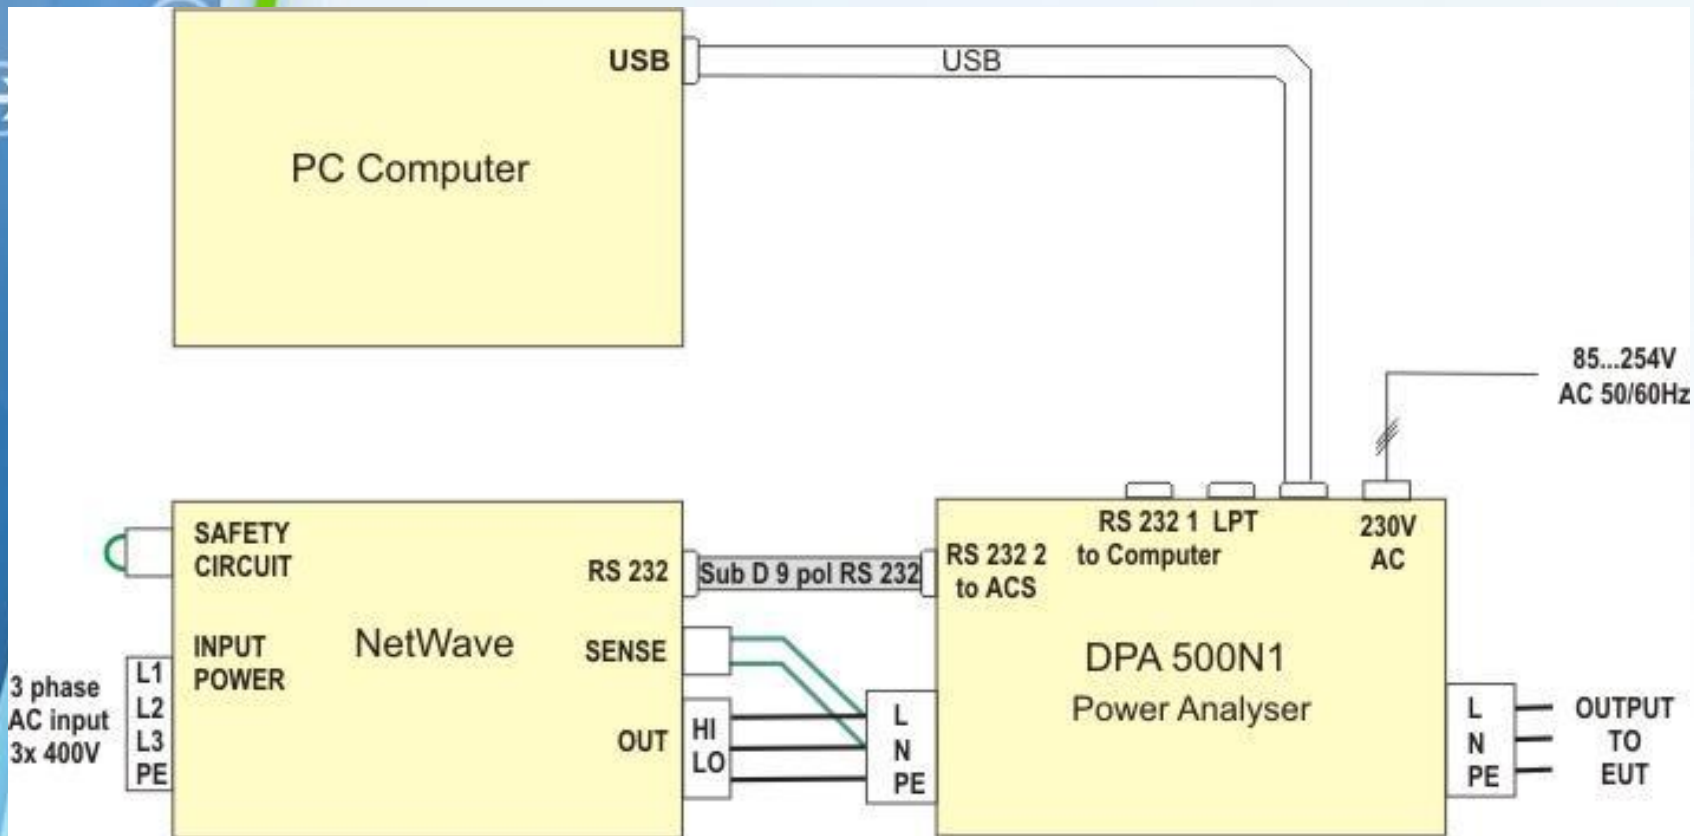




# Spectral effects

Temporal

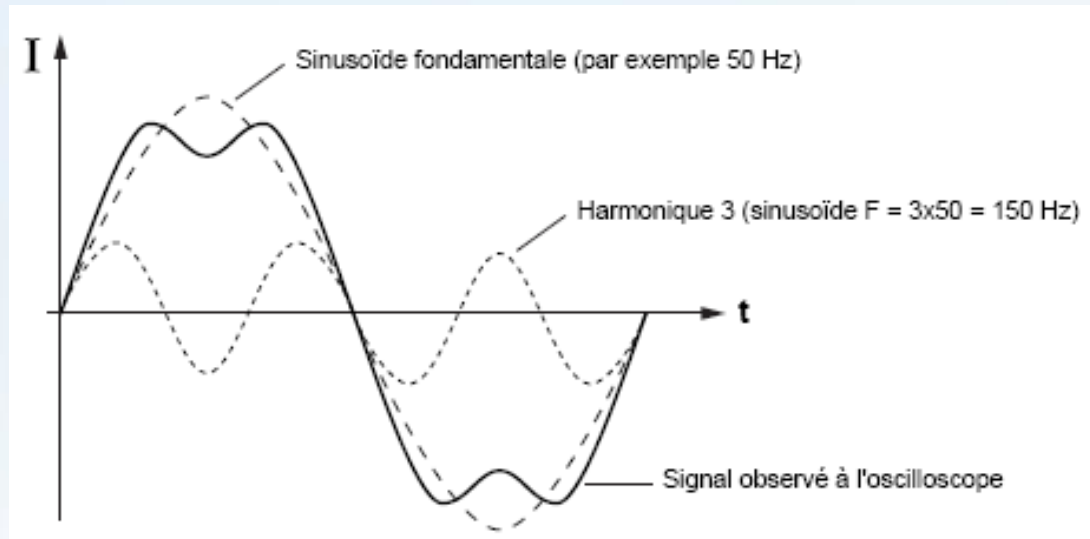

Spectral

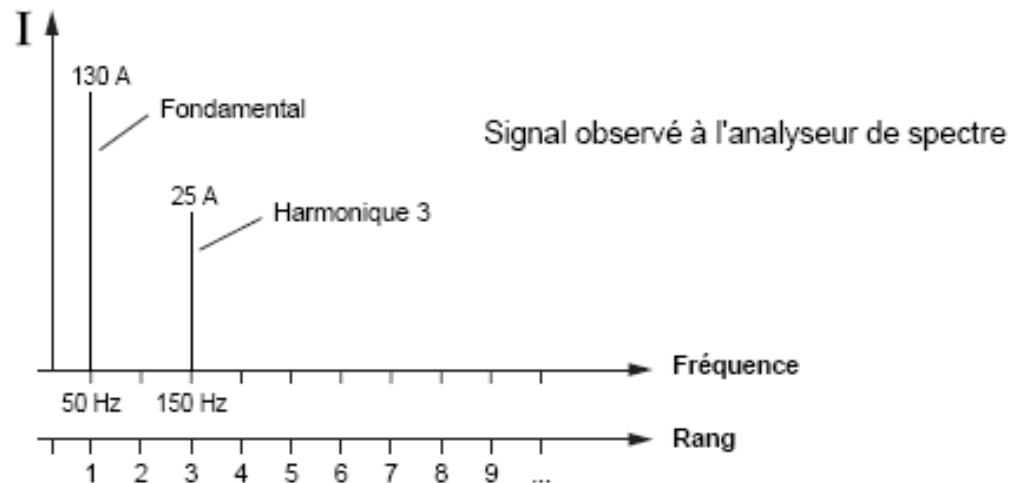



# Time vs frequency representation





# Test classes



There are 4 different classes in the EN 61000-3-2 that

have different limit values:

- Class A: Balanced 3-phase equipment, household appliances excluding equipment identified as class D, tools, excluding portable tools, dimmers for incandescent lamps, audio equipment, and all

other equipment, except that stated in one



Window title: dpa.control

Menu: Test File Setup Measurement Analyse Report Window Info

Toolbar: Refresh, Save, Folder, Navigation, -H +H, L1 L2 L3, Waveform, ACS, Harm., Flicker, 3Phase, 1Phase

emtest dpa.control

Harmonics  
Flicker  
3-phase  
1-phase

Select

operating mode

harmonics 3ph simulation

# Test procedure

1. Select the correct test observation period ( Table 6.1) of the EUT ( min. 10s)
2. Enter the following data (only Class C and D ), if available

Class D : Max. Power or Class C : Maximum Fund. current and Max Power Factor

1. Start the measuring
2. Upload the data to the computer
3. Select the Class A...D
4. Start the evaluation

# Data flow

- The DPA measures simultaneously on all 2 or 6 input channels, carries out the Fourier transformation in real time
- stores all data on the internal hard disk.
- When measuring fluctuations the system generates approx. 1 Mbyte data per minute on the hard disk. The upload of a 2.5 minute measurement needs less than 20 seconds.

An

# Test parameters

Evaluation acc. EN/IEC or JIS C 61000-3-2

**Standard**

EN/IEC 61000-3-2 Ed.3

JIS C 61000-3-2 (Japan)

**Percentage of limits**

Enable  Percent

**Select class**

Class A

Class B

Class C

Class D

Class X

**Japan Parameters**


Vnom:  V  1 Ph.  3 Ph. Delta  Household luminaire

**Maximum smoothed data**

Power : 23.70 W Fund. Current : 0.106 A Power Factor : 0.557

# Test result

Limit values are indicated and harmonics exceeding the specified limit are marked in red colour.

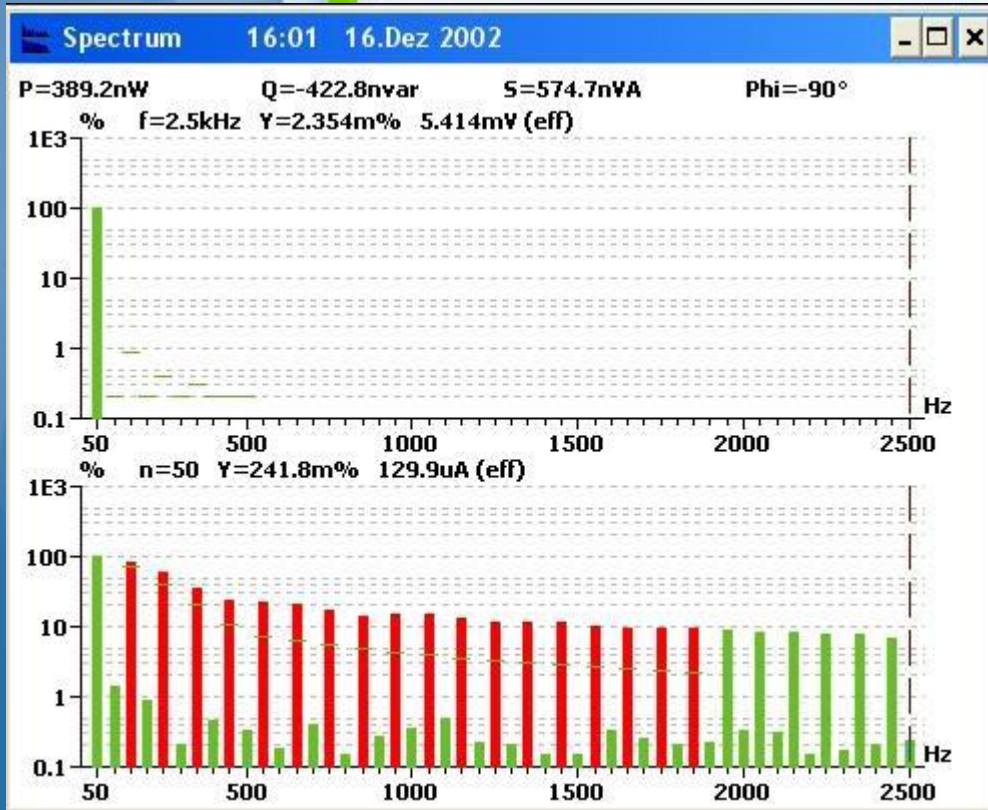

Check according to EN/IEC 61000-3-2 Ed. 3

Equipment class A <= 150% of the limit

Check harmonics 2..40 [exception odd 21..39]

Harmonic(s) >150% :  First Harmonic

Average >100% :  First Harmonic

Check odd harmonics 21..39

Partial >Partial limit :  First Dataset

Harmonic(s) >150% :  First Harmonic

Average >150% :  First Harmonic

Test result

EUT :  Power source :





# **Flickers emission IEC 61000-3-3**



# Flicker



- - - - Flicker standards are imposed to limit voltage variations caused by loads connected to the supply network that would cause lights connected at the same circuit to flicker.
- For device single phase up to 16A the standard



# Flickers emission – IEC 61000-3-3




Stable source



Flickers analyser



USB



EUT



Window title: dpa.control

Menu: Test File Setup Measurement Report Window Info

Toolbar: Refresh, Play, Print, Save, Harm., Flicker, 3Phase, 1Phase

emtest  
dpa.control

Harmonics  
Flicker  
3-phase  
1-phase

Select

operating mode

flicker 3ph

test system

# Flickers test

**Flicker-Parameter**

**Flickermeter**  
 230V / 50Hz     120V / 60Hz

**AC Source**  
 Use current ACS setting    230V/ 50Hz

**Standard**  
 EN/IEC 61000-3-3 Ed.2 2008 (replace A1:2001/A2:2005)  
 Special

Parameter	Limit	Enable
Pst	1.00	<input checked="" type="checkbox"/>
Plt	0.65	<input checked="" type="checkbox"/>
dc	3.30	<input checked="" type="checkbox"/>
dmax	4.00	<input checked="" type="checkbox"/>
dt [s]	0.50	<input checked="" type="checkbox"/>

**Test Time**  
 Measurement time [min]    10  
 Dwell time between measurements [s]    0  
 Number of measurement    12

**Test Procedure**  
 Acc. EN/IEC 61000-3-3  
 Acc. EN/IEC 61000-3-11

**Flicker Impedance**  
 Zref (IEC 60725)  
 Ztest (Isupply >=100%)

Stop measurement if EUT is out of limits

Save    Delete    Start    Cancel


The flicker analysis is based on a standards library including the basic standards but also, and even more important, product-specific Requirements such as hair dryers and vacuum cleaners.

The actual flicker values are continuously displayed. A test can be stopped once a limit is exceeded. This could, in case, save valuable test time.

After the flicker measurement the values of  $dc$ ,  $d_{max}$ ,  $dt$  are displayed on the screen.

- $dc$  : Relative continuous voltage variation ( must be smaller than 3.3% ) The  $dc$  value is a % value relative to the nominal AC voltage of 230V AC.
- $d_{max}$ : Max. relative voltage variation (must be smaller than 4% or 6.7%). The  $d_{max}$  value is a % value relative to the nominal AC voltage of 230V AC.

- $dt$ : Time with voltage variation  $> 3\%$ . During max. 500ms the voltage is allowed to be  $> 3.3\%$  limit.

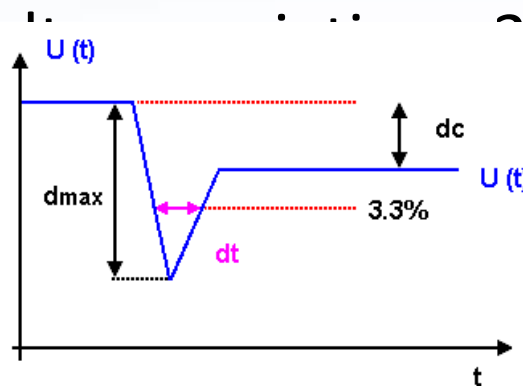

- The limits shall be applicable to voltage fluctuations and flicker at the supply terminals of the equipment under test:
- The following limits apply:
  - the value of  $P_{st}$  shall not be greater than 1,0;
  - the value of  $P_{lt}$  shall not be greater than 0,65;
  - the value of  $d(t)$  during a voltage change shall not exceed 3,3 % for more than 500 ms;
  - the relative steady-state voltage change,  $dc$ , shall not exceed 3,3 %;

# Limits

– the maximum relative voltage change  $d_{max}$ , shall not exceed

a) 4 % without additional conditions;

b) 6 % for equipment which is:

- switched manually, or
- switched automatically more frequently than twice per day

c) 7 % for equipment which is

- attended whilst in use
- switched on automatically, or is intended to be switched on manually, no more than twice per day, and also has either a delayed restart





**Result flicker measurement (maximum value)**

Measurement time: 10 min      Number of measurement: 12

	L1	L2	L3	Limit	Result
Pst	0.758	0.758	0.758	1.00	PASS
Plt	0.498	0.498	0.498	0.65	PASS
dc [%]	2.986	2.986	2.985	3.00	PASS
dmax [%]	5.121	5.126	5.126	4.00	FAIL
dt [s]	0.030	0.030	0.030	0.20	PASS



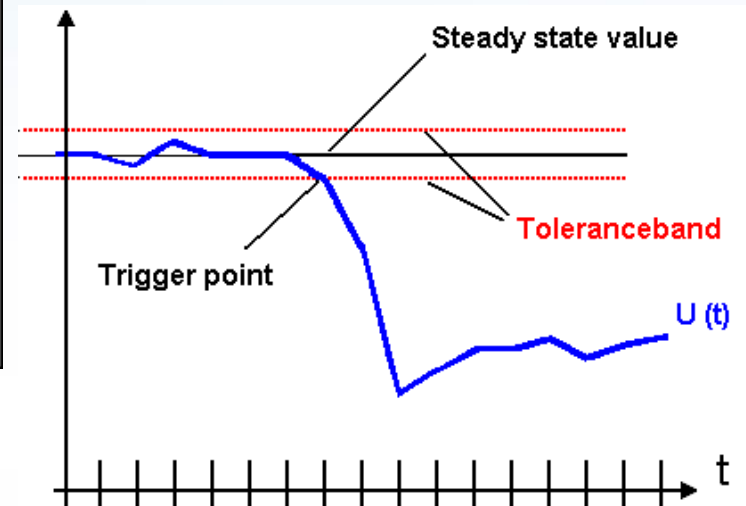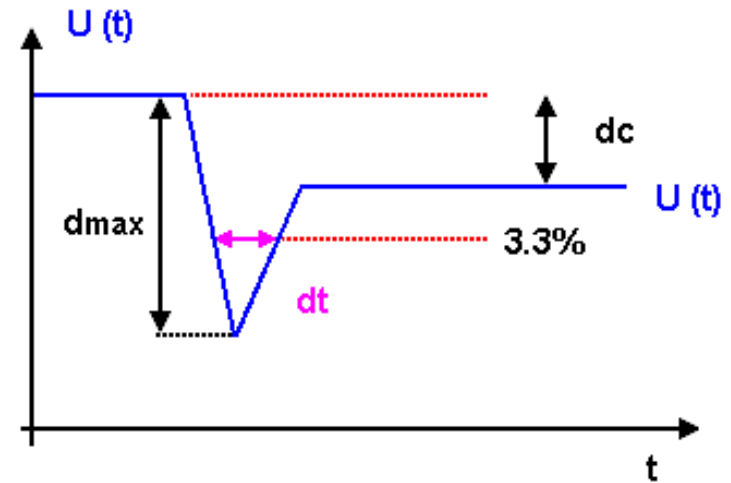

# EMC standards

Presented by: Karim Loukil & Kaïs Siala  
[Karim.wakil@cert.mincom.tn](mailto:Karim.wakil@cert.mincom.tn)  
[Kais.siala@cert.mincom.tn](mailto:Kais.siala@cert.mincom.tn)

