


UHF band 6 MHz channelling (frequencies in MHz)			
Channel	Channel boundaries		Central frequency
14	470	476	473
15	476	482	479
16	482	488	485
17	488	494	491
18	494	500	497
19	500	506	503
20	506	512	509
21	512	518	515
22	518	524	521
23	524	530	527
24	530	536	533
25	536	542	539
26	542	548	545
27	548	554	551
28	554	560	557
29	560	566	563
30	566	572	569
31	572	578	575
32	578	584	581
33	584	590	587
34	590	596	593
35	596	602	599
36	602	608	605
37	608	614	611
38	614	620	617
39	620	626	623
40	626	632	629
41	632	638	635
42	638	644	641
43	644	650	647
44	650	656	653
45	656	662	659
46	662	668	665
47	668	674	671
48	674	680	677
49	680	686	683
50	686	692	689
51	692	698	695
52	698	704	701
53	704	710	707
54	710	716	713

UHF band 8MHz channelling (frequencies in MHz)			
Channel	Channel boundaries		Central frequency
21	470	478	474
22	478	486	482
23	486	494	490
24	494	502	498
25	502	510	506
26	510	518	514
27	518	526	522
28	526	534	530
29	534	542	538
30	542	550	546
31	550	558	554
32	558	566	562
33	566	574	570
34	574	582	578
35	582	590	586
36	590	598	594
37	598	606	602
38	606	614	610
39	614	622	618
40	622	630	626
41	630	638	634
42	638	646	642
43	646	654	650
44	654	662	658
45	662	670	666
46	670	678	674
47	678	686	682
48	686	694	690
49	694	702	698
50	702	710	706
51	710	718	714

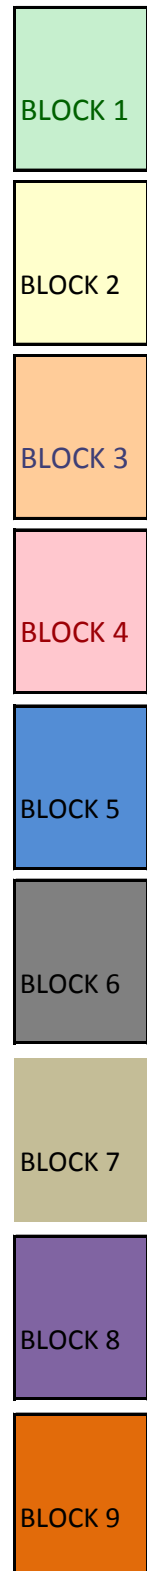

55	716	722	719
56	722	728	725
57	728	734	731
58	734	740	737
59	740	746	743
60	746	752	749
61	752	758	755
62	758	764	761
63	764	770	767
64	770	776	773
65	776	782	779
66	782	788	785
67	788	794	791
68	794	800	797
69	800	806	803
70	806	812	809
71	812	818	815
72	818	824	821
73	824	830	827
74	830	836	833
75	836	842	839
76	842	848	845
77	848	854	851
78	854	860	857
79	860	866	863
80	866	872	869
81	872	878	875
82	878	884	881
83	884	890	887

52	718	726	722
53	726	734	730
54	734	742	738
55	742	750	746
56	750	758	754
57	758	766	762
58	766	774	770
59	774	782	778
60	782	790	786
61	790	798	794
62	798	806	802
63	806	814	810
64	814	822	818
65	822	830	826
66	830	838	834
67	838	846	842
68	846	854	850
69	854	862	858

VHF band 6 MHz channelling (frequencies in MHz)			
Channel	Channel boundaries		Central frequency
7	174	180	177
8	180	186	183
9	186	192	189
10	192	198	195
11	198	204	201
12	204	210	207
13	210	216	213

VHF band 8MHz channelling (frequencies in MHz)			
Channel	Channel boundaries		Central frequency
5	174	182	178
6	182	190	186
7	190	198	194
8	198	206	202
9	206	214	210
10	214	222	218
11	222	230	226

- Channel not allocated to broadcasting according to the Radio Regulations (Article 5)
- Not included in the CAC planning
- Flexible channel for UHF, i.e. the software scans the whole concerned band
- Flexible channel for VHF, i.e. the software scans the whole concerned band