

RECOMMENDATION ITU-R P.453-8

The radio refractive index: its formula and refractivity data

(Question ITU-R 201/3)

(1970-1986-1990-1992-1994-1995-1997-1999-2001)

The ITU Radiocommunication Assembly,

considering

- a) the necessity of using a single formula for calculation of the index of refraction of the atmosphere;
- b) the need for reference data on refractivity and refractivity gradients all over the world;
- c) the necessity to have a mathematical method to express the statistical distribution of refractivity gradients,

recommends

- 1 that the atmospheric radio refractive index, n , be computed by means of the formula given in Annex 1;
- 2 that refractivity data given on world charts and global numerical maps in Annex 1 should be used, except if more reliable local data are available;
- 3 that the statistical distribution of refractivity gradients be computed using the method given in Annex 1;
- 4 that in the absence of local data on temperature and relative humidity, the global numerical map of the wet term of the surface radio refractivity exceeded for 50% of the year described in Annex 1, § 2.2 be used (see Fig. 3).

ANNEX 1

1 The formula for the radio refractive indexThe atmospheric radio refractive index, n , can be computed by the following formula:

$$n = 1 + N \times 10^{-6} \quad (1)$$

where:

 N : radio refractivity expressed by:

$$N = N_{dry} + N_{wet} = \frac{77.6}{T} \left(P + 4810 \frac{e}{T} \right) \quad (\text{N-units}) \quad (2)$$

with the dry term, N_{dry} , of radio refractivity given by:

$$N_{dry} = 77.6 \frac{P}{T} \quad (3)$$

and the wet term, N_{wet} , by:

$$N_{wet} = 3.732 \times 10^5 \frac{e}{T^2} \quad (4)$$

where:

P : atmospheric pressure (hPa)

e : water vapour pressure (hPa)

T : absolute temperature (K).

This expression may be used for all radio frequencies; for frequencies up to 100 GHz, the error is less than 0.5%. For representative profiles of temperature, pressure and water vapour pressure see Recommendation ITU-R P.835.

For ready reference, the relationship between water vapour pressure e and relative humidity is given by:

$$e = \frac{H e_s}{100} \quad \text{hPa} \quad (5)$$

with:

$$e_s = a \exp\left(\frac{b t}{t + c}\right) \quad \text{hPa} \quad (6)$$

where:

H : relative humidity (%)

t : Celsius temperature (°C)

e_s : saturation vapour pressure (hPa) at the temperature t (°C) and the coefficients a , b , c , are:

for water

$$a = 6.1121$$

$$b = 17.502$$

$$c = 240.97$$

(valid between -20° to $+50^\circ$,
with an accuracy of $\pm 0.20\%$)

for ice

$$a = 6.1115$$

$$b = 22.452$$

$$c = 272.55$$

(valid between -50° to 0° ,
with an accuracy of $\pm 0.20\%$)

Vapour pressure e is obtained from the water vapour density ρ using the equation:

$$e = \frac{\rho T}{216.7} \quad \text{hPa} \quad (7)$$

where ρ is given in g/m^3 . Representative values of ρ are given in Recommendation ITU-R P.836.

2 Surface refractivity and height dependence

2.1 Refractivity as a function of height

It has been found that the long-term mean dependence of the refractive index n upon the height h is well expressed by an exponential law:

$$n(h) = 1 + N_0 \times 10^{-6} \times \exp(-h/h_0) \quad (8)$$

where:

N_0 : average value of atmospheric refractivity extrapolated to sea level

h_0 : scale height (km).

N_0 and h_0 can be determined statistically for different climates. For reference purposes a global mean of the height profile of refractivity may be defined by:

$$N_0 = 315$$

$$h_0 = 7.35 \text{ km}$$

These numerical values apply only for terrestrial paths.

This reference profile may be used to compute the value of refractivity N_s at the Earth's surface from N_0 as follows:

$$N_s = N_0 \exp(-h_s/h_0) \quad (9)$$

where:

h_s : height of the Earth's surface above sea level (km).

It is to be noted, however, that the contours of Figs. 1 and 2 were derived using a value of h_0 equal to 9.5 km. Figures 1 and 2 were derived from a 5-year data set (1955-1959) from about 1000 surface stations. (Figures 1 and 2 are not available in numerical form.)

For Earth-satellite paths, the refractive index at any height is obtained using equations (1), (2) and (7) above, together with the appropriate values for the parameters given in Recommendation ITU-R P.835, Annex 1. The refractive indices thus obtained may then be used for numerical modelling of ray paths through the atmosphere.

(Note that the exponential profile in equation (9) may also be used for quick and approximate estimates of refractivity gradient near the Earth's surface and of the apparent boresight angle, as given in § 4.3 of Recommendation ITU-R P.834.)

2.2 Wet term of the surface refractivity

Figure 3 shows for easy reference the median value (50%) of the wet term of the surface refractivity exceeded for the average year. Data file ESANWET.TXT contains the numerical data.


The wet term of the surface refractivity was derived from two years (1992-1993) of initialization data of the numerical weather forecast of the European Centre for Medium-range Weather Forecast (ECMWF).

NOTE 1 – The data file ESANWET.TXT has a resolution of 1.5° in both latitude and longitude. The companion data files ESALAT.TXT and ESALON.TXT contain respectively the latitudes and longitudes of the corresponding entries (gridpoints) in data file ESANWET.TXT.

The data range from 0° to 360° in longitude and from $+90^\circ$ to -90° in latitude. For a location different from the gridpoints, the wet term of the refractivity at the desired location can be derived by performing a bi-linear interpolation on the values at the four closest gridpoints.


The data files can be obtained from the Radiocommunication Bureau (BR).

FIGURE 1
Monthly mean values of N_0 : February

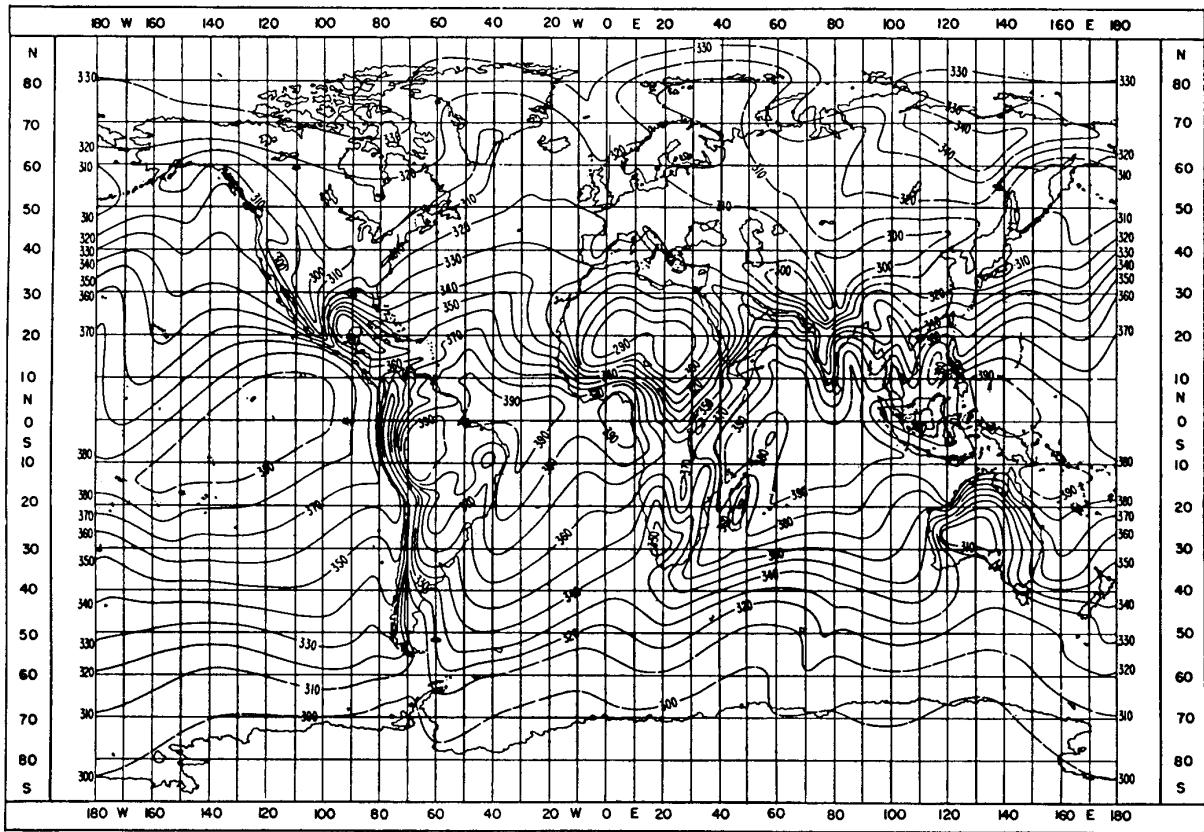


0453-01

FIGURE 2
Monthly mean values of N_0 : August

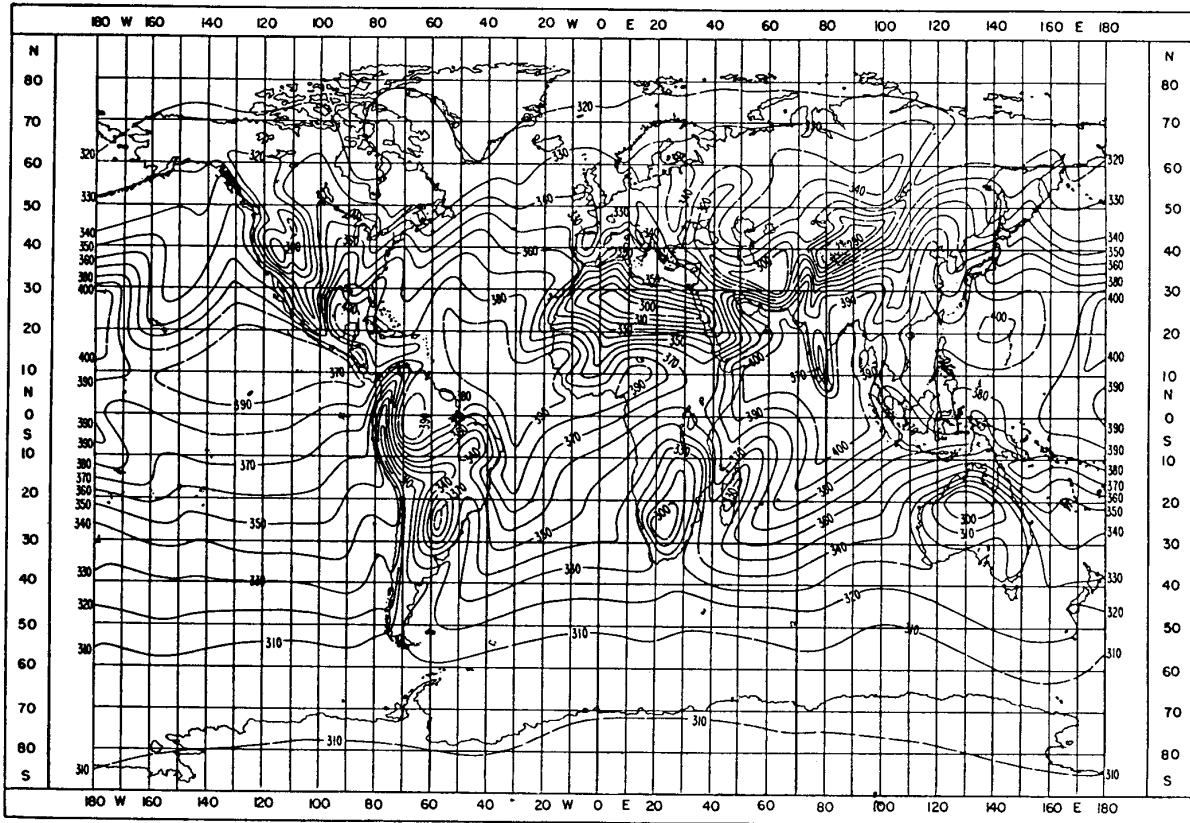

0453-02

FIGURE 3
Wet term of the surface refractivity (ppm) exceeded for 50% of the year

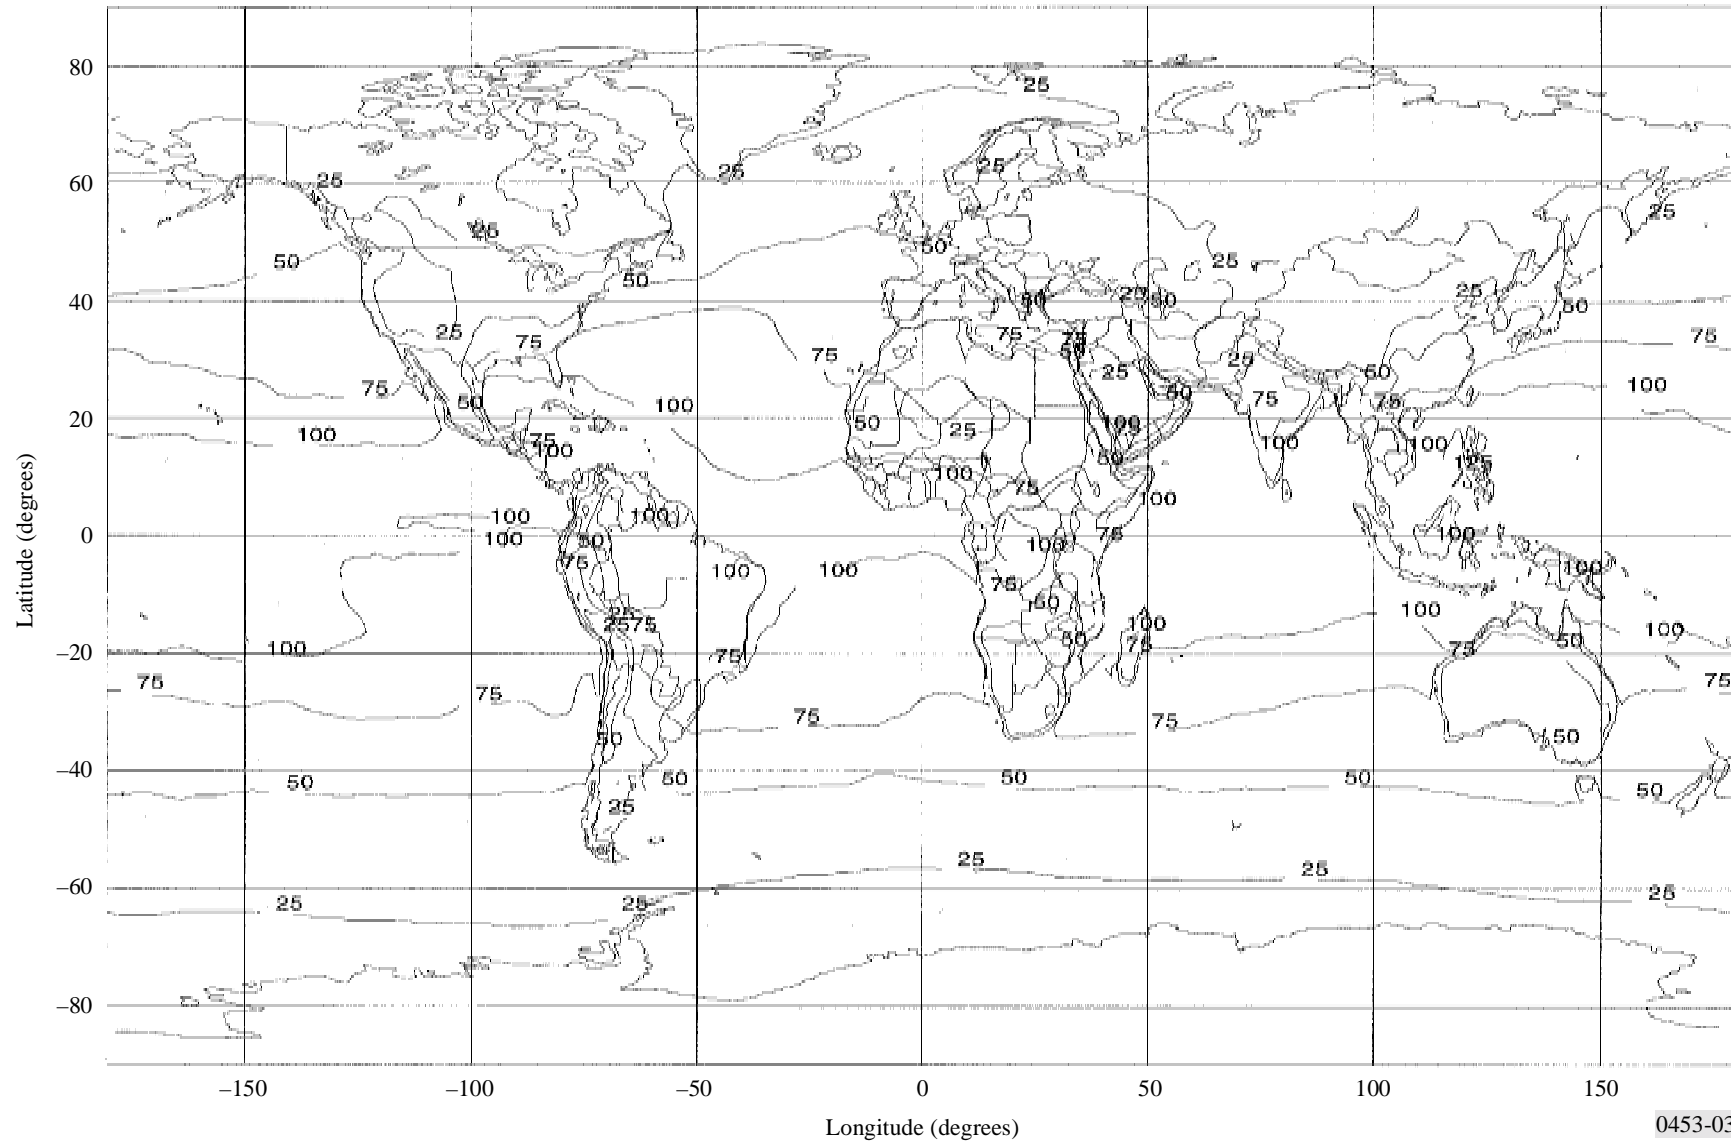

3 Vertical refractivity gradients

The statistics of the vertical gradient of radio refractivity in the lowest layer of the atmosphere are important parameters for the estimation of path clearance and propagation associated effects such as ducting on transhorizon paths, surface reflection and multipath fading and distortion on terrestrial line-of-sight links.

3.1 In the first kilometre of the atmosphere

Figures 4 to 7 present isopleths of monthly mean decrease (i.e. lapse) in radio refractivity over a 1 km layer from the surface. The change in radio refractivity, ΔN , was calculated from:

$$\Delta N = N_s - N_1 \quad (10)$$

where N_1 is the radio refractivity at a height of 1 km above the surface of the Earth. The ΔN values were not reduced to a reference surface. Figures 4 to 7 were derived from a 5-year data set (1955-1959) from 99 radiosonde sites. (Figures 4 to 7 are not available in numerical form.)

3.2 In the lowest atmospheric layer

Refractivity gradient statistics for the lowest 100 m from the surface of the Earth are used to estimate the probability of occurrence of ducting and multipath conditions. Where more reliable local data are not available, the charts in Figs. 8 to 11 give such statistics for the world which were derived from a 5-year data set (1955-1959) from 99 radiosonde sites. (Figures 8 to 11 are not available in numerical form.)

Figures 12 to 16 show for easy reference the refractivity gradient in the lowest 65 m of the atmosphere, dN_1 . Datafiles DNDZ_xx.TXT contain the numerical data shown in these Figures.

The refractivity gradient was derived from two years (1992-1993) of initialization data (4 times a day) of the numerical weather forecast of the ECMWF.

NOTE 1 – The data files DNDZ_xx.TXT have a resolution of 1.5° in both latitude and longitude. The companion data files DNDZLAT.TXT and DNDZLON.TXT contain respectively, the latitudes and longitudes of the corresponding entries (gridpoints) in data files DNDZ_xx.TXT.

The data range from 0° to 360° in longitude and from $+90^\circ$ to -90° in latitude. For a location different from the gridpoints, the refractivity gradient at the desired location can be derived by performing a bi-linear interpolation on the values at the four closest gridpoints.

The data files can be obtained from the BR.

FIGURE 4
Monthly mean values of ΔN : February

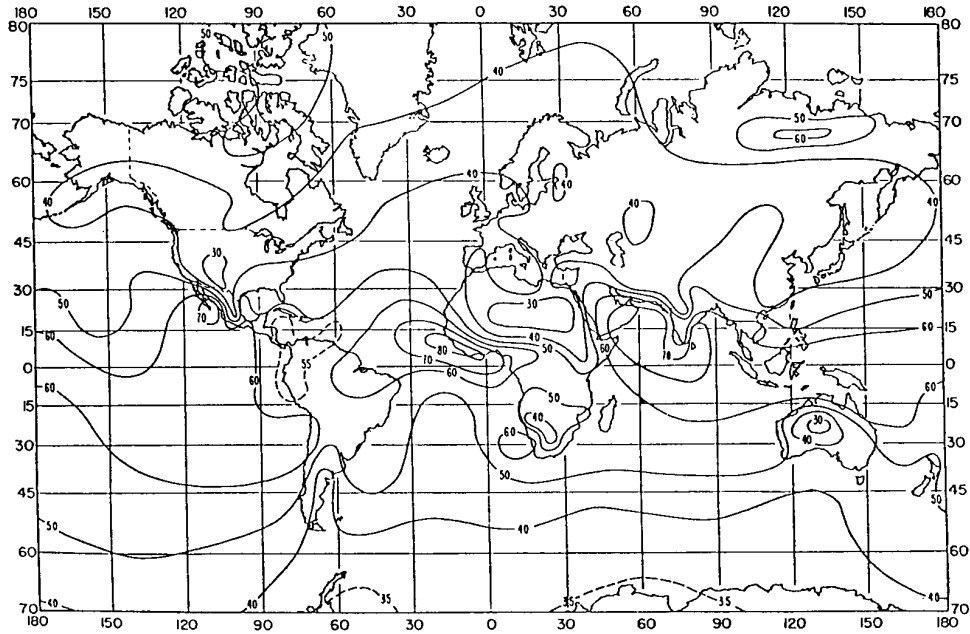


FIGURE 5
Monthly mean values of ΔN : May

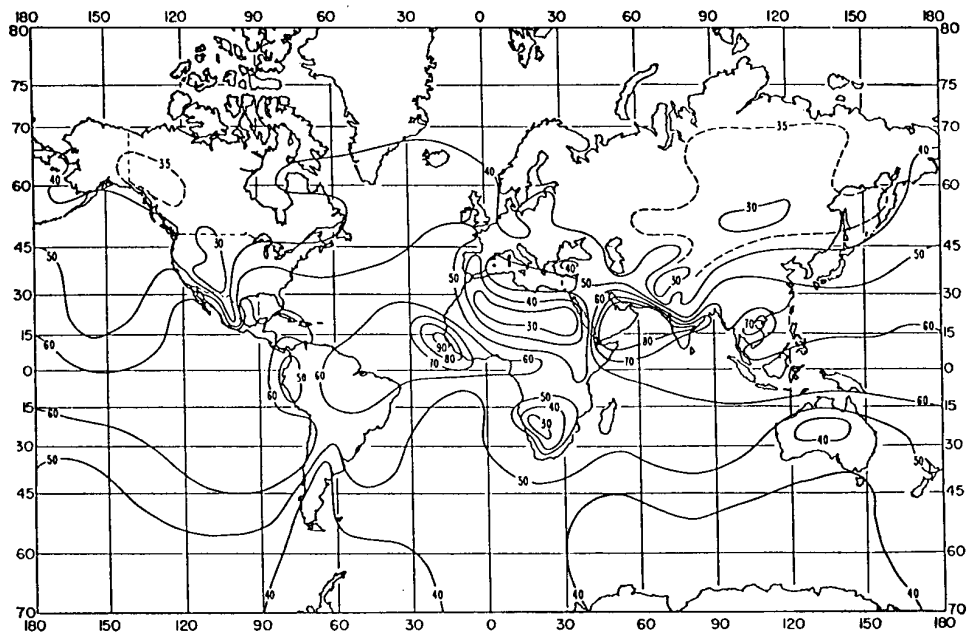


FIGURE 6
Monthly mean values of ΔN : August


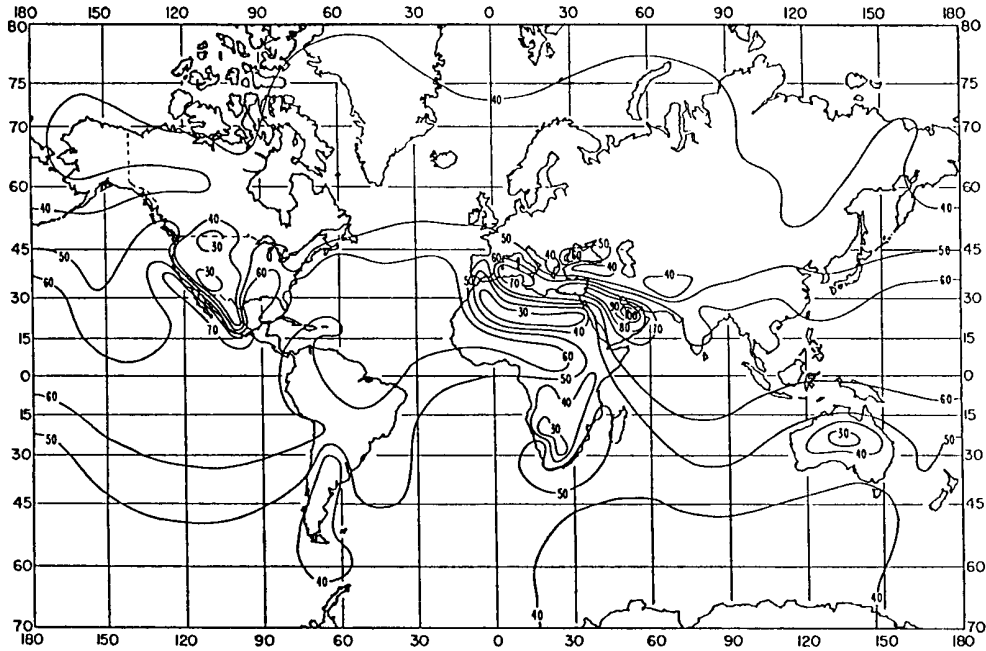


FIGURE 7
Monthly mean values of ΔN : November

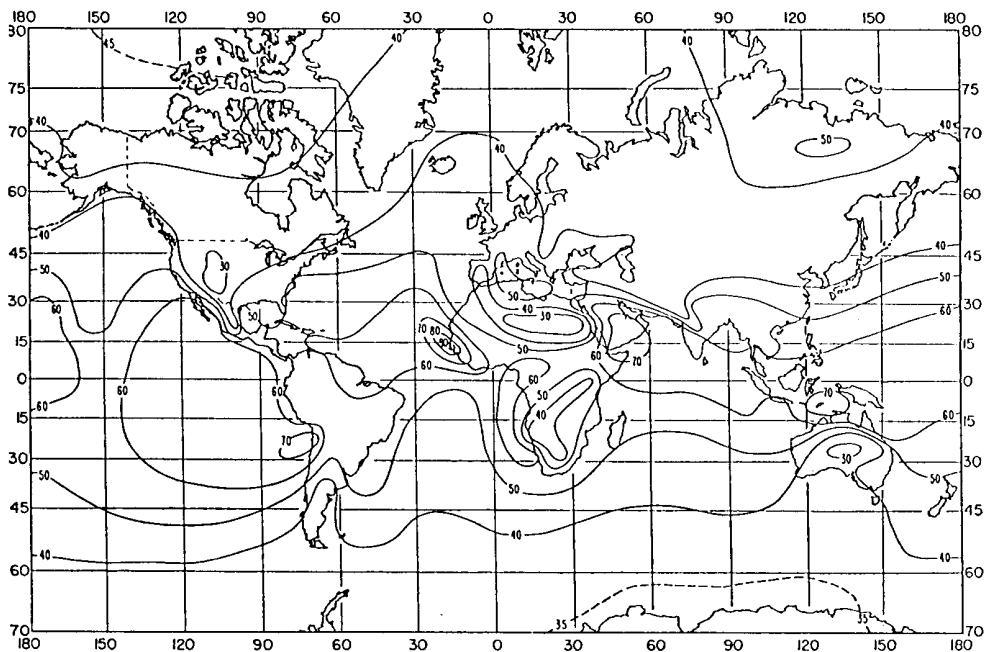

0453-067

FIGURE 8
Percentage of time gradient ≤ -100 (N-units/km): February

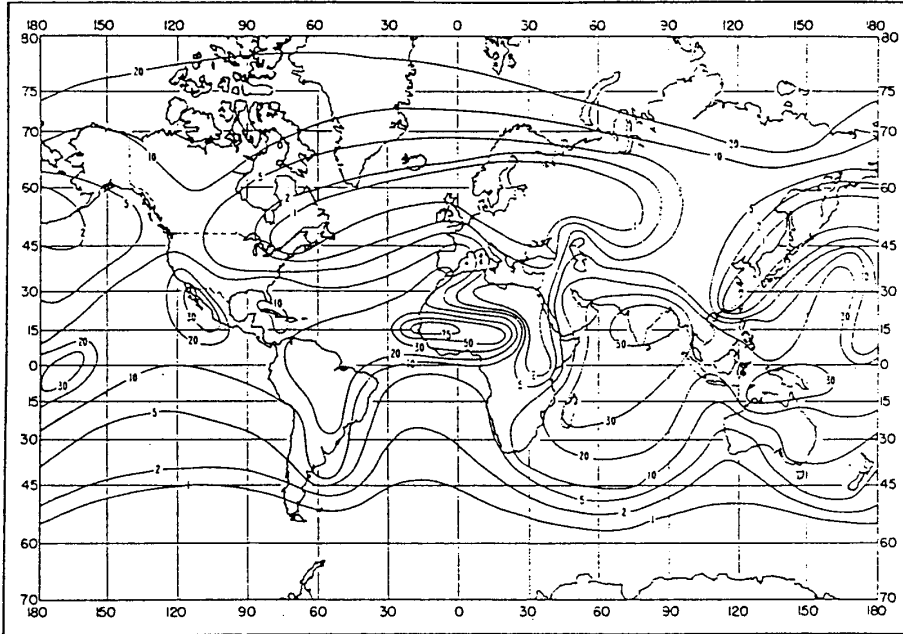


FIGURE 9
Percentage of time gradient ≤ -100 (N-units/km): May

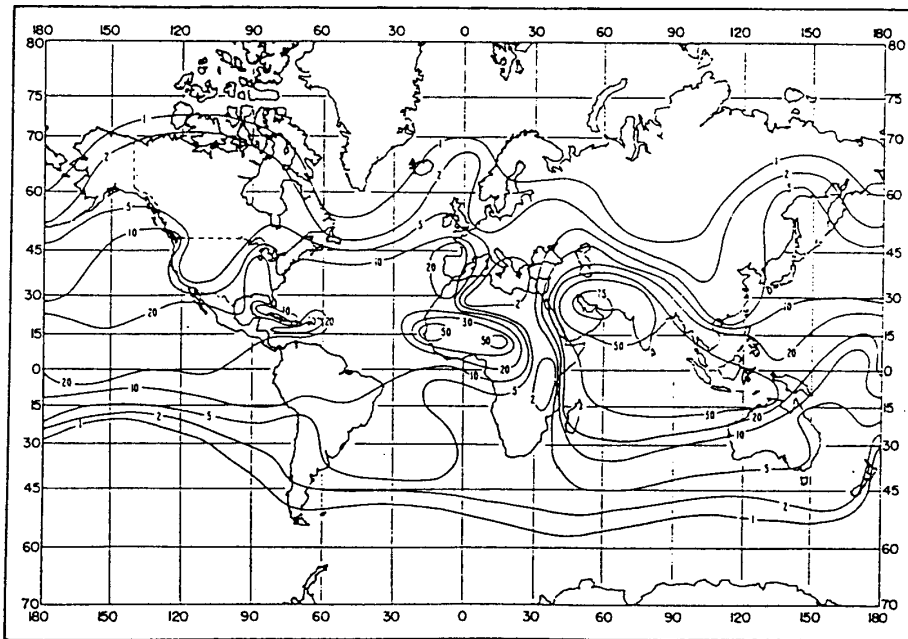


FIGURE 10
Percentage of time gradient ≤ -100 (N-units/km): August

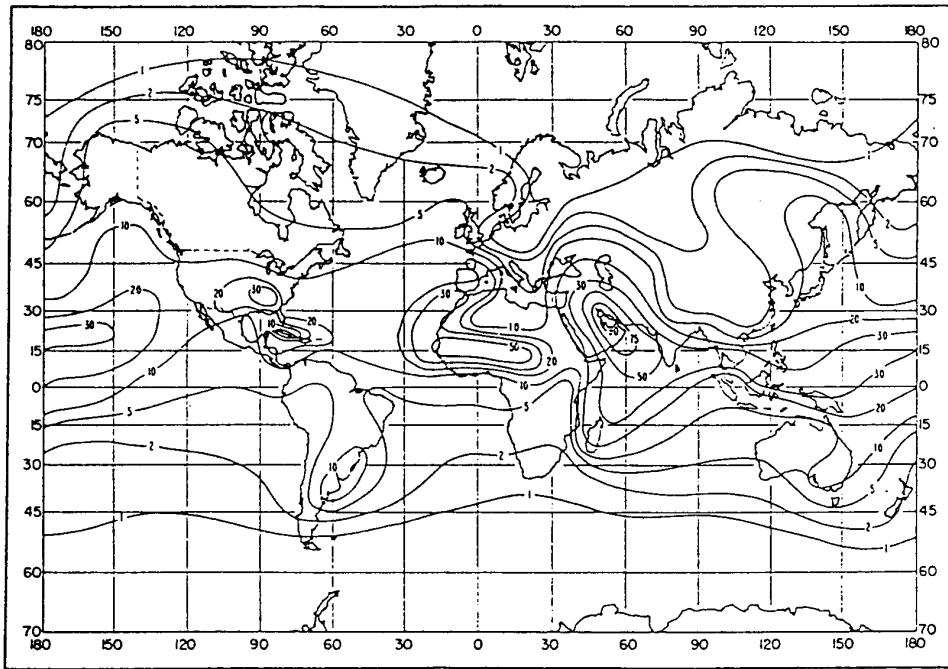


FIGURE 11
Percentage of time gradient ≤ -100 (N-units/km): November


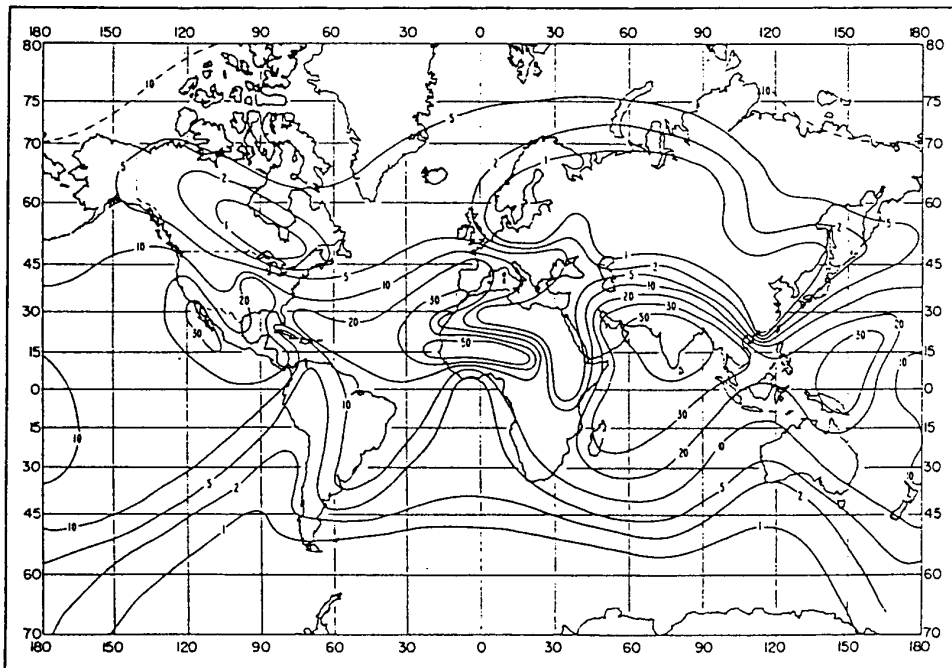


FIGURE 12
Refractivity gradient not exceeded for 1% of the average year in the lowest 65 m

(This is the parameter referred to as dN_1 in Recommendation ITU-R P.530)

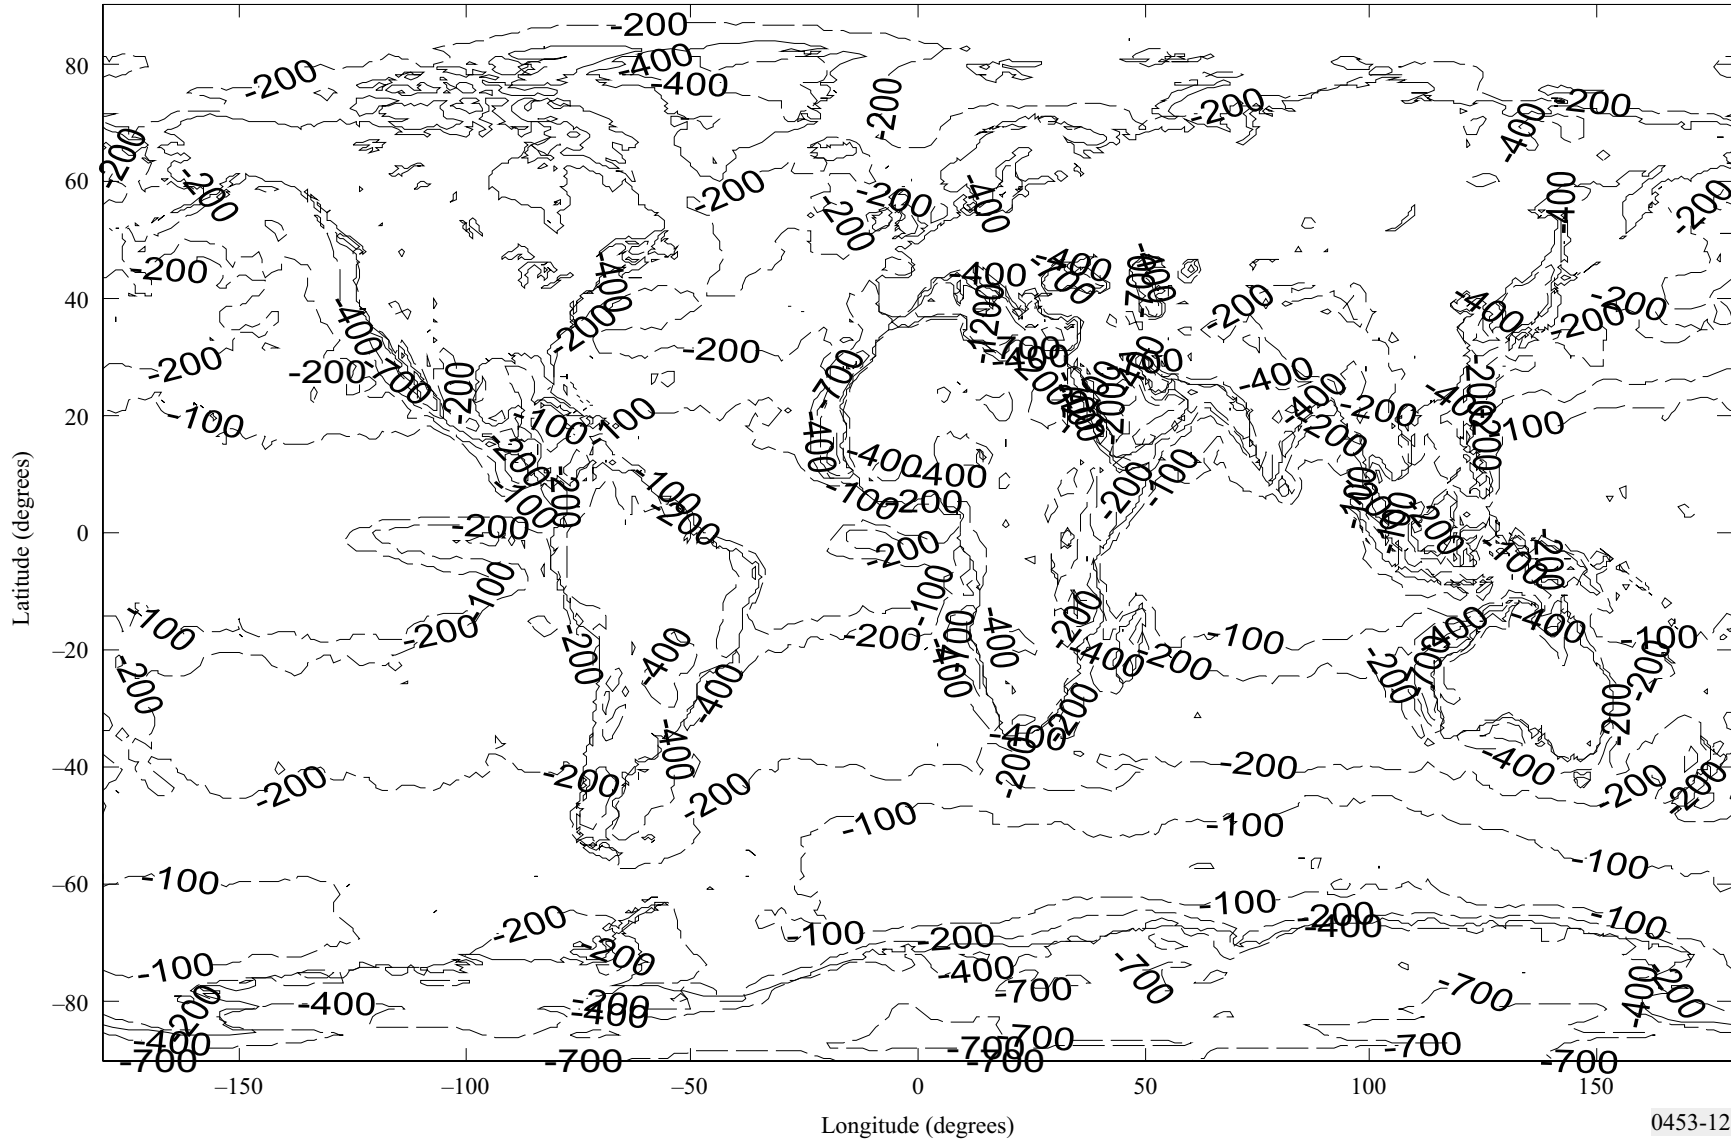

0453-12

FIGURE 13

Refractivity gradient not exceeded for 10% of the average year in the lowest 65 m

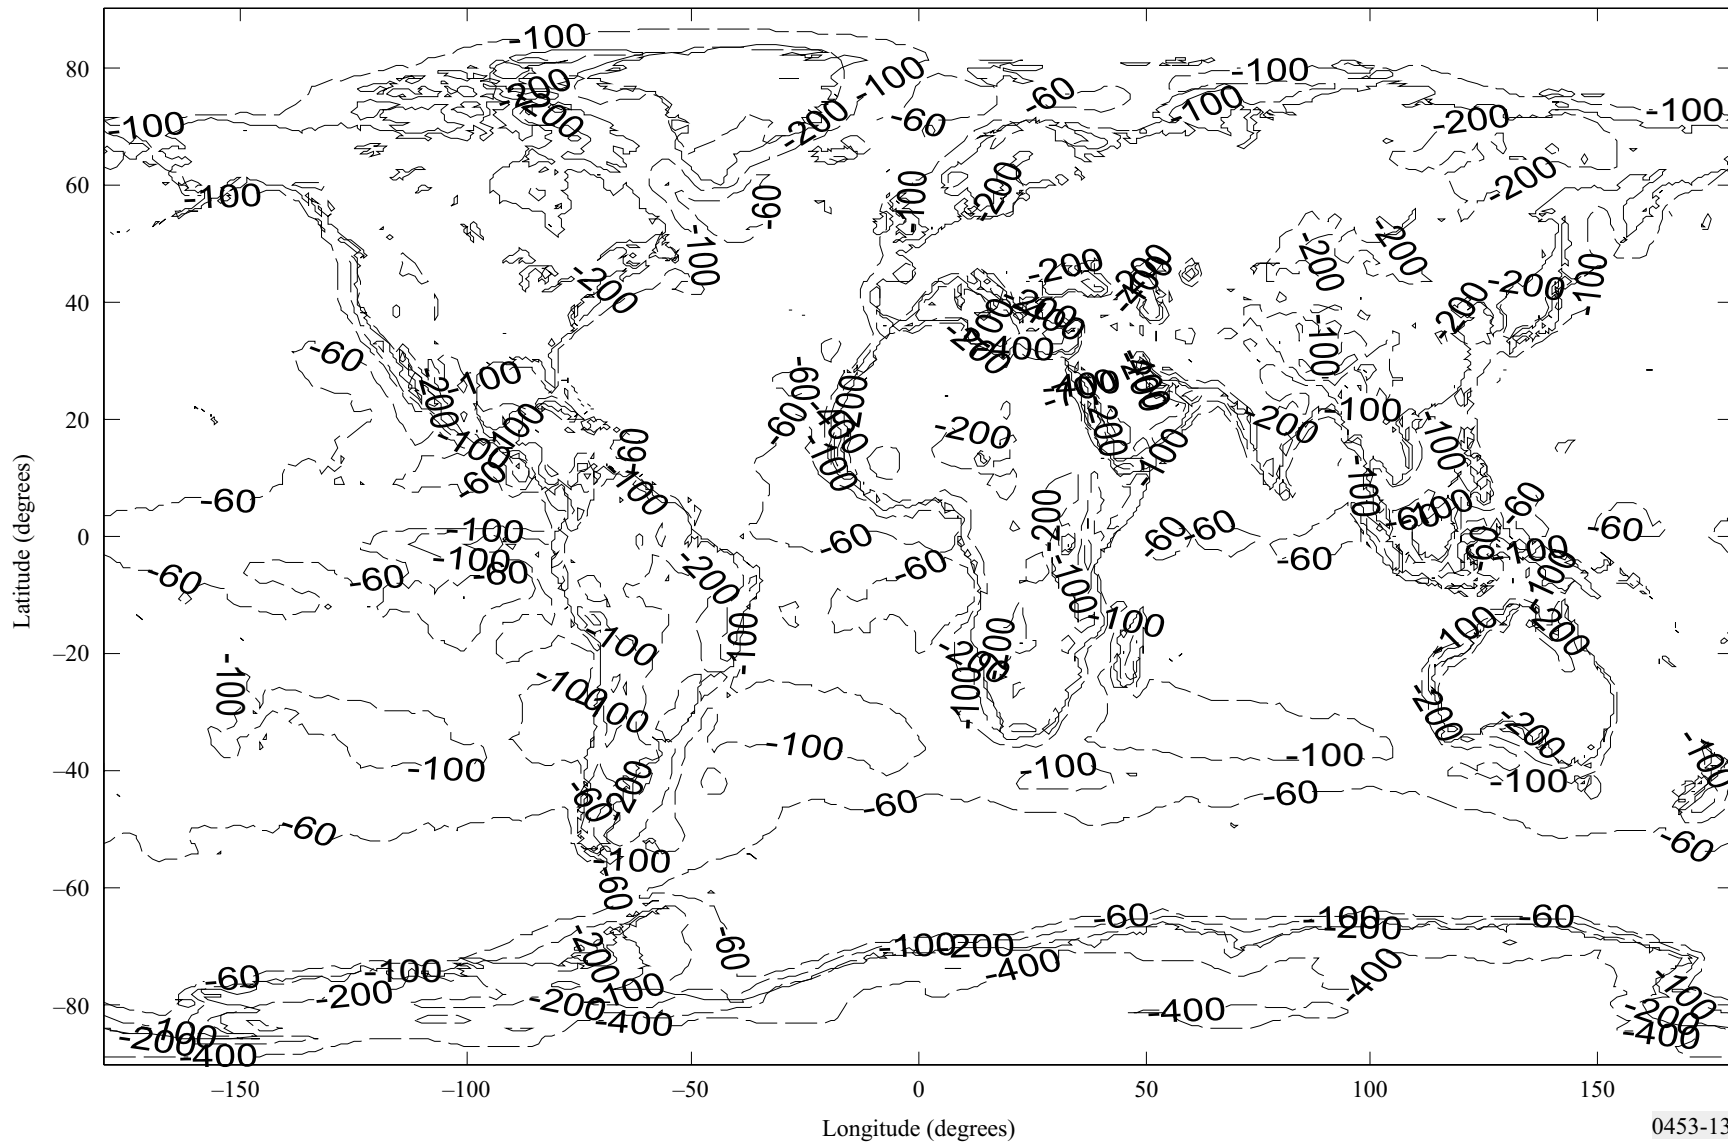


FIGURE 14
Refractivity gradient not exceeded for 50% of the average year in the lowest 65 m

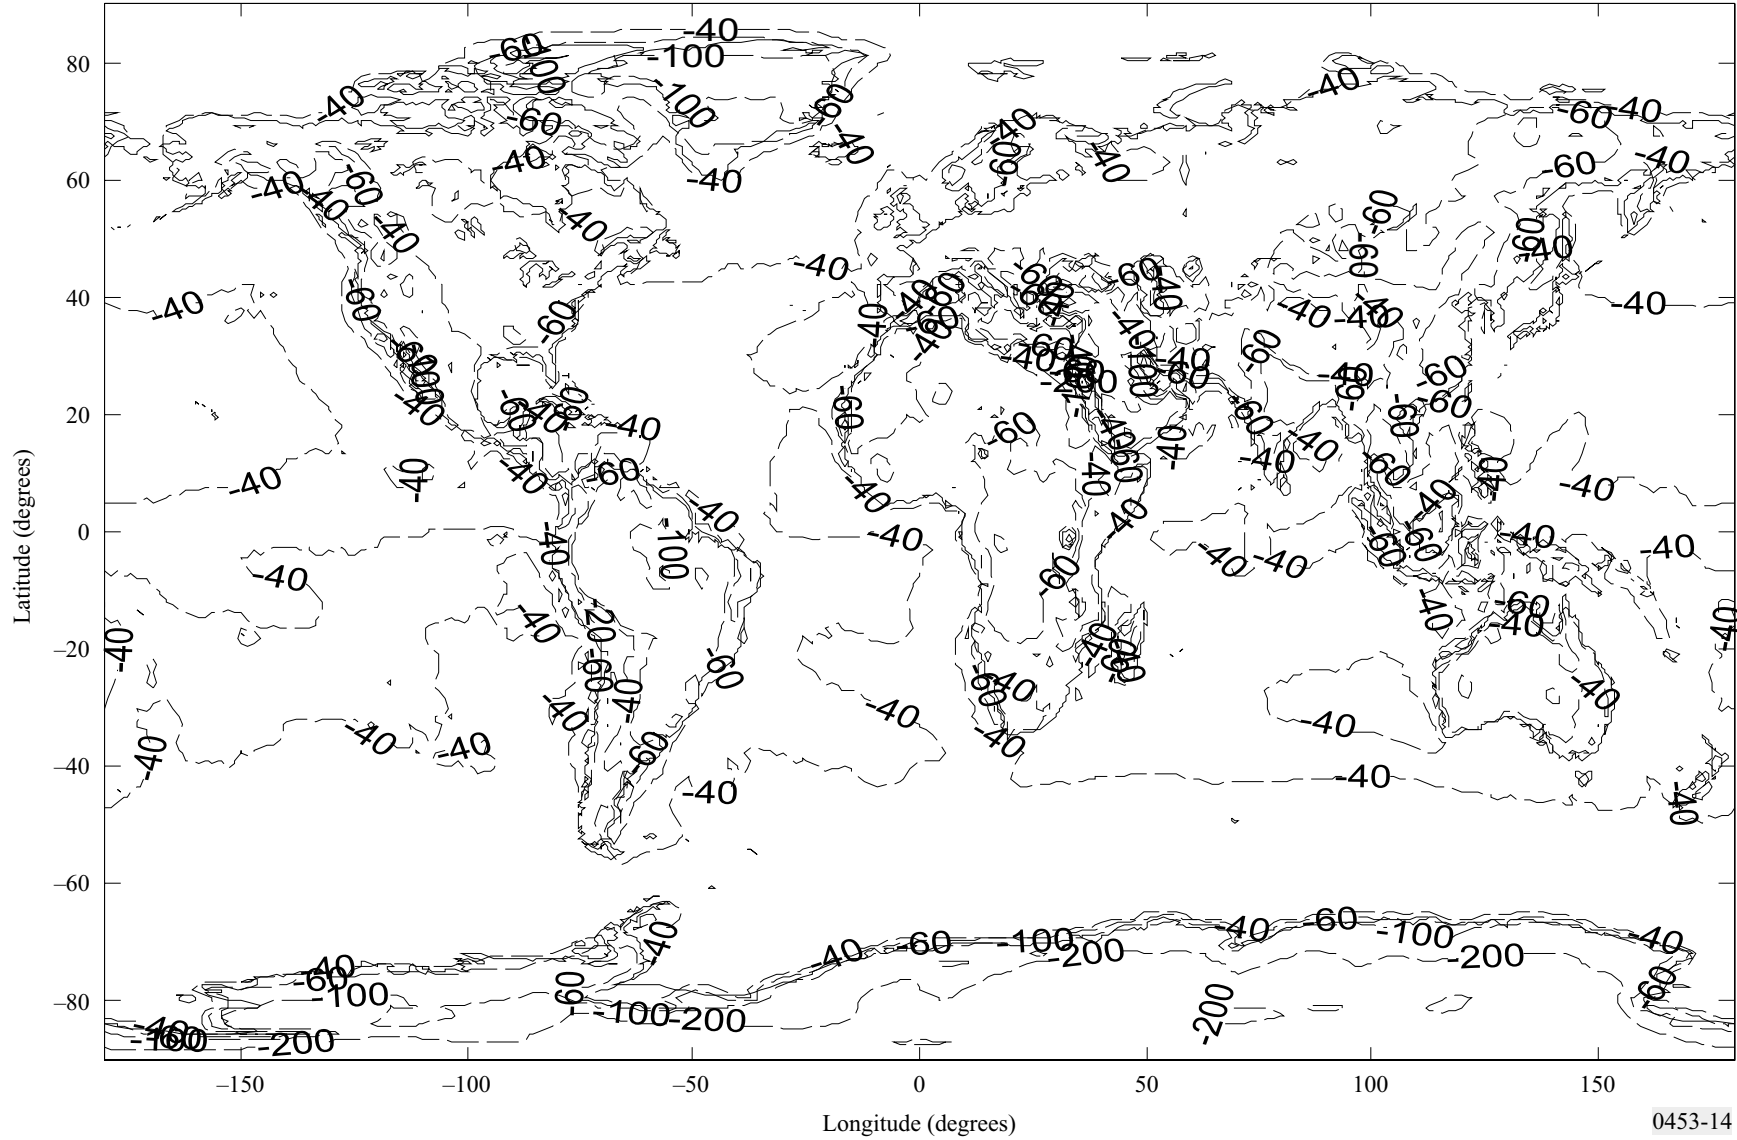


FIGURE 15

Refractivity gradient not exceeded for 90% of the average year in the lowest 65 m


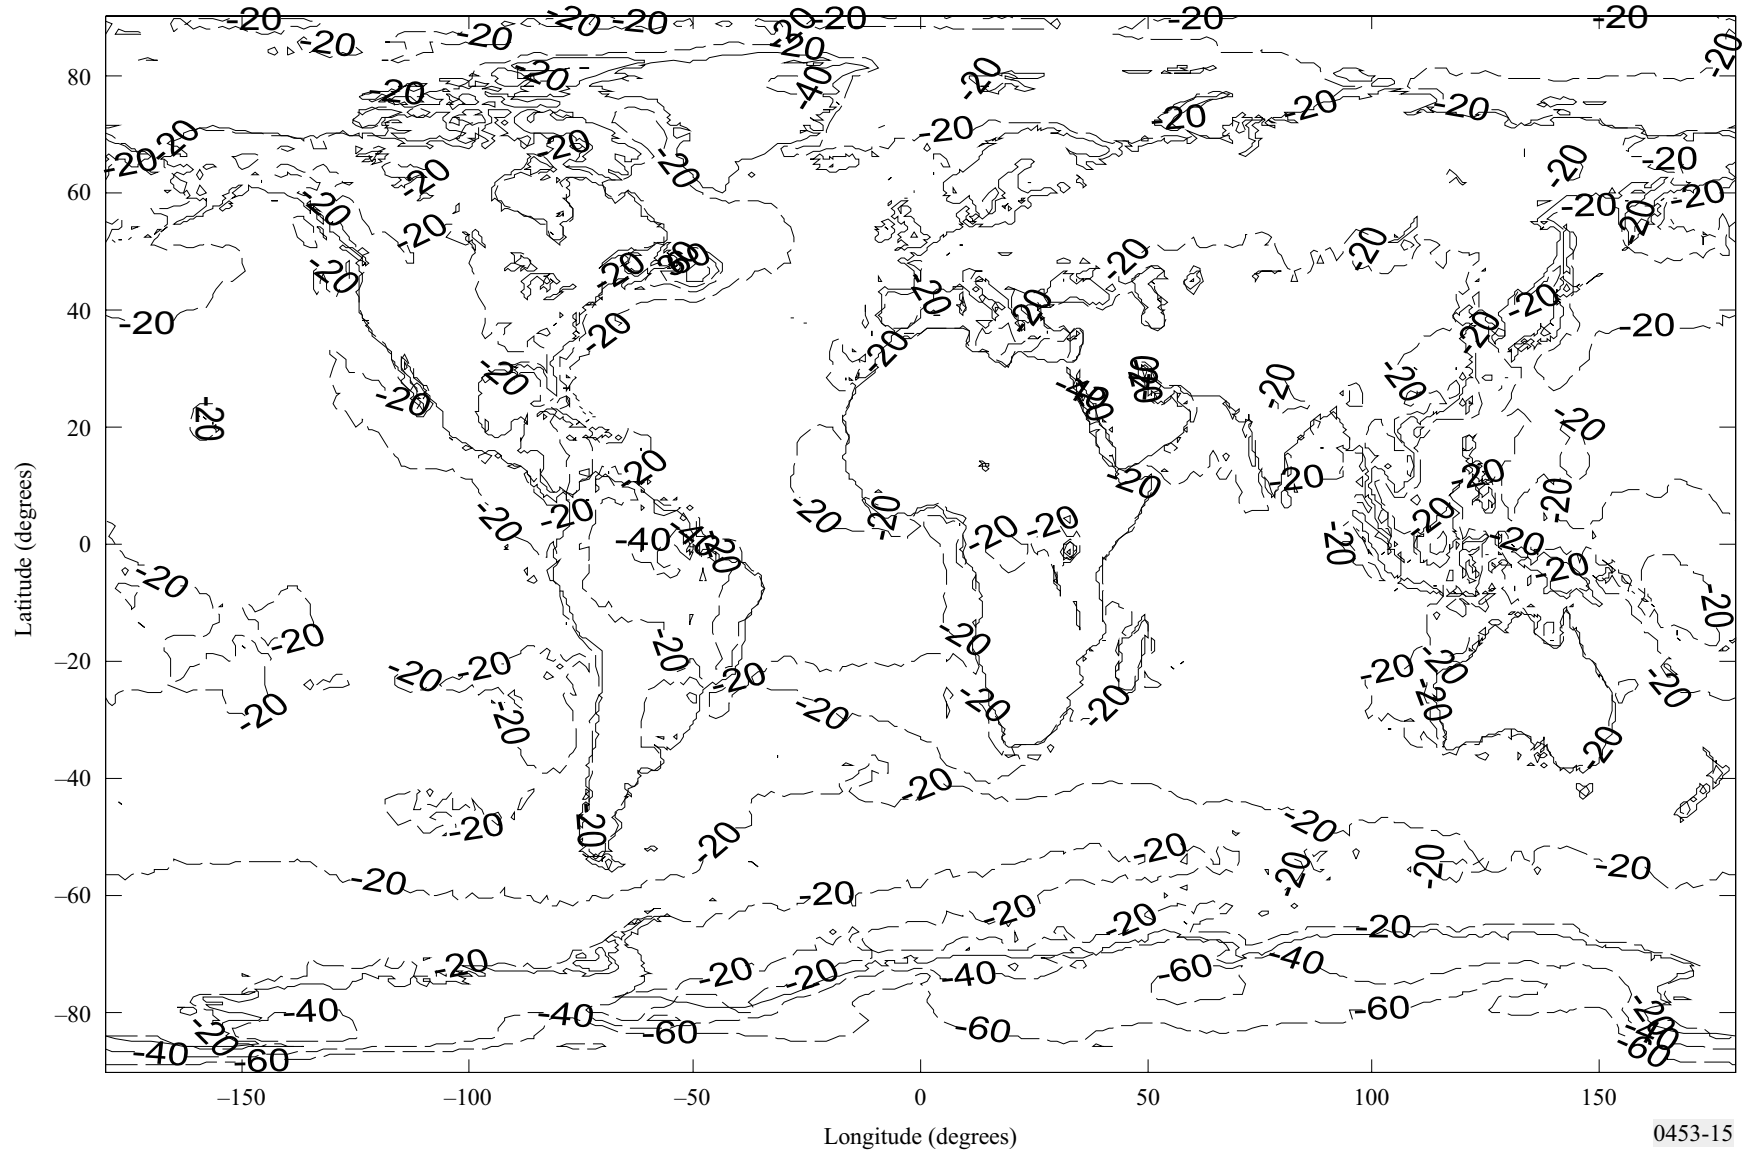


FIGURE 16

Refractivity gradient not exceeded for 99% of the average year in the lowest 65 m

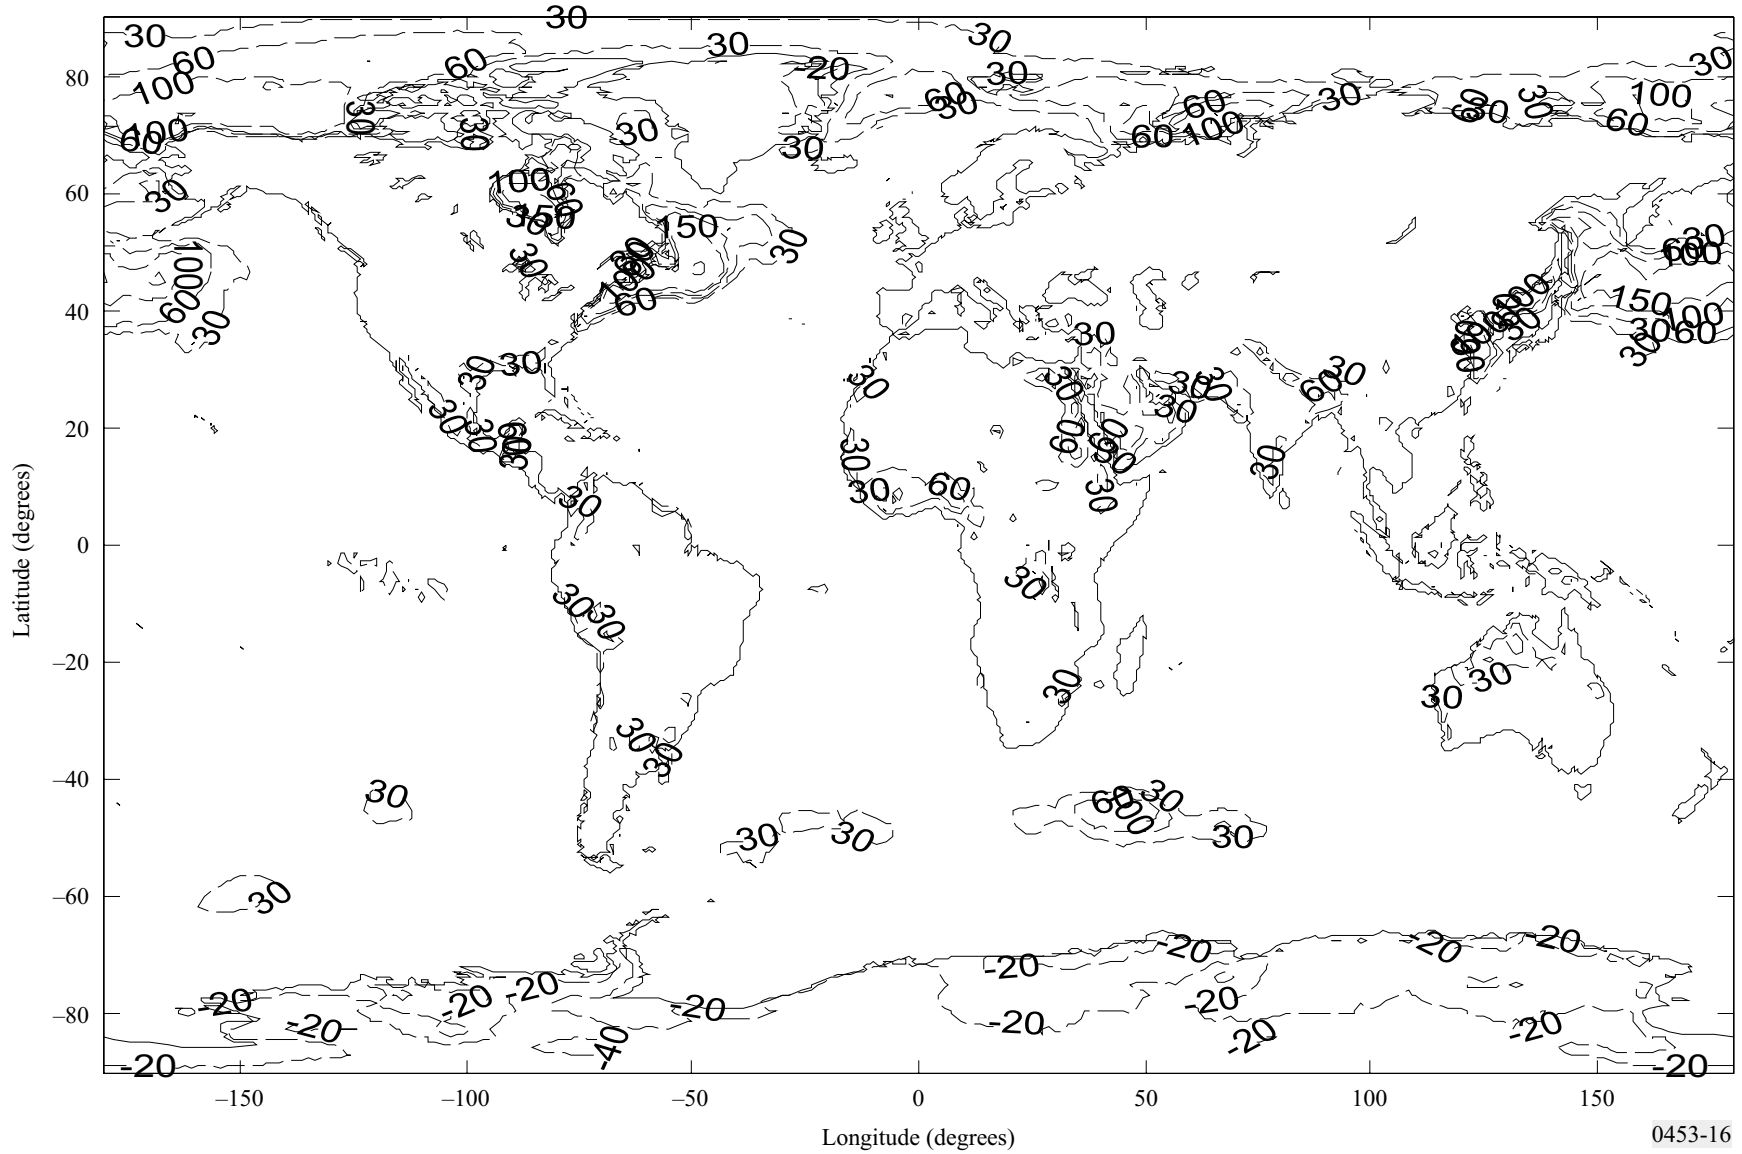

4 Surface and elevated ducts

Atmospheric ducts may cause deep slow fading, strong signal enhancement, and multipath fading on terrestrial line-of-sight links and may also be the cause of significant interference on transhorizon paths. It is therefore of interest to describe the occurrence of ducts and their structure. This section gives statistics derived from 20 years (1977-1996) of radiosonde observations from 661 sites.


Ducts are described in terms of modified refractivity defined as:

$$M(h) = N(h) + 157h \quad (\text{M-units}) \quad (11)$$

where h (km) is the height.

Figure 17 illustrates the modified refractivity as a function of height above ground and the definitions of duct types. Ducts can be of three types: surface based, elevated-surface, and elevated ducts. Due to rather few cases of elevated-surface ducts in comparison with surface ducts, the statistics have been derived by combining these two types into one group called surface ducts. Surface ducts are characterized by their strength, S_s (M-units) or E_s (M-units), and their thickness, S_t (m) or E_t (m). Two additional parameters are used to characterize elevated ducts: namely, the base height of the duct E_b (m), and E_m (m), the height within the duct of maximum M.

FIGURE 17
Definition of parameters describing a) surface, b) elevated surface
and c) elevated ducts

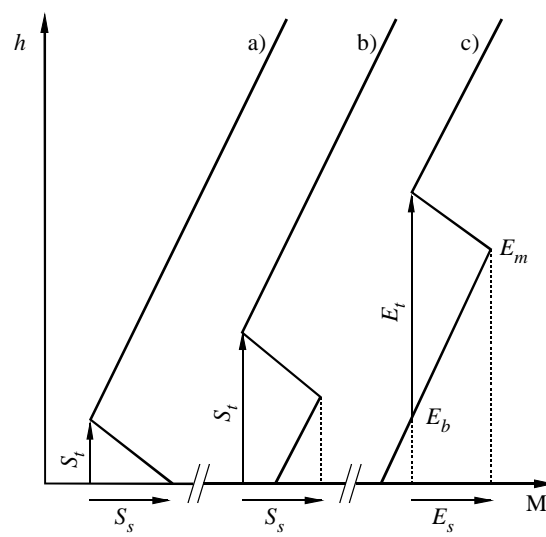

0453-17

Figures 18 to 25 present, for easy reference, the data contained in the datafiles mentioned in the caption of the Figures. The surface and elevated-surface ducts have been combined in the statistics, due to the rather few cases of elevated-surface ducts.

The data range from 0° to 360° in longitude and from $+90^\circ$ to -90° in latitude with a 1.5° resolution. For a location different from the gridpoints, the parameter of interest at the desired location can be derived by performing a bi-linear interpolation on the values at the four closest gridpoints.

The data files can be obtained from the BR.

FIGURE 18

Filename: S_OCCURRENCE.TXT

Average year surface duct occurrence, S_p (%)


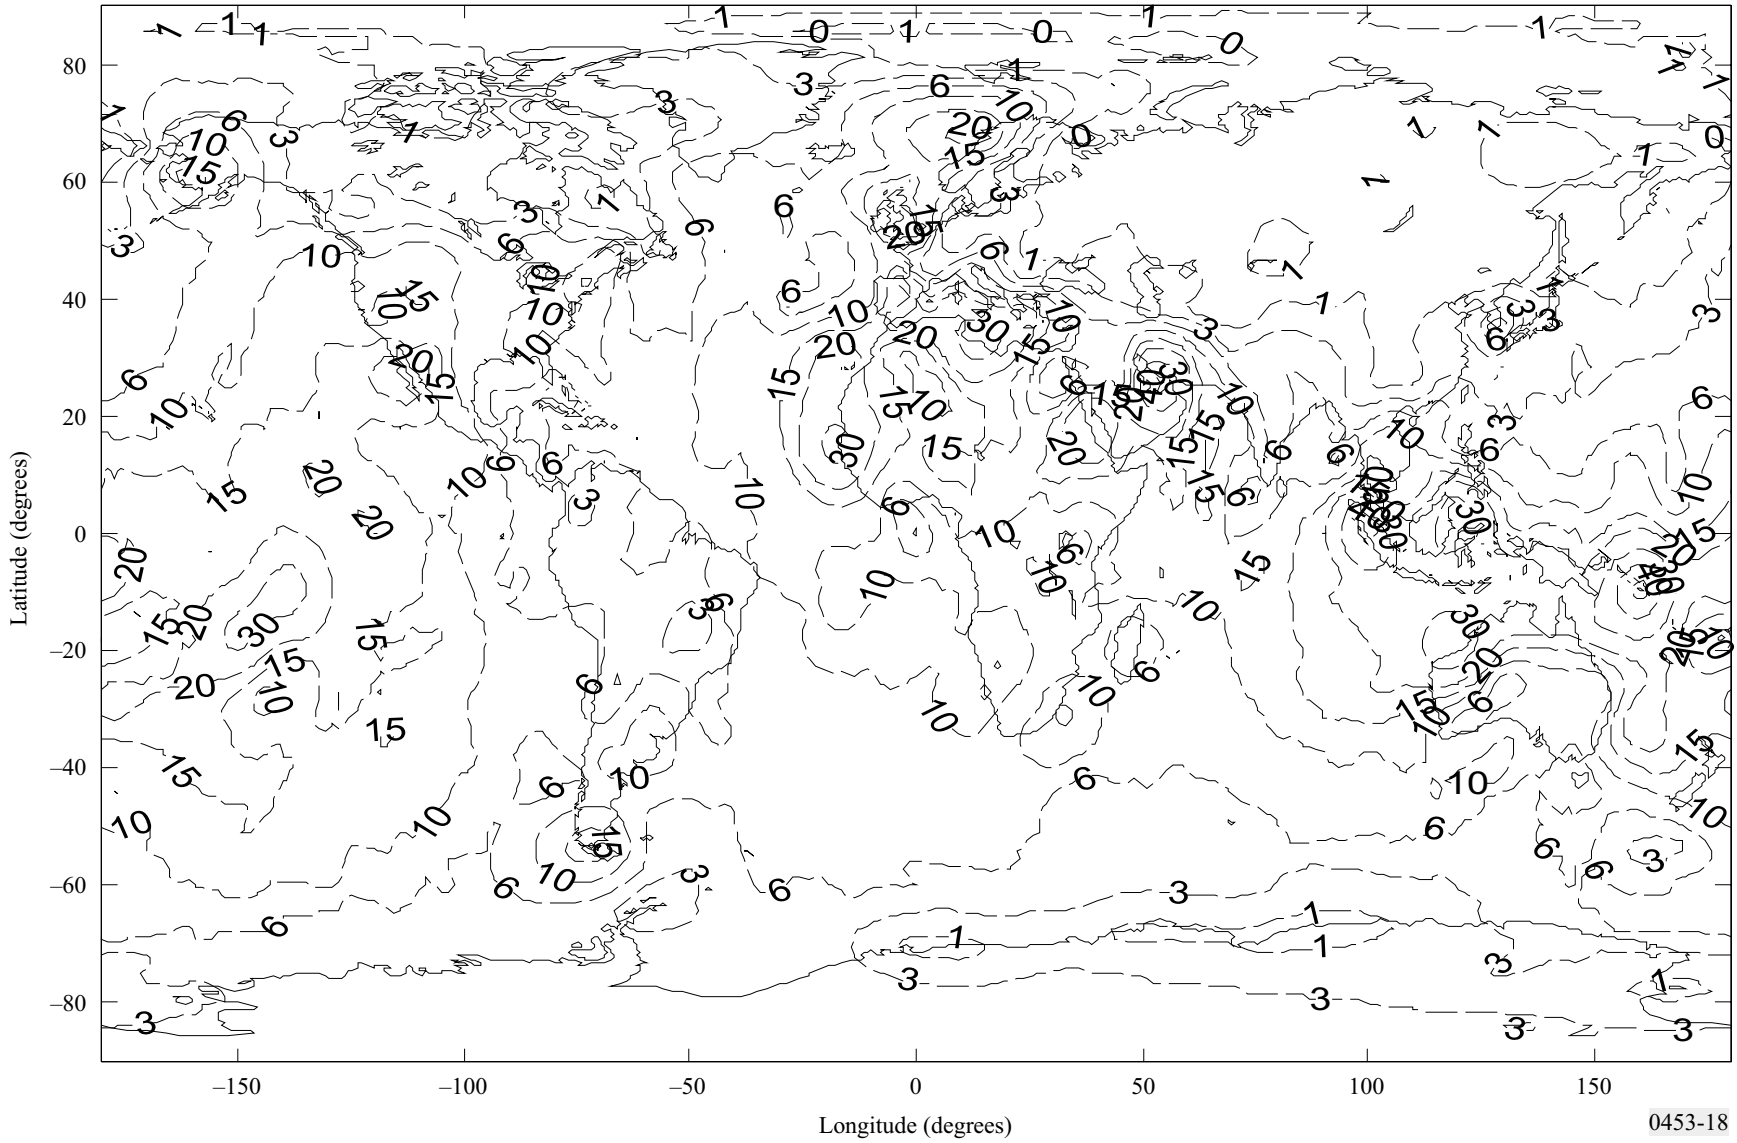


FIGURE 19
Filename: S_STRENGTH.TXT

Average year surface duct mean strength, S_y (M-units)

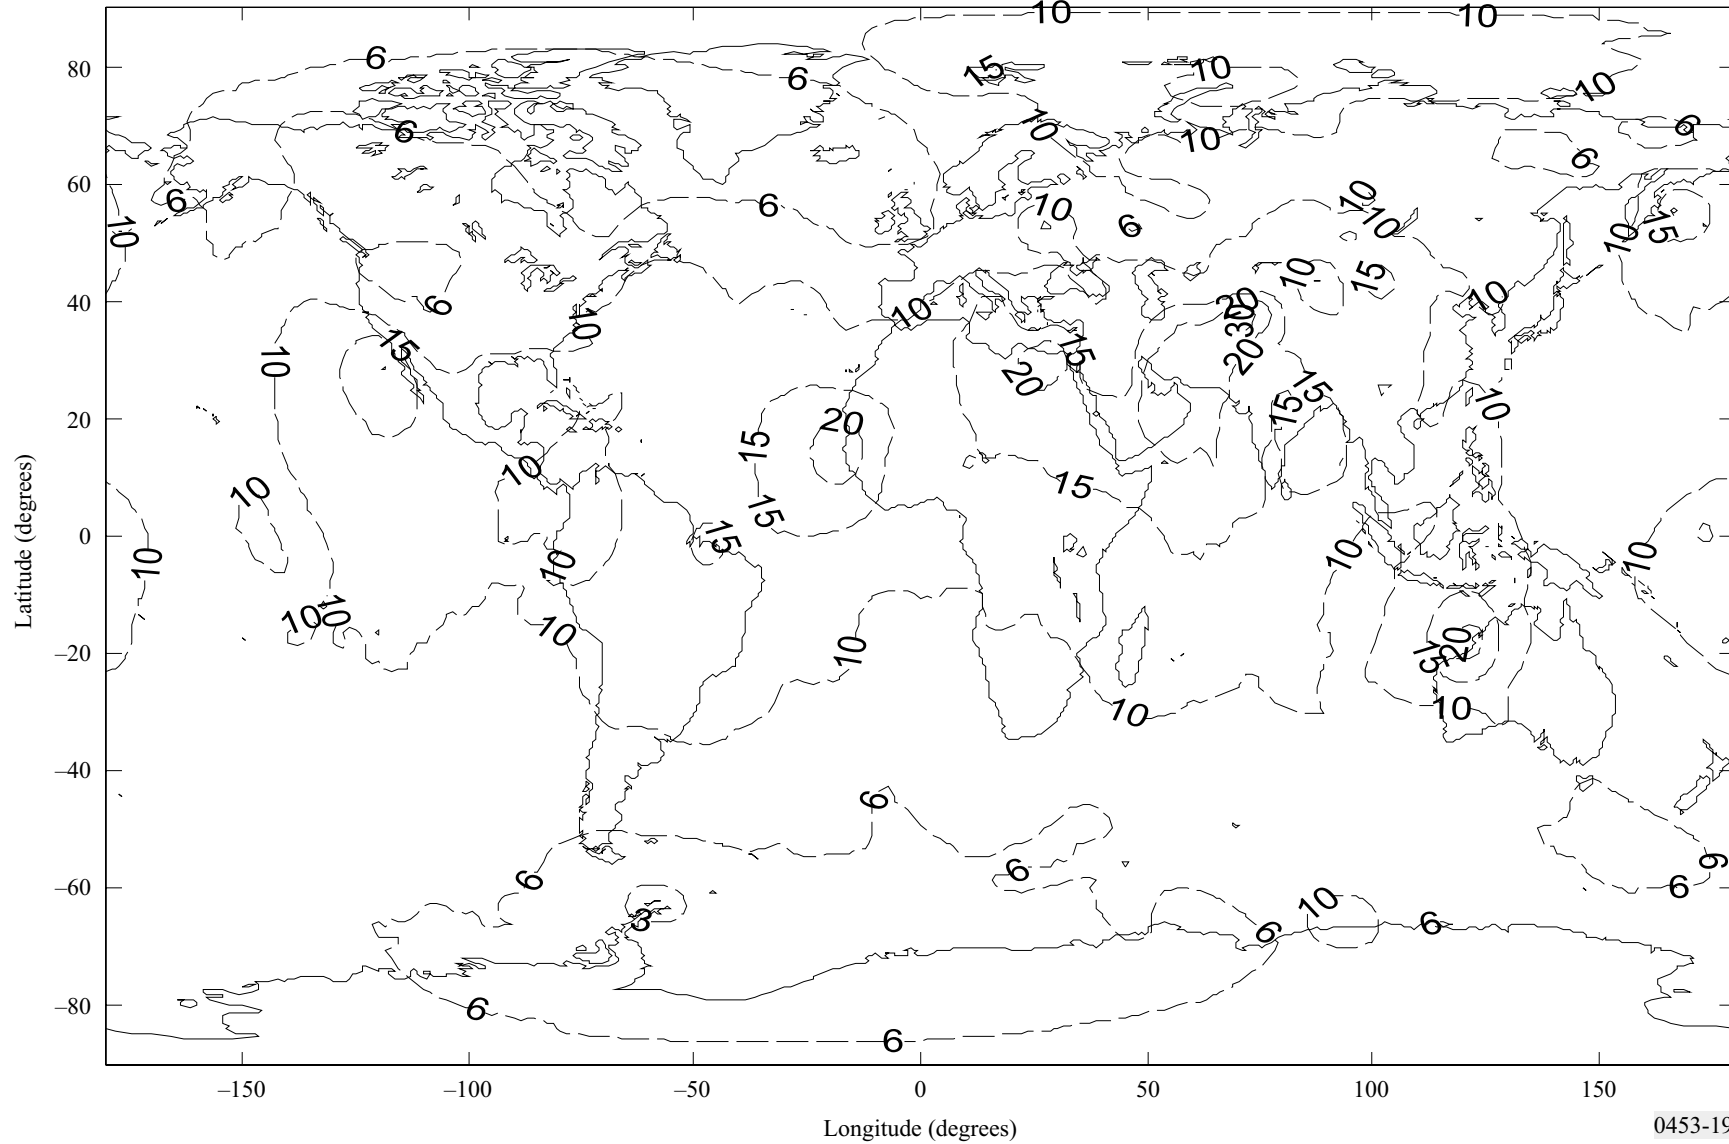


0453-19

FIGURE 20

Filename: S_THICKNESS.TXT

Average year surface duct mean thickness, S_s (m)

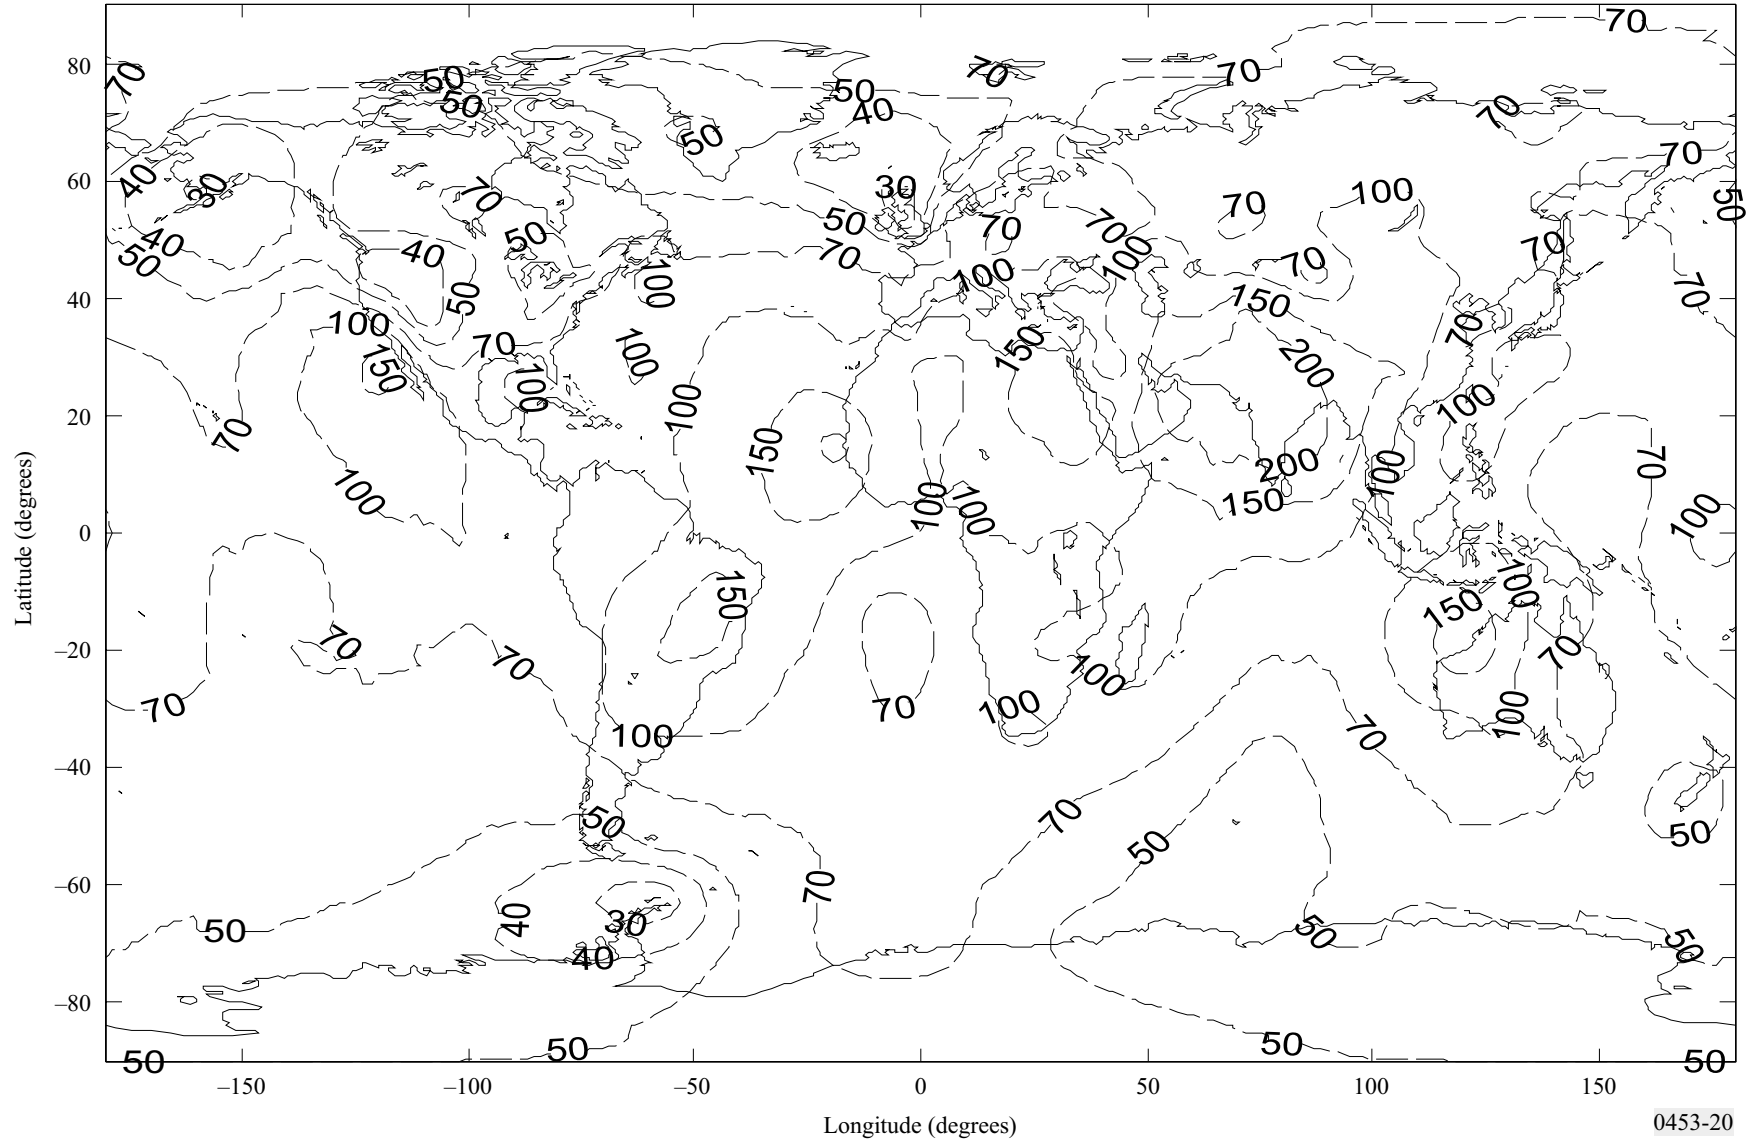

0453-20

FIGURE 21

Filename: E_OCCURRENCE.TXT

Average year elevated duct occurrence, E_p (%)


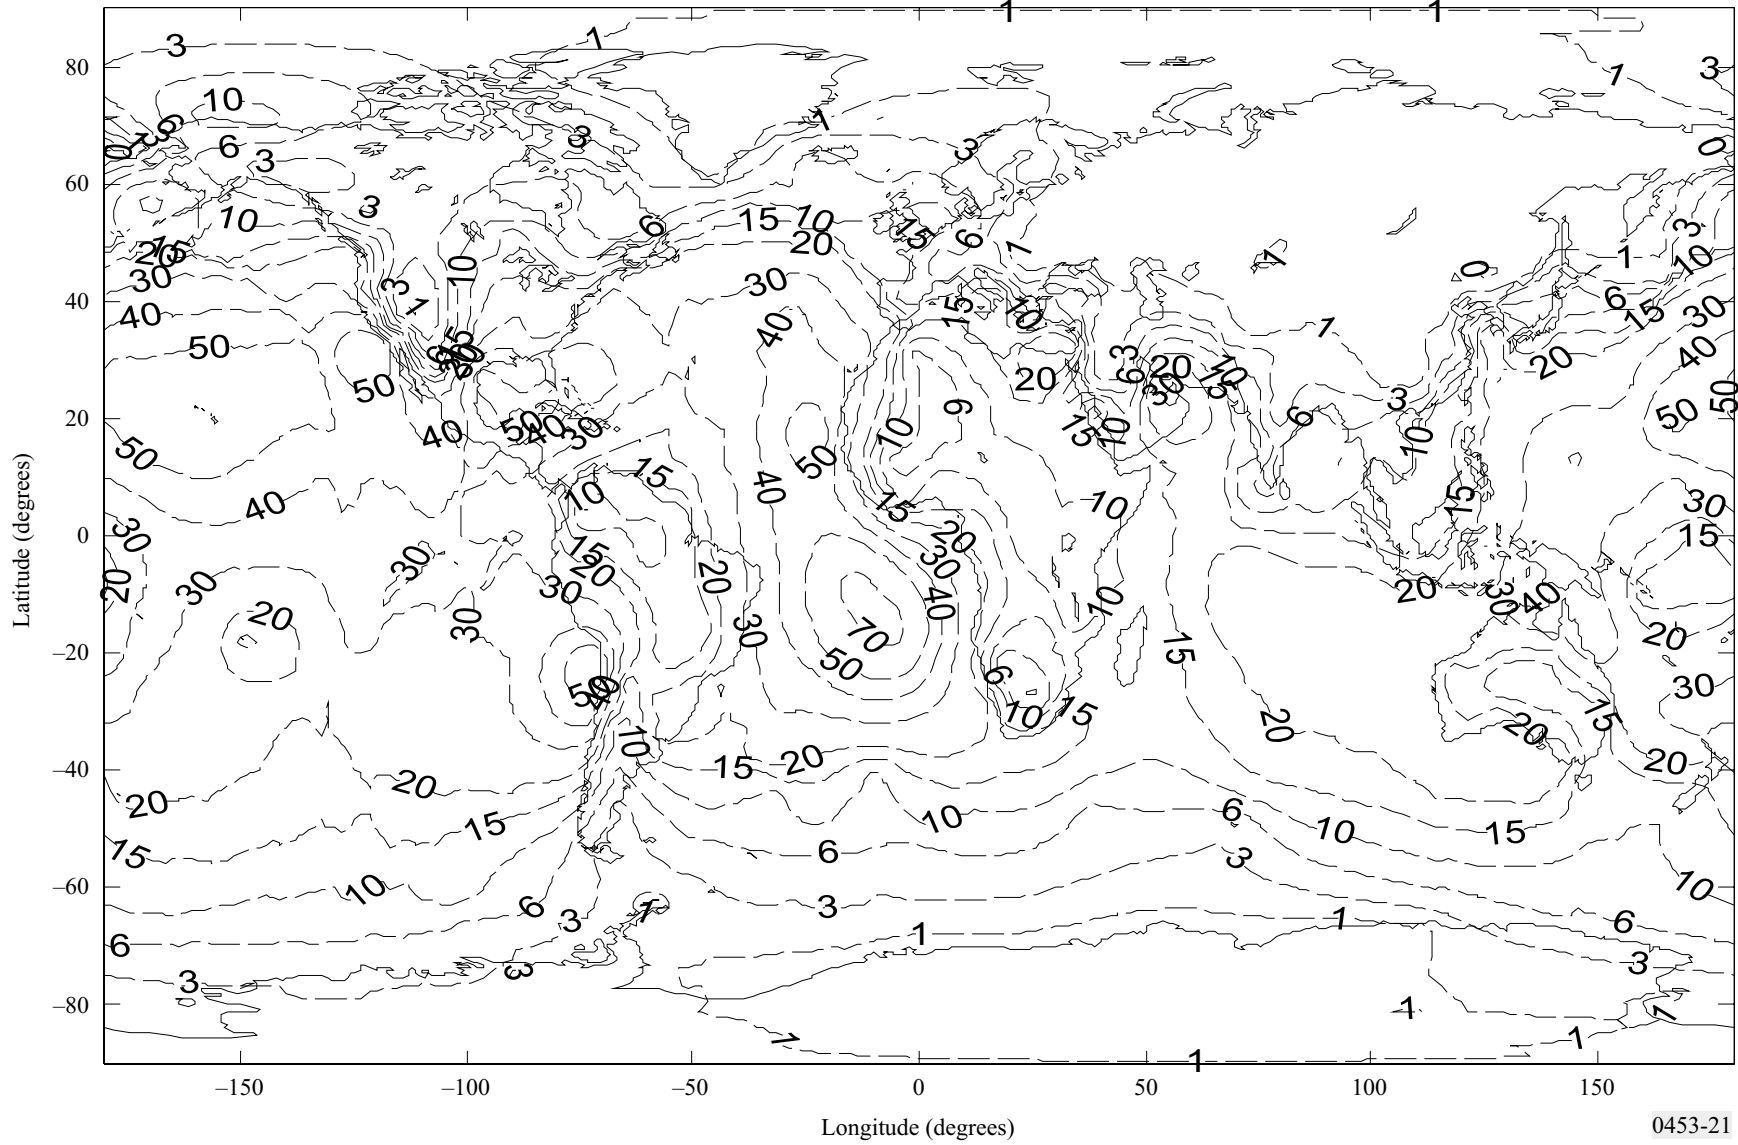


FIGURE 22

Filename: E_STRENGTH.TXT

Average year elevated duct mean strength, E_s (M-units)

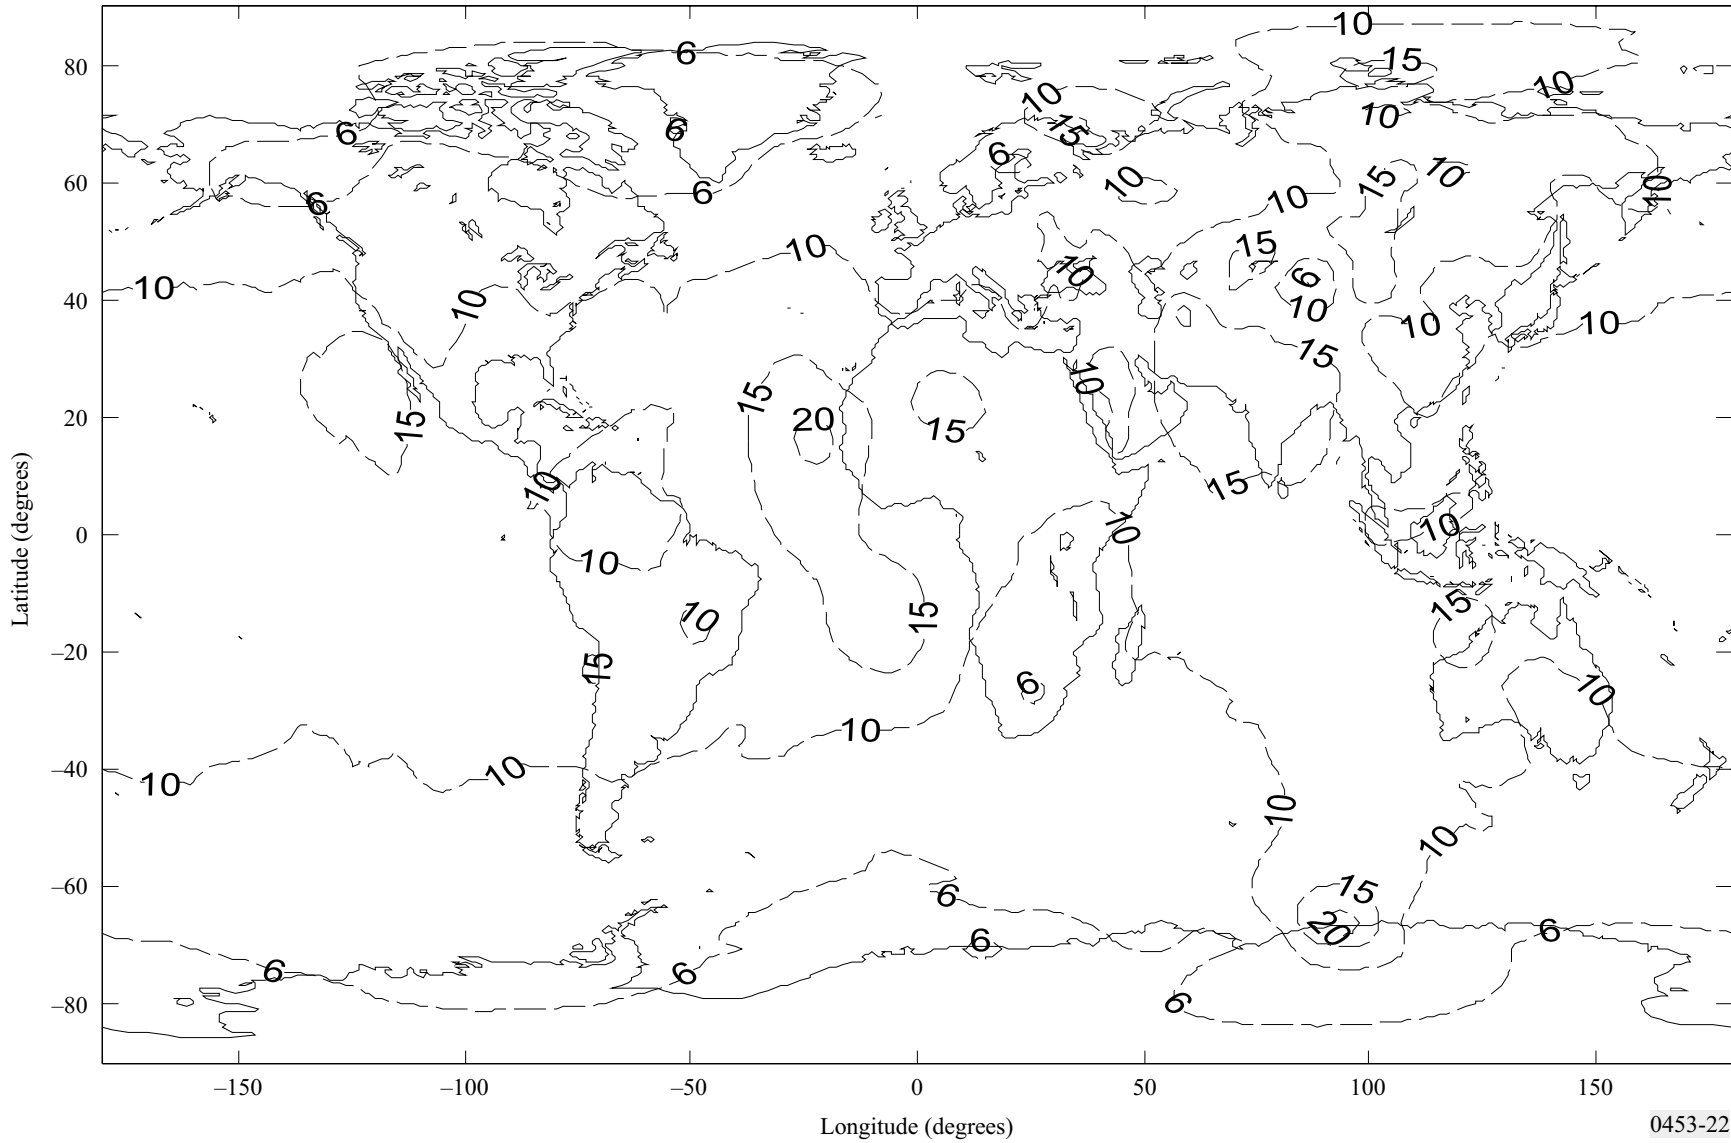

0453-22

FIGURE 23

Filename: E_THICKNESS.TXT

Average year elevated duct mean thickness, E_t (m)


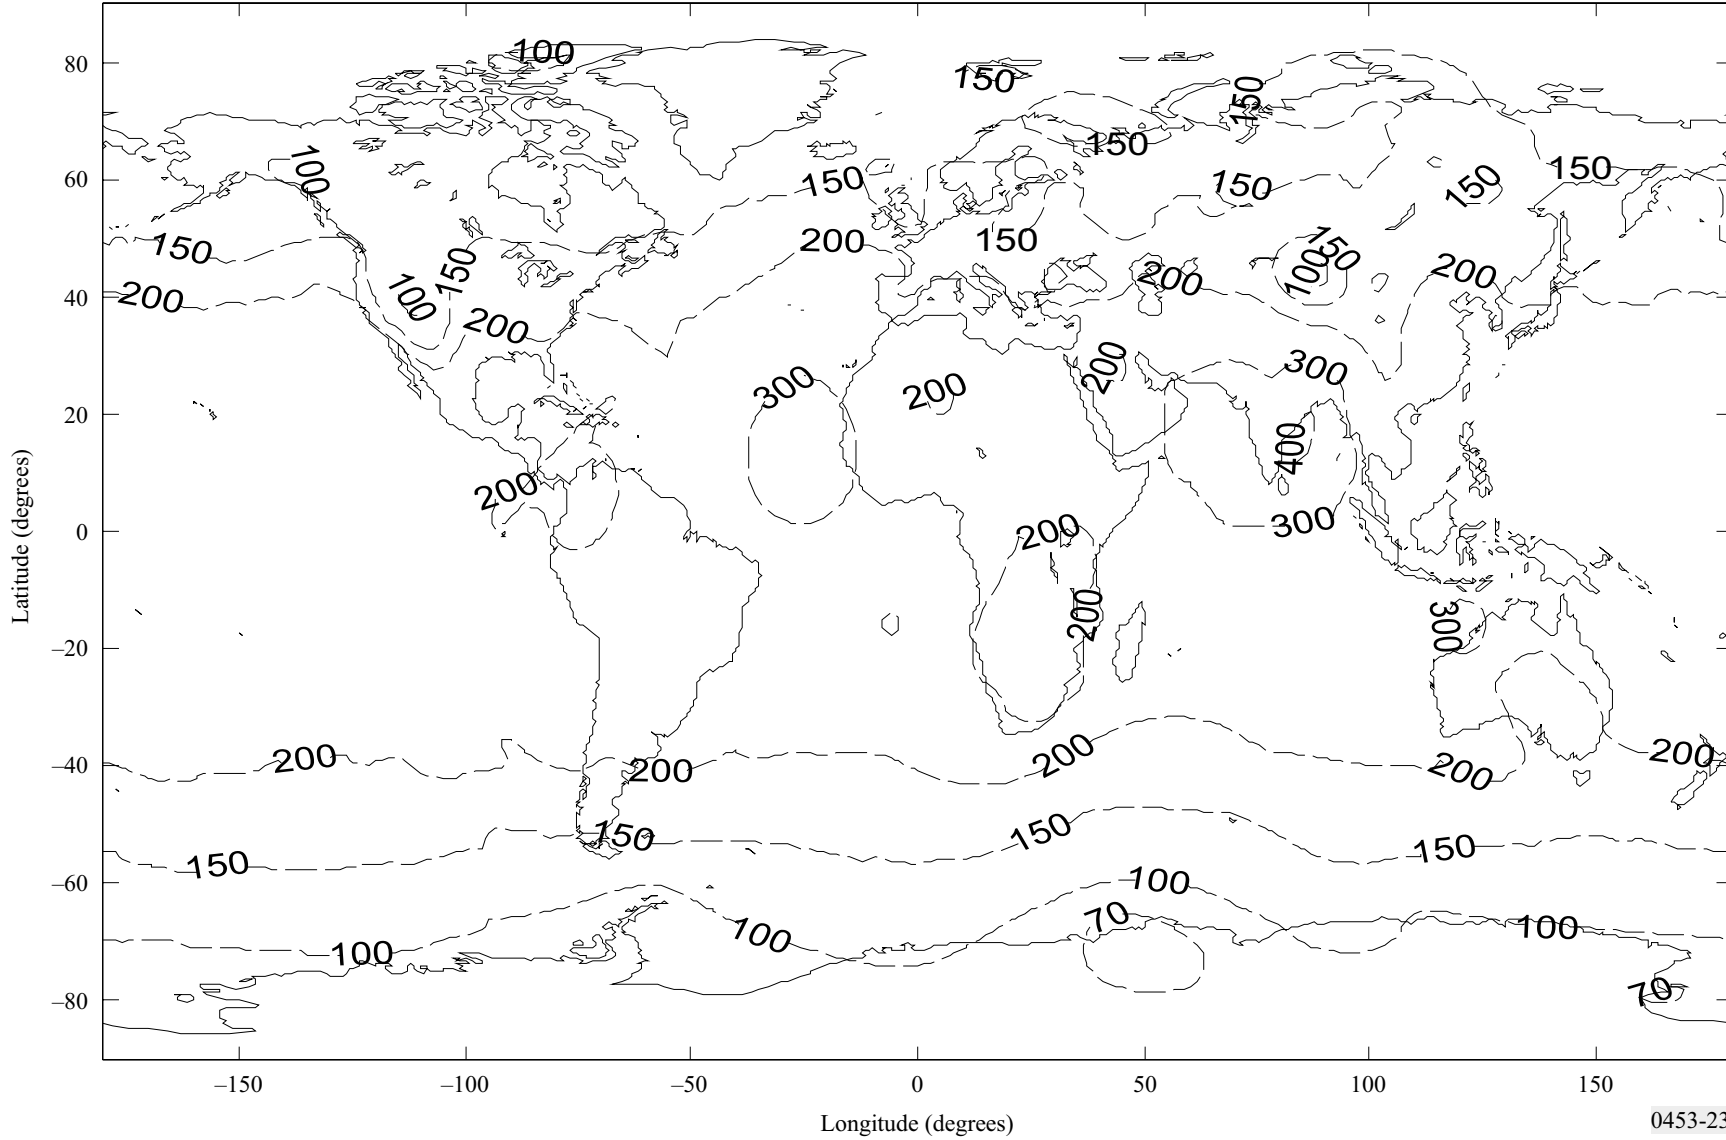


FIGURE 24
Filename: E_BASE.TXT

Average year elevated duct mean bottom height, E_b (m)

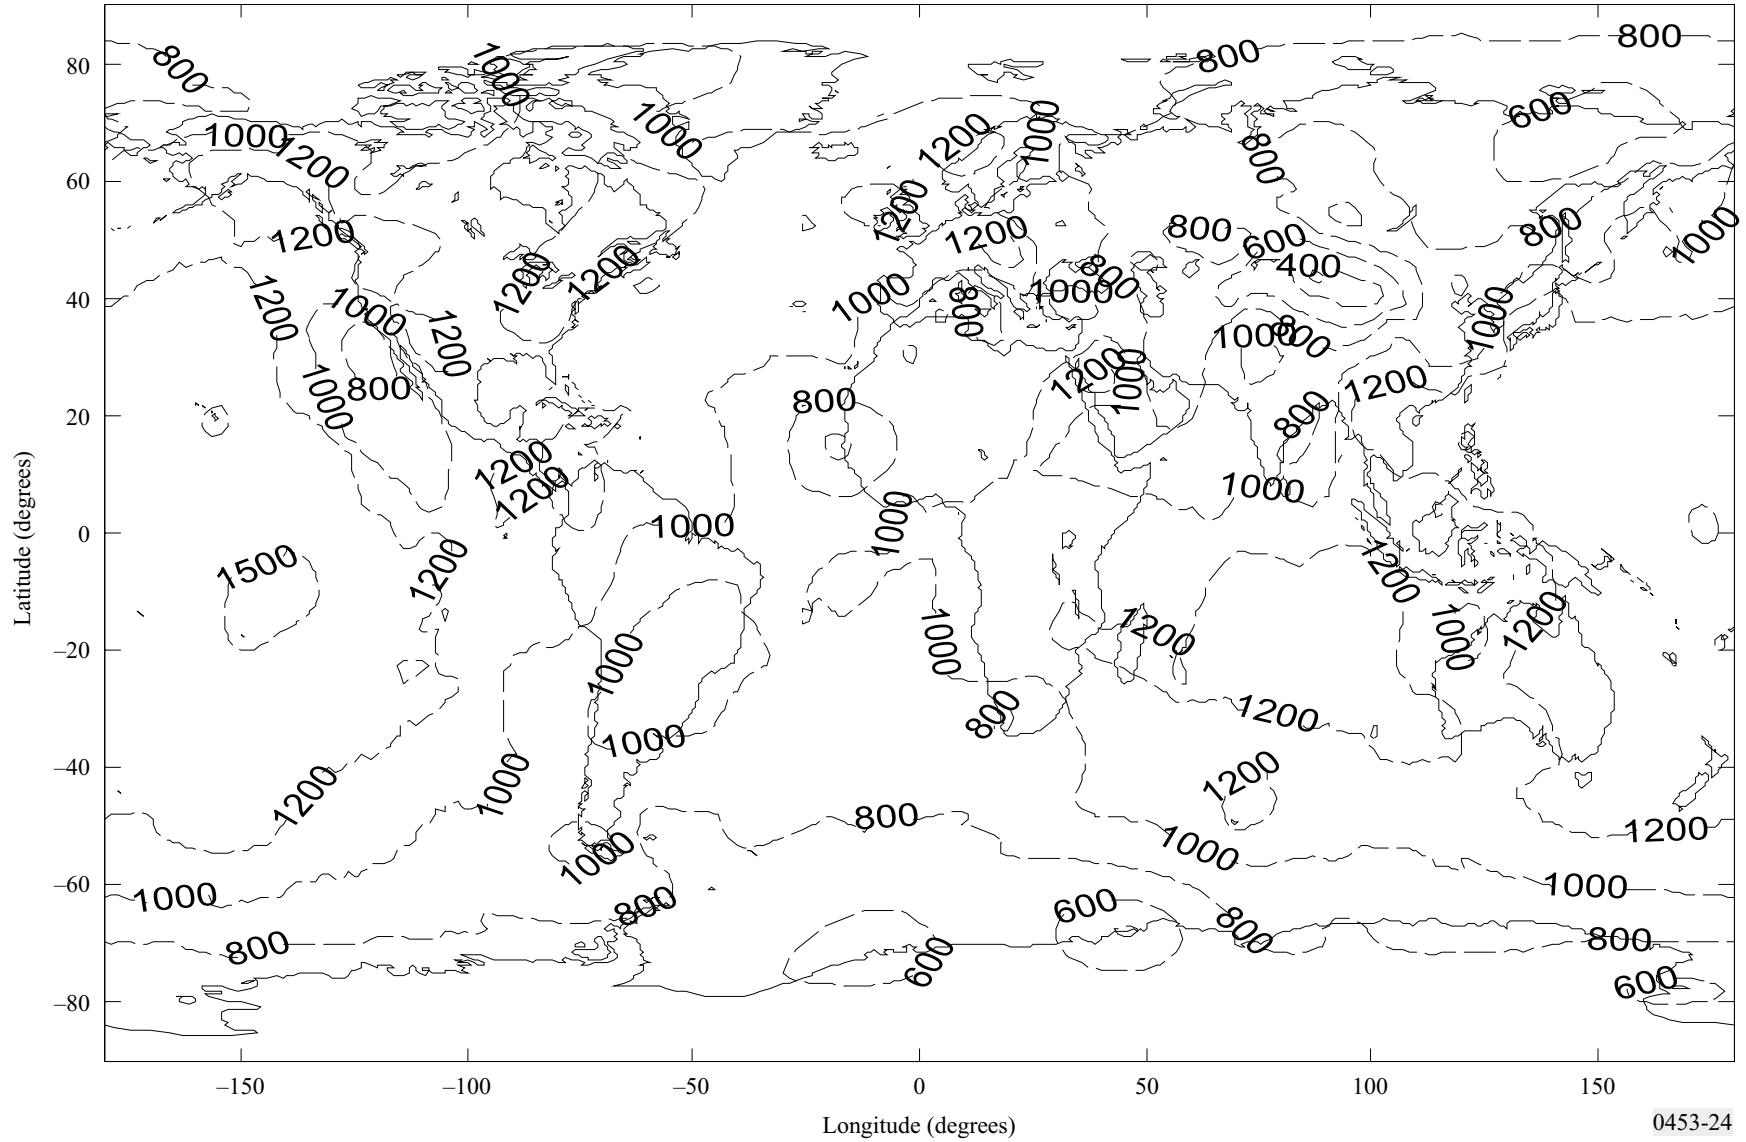

0453-24

FIGURE 25

Filename: E_MAX_M.TXT

Average year elevated duct mean coupling height, E_m (m)

