



INTERNATIONAL TELECOMMUNICATION UNION

ITU-T

TELECOMMUNICATION
STANDARDIZATION SECTOR
OF ITU

Q.310-Q.332

(11/1988)

SERIES Q: SWITCHING AND SIGNALLING

Specifications of Signalling System R1

ITU-T Recommendation Q.310-Q.332

(Formerly CCITT Recommendation)

ITU-T Q-SERIES RECOMMENDATIONS

SWITCHING AND SIGNALLING

SIGNALLING IN THE INTERNATIONAL MANUAL SERVICE	Q.1–Q.3
INTERNATIONAL AUTOMATIC AND SEMI-AUTOMATIC WORKING	Q.4–Q.59
Basic Recommendations	Q.4–Q.9
Numbering plan and dialling procedures in the international service	Q.10–Q.11
Routing plan for international service	Q.12–Q.19
General Recommendations relative to signalling and switching systems (national or international)	Q.20–Q.34
Tones for use in national signalling systems	Q.35–Q.39
General characteristics for international telephone connections and circuits	Q.40–Q.47
Signalling for satellite systems	Q.48–Q.49
Signalling for circuit multiplication equipment	Q.50–Q.59
FUNCTIONS AND INFORMATION FLOWS FOR SERVICES IN THE ISDN	Q.60–Q.99
Methodology	Q.60–Q.67
Basic services	Q.68–Q.79
Supplementary services	Q.80–Q.99
CLAUSES APPLICABLE TO ITU-T STANDARD SYSTEMS	Q.100–Q.119
General clauses	Q.100–Q.109
Transmission clauses for signalling	Q.110–Q.114
Control of echo suppressors	Q.115
Abnormal conditions	Q.116–Q.119
SPECIFICATIONS OF SIGNALLING SYSTEMS No. 4 AND No. 5	Q.120–Q.249
Specifications of Signalling System No. 4	Q.120–Q.139
Specifications of Signalling System No. 5	Q.140–Q.179
SPECIFICATIONS OF SIGNALLING SYSTEM No. 6	Q.250–Q.309
SPECIFICATIONS OF SIGNALLING SYSTEM R1	Q.310–Q.399
SPECIFICATIONS OF SIGNALLING SYSTEM R2	Q.400–Q.499
DIGITAL EXCHANGES	Q.500–Q.599
INTERWORKING OF SIGNALLING SYSTEMS	Q.600–Q.699
General considerations	Q.600–Q.609
Logic procedures	Q.610–Q.697
Interworking of Signalling Systems No. 7 and No. 6	Q.698
Interworking between Digital Subscriber Signalling System No. 1 and Signalling System No. 7	Q.699
SPECIFICATIONS OF SIGNALLING SYSTEM No. 7	Q.700–Q.799
Q3 INTERFACE	Q.800–Q.849
DIGITAL SUBSCRIBER SIGNALLING SYSTEM No. 1	Q.850–Q.999
PUBLIC LAND MOBILE NETWORK	Q.1000–Q.1099
INTERWORKING WITH SATELLITE MOBILE SYSTEMS	Q.1100–Q.1199
INTELLIGENT NETWORK	Q.1200–Q.1699
SIGNALLING REQUIREMENTS AND PROTOCOLS FOR IMT-2000	Q.1700–Q.1799
SPECIFICATIONS OF SIGNALLING RELATED TO BEARER INDEPENDENT CALL CONTROL (BICC)	Q.1900–Q.1999
BROADBAND ISDN	Q.2000–Q.2999

For further details, please refer to the list of ITU-T Recommendations.

ITU-T Recommendations Q.310-Q.332

Specifications of Signalling System R1

Summary

System R1 may be applied for automatic and semi-automatic operation of one-way and both-way circuits, within an international region (world numbering zone). When utilized in an integrated world numbering zone (e.g. Zone 1) the numbering and routing plans and operating facilities of that zone should apply.

The system is applicable to all types of circuits (except TASI derived circuits) meeting CCITT transmission standards, including satellite circuits.

Source

ITU-T Recommendations Q.310-Q.332 was prepared by CCITT Study Group XI (1985-1988) and approved by WTSC on 18 November 1988. Those texts were originally published in Blue Book, Fascicle VI.4.

FOREWORD

The International Telecommunication Union (ITU) is the United Nations specialized agency in the field of telecommunications. The ITU Telecommunication Standardization Sector (ITU-T) is a permanent organ of ITU. ITU-T is responsible for studying technical, operating and tariff questions and issuing Recommendations on them with a view to standardizing telecommunications on a worldwide basis.

The World Telecommunication Standardization Conference (WTSC), which meets every four years, establishes the topics for study by the ITU-T study groups which, in turn, produce Recommendations on these topics.

The approval of ITU-T Recommendations is covered by the procedure laid down in WTSC Resolution 1.

In some areas of information technology which fall within ITU-T's purview, the necessary standards are prepared on a collaborative basis with ISO and IEC.

NOTE

In this Recommendation, the expression "Administration" is used for conciseness to indicate both a telecommunication administration and a recognized operating agency.

INTELLECTUAL PROPERTY RIGHTS

ITU draws attention to the possibility that the practice or implementation of this Recommendations may involve the use of a claimed Intellectual Property Right. ITU takes no position concerning the evidence, validity or applicability of claimed Intellectual Property Rights, whether asserted by ITU members or others outside of the Recommendation development process.

As of the date of approval of this Recommendations, ITU had not received notice of intellectual property, protected by patents, which may be required to implement this Recommendations. However, implementors are cautioned that this may not represent the latest information and are therefore strongly urged to consult the TSB patent database.

© ITU 2002

All rights reserved. No part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from ITU.

CONTENTS

Part I – Specifications of Signalling System R1

Rec. No.		Page
	INTRODUCTION – <i>Principles of Signalling System R1</i>	1
	SECTION 1 – <i>Definition and function of signals</i>	
Q.310	1. Definition and function of signals	3
	SECTION 2 – <i>Line signalling</i>	
Q.311	2.1 2600 Hz line signalling.....	5
Q.312	2.2 2600 Hz line signal sender (transmitter).....	6
Q.313	2.3 2600 Hz line signal receiving equipment	7
Q.314	2.4 PCM line signalling	9
Q.315	2.5 PCM line signal sender (transmitter).....	9
Q.316	2.6 PCM line signal receiver	11
Q.317	2.7 Further specification clauses relative to line signalling.....	12
Q.318	2.8 Double seizing with both-way operation.....	12
Q.319	2.9 Speed of switching in international exchanges.....	13
	SECTION 3 – <i>Register signalling</i>	
Q.320	3.1 Signal code for register signalling	14
Q.321	3.2 End-of-pulsing conditions – Register arrangements concerning ST signal.....	15
Q.322	3.3 Multifrequency signal sender	16
Q.323	3.4 Multifrequency signal receiving equipment	16
Q.324	3.5 Analysis of address information for routing.....	17
Q.325	3.6 Release of registers.....	18
Q.326	3.7 Switching to the speech position	18
	SECTION 4 – <i>Testing arrangements</i>	
Q.327	4.1 General arrangements	19
Q.328	4.2 Routine testing of equipment (local maintenance)	19
Q.329	4.3 Manual testing	20
Q.330	4.4 Automatic transmission and signalling testing	20
Q.331	4.5 Test equipment for checking equipment and signals.....	21
	Annex A to the specifications of signalling system R1	23
	Part II – Interworking of Signalling System R1 with other standardized systems	
Q.332	5. Interworking	25

PART I – SPECIFICATIONS OF SIGNALLING SYSTEM R1

INTRODUCTION

PRINCIPLES OF SIGNALLING SYSTEM R1

General

The development of new exchanges, especially those utilizing stored programme control, has introduced new concepts in the division of functions between various components of signalling and switching systems. To allow the maximum freedom in incorporating new concepts which can contribute to the overall economy and efficiency of the system, the requirements as covered in this specification are for the combination of equipments necessary to provide a function. For example, the requirements for line signal receiving equipment as given here may be met by various subdivisions of functions between signal receiver, trunk relay sets and stored programme control.

System R1 may be applied for automatic and semi-automatic operation of one-way and both-way circuits, within an international region (world numbering zone). When utilized in an integrated world numbering zone (e.g. Zone 1) the numbering and routing plans and operating facilities of that zone should apply.

The system is applicable to all types of circuits (except TASI derived circuits)¹⁾ meeting CCITT transmission standards, including satellite circuits.

The signalling equipment used in System R1 consists of two parts:

- a) line signalling for line or supervisory signals; and
- b) register signalling for address signals.

a) *Line signalling*

1) *2600 Hz signalling*

Continuous tone type in-band line-signalling is used for the link-by-link transmission of all supervisory signals except the ring-forward (forward-transfer) signal which is a spurt signal. A single frequency, 2600 Hz, is used in each direction of the 4-wire transmission path, the presence or absence of this frequency indicates a specific signal dependent upon when it occurs in the signalling sequence and in certain cases upon its duration. When the circuit is idle, a low level signalling tone is continuously present in both directions.

2) *PCM signalling*

The 2600 Hz line signalling described in 1) is not normally applied to the speech paths of circuits working on PCM systems unless the PCM channels are connected in cascade with analogue channels to form a circuit. The signalling on PCM systems in the North American region is channel associated, in-slot, providing two signalling channels per speech channel, and utilizing bit stealing of the eighth bit of each channel every sixth frame.

¹⁾ Register signalling can be made compatible with TASI by providing a TASI locking tone.

b) *Register signalling*

Link-by-link multifrequency (MF) in-band pulse signalling is used for the transmission of address information. The signalling frequencies are 700 Hz to 1700 Hz, in 200 Hz steps, and combinations of two, and two only, determine the signal. The address information is preceded by a KP signal (start-of-pulsing) and terminated by an ST signal (end-of-pulsing). Either *en bloc*²⁾, or *en bloc* overlap²⁾, or overlap sending may apply. This register signalling arrangement is used extensively with other in-band and out-band line signalling systems.

Companders may affect signalling, particularly short pulse compound register signals, due to pulse length distortion and the production of intermodulation frequencies. By virtue of the link-by-link signalling and the adopted duration of register and line signal pulses, System R1 functions correctly in the presence of companders designed in accordance with CCITT recommendations.

²⁾ See Recommendation Q.151, Note to § 3.1.1 for an explanation of these terms.

SECTION 1

DEFINITION AND FUNCTION OF SIGNALS

Recommendation Q.310

Specifications of Signalling System R1

1. DEFINITION AND FUNCTION OF SIGNALS¹⁾

1.1 **connect (seizing) signal** (sent in the forward direction)

This line signal is transmitted at the beginning of a call to initiate circuit operation at the incoming end of the circuit to busy the circuit and to seize equipment for switching the call.

1.2 **delay-dialling signal** (sent in the backward direction)

This line signal is transmitted by the incoming exchange following the recognition of the connect (seizing) signal to verify receipt of the connect (seizing) signal and to indicate that the incoming register equipment is not yet attached or ready to receive address signals.

1.3 **start-dialling (proceed-to-send) signal** (sent in the backward direction)

This line signal is sent from the incoming exchange subsequent to the sending of a delay-dialling signal to indicate that the incoming register equipment has been connected and is ready to receive address signals.

1.4 **KP (start-of-pulsing) signal** (sent in the forward direction)

This register signal is sent subsequent to the recognition of a start-dialling signal and is used to prepare the incoming multifrequency register for the receipt of subsequent interregister signals.

1.5 **address signal** (sent in the forward direction)

This register signal is sent to indicate one decimal element of information (digit 1, 2, ..., 9 or 0) about the called party's number. For each call a succession of address signals is sent.

1.6 **ST (end-of-pulsing) signal** (sent in the forward direction)

This register signal is sent to indicate that there are no more address signals to follow. The signal is always sent in semi-automatic as well as automatic working.

¹⁾ In this part the North American designation for line signals is used. The designation of the signal in System No. 5 which most nearly corresponds to a particular North American signal is shown in parentheses. There is not always exact correspondence in function, e.g. the ring-forward signal can only be effective when a connection has been established through an incoming operator.

1.7 **answer signal** (sent in the backward direction)^{2), 3)}

This line signal is sent to the outgoing exchange to indicate that the called party has answered.

In semi-automatic working, the signal has a supervisory function.

In automatic working, it is used:

- to start metering the charge to the calling subscriber;
- to start the measurement of call duration for international accounting purposes, if this is desired.

1.8 **hang-up (clear-back) signal** (sent in the backward direction)²⁾

This line signal is sent to the outgoing exchange to indicate that the called party has cleared. In the semi-automatic service it performs a supervisory function.

In automatic working, arrangements are made to clear the connection, stop the charging, and stop the measurement of call duration if within 10 to 120 seconds⁴⁾ after recognition of the hang-up signal, the calling subscriber has not cleared. Clearing of the connection should preferably be controlled from the point where the charging is carried out.

1.9 **ring-forward (forward-transfer) signal** (sent in the forward direction)

This line signal is initiated by an operator to recall an operator at a point further ahead in the connection.

1.10 **disconnect (clear-forward) signal** (sent in the forward direction)

This line signal is sent in the forward direction at the end of a call when:

- a) in semi-automatic working, the operator at the outgoing exchange withdraws the plug from the jack, or when an equivalent operation is performed;
- b) in automatic working, the calling party hangs up, or when the time-out period of 10 to 120 seconds as discussed in § 1.8 above occurs.

1.11 *Diagrams showing signal sequence*

Typical sequences of signals in semi-automatic and automatic working are shown in Annex A to these Specifications of Signalling System R1.

²⁾ Notes on the answer and hang-up (clear-back) signals. – See corresponding notes in Recommendation Q.120, § 1.8, Volume VI-2 of the *Green Book*.

³⁾ See Recommendation Q.27 for the actions to be taken to assure that answer signals, both national and international, are transmitted as quickly as possible.

⁴⁾ In word numbering Zone 1, 13 to 32 seconds is used.

SECTION 2

LINE SIGNALLING

Recommendation Q.311

2.1 2600 HZ LINE SIGNALLING

The line-signal coding arrangement is based on the application and removal of a single frequency tone (2600 Hz) as shown in Table 1/Q.311.

TABLE 1/Q.311
Line signal code

Signal	Signal direction ^{1), 2)}	Transmitted (sending) duration	Transmitted state ^{5), 6)}	
			Originating end	Terminating end
Idle	↔	continuous	0	0
Connect (seizing)	---->	continuous	1	0
Delay-dialling	←----	continuous ³⁾	1	1
Start-dialling (proceed-to-send)	←---	continuous ³⁾	1	0
Answer	←----	continuous	1	1
Hang-up (clear-back)	←---	continuous	1	0
Disconnect (clear-forward)	-->	continuous	0	0 or 1
Ring-forward (forward-transfer)	-->	65-135 ms	0	0 or 1
Busy, re-order (congestion) ⁴⁾	←---	-	off	on

¹⁾ →, ----> indicates forward signalling state 0 or 1, respectively.

²⁾ ←, ←---- indicates backward signalling state 0 or 1, respectively.

³⁾ The durations of these signals are variable and depend upon when the succeeding signal occurs. To ensure proper registration of these signals, the transmitted signal durations should not be less than 140 ms.

⁴⁾ Busy and re-order (congestion) conditions are indicated by audible tones.

⁵⁾ 0: Tone on, or signalling bit state 0 in PCM systems.

⁶⁾ 1: Tone off, or signalling bit state 1 in PCM systems.

By taking advantage of the fixed order of occurrence of specific signals, both tone-on and tone-off signals are used to indicate more than one signal condition. For example, in the backward direction tone-on is used to indicate start-dialling (proceed-to-send), and terminating end hang-up (clear-back) signals without conflict. The equipment must retain memory of the preceding signal states and the direction of signals in order to differentiate between tone-on and tone-off signals.

Recommendation Q.312

2.2 2600 HZ LINE SIGNAL SENDER¹⁾ (TRANSMITTER)

2.2.1 *Signal frequency*

2600 ± 5 Hz.

2.2.2 *Transmitted signal level of tone-on signals*

-8 ± 1 dBm₀ for the duration of the signal or for a minimum of 300 ms (whichever is shorter) and for a maximum of 550 ms after which the level of the signal shall be reduced to -20 ± 1 dBm₀.

2.2.3 *Transmitted signal durations*

The transmitted signal durations are shown in Table 1/Q.311.

2.2.4 *Signal frequency leak*

The level of signal frequency leak power transmitted to the line should not exceed -70 dBm₀, during the tone-off condition.

2.2.5 *Extraneous frequency components*

The total power of extraneous frequency components accompanying a tone signal should be at least 35 dB below the fundamental signal power.

2.2.6 *Transmitting line split*

The following splitting arrangements are required when transmitting line signals to prevent incorrect operation of the receiving equipment due to transients caused by the opening or closing of direct current circuits in the exchange at the transmitting end:

- a) when a tone-on signal is to be transmitted, the speech path from the exchange shall be split (disconnected), if not already split, within an interval from 20 ms before, to 5 ms²⁾ after tone is applied to the line, and remain split for a minimum of 350 ms and a maximum of 750 ms;
- b) when a tone-off signal is to be transmitted, the speech path from the exchange shall be split (disconnected), if not already split, within an interval from 20 ms before to 5 ms after tone is removed from the line, and remain split for a minimum of 75 ms and a maximum of 160 ms after the tone is removed;
- c) when the signalling equipment is receiving and sending tones simultaneously the split shall be maintained until:
 - i) the transmitted tone is terminated, in which case the split must be removed in the interval from 75 to 160 ms after tone is removed [as in b)]; or
 - ii) the incoming tone ceases, in which case the split must be removed in the interval from 350 to 750 ms after tone ceases;
- d) when the signalling equipment is sending tone, a split shall be introduced, if not already split, within 250 ms of receipt of an incoming tone.

The above requirements given in a), b), c) and d) establish a transmitting path split at both ends of the circuit during the idle condition.

¹⁾ See also Recommendation Q.112.

²⁾ The 5 ms may be relaxed to 15 ms if tone is applied while tone is being received.

Recommendation Q.313

2.3 2600 HZ LINE SIGNAL RECEIVING EQUIPMENT¹⁾

2.3.1 Operate limits (tone-on signals)

The receiving equipment shall operate on a received tone signal, in the presence of the maximum noise expected on an international circuit, -40 dBm₀ uniform spectral energy over the range of 300 to 3400 Hz, that meets the conditions listed below:

- a) 2600 ± 15 Hz;
- b) to ensure proper operation in the presence of noise, the signal level of the initial portion of each tone-on signal shall be augmented by 12 dB (see § 2.2.2).

As a result, the following requirement reflects both the augmented and steady-state signal levels. The absolute power level N of each signal is within the limits $(-27 + n \leq N \leq -1 + n)$ dBm where n is the relative power level at the input to the receiving equipment. The minimum absolute power level $N = (-27 + n)$ gives a margin of 7 dB on the steady-state nominal absolute power level of the received signal at the input to the receiving equipment. With augmentation the effective margin is increased from 7 to 19 dB.

The maximum absolute power level $N = (-1 + n)$ gives a margin of 7 dB on the augmented nominal absolute power level of the received signal at the input to the receiving equipment.

The above tolerances are to allow for variations at the sending end and variations in line transmission.

Note – Since higher steady noise as well as impulsive noise may be encountered on intra-regional circuits especially over certain compandored carrier systems, the maximum expected noise within a region must be taken into account in the design of equipment for that region.

2.3.2 Non-operate limits

1) The receiving equipment shall neither operate on signals originating from subscriber stations (or other sources) if the total power in the band from 800 Hz to 2450 Hz equals or exceeds the total power present at the same time in the band from 2450 Hz to 2750 Hz, as measured at the station, nor degrade these signals. Allowances shall be made in the receiving equipment design to accommodate expected deviations from these values due to attenuation distortion and carrier frequency shift on the total transmission path between the station and the receiving equipment.

2) The receiving equipment shall not operate on any tone or signal whose absolute power level at the point of connection of the receiving equipment is $(-17 - 20 + n)$ dBm or less, n being the relative power level at this point.

2.3.3 Recognition of signals

1) System R1 must be protected against false signal recognition caused by:

- a) signal simulation of tone-on or tone-off signals by speech or other signals;
- b) signal simulation of tone-off signals by momentary interruptions of the transmission path.

The method of providing this protection is left to each Administration concerned to allow for maximum flexibility in the implementation of the signalling and switching system design. However, the overall system requirements given in 2) and 3) below shall be met.

2) The following requirements for signal recognition are specified in terms of signal duration at the input to the signal receiving equipment and further assumes that signal levels, frequency and accompanying noise are within the limits specified in § 2.3.1:

- a) A tone-on signal lasting 30 ms or less must be rejected; that is, it must not be recognized as a signal.

¹⁾ See also Recommendation Q.112.

- b) A tone-off signal lasting 40 ms or less must be rejected if the previous tone-on signal is 350 ms or longer; that is, it must not be recognized as a signal.
- c) Subsequent to establishing the cross office path, a tone-on ring-forward (forward-transfer) spurt signal lasting between 65 and 135 ms must be recognized as a valid signal.
- d) A tone-on forward signal lasting 300 ms or longer must be recognized as a valid disconnect (clear-forward) signal. Prior to attaching a register, a forward tone-on signal lasting 30 ms or longer may be recognized as a valid disconnect (clear-forward) signal.
- e) To protect against a momentary interruption in the transmission facility causing a continuous succession of false connect (seizing) and disconnect (clear-forward) signals, the incoming equipment should be arranged to delay responding to the second of two closely spaced connect (seizing) signals. The timed delay introduced should be started at the end of initial connect (seizing) signal or on recognition of the disconnect (clear-forward) signal. The delay introduced should be a function of the round trip signalling time. For satellite circuits the recommended time is 1300 ± 100 ms. For terrestrial circuits the recommended time is 500 ± 100 ms. If the second connect (seizing) signal persists beyond this timed interval, the signal should be considered valid and a delay dialling signal returned.
- f) Other tone-on and tone-off signals should be recognized as valid signals, subsequent to the minimum limits imposed by a) and b) above, as soon as possible.

Note – Delays introduced by line signalling equipment should be held to a minimum consistent with the requirements covered herein to minimize signal transfer times. Minimizing the delay is especially important in the case of the answer signal and in the case of satellite circuit operation. In this latter case, if a hang-up (clear-back) signal has not been sent prior to recognition of a disconnect (clear-forward) signal, it is necessary that the idle tone-on signal, sent by the incoming exchange in response to the disconnect signal, be recognized by the outgoing exchange prior to the elapse of the guard timing specified in Recommendation Q.317, § 2.7.1.

- 3) The following signal simulation rates shall not be exceeded.
 - a) On the average not more than one false recognition of a disconnect (clear-forward) signal shall occur per 1500 call hours of speech, at the *minimum* disconnect recognition time, as selected according to § 2.3.3, 2) c) and d). (In some older designs, this requirement may not be met, but for these cases the call hours figure must not be less than 500²⁾ call hours.)
 - b) On the average, not more than one false ring-forward (forward-transfer) signal shall occur per 70²⁾ call hours of speech, at the *minimum* ring-forward recognition time.
 - c) Speech or other electrical signals as audible-tone signals, with levels up to + 10 dBm0 shall not cause any false simulation of answer signals.
 - d) The number and characteristics of false splits of the speech path caused by speech or other signals shall not cause a noticeable reduction in the transmission quality of the circuit.

2.3.4 Receiving line split

To prevent line signals of the signalling system from causing disturbances to signalling systems on subsequent circuits, the receiving transmission path to the connected exchange should be split when the signal frequency is received to ensure that no portion of any signal exceeding 20 ms duration may pass out of the circuit. The use of a band-stop filter for splitting is necessary since in the case of non-charged calls a continuous signal tone persists in the return transmission path during conversation. The level of signal leak current transmitted to the subsequent circuit with the band-stop filter inserted should be at least 35 dB below the received signal level. In addition, the band-stop filter must not introduce more than 5 dB loss at frequencies 200 Hz or more above or below the midband frequency nor more than 0.5 dB loss at frequencies 400 Hz or more above or below the midband frequency.

The receiving line split must be maintained for the duration of the incoming tone signal, but must cease within 300 ms of tone removal.

Note – In some existing designs, the initial cut may be a physical line disconnection but the filter must be inserted within 100 ms of tone reception.

²⁾ In the case when no answer signal is transmitted (non-charged calls), the simulation rates specified in §§ 3 a) and 3 b) may, in some existing designs, be somewhat in excess of the values quoted.

Recommendation Q.314

2.4 PCM LINE SIGNALLING

Individual channel line signalling is provided in the format of the CCITT primary multiplex operating at 1544 kbit/s (Recommendation G.733). Designated signalling bits are marked 0 or 1 corresponding to tone-on, tone-off in the single frequency in-band arrangement as shown in Table 1/Q.311. As in the in-band system, the same signalling state is used to indicate more than one signal by taking advantage of the fixed order of occurrence of specific signals. The equipment must retain memory of the preceding signal states and the direction of signals in order to differentiate between like state 0 and state 1 signals.

Recommendation Q.315

2.5 PCM LINE SIGNAL SENDER (TRANSMITTER)

2.5.1 *Signalling format*


The primary multiplex format is shown in Figure 1/Q.315. Per channel, in-slot signalling is accomplished by utilizing bit No. 8 in each time slot of the designated frames (6, 12, etc.) for signalling purposes. Bit No. 8 of each time slot in the intervening frames (1-5, 7-11, etc.) is used for encoding speech. Two signalling channels per speech channel are provided in the format. The multiframe alignment required for signalling purposes is obtained by subdividing the 8 kbit/s framing pulse stream into two 4 kbit/s streams, one for terminal framing and one for signalling framing (S-bits). The relationship of the framing and multiframing signals to the signalling bits is given in Table 2/Q.315. Since only one line signalling channel is required for System R1, the same signalling information is sent over both signalling channels A and B.

2.5.2 *Transmitted signal duration*

The transmitted signal durations are given in Table 1/Q.311 of Recommendation Q.311.

2.5.3 *Transmitting line split*

Since signalling is out-band, no transmitting line split is required.

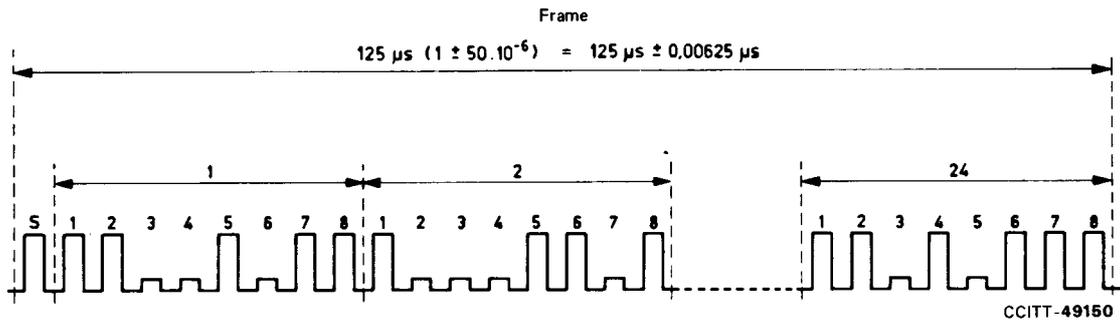

Sampling frequency $8000 (1 \pm 50 \times 10^{-6}) \text{ Hz} = 8000 \pm 0.4 \text{ Hz}$
Output bit rate $1544 (1 \pm 50 \times 10^{-6}) \text{ kbit/s} = 1544 \text{ kbit/s} \pm 77 \text{ bit/s}$
Bits/frame 193
Time slots/frame 24
Signalling Eighth bit every sixth frame as shown in Table 2/Q.315.
 The 8 bits in each time slot are defined in Table 2/Q.315.
 The F-bit is time shared between terminal framing and signalling framing (S) as shown in Table 2/Q.315.

FIGURE 1/Q.315
Primary multiplex format

TABLE 2/Q.315

Multiframe structure

Frame number	Frame alignment signal	Multiframe alignment signal (S-bit)	Bit number(s) in each channel time slot		Signalling channel
			For character signal	For signalling	
1	1	—	1 to 8	—	A
2	—	0	1 to 8	—	
3	0	—	1 to 8	—	
4	—	0	1 to 8	—	
5	1	—	1 to 8	—	
6	—	1	1 to 7	8	
7	0	—	1 to 8	—	
8	—	1	1 to 8	—	
9	1	—	1 to 8	—	
10	—	1	1 to 8	—	
11	0	—	1 to 8	—	
12	—	0	1 to 7	8	

Note 1 – The sequence shown is repetitive.

Note 2 – For System R1 the same signalling information is sent on signalling channels A and B.

Recommendation Q.316

2.6 PCM LINE SIGNAL RECEIVER

2.6.1 *Recognition of signals*

System R1 must be protected against false signal recognition caused by signal simulation due to momentary loss of synchronization of the PCM system. The method of providing this protection is left to each Administration concerned to allow for maximum flexibility in the implementation of the signalling and switching system design. However, the overall system requirements given below must be met.

- a) A state 0 signal lasting 30 ms or less must be rejected; that is, it must not be recognized as a signal.
- b) A state 1 signal lasting 40 ms or less must be rejected if the previous state 0 signal is 350 ms or longer; that is, it must not be recognized as a signal.
- c) Subsequent to establishing the speech path, a state 0 ring-forward (forward-transfer) signal lasting 65-135 ms must be recognized as a valid signal.
- d) A state 0 forward signal lasting 300 ms or longer must be recognized as a valid disconnect (clear-forward) signal. Prior to attaching a register, a forward state 0 signal lasting 30 ms or longer may be recognized as a valid disconnect (clear-forward) signal.
- e) To protect against a momentary fault causing a continuous succession of false connect (seizing) and disconnect (clear-forward) signals, the incoming equipment should be arranged to delay responding to the second of two closely spaced connect (seizing) signals. The time delay introduced should be started at the end of the initial connect (seizing) signal or on recognition of the disconnect (clear-forward) signal. The delay introduced should be a function of the round trip signalling time. For satellite circuits the recommended time is 1300 ± 100 ms. For terrestrial circuits the recommended time is 500 ± 100 ms. If the second connect (seizing) signal persists beyond this timed interval, the signal should be considered valid and a delay dialling signal returned.
- f) Other state 0 and state 1 signals should be recognized as valid signals subsequent to the minimum limits imposed by a) and b) above, as soon as possible.

Note – Delays introduced by line signalling equipment should be held to a minimum consistent with the requirements covered herein to minimize signal transfer times. Minimizing the delay is especially important in the case of the answer signal and in the case of satellite circuit operation. In this latter case, if a hang-up (clear-back) signal has not been sent prior to recognition of a disconnect (clear-forward) signal, it is necessary that the idle state 0 signal, sent by the incoming exchange in response to the disconnect signal, be recognized by the outgoing exchange prior to the elapse of the guard timing specified in Recommendation Q.317, § 2.7.1.

2.6.2 *Receiving line split*

Since signalling is out-band, no receiving line split is required.

2.6.3 *Action on receipt of an alarm*

When the PCM primary multiplex has detected a fault and given an alarm (see Recommendation G.733, § 3.2) appropriate action shall be taken to remove automatically the affected circuits from service, and to terminate calls in progress, i.e. stop charging, release interconnected circuits, etc. When the alarm has been cleared the affected circuits should be automatically restored to service.

Recommendation Q.317

2.7 FURTHER SPECIFICATION CLAUSES RELATIVE TO LINE SIGNALLING

2.7.1 Access to the outgoing circuits shall be denied (guarded) for 750 to 1250 ms (1050 ms to 1250 ms for satellite circuits) after initiation of the disconnect (clear-forward) signal to ensure sufficient time for the release of the equipment at the incoming exchange. [See also the Note to § 2.3.3, 2) of Recommendation Q.313 and to § 2.6.1 of Recommendation Q.316.]

2.7.2 The disconnect (clear-forward) signal may be sent at any time in the call sequence.

2.7.3 The release of the chain of circuits in an established connection is only initiated from the originating exchange or the charge-recording exchange.

2.7.4 The start of metering the charge should be delayed by an appropriate time after recording of the answer signal to prevent false charging resulting from possible false recognition of an invalid answer signal.

Recommendation Q.318

2.8 DOUBLE SEIZING WITH BOTH-WAY OPERATION

2.8.1 *General*

To minimize the probability of double seizing, the circuit selection at the two ends of both-way circuit groups should be such that, as far as possible, double seizing can occur only when a single circuit of the group remains free (e.g. by selection of circuits in opposite order at the two ends of the circuit group).

2.8.2 *Unguarded interval*

In general the unguarded interval is small, except in the case of satellite operation where the circuit propagation time is long. However, System R1 does provide a means of detecting double seizing.

2.8.3 *Detection of double seizing*

In the event of double seizing, the incoming connect (seizing) signal is recognized at each end as a delay-dialling signal. If a start-dialling (proceed-to-send) signal is not received within the time-out interval (e.g. 5 seconds) double seizing is assumed.

In this event, either of the following arrangements may apply:

- a) an automatic repeat attempt to set up the call; or
- b) a recorder indication is given to the operator or to the calling subscriber and no automatic repeat attempt is made.

With either method, means must be provided to ensure positive release of the double seized circuit. To achieve the release it is recommended that the office which first assumes (based on timing) that dual seizure has occurred transmits a tone-on (0 state) signal followed by a tone-off (1 state) signal before the final tone-on (0 state) signal (disconnect) is sent. The duration of initial tone-on (0 state) signal should be a minimum of 100 ms and a maximum of 200 ms. The tone-off (1 state) signal should be recognized as an unexpected tone-off (1 state) signal at the distant end, after which the action specified in § 3.6.2, 1) c) of Recommendation Q.325 applies.

Recommendation Q.319

2.9 SPEED OF SWITCHING IN INTERNATIONAL EXCHANGES

2.9.1 It is recommended that the equipment in international exchanges shall have a high switching speed so that the switching time may be as short as possible.

2.9.2 At the outgoing, transit and incoming international exchanges, the seizing of the circuit and the setting up of the connection should take place as soon as possible after receipt of the digits of the address that are necessary to determine the routing.

2.9.3 At international exchanges the delay-dialling signal should be returned as soon as possible after recognition of the connect (seizing) signal. The start-dialling (proceed-to-send) signal should be returned as soon as possible but in any case, the return should be before the time-out of the outgoing register. [See § 3.6.2, 1) *a*) and *b*) of Recommendation Q.325.]

SECTION 3

REGISTER SIGNALLING¹⁾

Recommendation Q.320

3.1 SIGNAL CODE FOR REGISTER SIGNALLING

3.1.1 *General*

- 1) Either semi-automatic working (with automatic machine or direct operator access), or automatic working (with automatic machine access) may be used for outgoing traffic. With automatic machine access the incoming address signals are stored in a register until sufficient address information is received to route the call properly, at which time a free circuit may be selected and a connect (seizing) line signal sent. Subsequent to the recognition of a delay-dialling line signal and a start-dialling (proceed-to-send) line signal a KP (start-of-pulsing) signal followed by the address and ST (end-of-pulsing) signals are transmitted. The KP signal, which is nominally 100 ms in duration, prepares the receiving equipment to accept subsequent register signals. The transmission of the KP signal should be delayed by a minimum of 140 ms, but not more than 300 ms, after recognition of the start-dialling line signal.
- 2) Link-by-link register signalling applies.
- 3) Register signalling is in a forward direction only and shall be in accordance with the two-out-of-six multifrequency code shown in Table 3/Q.320. Three of the 15 possible codes are unused in international service and are available for special purposes.
- 4) The receiving equipment must furnish a two-and-two only frequency check on each received signal to ensure its validity.

3.1.2 *Sending sequence of register signals*

- 1) The sending sequence of address signals conforms to the sequence indicated in Recommendation Q.107. However, for traffic within an integrated world numbering zone (e.g. Zone 1) the language or discriminating digit and country codes may have no application and may not be sent. In Zone 1, the sequence of signals sent from the operator or subscriber is as follows:
 - a) *Semi-automatic working for calls to a subscriber within Zone 1:*
 - i) KP;
 - ii) national (significant) number of the called subscriber;
 - iii) ST.
 - b) *Semi-automatic working for calls to operators within Zone 1:*
 - i) KP;
 - ii) special decimal numbers; ²⁾
 - iii) ST.

1) As used in this Recommendation, the term register includes traditional registers in electromechanical exchanges and also the equivalent receiving device, memory and logic in stored program exchanges.

2) The special numbers used to reach operators are by agreement between Administrations.

- c) *Automatic working for calls to a subscriber within Zone 1:*
 - i) national (significant) number of the called subscriber.
- 2) The sending sequence of register signals shall conform to Table 3/Q.320, noting the following:
 - a) a KP (start-of-pulsing) signal shall precede the sequence of signals in all cases;
 - b) the ST (end-of-pulsing) signal shall follow the sequence of signals in all cases.

TABLE 3/Q.320

Register signal code of System R1

Signals	Frequencies (compound) Hz
KP (start-of-pulsing)	1100 + 1700
Digit 1	700 + 900
Digit 2	700 + 1100
Digit 3	900 + 1100
Digit 4	700 + 1300
Digit 5	900 + 1300
Digit 6	1100 + 1300
Digit 7	700 + 1500
Digit 8	900 + 1500
Digit 9	1100 + 1500
Digit 0	1300 + 1500
ST (end-of-pulsing)	1500 + 1700
Spare	700 + 1700
Spare	900 + 1700
Spare	1300 + 1700

Recommendation Q.321

3.2 END-OF-PULSING CONDITIONS – REGISTER ARRANGEMENTS CONCERNING ST SIGNAL

3.2.1 The register signalling arrangements shall provide for the sending of an ST signal for both semi-automatic and automatic operation; the arrangements in the outgoing international register for recognizing the ST (end-of-pulsing) signal condition may vary as follows:

- a) *Semi-automatic operation*

The ST condition is determined by the receipt of the end-of-pulsing signal initiated by the operator.
- b) *Automatic operation*
 - i) Where the ST condition is determined by the originating national network, an ST signal is transmitted to the outgoing international register. No further arrangements are necessary in that register for this purpose.
 - ii) Where the ST condition is not received from the originating national network, the outgoing international register will be required to determine the ST condition. (See for example the requirements for System No. 5, Recommendation Q.152, *Green Book*).

Recommendation Q.322

3.3 MULTIFREQUENCY SIGNAL SENDER

3.3.1 Signalling frequencies 700, 900, 1100, 1300, 1500 and 1700 Hz. A signal shall consist of a combination of any two of these six frequencies. The frequency variation shall not exceed $\pm 1.5\%$ of each nominal frequency.

3.3.2 Transmitted signal level -7 ± 1 dBm0 per frequency. The difference in transmitted level between the two frequencies comprising a signal shall not exceed 0.5 dB.

3.3.3 Signal frequency leak and modulation products. The level of the signal leak current transmitted to the line should be at least:

- a) 50 dB below the single frequency level when a multifrequency signal is not being transmitted;
- b) 30 dB below the transmitted signal level of either of the two frequencies when a multifrequency signal is being transmitted. The modulation products of a signal shall be at least 30 dB below the transmitted level of either of the two frequencies comprising the signal.

3.3.4 *Signal durations*

KP signal: 100 ± 10 ms.

All other signals: 68 ± 7 ms.

Interval between all signals: 68 ± 7 ms.

3.3.5 *Compound signal tolerance*

The interval of time between the moments when the two frequencies comprising a signal are sent must not exceed 1 ms. The interval of time between the moments when the two frequencies cease must not exceed 1 ms.

Recommendation Q.323

3.4 MULTIFREQUENCY SIGNAL RECEIVING EQUIPMENT

3.4.1 *Operate limits*

The signal receiving equipment must operate satisfactorily on any combination of two of the frequencies received as a single pulse or train of pulses in the presence of maximum expected noise on an international circuit, -40 dBm0 uniform spectral energy over the range of 300 to 3400 Hz, that meets the conditions listed below:

- a) each frequency of the received signal is within $\pm 1.5\%$ of the nominal signalling frequency;
- b) the absolute power level N of each received frequency is within the limits

$$(-14 + n \leq N \leq +0 + n) \text{ dBm}$$

where n is the relative power level at the signal receiver input. Assuming a nominal circuit loss of 0 dB these limits give a margin of ± 7 dB on the nominal absolute level of each received signal. Considering that a single equipment may serve circuits whose designed loss (nominal loss) is greater than 0 dB (e.g., circuits that are not equipped with echo suppressors) account must be taken of the highest circuit loss in the design of the receiving equipment (e.g., by increasing must-operate sensitivity) to ensure that the minimum margin is 7 dB;

- c) the difference in level between the frequencies comprising a received signal is less than 6 dB;

- d) the signal receiving equipment must accept signals meeting the following conditions:
- i) signals within the limits specified in a), b), and c) above in the presence of maximum expected noise and subject to the maximum expected delay distortion;
 - ii) the duration of each frequency comprising a signal is 30 ms or greater; and
 - iii) the silent interval preceding the signal is 20 ms or greater.

The tolerances given in a), b), and c) are to allow for variations at the sending end and in line transmission.

The test values indicated in d) are less than the working values. The difference between the test value and the working values will allow for pulse distortion, variations in registration devices, etc.

Note – Since higher steady noise as well as impulsive noise may be encountered on intraregional circuits, especially over certain companded carrier systems, the maximum expected noise within a region must be taken into account in the design of equipment for that region.

3.4.2 *Non-operate limits*

- 1) The receiving equipment shall not operate on any signal whose absolute power level at the point of the receiving equipment is 9 dB or more below the must-operate sensitivity required to satisfy the conditions established in § 3.4.1 b).
- 2) The receiving equipment shall release when the signal level falls 1 dB below the level established in § 1) above.
- 3) Operation of the receiving equipment shall be delayed for a minimum period necessary to guard against false operation due to spurious signals generated internally on reception of any signal.
- 4) The receiving equipment should not operate on a pulse signal of 10 ms or less. This signal may be of a single frequency or two frequencies received simultaneously. Likewise, after operation the equipment shall ignore short interruptions of the signal frequencies.

3.4.3 *Input impedance*

The value of the input impedance should be such that the return loss over a frequency range of 500 to 2700 Hz against a 600-ohm non-inductive resistor in series with a two-microfarad capacitor is greater than 27 dB.

Recommendation Q.324

3.5 ANALYSIS OF ADDRESS INFORMATION FOR ROUTING

In the application of System R1 to intraregional networks, the routing plan of that network shall apply. The routing plan is such that analysis is limited to a maximum of six digits.

Note – An ISC processing an incoming call on a circuit using System R1, if encountering a barred routing or unallocated number condition, should preferably send the special information tone toward the originating subscriber.

Recommendation Q.325

3.6 RELEASE OF REGISTERS

3.6.1 *Normal release conditions*

- 1) An outgoing register shall be released when it has transmitted the ST signal.
- 2) An incoming register shall be released on the forward transmission of the ST signal to the next exchange, or when all pertinent information has been transferred to an outgoing register.

3.6.2 *Abnormal release conditions*

- 1) An outgoing register shall release in any of the following situations:
 - a) on failure to recognize a delay-dialling signal within 5 seconds of circuit seizure unless a longer interval is preferred for particular traffic conditions;
 - b) on failure to recognize a start-dialling (proceed-to-send) signal within 5 seconds of recognition of the delay-dialling signal unless a longer interval is preferred for particular traffic conditions;
 - c) on recognition of an unexpected tone-off (0 state) line signal subsequent to the recognition of a start-dialling (proceed-to-send) signal, but prior to completion of outpulsing. This signal sequence will occur in the event of double seizing and therefore a repeat attempt may be invoked and as a result the register may not be released prior to completion of the second attempt. (See Recommendation Q.318.);
 - d) on exceeding overall register timing of 240 seconds.
- 2) An incoming register shall release in any of the following situations:
 - a) on failure to receive the KP signal within 10 to 20 seconds of register seizure;
 - b) on failure to receive the 1st through 3rd digits within 10 to 20 seconds of receipt of the KP signal;
 - c) on failure to receive the 4th through 6th digits within 10 to 20 seconds of the registration of the 3rd digit;
 - d) on failure to receive the remaining digits and ST signal within 10 to 20 seconds of registration of the 6th digit;
 - e) on error detection such as receipt of one or more than two frequencies in a pulse;
 - f) on failure to gain access to associated switching equipment within appropriate intervals of time.

The timing intervals given in 1) and 2) above are representative values but need not necessarily apply to all types of switching systems or all traffic loads.

An abnormal release of an outgoing register on failure to receive a delay-dialling signal as discussed in 1) a) above, shall result in the circuit being locked out which maintains the tone-off (1 state) condition toward the distant end. The maintenance personnel should be alerted.

Abnormal releases should result in the return of an audible re-order (congestion) tone toward the originating end. If this condition (re-order) persists for more than 1 to 2 minutes, maintenance personnel should be alerted.

Recommendation Q.326

3.7 SWITCHING TO THE SPEECH POSITION

At all exchanges, the circuit shall be switched to the speech position when the registers (incoming or outgoing) are released.

SECTION 4

TESTING ARRANGEMENTS

Recommendation Q.327

4.1 GENERAL ARRANGEMENTS

The guiding principles for the maintenance of automatic circuits as covered in Recommendations M.700 to M.734 are in general applicable to testing of System R1.

Recommendation Q.328

4.2 ROUTINE TESTING OF EQUIPMENT (LOCAL MAINTENANCE)

4.2.1 Test equipment for routine testing of individual items of equipment such as circuit equipment, connecting circuits, registers, etc., should be provided in every international exchange. Routine tests should be made in accordance with the practice followed in each country for the local maintenance of switching equipment and may be made with suitable semi-automatic or automatic test equipment if available.

4.2.2 The testing equipment must conform to the following principles:

- a) an item of equipment must not be taken for test until it is free;
- b) an item of equipment taken for test will be marked engaged (busy) for the duration of the test. Before a circuit equipment is taken for test, the circuit will be withdrawn from service at both international exchanges;
- c) as an alternative to *b*), a like item of equipment, known to be properly adjusted, may be switched in, and the item of equipment to be tested is switched out during the test.

4.2.3 Testing of the circuit and signalling equipment should include a check that the specifications of System R1 are met in regard to the following:

- a) *2600 Hz line signalling system:*
 - signal frequency;
 - transmitted signal levels;
 - signal frequency leak;
 - receiving equipment operate and non-operate limits;
 - receiving-end line split;
 - sending-end line split;
 - sending duration of signals.
- b) *PCM line signalling equipment:*
 - receiving equipment operate and non-operate limits;
 - sending duration of signals.

- c) *Register signalling system:*
- signal frequencies;
 - transmitted signal levels;
 - signal frequency leak;
 - sending duration of signals;
 - receiving equipment operate and non-operate limits;
 - operation of the receiving equipment in response to a series of pulses;
 - error checking features.

Recommendation Q.329

4.3 MANUAL TESTING

4.3.1 *Functional testing of signalling arrangements*

Functional tests from one end of the circuit to the other can be made by verification of satisfactory signal transmission by initiating a test call to:

- a) technical personnel at the distant-end international exchange; or
- b) a test call signal testing and answering device, if such equipment is available at the distant-end international exchange.

4.3.2 *Test calls*

1) Steps in the verification of satisfactory transmission of signals, involved in the completion of test calls (manual method):

- a) place a call to the technical personnel at the distant international exchange;
- b) on completion of the connection the audible ringing tone should be heard and the answer signal should be received when the call is answered at the distant end;
- c) request distant end to initiate a hang-up (clear-back) signal, followed by a re-answer signal;
- d) a hang-up (clear-back) signal should be received and recognized when the distant end hangs up and a second answer signal should be received and recognized when the distant end re-answers the call;
- e) initiate a ring-forward (forward-transfer) signal which should be recognized at the distant end;
- f) terminate the call and observe that the circuit restores to the idle condition.

2) If incoming signalling testing devices are available at the distant international exchange, the signal verification tests should be made using this equipment to the extent that the applicable features indicated in 1) above are available.

Recommendation Q.330

4.4 AUTOMATIC TRANSMISSION AND SIGNALLING TESTING

Considering that automatic transmission and signalling testing of international circuits is extremely desirable, Administrations using or intending to use System R1 are encouraged to provide for this type of testing. Existing automatic testing equipment presently in use in world numbering Zone 1, may be used. When the automatic transmission measuring and signalling testing equipment (ATME) No. 2 becomes available, it may be used as an alternative by agreement of the Administrations concerned.

Recommendation Q.331

4.5 TEST EQUIPMENT FOR CHECKING EQUIPMENT AND SIGNALS

4.5.1 *General*

For local checks of correct equipment operation and for readjusting the equipment, international exchanges should have test equipment available which includes:

- a) line and register signal generators;
- b) signal-measuring apparatus.

4.5.2 *Signal generators*

The signal generators should be able to simulate all line and register signals. The generators may be part of test equipment which cycles the equipment to be tested through actual signalling sequences, in a manner which enables rapid complete testing to determine whether the equipment meets system specifications.

1) *Line signal generator characteristics as follows:*

- a) signal frequency should be within ± 5 Hz of the nominal signal frequency and shall not vary during the time required for testing;
- b) signal levels should be variable between the limits given in the specification and be able to be set within ± 0.2 dB;
- c) signal durations should be long enough so that the signals can be recognized. See Recommendation Q.313, § 2.3.3.

2) *Register signal generator characteristics as follows:*

- a) signal frequencies should be within $\pm 1.5\%$ of the nominal signal frequency or frequencies and shall not vary during the time required for testing;
- b) signal levels should be variable between the limits given in the specification and be able to be set within ± 0.2 dB;
- c) signal durations and intervals between signals shall be within the limits given in the specification in Recommendation Q.322, § 3.3.4, for normal operate values and in Recommendation Q.323, § 3.4.1 d), for test operate values.

4.5.3 *Signal-measuring equipment*

Equipment capable of measuring signal frequencies, signal levels, signal durations and other significant signal time intervals may be part of the test equipment referred to in § 4.5.2, or separate instruments.

1) *Line signal measuring equipment characteristics as follows:*

- a) signal frequency between the extreme limits given in the specification should be measured with an accuracy of ± 1 Hz;
- b) level of the signal frequency measured over the range given in the specification should be measured with an accuracy of ± 0.2 dB;
- c) signal durations, and other significant time intervals as given in the specification should be measured with an accuracy of ± 1 ms or $\pm 1\%$ of the nominal duration, whichever yields the higher value.

- 2) *Register signal measuring equipment characteristics as follows:*
- a) signal frequency or frequencies between the extreme limits given in the specification, should be measured with an accuracy of ± 1 Hz;
 - b) level of the signal frequency or frequencies over the range given in the specification should be measured with an accuracy of ± 0.2 dB;
 - c) signal duration and intervals between signals as given in the specification should be measured with an accuracy of ± 1 ms.
- 3) In regard to measuring time intervals a recorder having a minimum of two input channels may be useful. The recorder characteristic should conform with the accuracy requirements quoted in 1) and 2) above and be easily connected to the circuit under test. The recorder input characteristic should be such as to have a negligible effect on circuit performance.

**ANNEX A TO THE SPECIFICATIONS
OF SIGNALLING SYSTEM R1**

SIGNAL SEQUENCE

TABLE A-1

Semi-automatic (SA) and automatic (A) traffic in Zone 1

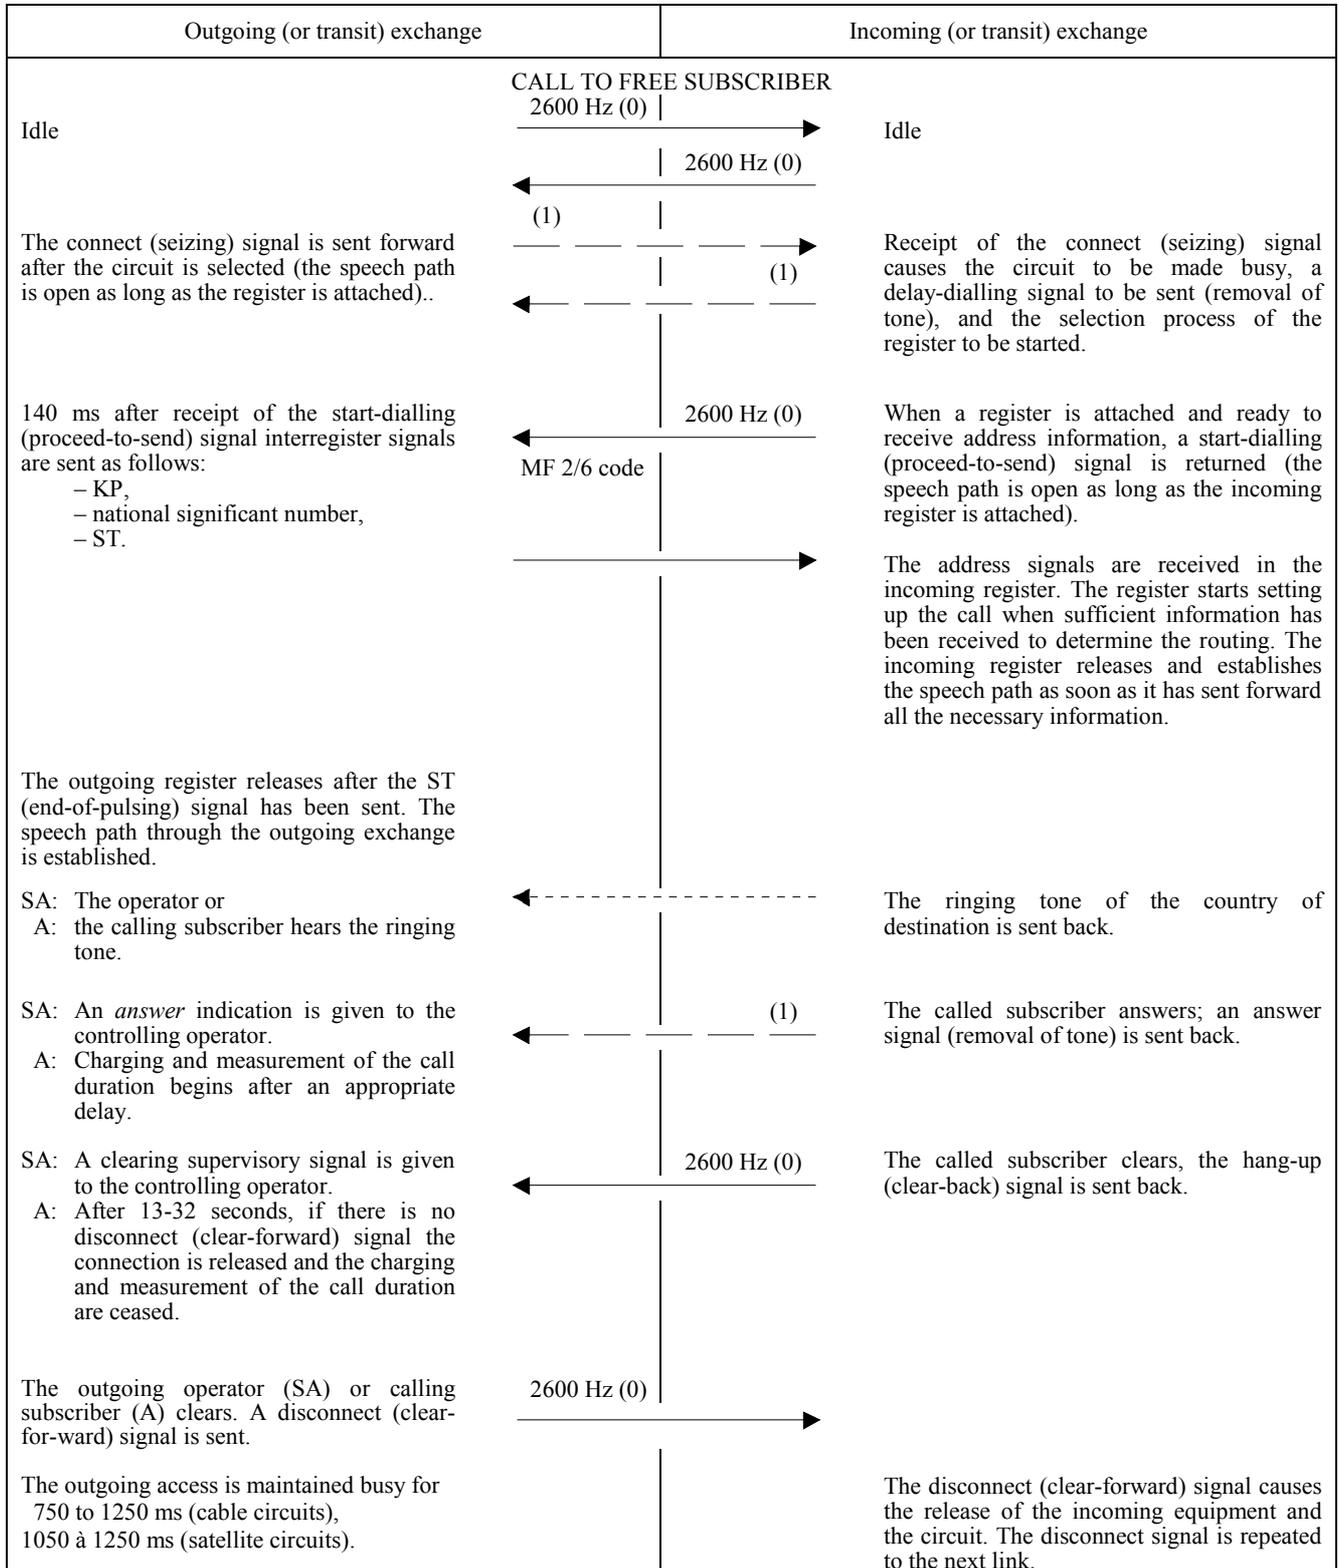


TABLE A-1 (cont.)

Outgoing (or transit) exchange	Incoming (or transit) exchange
CALL TO A BUSY SUBSCRIBER OR CONGESTION	
The signal sequence is the same as for a call to a free subscriber, up to the release of the incoming register	
<p>The operator (SA) or calling subscriber (A) hears the audible tone and clears. The disconnect (clear-forward) signal is sent.</p>	<p>Busy subscriber. The audible busy tone of the country of destination is returned. Congestion. The audible congestion tone of the country of destination is returned.</p>
SPECIAL CONDITIONS	
<p>1. <i>Ring-forward (forward-transfer)</i> Following a call established by operators, if the outgoing controlling operator wishes to recall the incoming operator, a ring-forward (forward-transfer) signal is sent.</p>	<p>Recalls the incoming operator.</p>
<p style="text-align: center;">2600 Hz (0) pulse (100 ± 35 ms)</p>	
<p>2. <i>Double seizing</i> The outgoing end sends the connect (seizing) signal.</p>	<p>The incoming end also sends the connect (seizing) signal.</p>
<p>Each end interprets the connect (seizing) signal as a delay-dialling signal. If the start-dialling (proceed-to-send) signal is not recognized within the specified timing interval, double seizing is assumed and the following may apply:</p> <ul style="list-style-type: none"> a) an automatic repeat attempt is made, or b) a re-order (congestion) audible tone is given to the calling subscriber or operator and no automatic repeat attempt is made. 	
(See Recommendation Q.318.)	

In this table the arrows have the following meanings:

- ▶ transmission of a signalling frequency (permanent or pulse emission).
- -▶ end of transmission of the signalling frequency in the case of its permanent transmission.
- -▶ transmission of an audible tone.

PART II – Interworking of Signalling System R1 with other standardized systems

Recommendation Q.332

5. INTERWORKING

5.1 *General*

System R1 is capable of interworking with any of the CCITT standardized signalling systems.

Specifications on interworking of System R1 with other CCITT signalling systems are not yet available.

Typical information is found in Recommendation Q.180 of Fascicle VI.2.

SERIES OF ITU-T RECOMMENDATIONS

Series A	Organization of the work of ITU-T
Series B	Means of expression: definitions, symbols, classification
Series C	General telecommunication statistics
Series D	General tariff principles
Series E	Overall network operation, telephone service, service operation and human factors
Series F	Non-telephone telecommunication services
Series G	Transmission systems and media, digital systems and networks
Series H	Audiovisual and multimedia systems
Series I	Integrated services digital network
Series J	Cable networks and transmission of television, sound programme and other multimedia signals
Series K	Protection against interference
Series L	Construction, installation and protection of cables and other elements of outside plant
Series M	TMN and network maintenance: international transmission systems, telephone circuits, telegraphy, facsimile and leased circuits
Series N	Maintenance: international sound programme and television transmission circuits
Series O	Specifications of measuring equipment
Series P	Telephone transmission quality, telephone installations, local line networks
Series Q	Switching and signalling
Series R	Telegraph transmission
Series S	Telegraph services terminal equipment
Series T	Terminals for telematic services
Series U	Telegraph switching
Series V	Data communication over the telephone network
Series X	Data networks and open system communications
Series Y	Global information infrastructure and Internet protocol aspects
Series Z	Languages and general software aspects for telecommunication systems