



INTERNATIONAL TELECOMMUNICATION UNION

CCITT

THE INTERNATIONAL
TELEGRAPH AND TELEPHONE
CONSULTATIVE COMMITTEE

Q.87.1

(11/1988)

SERIES Q: SWITCHING AND SIGNALLING

Functions and information flows for services in the ISDN –
Supplementary services

**ADDITIONAL INFORMATION TRANSFER
SUPPLEMENTARY SERVICES – ISDN USER-TO-
USER SIGNALLING SERVICES**

Reedition of CCITT Recommendation Q.87.1 published in
the Blue Book, Fascicle VI.1 (1988)

NOTES

- 1 CCITT Recommendation Q.87.1 was published in Fascicle VI.1 of the *Blue Book*. This file is an extract from the *Blue Book*. While the presentation and layout of the text might be slightly different from the *Blue Book* version, the contents of the file are identical to the *Blue Book* version and copyright conditions remain unchanged (see below).
- 2 In this Recommendation, the expression “Administration” is used for conciseness to indicate both a telecommunication administration and a recognized operating agency.

Recommendation Q.87.1

ADDITIONAL INFORMATION TRANSFER SUPPLEMENTARY SERVICES

1 ISDN user-to-user signalling services

1.1 General

This Recommendation provides information on the functions in ISDN entities and the information flows between the entities which are required to provide user-to-user signalling services.

The service may be used for unrestricted user signalling information in a packet manner over the D channel at the user-network interface.

1.2 Description of service uses

1.1.1 General description

The **user-to-user signalling (UUS) supplementary service** allows an ISDN user to send/receive a limited amount of information to/from another ISDN user over the signalling channel in association with a call to the other ISDN user.

Note – These procedures are applicable to user-to-user information (UII) transfer in association with a circuit-switched telecommunication service only. Procedures to permit UII transfer in association with other types of calls (e.g. packet bearer services) need to be investigated.

1.2.2 Signalling information transfer

This packet service allows two users (e.g., terminals, PABXs) in a point-to-point configuration, to communicate via the ISDN over the D channel.

Service 1 provides this capability within the basic call signalling messages. Services 2 and 3 allow this capability within additional messages. Service 2 may be sent from SETUP through SETUP confirmation (CONNECT) and Service 3 from SETUP confirmation through DISCONNECT.

1.2.3 Service invocation

Users indicate their intended user of a user-to-user signalling service at the time of call setup by including appropriate information in the service request sent to the network over the user/network signalling channel (D channel) or for Service 1 by including user-to-user information in the SETUP message. If the request is an explicit request at call setup, the user may mark the request essential/not essential. If the request is essential the call will be cleared by the network if any essential user-to-user service cannot be provided. Service 3 may be activated by either the calling or called user during the setup or active phase of the call.

1.3 Derivation of the functional model for user-to-user signalling

1.3.1 Functional model

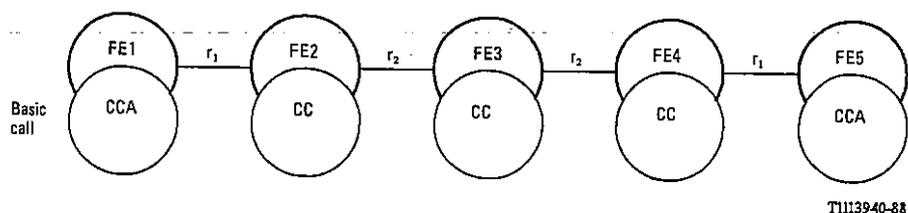


FIGURE 1-1/Q.87
Functional model

FE1 and FE5 are the functional entities that serve the users and are responsible for initiating functional requests and interacting with network: FE2, 3 and 4 are the functional entities within the network that cooperate with their peers to provide the services requested by FE1 and FE5. r_1 and r_2 are relationships between functional entities wherein information flows occur in order to process call attempts or service requests.

1.3.1.1 *Relationship to basic service*

Service 1 is carried across the network as part of Basic Service. Services 2 and 3 allow additional messages to be accepted and processed from specific states in the basic service model. These messages do not alter the state but require an action to take place.

1.3.1.2 *Description of the call control Agent functional entity*

The CCA functional entity supports the functionality to:

- a) access the service-providing capabilities of the CC entities, using service requests to establish, manipulate and release a single call;
- b) receive indications relating to the call from the CC entity and relay them to the user;
- c) maintain call state information as perceived from this functional end-point of the service (i.e., a single-ended view of the call).

1.3.1.3 *Description of the call control (CC) functional entity*


The CC functional entity supports the functionality to:

- a) establish, manipulate and release a single call (upon request of the CCA entity);
- b) associate and relate the CCA entities that are involved in a particular call and/or service;
- c) manage the relationship between the CCA entities involved in a call (i.e., reconcile and maintain the overall perspective of the call and/or service);

1.4 *Information flow diagrams*

Information flow diagrams for user-to-user signalling service call setup, service usage and call release are shown in Figures 1-2/Q.87 to 1-10/Q.87.

- Figure 1-2/Q.87 shows a successful use of UUS Service 1 in a point-to-point configuration;
- Figure 1-3/Q.87 shows a successful use of UUS Service 1 in a point-to-multipoint configuration;
- Figure 1-4/Q.87 shows a successful use of UUS Service 2 in a point-to-point configuration;
- Figure 1-5/Q.87 shows an unsuccessful use of UUS Service 2 in a point-to-multipoint configuration;
- Figure 1-6/Q.87 shows a successful use of UUS Service 3 requested and essential;
- Figure 1-7/Q.87 shows a successful use of UUS Service 3 requested and not essential;
- Figure 1-8/Q.87 shows a successful use of UUS Service 3 requested during the active phase;
- Figure 1-9/Q.87 shows a successful use of UUS Service 3 requested during the active phase by the called party;
- Figure 1-10/Q.87 shows a UUS service requested in a point-to-multipoint configuration.

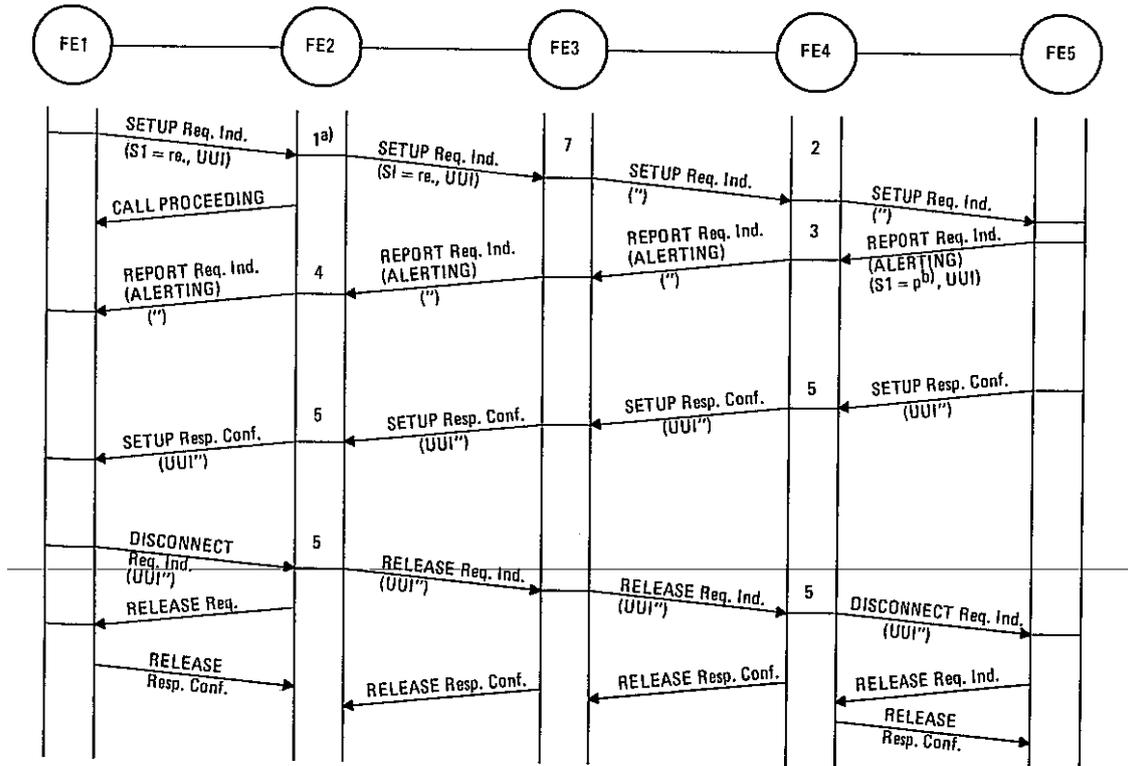


T1113950-88

re. Requested and essential
p. Provided

- a) 1-7 are functional action entities described in § 6.
- b) This indication may be included in the CONNECT/ANSWER messages.

Note — Although not shown in this Figure, the calling user is allowed to request Service 1 as non-essential (i.e., rne).

FIGURE 1-2/Q.87
UUS Service 1 – Successful case
Called user is point-to-point

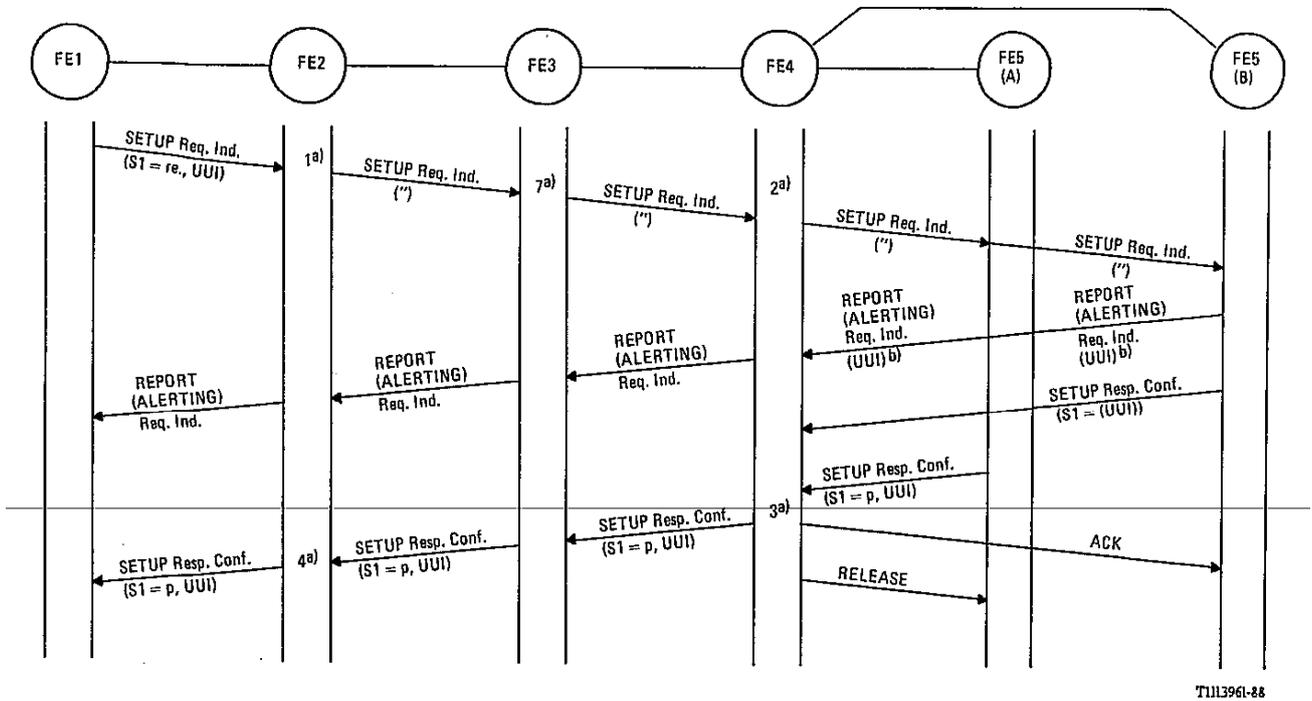


T1113961-88

a) 1-7 are functional action entities described in § 6.

b) In case of point-to-multipoint configuration, UUI (1, 11, 411) in the ALERTING (FE5A and FE5B) and CONNECT from the non-selected FE5 (FE5A) are discarded at FE4.


FIGURE 1-3/Q.87
UUS Service 1
 Called user is point-to-multipoint

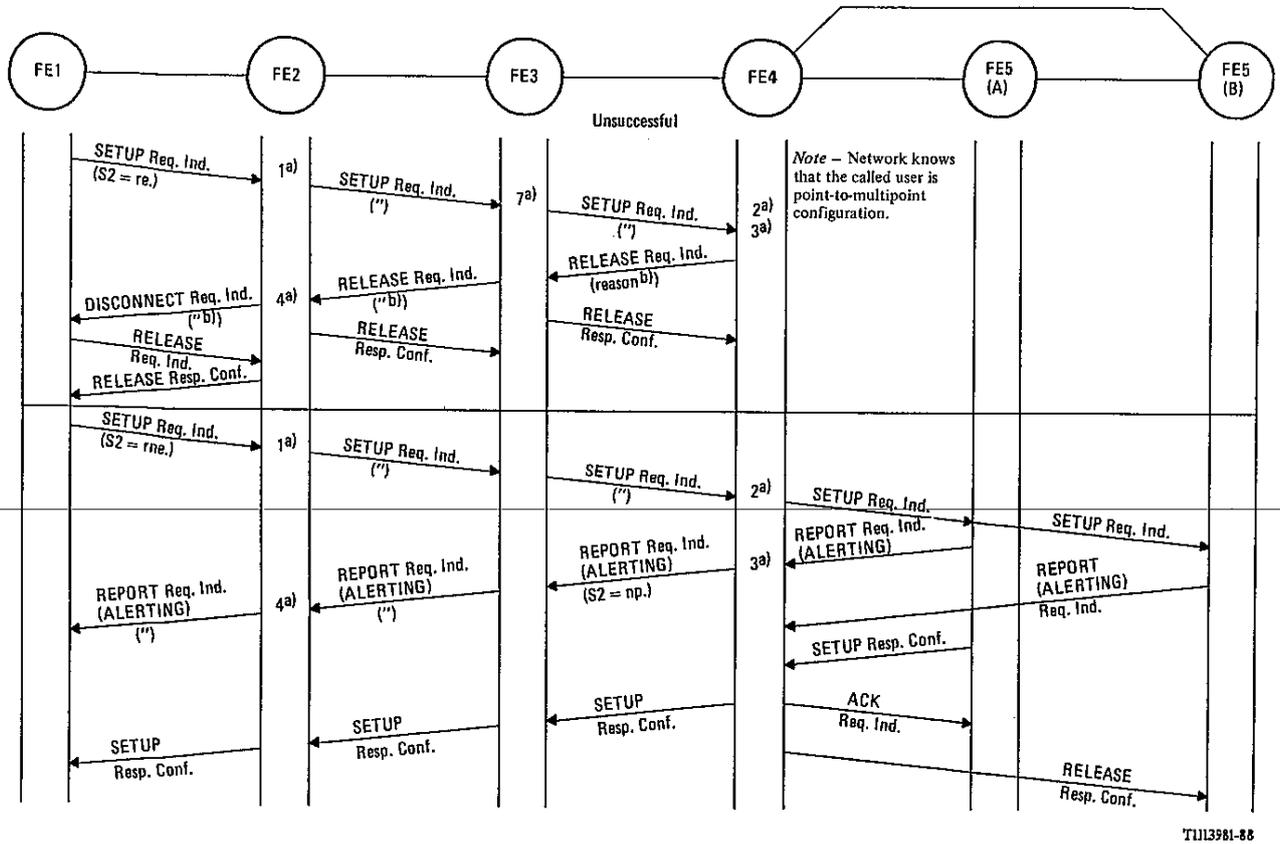

T1113981-88

- a) 1-7 are functional action entities described in § 6.
- b) The reason is “UUS Service 2 cannot be provided because called party has point-to-multipoint configuration”.


FIGURE 1-5/Q.87
UUS Service 2
 Called user is point-to-multipoint

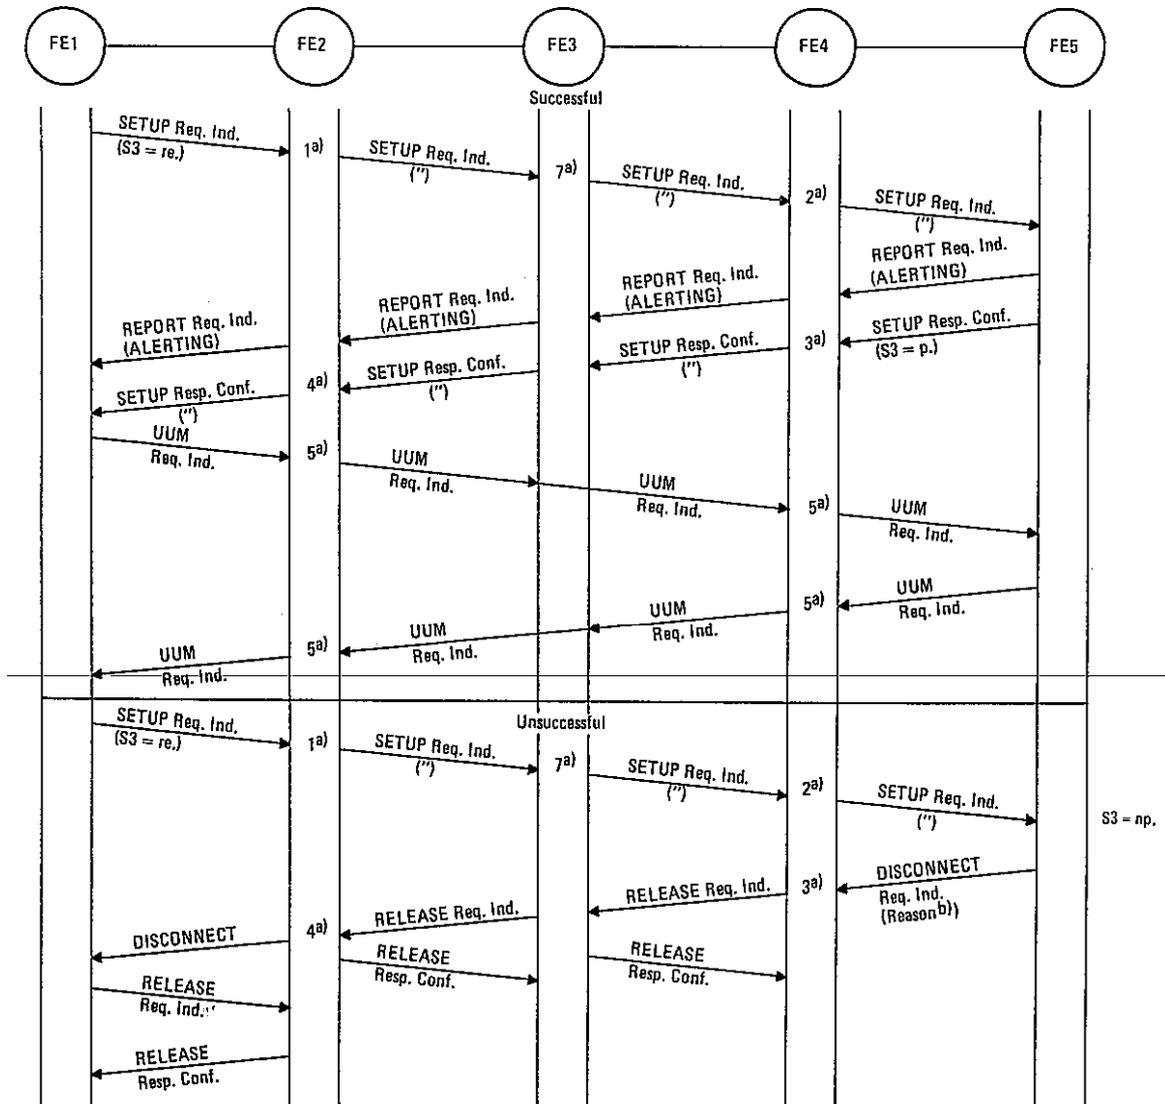

TI113991-88

- a) 1-7 are functional action entities described in § 6.
- b) The reason is "this service cannot be provided by the called user".


FIGURE 1-6/Q.87
 UUS Service 3
 S3 requested and essential

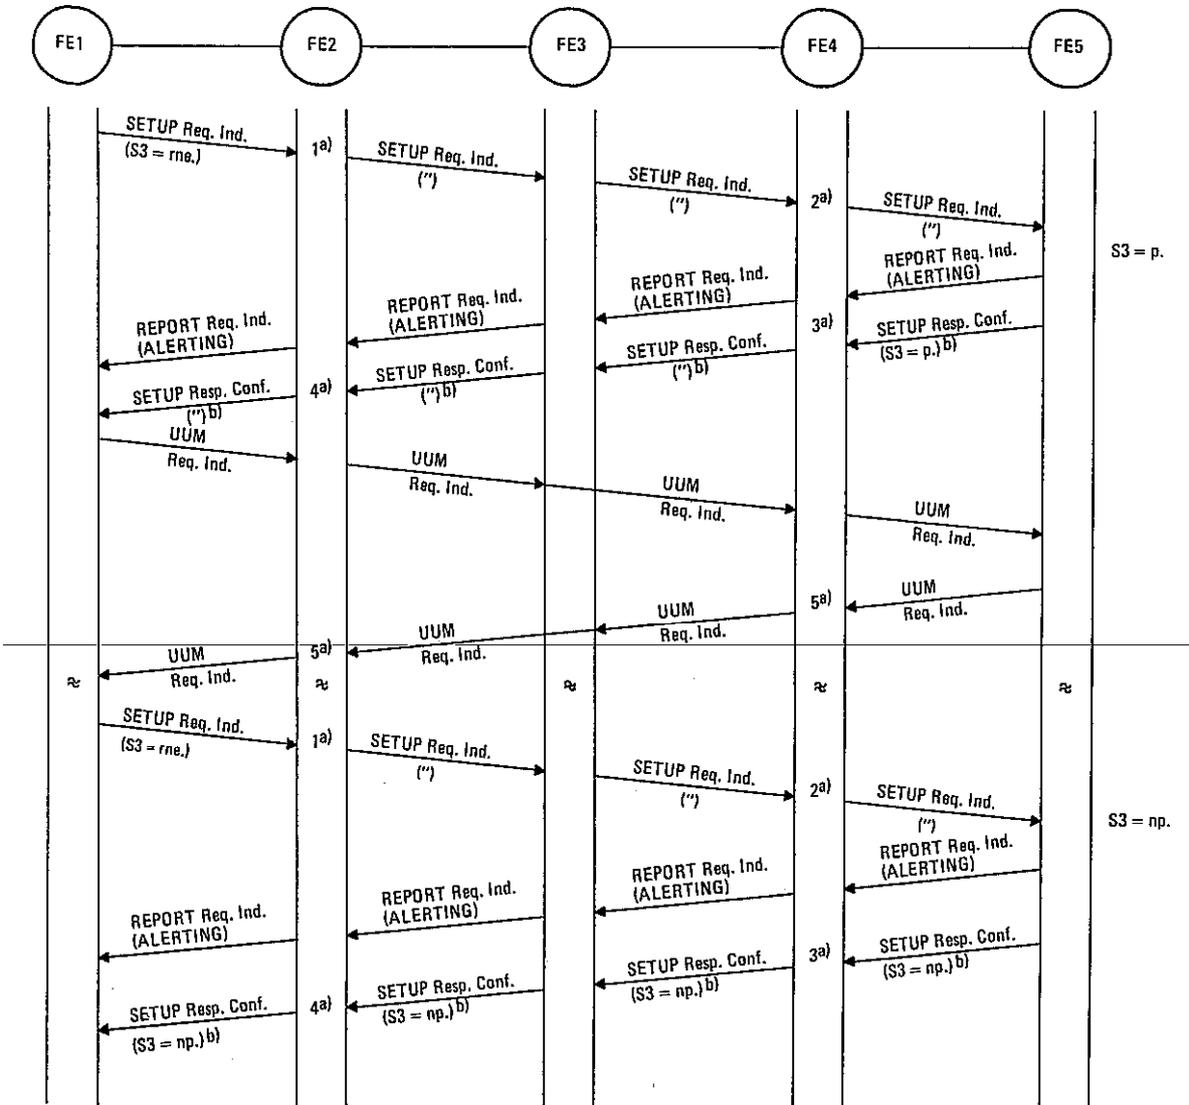

T1114001-88

- a) 1-7 are functional action entities described in § 6.
- b) Could be sent in REPORT flow.


FIGURE 1-7/Q.87
UUS Service 3
 S3 requested but not essential

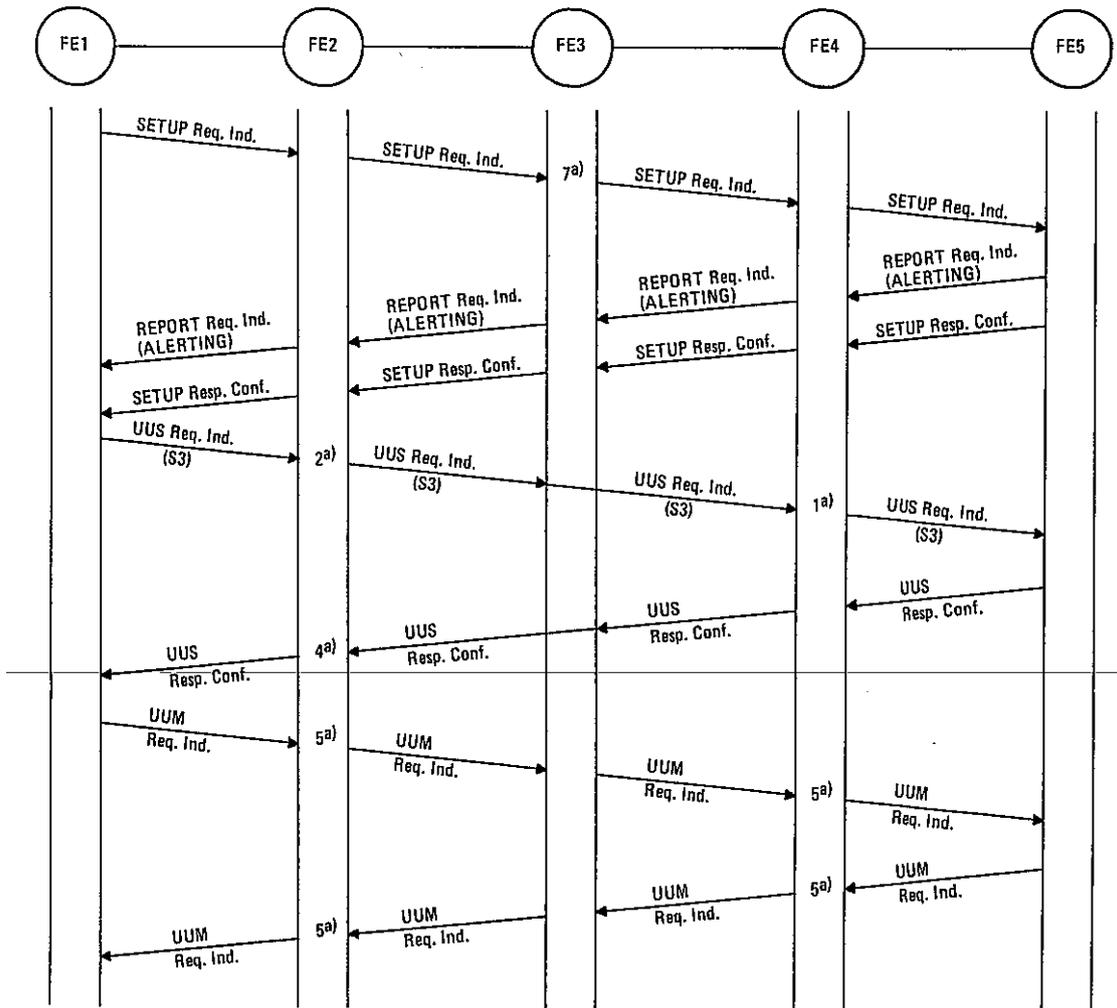

T1114011-88

a) 1-7 are functional action entities described in § 6.


FIGURE 1-8/Q.87
UUS Service 3
 Requested during active phase (by calling party)
 (Not-essential)

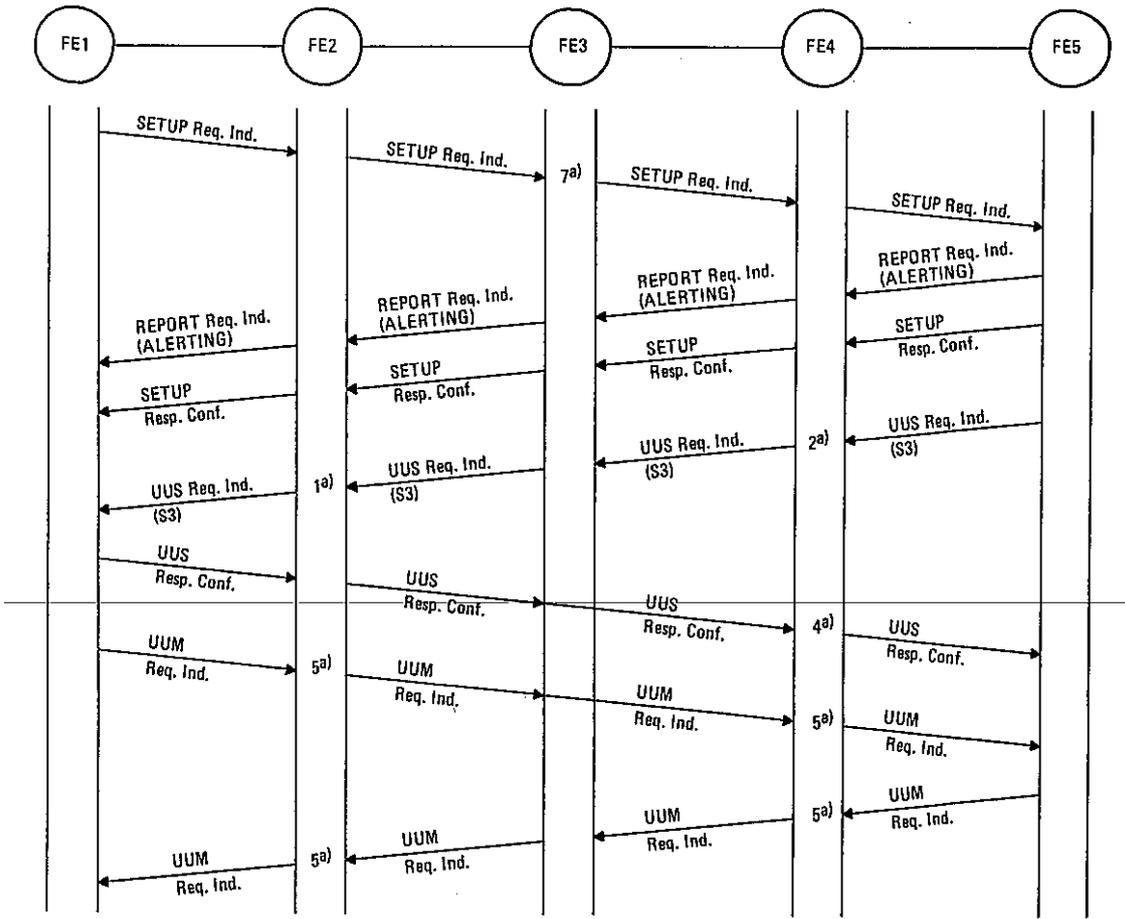

T1114021-88

a) 1-7 are functional action entities described in § 6.

FIGURE 1-9/Q.87
UUS Service 3
 Requested during active phase (by called party)
 (Not-essential)

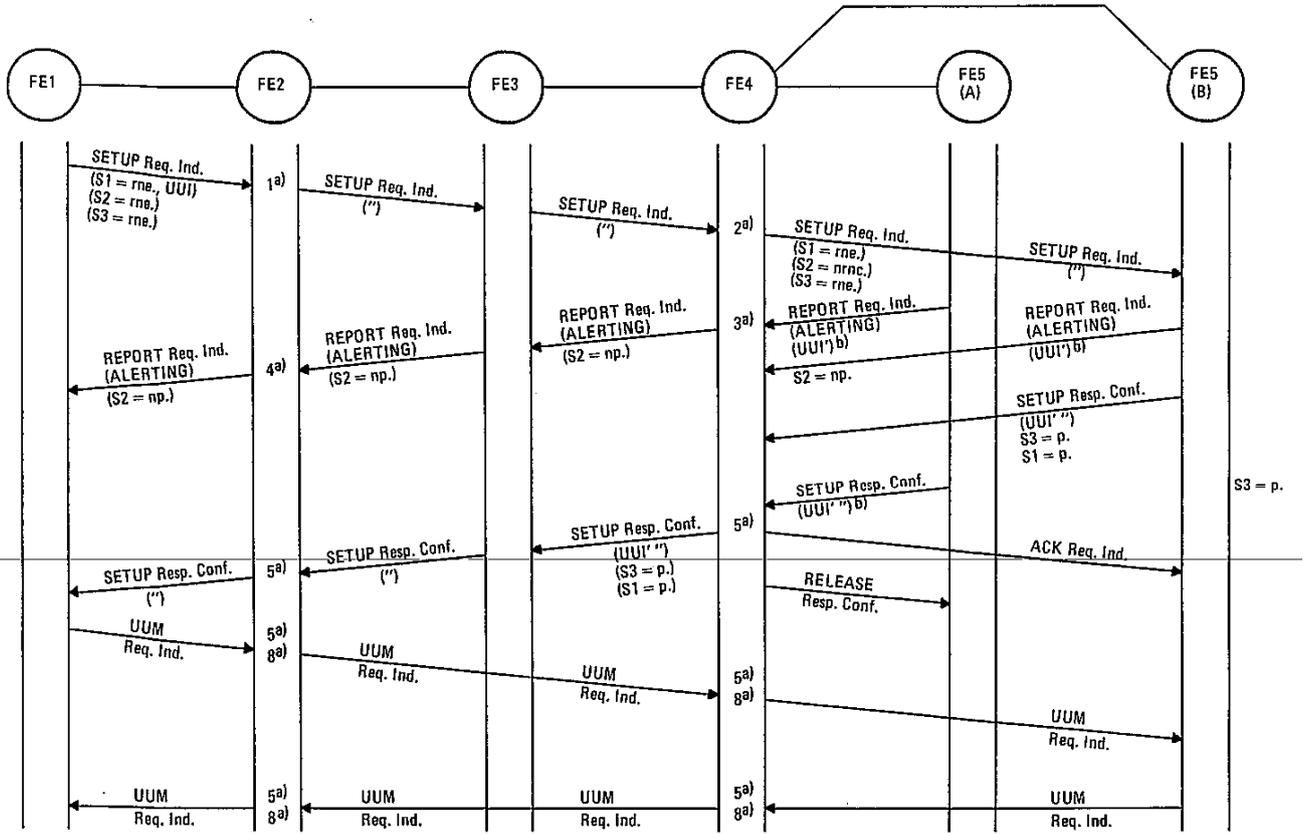

T1114030-88

- a) 1-7 are functional action entities described in § 6.
- b) In case of point-to-point configuration, UII ('', '''), in the ALERTING [FE5(A) or FE5(B)] and CONNECT from the non-selected FE5 [FE5(A)] are discarded at FE4.

FIGURE 1-10/Q.87
All the UUS services 1, 2, 3 are requested
 Called user to point-to-multipoint

1.5.1 SLDs for FE1 and FE5

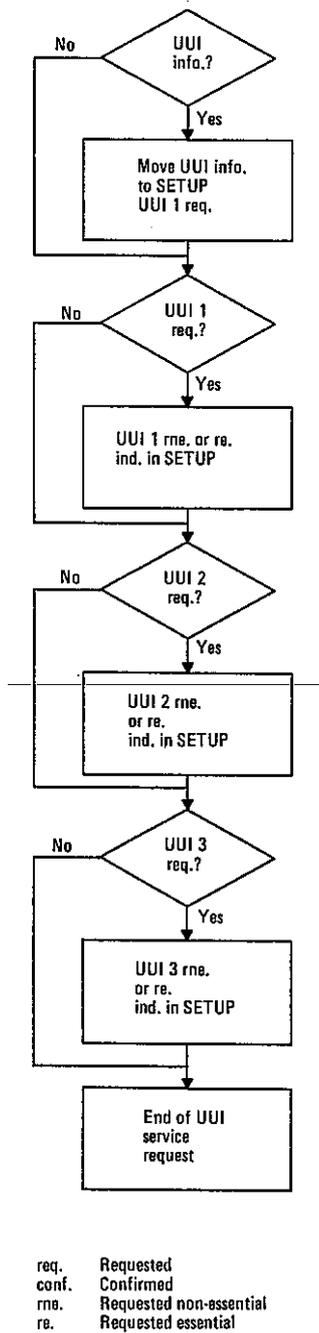


FIGURE 1-11/Q.87
 CCA additions to basic call for UUS
 Process service request

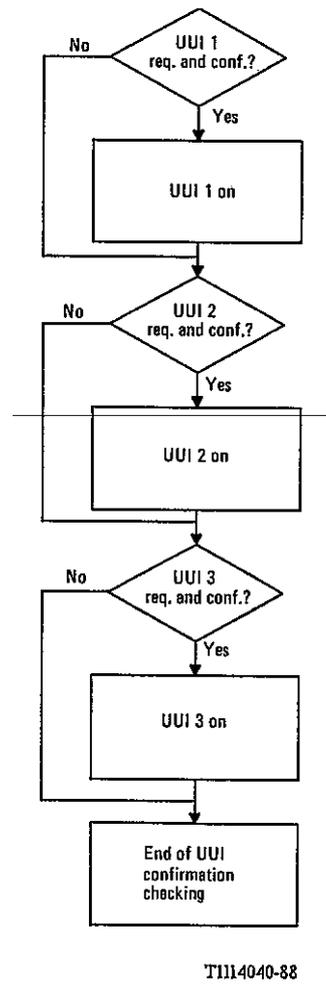


FIGURE 1-12/Q.87
 Report ind. or report (Alerting) ind.
 Processing of parameters

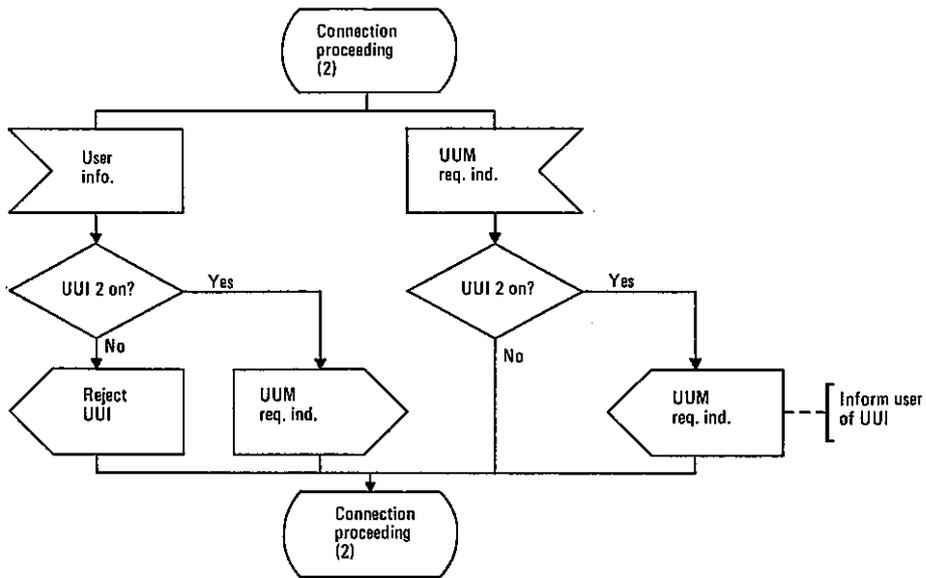


FIGURE 1-13/Q.87
CCA r₁-User UUM connection proceeding processing

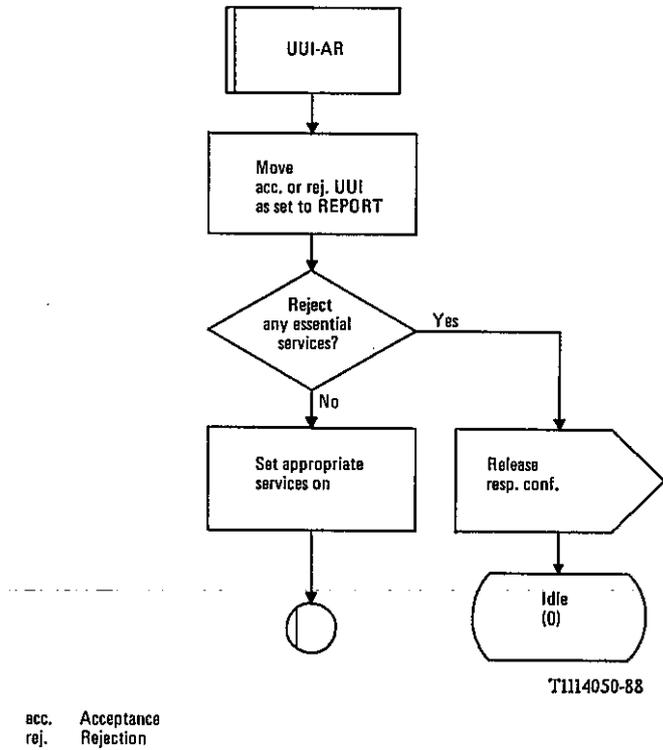


FIGURE 1-14/Q.87
CCA r₁-User acceptance or rejection of UUI request
Process attempt
Macrodefinition UUI AR

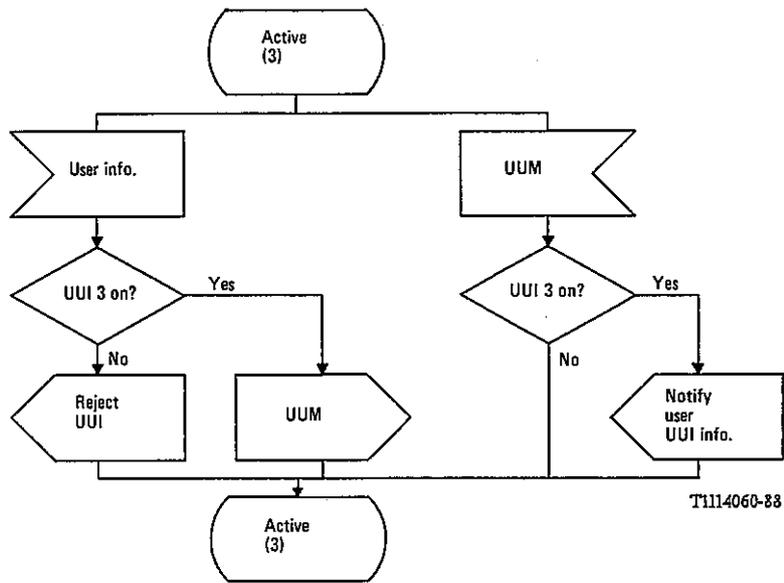


FIGURE 1-15/Q.87
CCA r₁-User UUM active processing

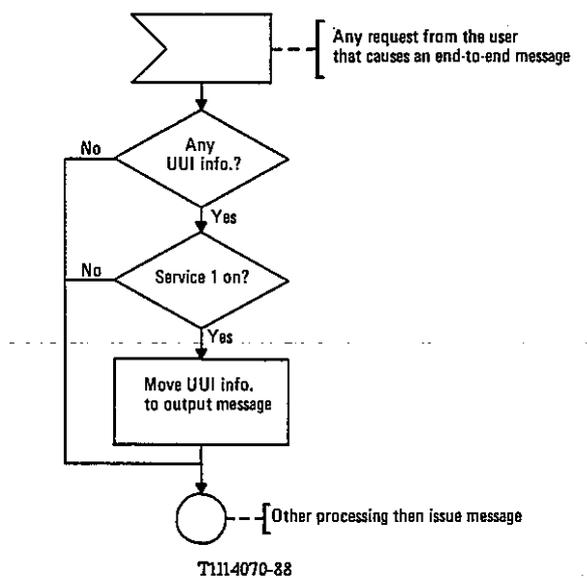
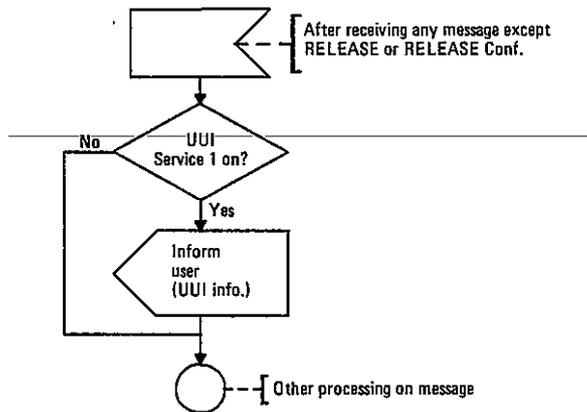


FIGURE 1-16/Q.87
CCA r₁-User UUS 1 processing
For call control message handling

1.5.2 Stage 2 SDLs for FE2 “CC functional entity (r1-r1)”

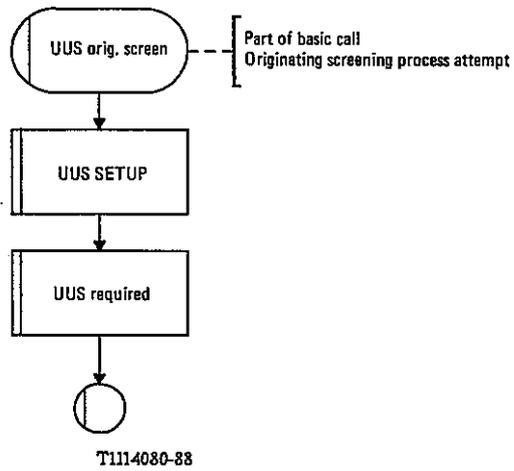


FIGURE 1-17/Q.87
Macrodefinition UUS originating screen

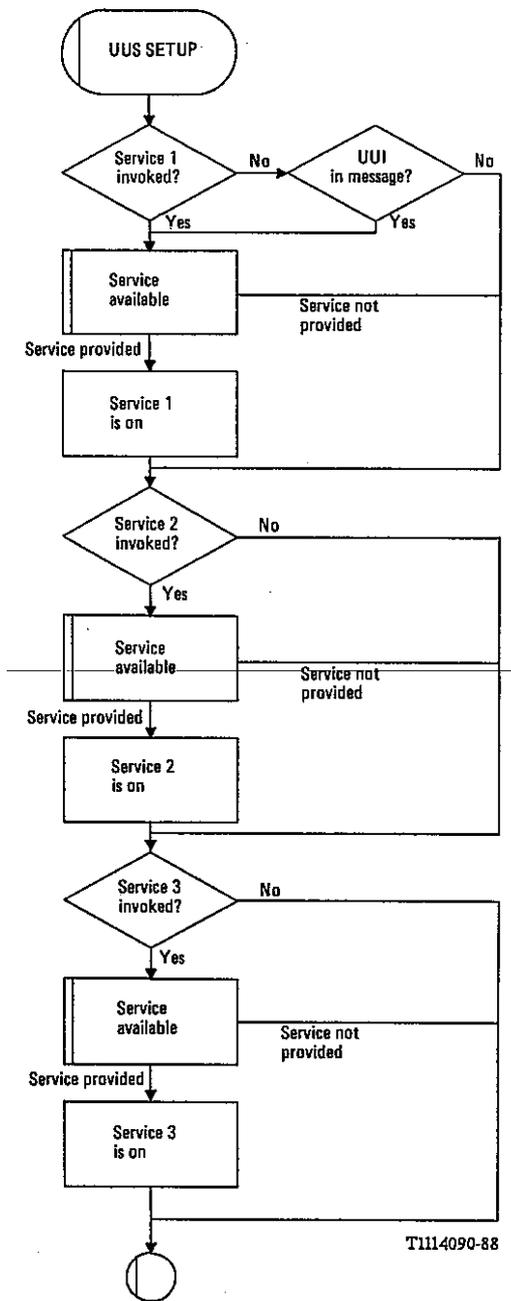


FIGURE 1-18/Q.87
Macrodefinition UUS SETUP, r₁-r₁


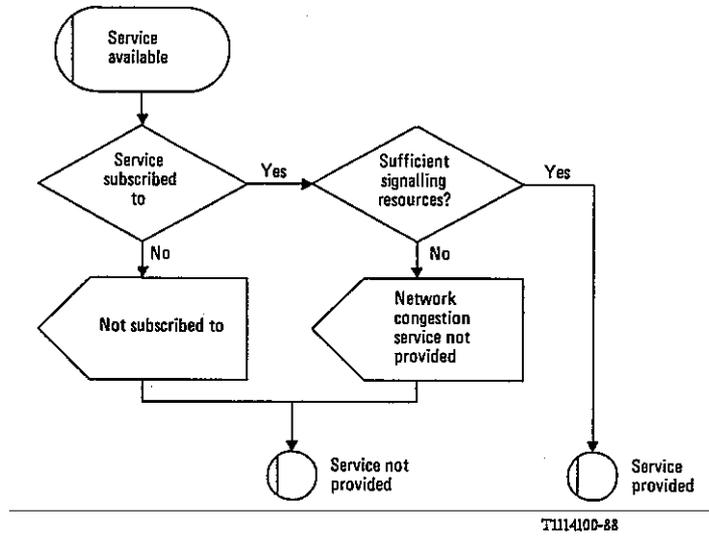


FIGURE 1-19/Q.87
Macrodefinition service available

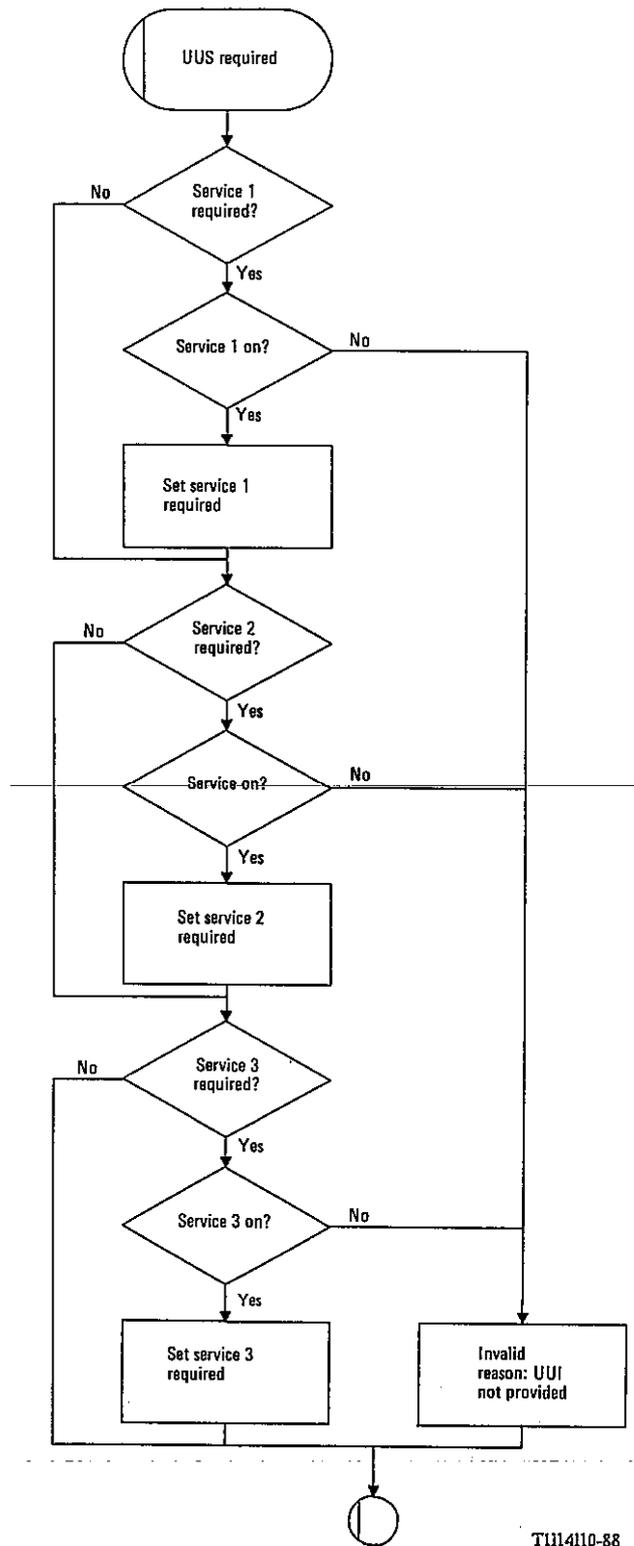

T1114110-88

FIGURE 1-20/Q.87
Macrodefinition UUS required

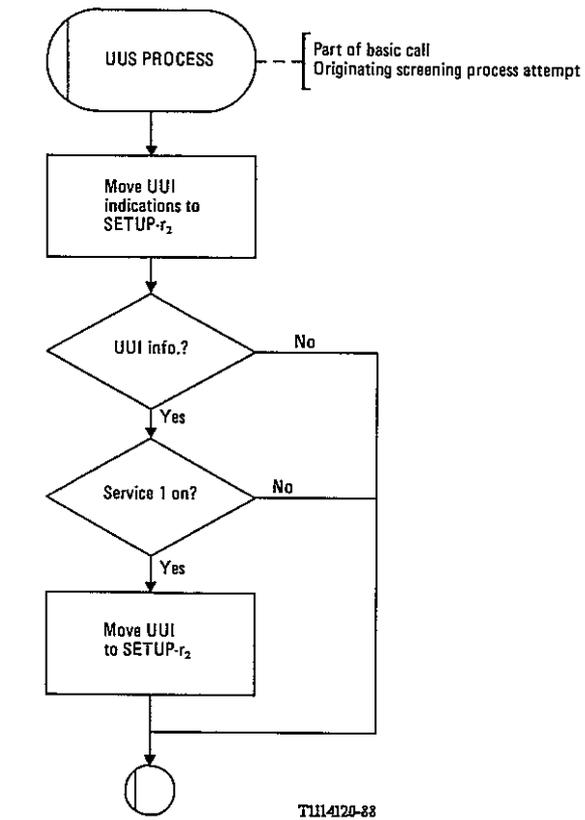


FIGURE 1-21/Q.87
Macrodefinition UUS process

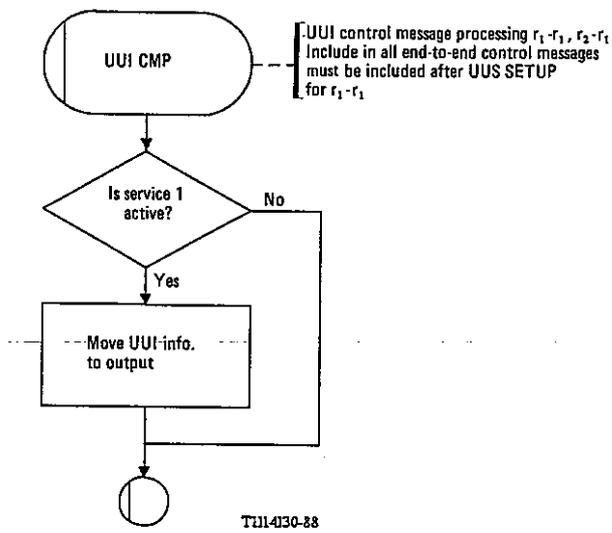


FIGURE 1-22/Q.87 (Sheet 1 of 2)
Macrodefinition UUI CMP

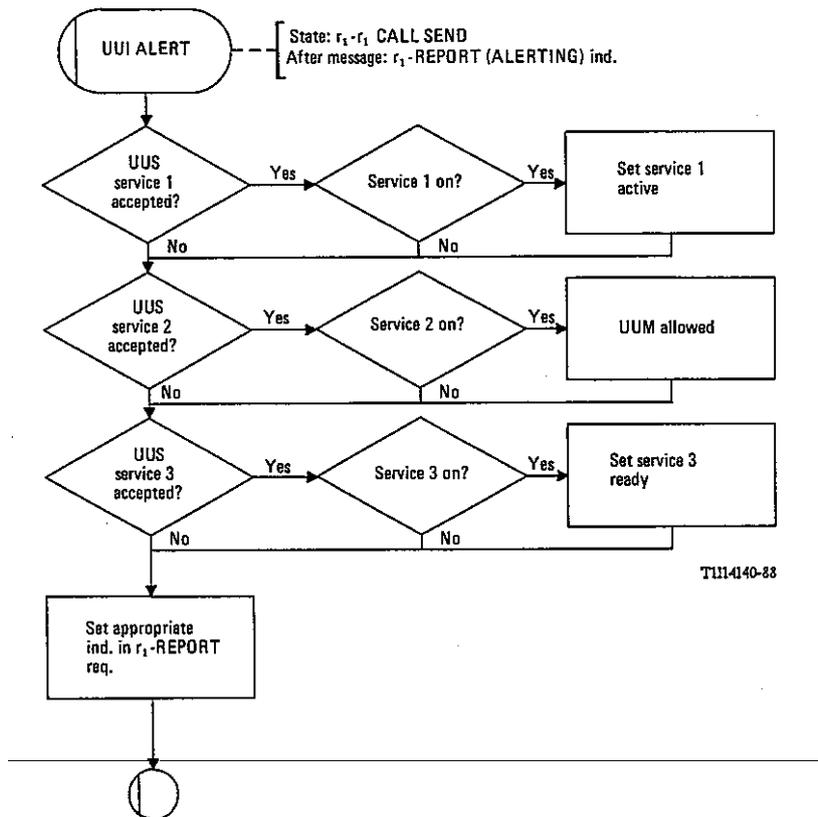


FIGURE 1-22/Q.87 (Sheet 2 of 2)
Macrodefinition UUI Alert



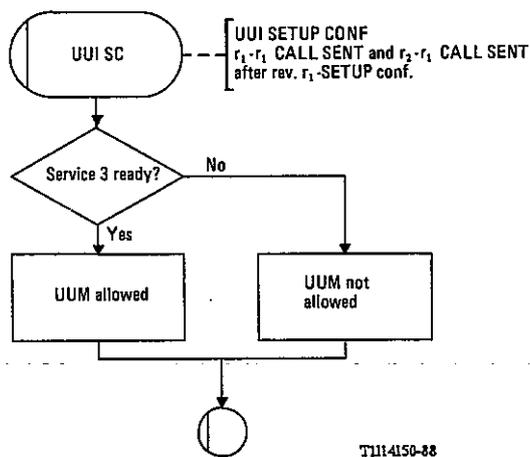


FIGURE 1-23/Q.87
Macrodefinition UUI SC

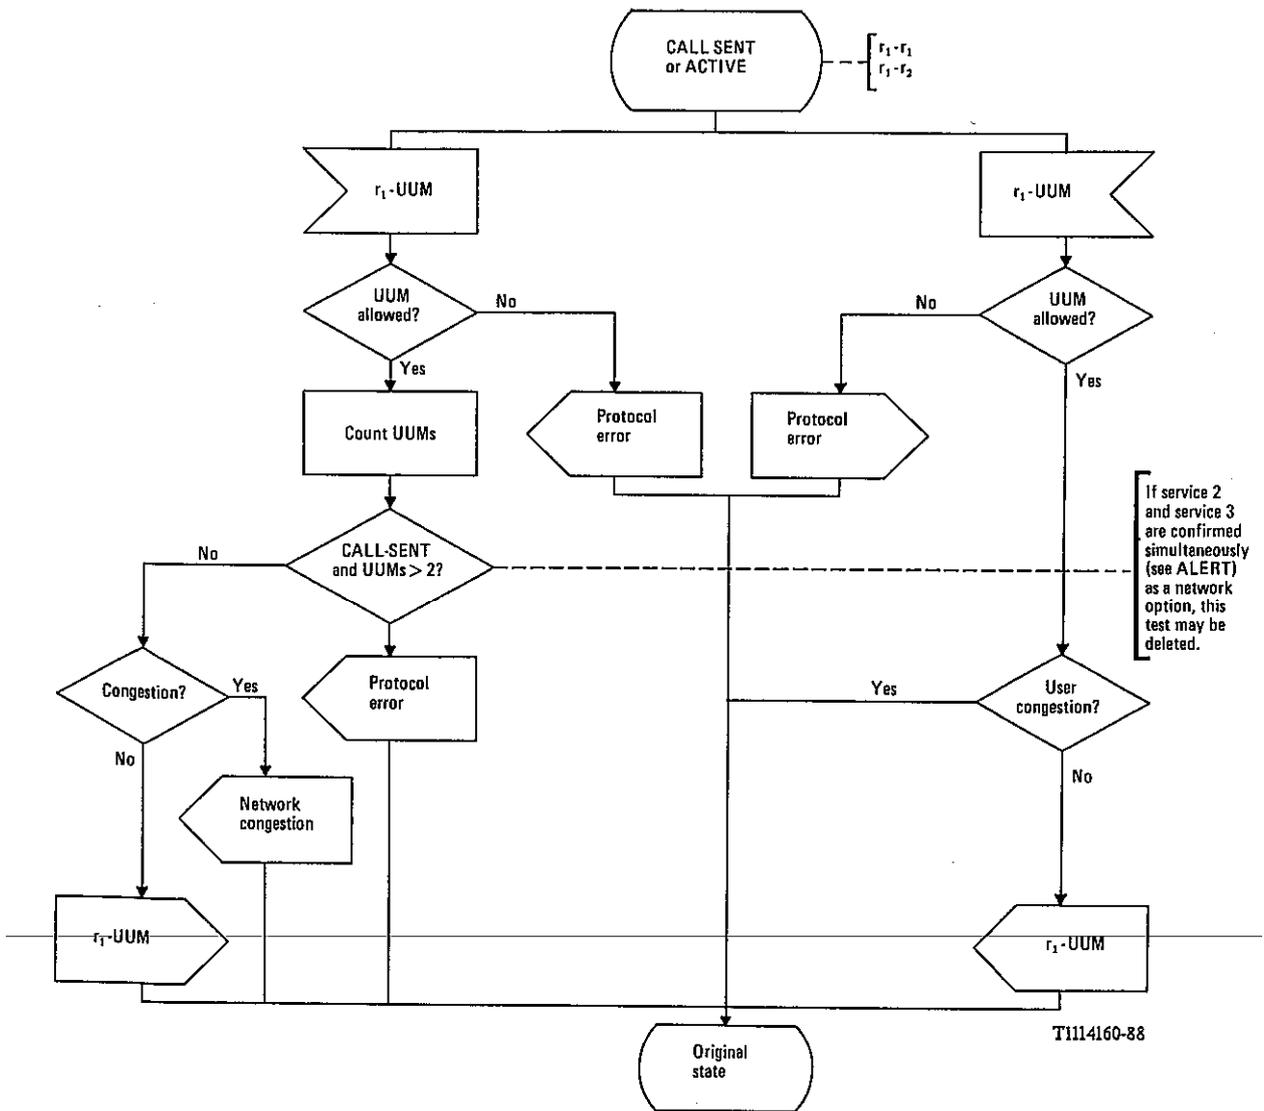

Note — A limit may be introduced for service 3 SDL UUM handling also found in FE4.

FIGURE 1-24/Q.87
UUM handling

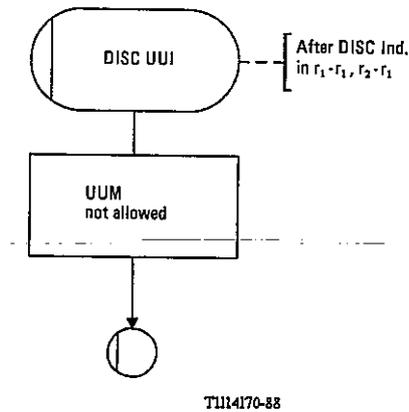

SDL disc UUI also used in FE4.

FIGURE 1-25/Q.87
Macrodefinition DISC UUI

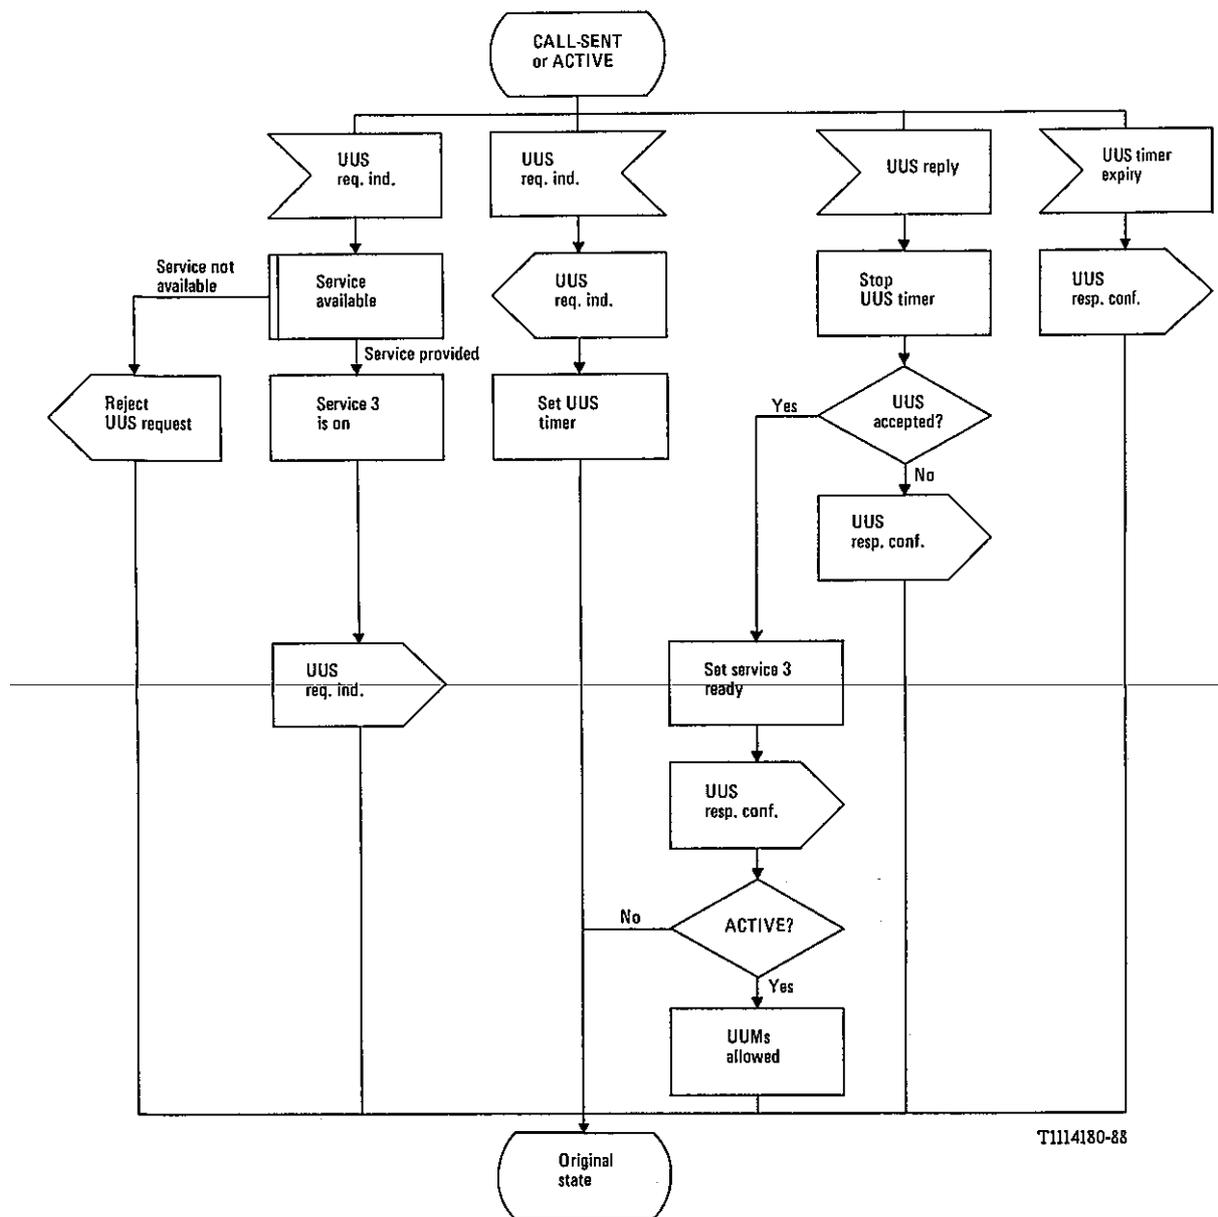


FIGURE 1-26/Q.87
Late invocation r_1-r_1



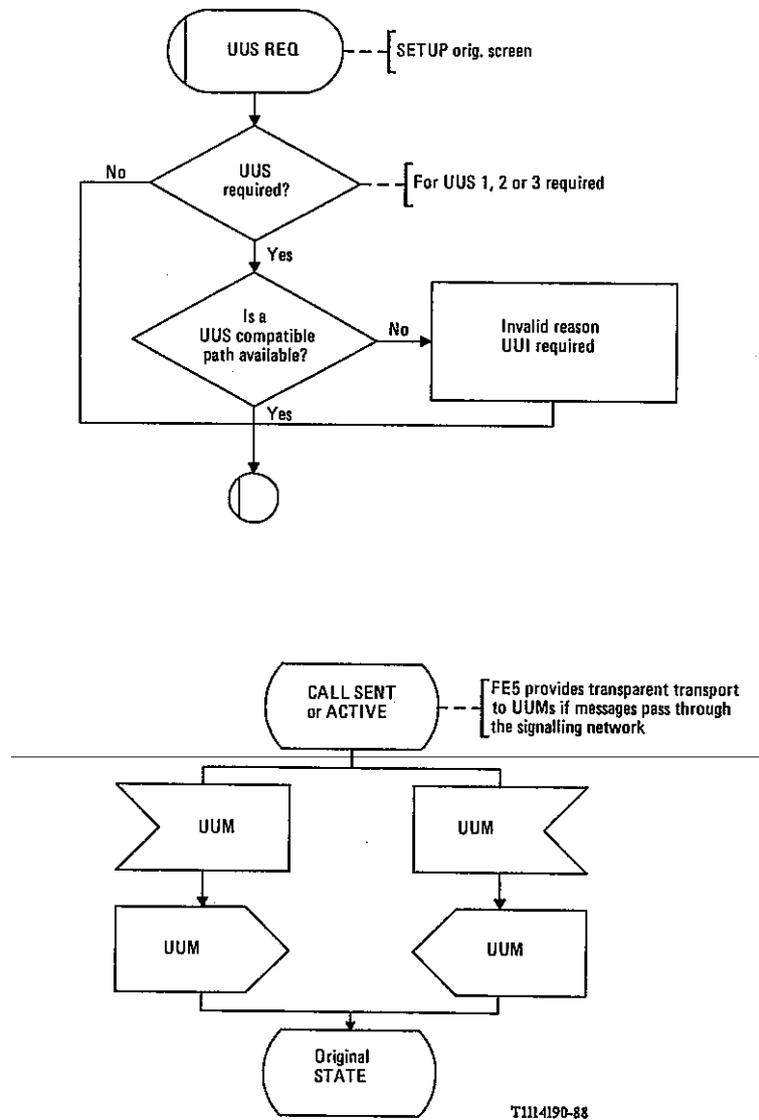


FIGURE 1-27/Q.87
 SDL additions to basic call for FE3 “CC r₂-r₂”
 Macrodefinition UUS REQ

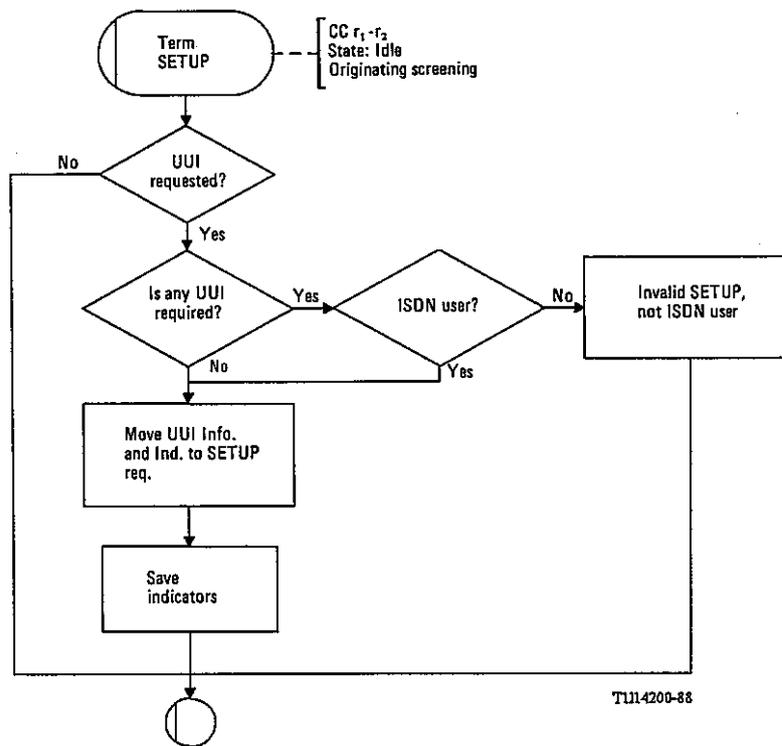


Info. Information
req. Request

FIGURE 1-28/Q.87
Macrodefinition TERM SETUP FE4

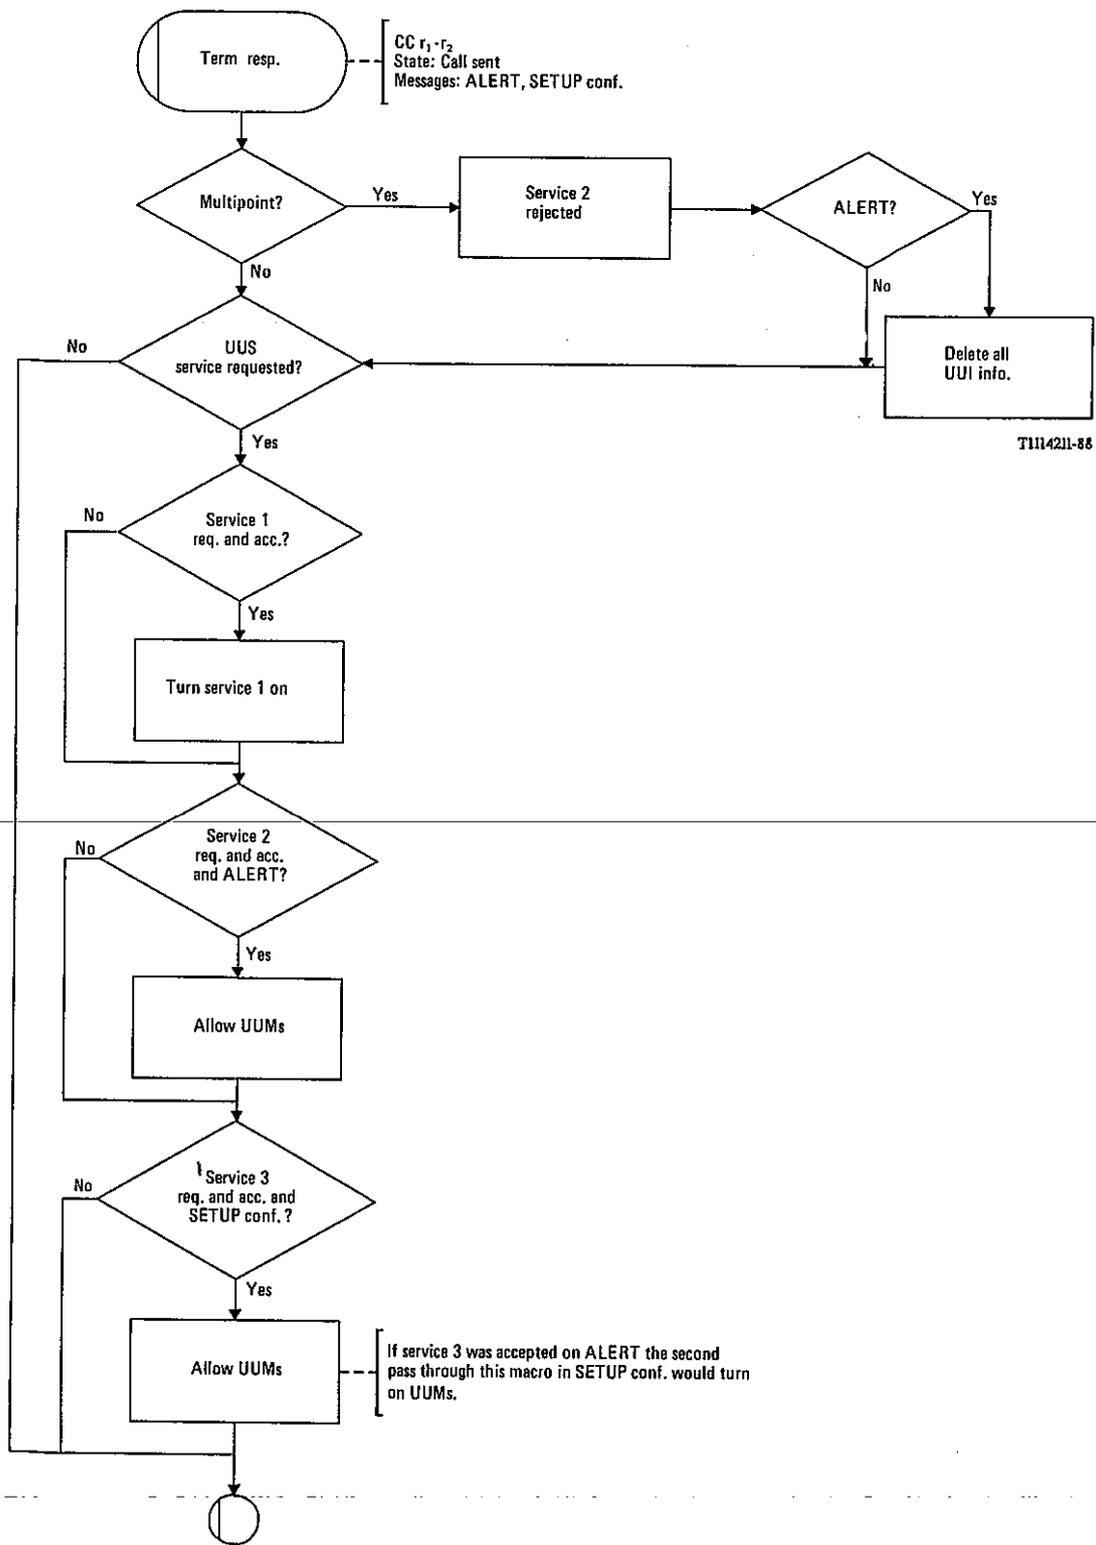

Note - Required = Required and essential.

FIGURE 1-29/Q.87
Macrodefinition TERM RESP FE4

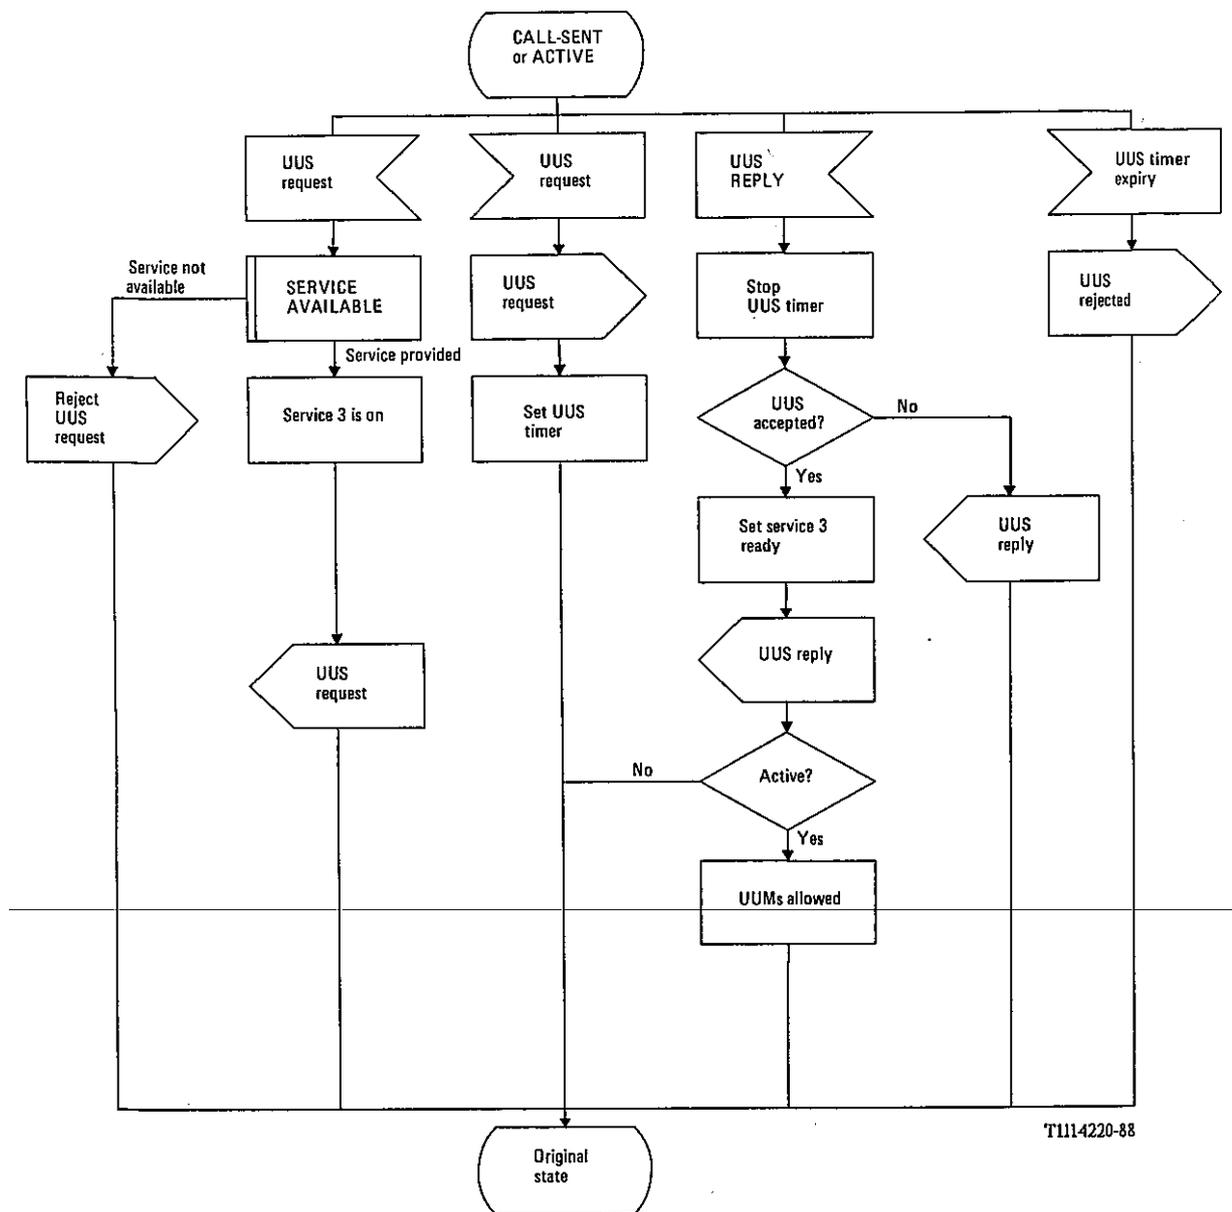

T1114220-88

FIGURE 1-30/Q.87
Late invocation r_2-r_1

1.6 *Functional entity actions*

1.6.1 *Check UUS service request*

- Check for implicit Service 1 request
- Check for explicit service requests
- Determine any services are essential
- Are services subscribed to?
- Are there sufficient signalling resources?

1.6.2 *Check for UUI to END user*

- UUI requested?
- Any UUI required?
- Is the user an ISDN user?

- 1.6.3 *Check called user response*
- Is user multipoint?
 - Can user accept UUI Service 2?
 - Are all required services accepted?
- 1.6.4 *Check which services are available to calling user*
- Which services were requested?
 - Which services were confirmed by called user?
 - Inform calling user of accepted services
- 1.6.5 *Is UUI or UUM transfer allowed?*
- Is there UUI or UUM?
 - Is the appropriate service active?
 - If UUM is the network congested?
- 1.6.6 *Check limit of Service 2 UUMs*
- Count UUMs
 - Reject UUMs over 2 coming from attached user
- 1.6.7 *Can a UUI compatible path be found?*
- Is UUS required?
 - If there is no compatible path act appropriately
- 1.7 *Allocation of functional entities to physical location*

The mapping between functional entities of the functional model for the user signalling bearer service and their possible physical locations is given in the matrix shown in Table 1-1/Q.87.

TABLE 1-1/Q.87
Possible physical location of functional entities

	FE1	FE2	FE3	FE4	FE5
TE (User terminal equipment)	X				
NT2 (Network termination 2)	X	X			
LE (Local exchange)	X	X	X		
TR (Transit exchange)			X		
LE (Local exchange)			X	X	X
NT2 (Network termination 2)				X	X
TE (User terminal equipment)					X

Note – A cross in the matrix indicates a possible allocation of the functional entity on top of the column to the physical location on each line. Different call scenarios can be generated from this matrix.

ITU-T RECOMMENDATIONS SERIES

Series A	Organization of the work of the ITU-T
Series B	Means of expression: definitions, symbols, classification
Series C	General telecommunication statistics
Series D	General tariff principles
Series E	Overall network operation, telephone service, service operation and human factors
Series F	Non-telephone telecommunication services
Series G	Transmission systems and media, digital systems and networks
Series H	Audiovisual and multimedia systems
Series I	Integrated services digital network
Series J	Transmission of television, sound programme and other multimedia signals
Series K	Protection against interference
Series L	Construction, installation and protection of cables and other elements of outside plant
Series M	TMN and network maintenance: international transmission systems, telephone circuits, telegraphy, facsimile and leased circuits
Series N	Maintenance: international sound programme and television transmission circuits
Series O	Specifications of measuring equipment
Series P	Telephone transmission quality, telephone installations, local line networks
Series Q	Switching and signalling
Series R	Telegraph transmission
Series S	Telegraph services terminal equipment
Series T	Terminals for telematic services
Series U	Telegraph switching
Series V	Data communication over the telephone network
Series X	Data networks and open system communications
Series Y	Global information infrastructure and Internet protocol aspects
Series Z	Languages and general software aspects for telecommunication systems