



EETT

HELLENIC TELECOMMUNICATIONS & POST COMMISSION

TELECOMMUNICATION

ITU-T

STANDARDIZATION SECTOR
OF ITU

E.806
(03/2020)

SERIES E: OVERALL NETWORK OPERATION, TELEPHONE SERVICE, SERVICE OPERATION AND HUMAN FACTORS
Quality of telecommunication services: concepts, models, objectives and dependability planning – Terms and definitions related to the quality of telecommunication services

Measurement campaigns, monitoring systems and sampling methodologies to monitor the quality of service in mobile networks

Dr. Stavroula Bouzouki


Head of Regional Office of Hellenic Telecommunication & Post Commission-EETT

ITU Workshop on Network Performance, Quality of Service and Quality of Experience


Chad, 2-3 March 2020

Monitoring QoS of Mobile Networks


The provision of objective information to all entrepreneurship in telecommunications

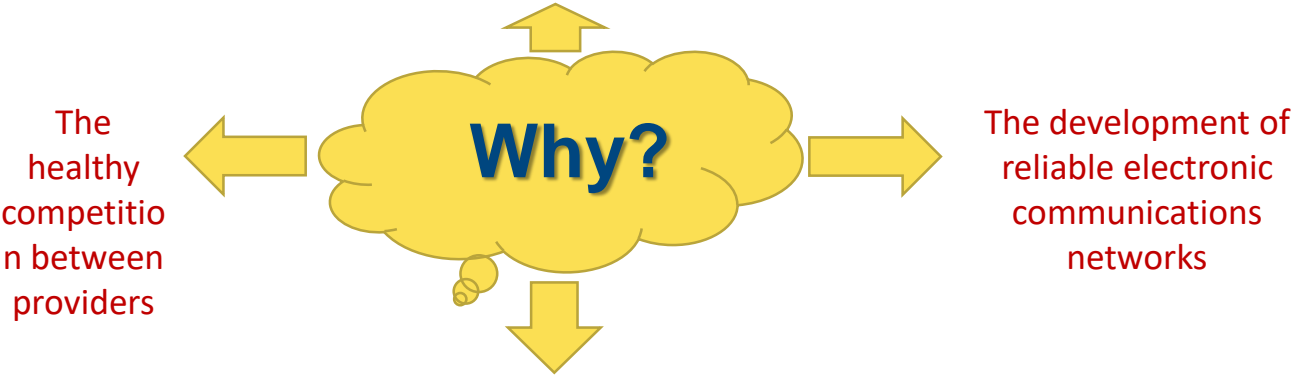

Service & Network Providers

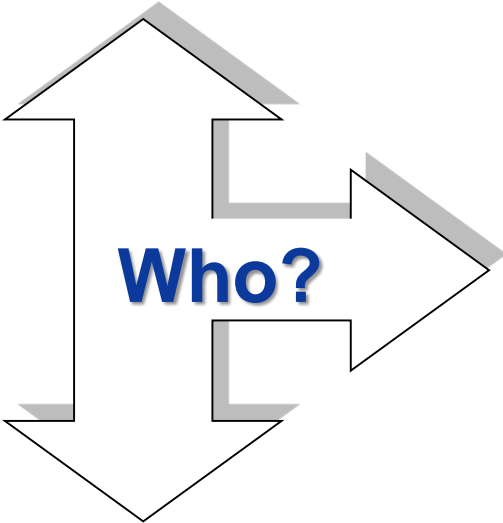

Regulators

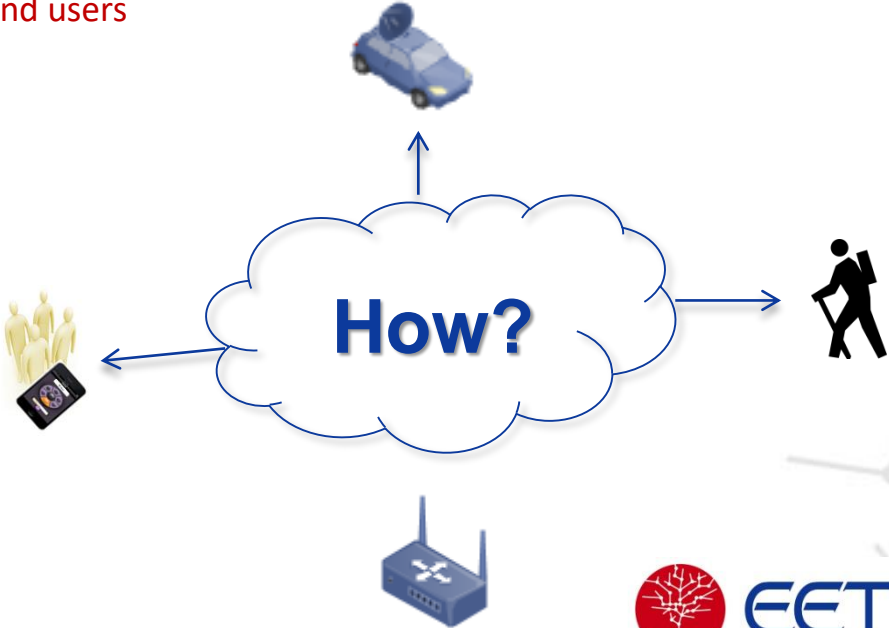

Third party (companies)

Scope

This Recommendation describes a baseline framework of:

- best practices for measuring quality of service (QoS) throughout the industry
- mobile network QoS measurement campaigns
- characteristics and requirements for monitoring systems
- post-processing scenarios
- sampling methodologies

used by *regulators, test equipment vendors, companies* that deliver network measurements, *data analysts and service providers* to monitor QoS on a national level.

Measurement campaigns to monitor QoS

QoS measurement campaigns aim to gather information to characterize the QoS of mobile networks in terms of:

- ↪ key performance indicators (KPIs)
- ↪ perform benchmarking
- ↪ evaluate conformance to existing legislation commitments.

The intended scope of QoS measurements related to geographical footprint, timeframe and testing frequency depends mainly on the purpose of the measurement campaign and the measurement environment

NOTE: The result produced by testing for each of these purposes is different

Measurement environment

For mobile networks, measurement environments can be divided into two main categories:

- ✓ Indoor
- ✓ Outdoor

Measurements can include both indoor and outdoor, ***stationary and mobile scenarios*** thus covering all the different environments in which end users make use of their mobile service.

Currently, there is a high rate of mobile traffic generated from indoor environments; hence, it is advisable to measure indoor QoS performance, in addition to outdoor.

Measurement methodologies

Indoor testing

- walk testing
- unattended probes
- crowdsourced data collection

Outdoor testing

- drive testing
- walk testing
- unattended probes
- crowdsourced data collection

Walk testing

Where: Locations such as train stations, underground train platforms, airports, sports stadiums, shopping malls, university campuses and pedestrian zones are becoming hotspots for wireless communication.

In outdoor measurements, walk testing is normally employed where vehicles cannot be used.

Measurement setup: Multi-device, carry-on testing equipment provides a convenient way to work when benchmarking multiple operators or testing coverage for multiple services and radio access technologies.

Walk testing measurement campaigns have some *limitations* in terms of:

1. number of samples and of mobile network operator (MNO)
2. service due to physical parameters such as spatial dimensions, equipment weight and technical requirements, like antenna isolation, which ultimately can influence sample resolution.

Drive testing

Drive testing measurement campaigns involve preplanning procedures to satisfy the goal and scope of the campaign. Targeted services, demographic distribution and socio-economic factors can impose different campaign design parameters. Essentially, a successful drive testing campaign shall consider a sample size so that the measured data are representative of the targeted region's population.

This recommendation gives answers to the questions:

- Where?
- When?
- How to achieve comparison results?
- How many samples?

Unattended probes

Unattended probes may provide *near real time and historical* end-to-end QoS performance and can be used to collect granular data that can help to detect QoS degradations

Users should consider the following operating and design recommendations to deploy a probe-based measurement campaign.

- 1 Unattended probes should be installed *securely in chosen locations* or vehicles with power supply; the choice of these locations or vehicles depends on the measurement objective.
- 2 Indoor unattended probes should be installed in locations with *adequate radio coverage conditions* and include high network usage. Depending on the measurement scope, this may be a location with the best possible coverage if peak network performance is monitored. If unattended probes are intended to monitor minimum radio coverage, a location with non-optimal coverage conditions can be considered.
- 3 All unattended probes should *operate under a global positioning system* (GPS) (or another suitable global navigation satellite system) connection.
- 4 The *number* of unattended probes per targeted location *depends on the sampling requirements*, the *number of services or operators* to be evaluated, *user density* and *occurring events* (concerts, sports tournaments, etc.).

Crowdsourced data collection

Crowdsourced data collection campaigns can be used to obtain QoS measurement data that can only be meaningful if a representative number of samples from different end users are gathered.

It is recommended that measurements results be *used for any conclusion* only if they are *representative for the respective measurement goal*. Data gap limitations have to be taken into account.

Crowdsourced data collection solutions must be in compliance with national data protection legislation, guaranteeing that no personal data is mishandled.

The sample collection frequency can be continuous unlike the conventional (simulating collection) QoS sample collection, therefore crowd-sourced measurements can be a source of 24 hours by 7 days QoS measurements.

Crowdsourced data collection can be largely categorized into two categories namely, *active and passive measurements* (see [IETF RFC 7799]):

NOTE – Alternatives sources to collect continuous information on network QoS are discussed in [ITU-T E.804]. Depending on the legal framework in each country, regulators may have access to network performance counters information. In accordance to data protection legislation and where both parties so desire, operators and regulators may want to enter into non-disclosure agreements as per the foregoing.

Guidelines for measuring quality of service parameters on mobile networks

This section provides further details on the measurement campaigns for monitoring some relevant parameters. The parameters listed here can be measured by any of the methodologies described before and should be considered as examples only; more references can be found in [ITU-T E.804].

- **Radio coverage**
- **Voice call services**
- **Short message service and multimedia messaging service**
- **Broadband data**



Characteristics and requirements for monitoring systems (1/3)

Monitoring systems should be able to *perform an evaluation* on how *degraded* network *performance* affects *service quality to the end user*. It therefore gives an indication of network coverage performance, capacity and end-to-end QoS.

Characteristics and requirements for monitoring systems (2/3)

The following monitoring systems characteristics apply to all measurement, unless otherwise stated, except for crowdsourced data collection.

- Ability to execute simultaneous measurements in all access technologies.
- Ability to execute simultaneous measurements, e.g., voice, SMS and data, if needed.
- It should be possible to carry out the measurements in movement, at static locations or combining both modalities.
- It should automatically store data from measurements and should count with additional external storage for backup.
- It should have a GPS (or another suitable global navigation satellite system) to identify and register the geographical location and speed for each measurement.
- It should be kept in optimal operation conditions through maintenance programmes considering all applicable regulation certification requirements.
- Antennas must be placed at an appropriate distance to avoid interference.
- It should be able to execute measurements for all access technologies and therefore be updated to meet the needs of technological evolution.
- It should allow the setup and reuse of measurement script templates.
- It should use certified mobile equipment similar to those regularly purchased in MNO shops by end users.
- It should support voice codecs for all access technologies.

Characteristics and requirements for monitoring systems (3/3)

- It should be able to produce visual or audio alarms to notify any failure in the measuring equipment
- Measuring equipment should provide a feature, as an added functionality or additional equipment, to register the day, hour and geo-referenced position of each measurement
- It is desirable that the measurement equipment provide the ability to register, at least, the start and the end of the measurement campaign, breaks, equipment failures and extraordinary situations such as atypical end user concentration, vandalism, interference or natural disasters
- Any situation that could potentially affect the results and is not attributed to the network of the MNO should be registered
- All activities registered by the measurement equipment, mentioned in the foregoing, should be correlated with the log files and measurements taken during these time intervals and should be discarded during the post-processing stage
- Monitoring systems should generate encrypted log files.
- Unattended probes should be equipped with self-monitoring functionality (e.g., temperature sensors or adequate power supply level) to detect unusual operating conditions
- Unattended probes should be robust against loss of external power supply, e.g., have power supply buffering to ensure secure turn-off processes and reliable turn-on processes
- Depending on the way measured data are transferred (e.g., via the monitored network), and the type of information that is expected to be created, unattended probes and back-end infrastructure shall provide adequate monitoring functionality

NOTE – The characteristics for crowdsourced data collection monitoring systems need further study.



EETT

General recommendations for post processing (1/2)

The first step in the post processing of results is to **determine the radio coverage limit** for which the electronic service of a mobile communications network is considered to be provided.

This limit should be set for each technology (e.g., 2G, 3G, 4G) separately.

These limits will determine which tests will be taken into consideration when exporting the final results.

Also, **rules should be laid down** as to when a measurement should be taken into account in the results. Such rules are, for example, if during a measurement there is a period of time that does not meet the radio coverage limit, how long should that period be for the test to be taken into account in the results.

General recommendations for post processing (2/2)

The following general recommendations should be practised by all monitoring system users during post-processing action for all measurement methodologies.

- In order to examine the events that occurred during the measurements, signalling information should be taken into account. Post processing of measurements results should consider and manage all log files obtained during the measurement campaign. It is recommended that all software errors be considered. The final number of measurements gathered in the measurement campaign will have an impact on the estimation error of the results. The estimation error can be calculated based on the sample size. If it is larger than desired, it is recommended that the measurement campaign for the target area be repeated. More information is provided in Annex A and [ITU-T E.802], [ITU-T E.840] and [ITU-T P.1401].
- Users conducting QoS measurements should check measurement data integrity and cleanse data. Outlier samples can be generated for many reasons, e.g., equipment alarms due to equipment or software failure or malfunction, network element upgrade, incidents or maintenance.
- All log files gathered from the testing equipment should be checked, if missing or corrupted.
- It is essential to set the accepted percentage threshold for fake or false samples collected in a measurement campaign.

Sampling methodologies (1/2)

The number of measurements must be determined in such a way that the statistical relative accuracy is less than the maximum value established and for at least a 95% level of confidence. More information is provided in [ITU-T E.802].

A two-step methodology that can be used to obtain representative samples involves stratification and simple random sampling.

- Stratification can be used to calculate the number of geographical areas (e.g., cities, municipalities or districts) to be covered during a measurement campaign to get results that represent the network QoS at a national level. In this sense, stratification is a tool useful to obtain representative results when it is not possible to measure a large area (e.g., large countries).
- Simple random sampling can then be used to calculate the number of measurements to perform at each of the geographical areas that were selected through sampling methods. More details are provided in Annex A.

Sampling methodologies (2/2)

To perform measurements over a large area, monitoring system users are advised to:

1. divide the base zone into parts, and
2. allocate a weight to each part in accordance with criteria that will identify where it is more relevant to carry out a greater number of measurements, depending on the purpose of the measurement campaign.

Some examples of criteria are:

- ✓ population weight
- ✓ telecommunications density
- ✓ traffic density
- ✓ end user density

In order to define these criteria, it is highly advisable that monitoring system users obtain updated data from an official source.

Publication of benchmarking performance results lies outside the scope of this Recommendation; however, a statistical framework aimed to score and rank network performance can be found in [ITU-T E.840].