

International Telecommunication Union

ITU-T

TELECOMMUNICATION
STANDARDIZATION SECTOR
OF ITU

G.8080/Y.1304

Amendment 2

(09/2010)

SERIES G: TRANSMISSION SYSTEMS AND MEDIA,
DIGITAL SYSTEMS AND NETWORKS

Packet over Transport aspects – Ethernet over Transport
aspects

SERIES Y: GLOBAL INFORMATION
INFRASTRUCTURE, INTERNET PROTOCOL ASPECTS
AND NEXT-GENERATION NETWORKS

Internet protocol aspects – Transport

Architecture for the automatically switched optical
network (ASON)

Amendment 2

Recommendation ITU-T G.8080/Y.1304 (2006) –
Amendment 2



ITU-T G-SERIES RECOMMENDATIONS
TRANSMISSION SYSTEMS AND MEDIA, DIGITAL SYSTEMS AND NETWORKS

INTERNATIONAL TELEPHONE CONNECTIONS AND CIRCUITS	G.100–G.199
GENERAL CHARACTERISTICS COMMON TO ALL ANALOGUE CARRIER-TRANSMISSION SYSTEMS	G.200–G.299
INDIVIDUAL CHARACTERISTICS OF INTERNATIONAL CARRIER TELEPHONE SYSTEMS ON METALLIC LINES	G.300–G.399
GENERAL CHARACTERISTICS OF INTERNATIONAL CARRIER TELEPHONE SYSTEMS ON RADIO-RELAY OR SATELLITE LINKS AND INTERCONNECTION WITH METALLIC LINES	G.400–G.449
COORDINATION OF RADIOTELEPHONY AND LINE TELEPHONY	G.450–G.499
TRANSMISSION MEDIA AND OPTICAL SYSTEMS CHARACTERISTICS	G.600–G.699
DIGITAL TERMINAL EQUIPMENTS	G.700–G.799
DIGITAL NETWORKS	G.800–G.899
DIGITAL SECTIONS AND DIGITAL LINE SYSTEM	G.900–G.999
MULTIMEDIA QUALITY OF SERVICE AND PERFORMANCE – GENERIC AND USER-RELATED ASPECTS	G.1000–G.1999
TRANSMISSION MEDIA CHARACTERISTICS	G.6000–G.6999
DATA OVER TRANSPORT – GENERIC ASPECTS	G.7000–G.7999
PACKET OVER TRANSPORT ASPECTS	G.8000–G.8999
Ethernet over Transport aspects	G.8000–G.8099
MPLS over Transport aspects	G.8100–G.8199
Quality and availability targets	G.8200–G.8299
Service Management	G.8600–G.8699
ACCESS NETWORKS	G.9000–G.9999

For further details, please refer to the list of ITU-T Recommendations.

Recommendation ITU-T G.8080/Y.1304

Architecture for the automatically switched optical network (ASON)

Amendment 2

Summary

Amendment 2 to Recommendation ITU-T G.8080/Y.1304 contains:

- Additions for multilayer topology representation.
- Addition of a directory service component.
- An appendix illustrating rerouting and protection domain interaction.

History

Edition	Recommendation	Approval	Study Group
1.0	ITU-T G.8080/Y.1304	2001-11-29	15
1.1	ITU-T G.8080/Y.1304 (2001) Amend. 1	2003-03-16	15
1.2	ITU-T G.8080/Y.1304 (2001) Amend. 2	2005-02-22	15
2.0	ITU-T G.8080/Y.1304	2006-06-06	15
2.1	ITU-T G.8080/Y.1304 (2006) Cor. 1	2007-09-06	15
2.2	ITU-T G.8080/Y.1304 (2006) Amend. 1	2008-03-29	15
2.3	ITU-T G.8080/Y.1304 (2006) Amend. 2	2010-09-06	15

FOREWORD

The International Telecommunication Union (ITU) is the United Nations specialized agency in the field of telecommunications, information and communication technologies (ICTs). The ITU Telecommunication Standardization Sector (ITU-T) is a permanent organ of ITU. ITU-T is responsible for studying technical, operating and tariff questions and issuing Recommendations on them with a view to standardizing telecommunications on a worldwide basis.

The World Telecommunication Standardization Assembly (WTSA), which meets every four years, establishes the topics for study by the ITU-T study groups which, in turn, produce Recommendations on these topics.

The approval of ITU-T Recommendations is covered by the procedure laid down in WTSA Resolution 1.

In some areas of information technology which fall within ITU-T's purview, the necessary standards are prepared on a collaborative basis with ISO and IEC.

NOTE

In this Recommendation, the expression "Administration" is used for conciseness to indicate both a telecommunication administration and a recognized operating agency.

Compliance with this Recommendation is voluntary. However, the Recommendation may contain certain mandatory provisions (to ensure, e.g., interoperability or applicability) and compliance with the Recommendation is achieved when all of these mandatory provisions are met. The words "shall" or some other obligatory language such as "must" and the negative equivalents are used to express requirements. The use of such words does not suggest that compliance with the Recommendation is required of any party.

INTELLECTUAL PROPERTY RIGHTS

ITU draws attention to the possibility that the practice or implementation of this Recommendation may involve the use of a claimed Intellectual Property Right. ITU takes no position concerning the evidence, validity or applicability of claimed Intellectual Property Rights, whether asserted by ITU members or others outside of the Recommendation development process.

As of the date of approval of this Recommendation, ITU had received notice of intellectual property, protected by patents, which may be required to implement this Recommendation. However, implementers are cautioned that this may not represent the latest information and are therefore strongly urged to consult the TSB patent database at <http://www.itu.int/ITU-T/ipr/>.

© ITU 2011

All rights reserved. No part of this publication may be reproduced, by any means whatsoever, without the prior written permission of ITU.

CONTENTS

	Page
1) Clause 2, References.....	1
2) Clause 3, Definitions	1
3) Clause 6, Transport resources and their organization.....	1
4) Add the following new clause 6.8	3
5) Clause 7.3.5.2	4
6) Clause 7, Control plane architecture.....	4
7) New clause 11.3.....	6
8) Appendix I.....	6
9) Appendix II.....	6
10) New Appendix VI.....	6
11) Bibliography	11
12) New Appendix VII	11

Recommendation ITU-T G.8080/Y.1304

Architecture for the automatically switched optical network (ASON)

Amendment 2

1) Clause 2, References

Remove the following references: Recommendations ITU-T G.707/Y.1322, G.709/Y.1331, G.783, G.798, G.803, G.872, M.3000, and M.3010.

2) Clause 3, Definitions

Add the following definition:

3.59 transitional SNPP link: See [ITU-T G.8081].

3) Clause 6, Transport resources and their organization

a) *In clause 6.1, add after the sentence:* The association between SNPPs on different subnetworks is an SNPP link.

An SNPP link where each subnetwork is in a different layer is known as a transitional SNPP link. It may also be an SNPP link in which the subnetworks are in different sublayers of the same layer. They only occur across boundaries between layers or sublayers where [ITU-T G.800] transitional links can exist.

b) *In clause 6.2, add at the end of the clause the following paragraph:*

Routing areas in different layers may be connected by transitional SNPP links. This enables multi-layer routing topology construction. Routing areas in different sublayers of the same layer may also be connected by transitional SNPP links.

c) *Add new clause 6.5.3: Multilayer routing topology:*

6.5.3 Multilayer routing topology

In addition to the single layer topology representation in clause 6.5.2, a routing topology representative of a multilayer network may be constructed using transitional SNPP links that connect routing areas in different layers. Paths may be determined that traverse link and subnetwork connections in more than one layer and/or sublayer. Control plane components that are involved in configuring the resulting connection configure link connections, subnetwork connections, and transitional link connections.

The use of a transitional SNPP link implies that a sequence of adaptations between layers, or sequence of layer processors within a layer, is used. The transitional SNPP link enables a connected graph to be constructed that represents a multilayer network for the purpose of routing.

Figure 14-1 illustrates the [ITU-T G.800] representation and the corresponding multilayer routing topologies.

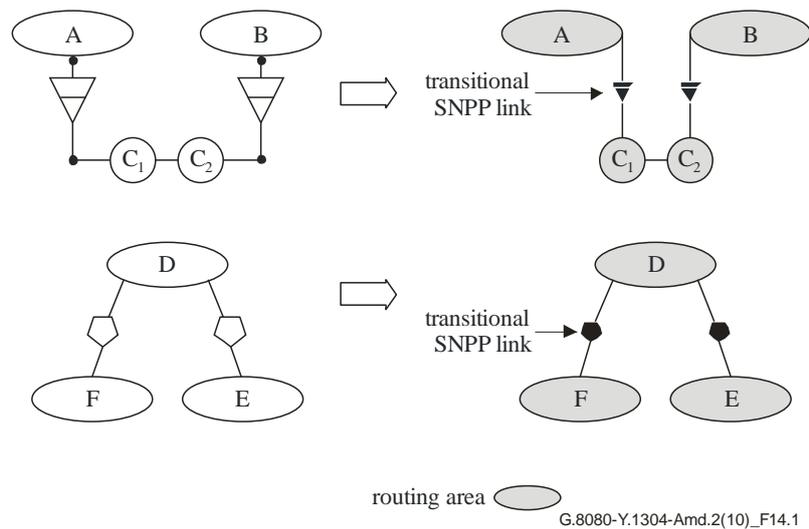


Figure 14-1 – Multilayer routing topology representations

A multilayer topology corresponding to the model in Figure 14 is illustrated in Figure 14-2 on the left. It differs from the model in Figure 14 in that the topology is multilayer (i.e., contains both client and server SNPPs).

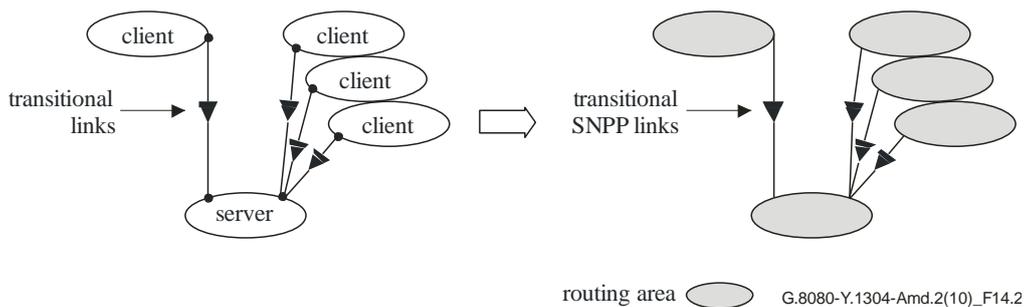


Figure 14-2 – Multilayer routing topology representation of Figure 14

A path computation begins by selecting two (sets of) points at the boundary of a routing area. The path computation may be accomplished using a set of subordinate path computations involving contained routing areas. The routing areas relevant to the path computation are selected by the path computation algorithm, and these routing areas may belong to one or more layers (i.e., they may be part of a multilayer topology).

In a multilayer routing topology, when a transitional SNPP link is used between a routing area in a first layer to another routing area in an adjacent second layer and the first layer is traversed further in a route, it is expected that a corresponding transitional link is used to eventually return to the first layer in computed paths.

For segments of a path computed between sublayers, traversal of a single transitional SNPP link is allowed.

An additional example of a multilayer topology is shown in Appendix VII.

NOTE – Use of transitional links for a 1:1 adaptation is described in this clause. Usage for 1:n and m:1 is for further study.

4) Add the following new clause 6.8

6.8 Mapped server interlayer relationships

When a client layer CI is mapped to a server layer as described in clauses 6.5 and 6.6, several types of arrangements can exist. They include client/servers in 1:1 and 1:n relationships. The ratio refers to the number of connection points in each layer.

6.8.1 1:1 relationship

In the 1:1 relationship, support for a client communication is supported by the server layer as a single trail. The $NCC_{client}:NCC_{server}$ relationship is also 1:1. A specific example of this is shown in Appendix IV where Ethernet CI is mapped to a single VC-3. Another example is a DS-3 into an STS-1.

As the NCC_{client} is trying to use the server layer, it must have knowledge of the relevant call parameters of the NCC_{server} including whether the client initiated the server layer call (server NCC coordination out interface) or whether the server layer already existed for client layer use (client NCC coordination out interface).

The NCC_{server} is not required to possess knowledge of the client layer call parameters, but should inform the NCC_{client} if there are changes in the server layer call.

6.8.2 1:n relationship

In a 1:n relationship, the client communication is supported by multiple connections in the server layer. This is supported either by the server NCC supporting multiple connections or multiple NCC s in the server layer supporting the one client layer NCC .

The example below in Figure 16-1 illustrates the latter case. The Ethernet call is mapped to a VC-4-2v VCAT call. The VCAT (virtual concatenation) call is related to multiple server layer VC-4 calls. The Ethernet/GFP layer to VCAT relationship is 1:1.

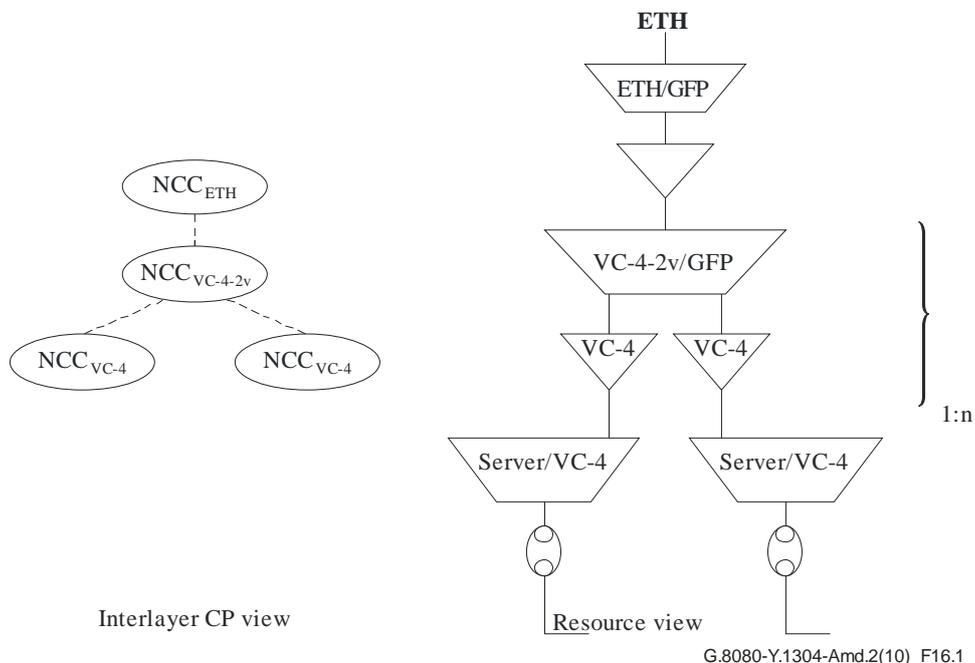


Figure 16-1 – Example 1:n mapped server

It is necessary for the client layer NCC (the VC-4-2v layer) to know about the call parameters of the server layer, as it must ensure that there are sufficient server layer calls as well as their aggregate characteristics. The server layer is not required to possess knowledge of the client layer call parameters, but should inform the client call if there are changes in the server layer call.

5) Clause 7.3.5.2

a) *Change the following bullet in the list in clause 7.3.5.2:*

- call state management.

to:

- state management of client calls and itself.

b) *Add the following to the first list in clause 7.3.5.2:*

- adaptation management of transport resources via the TAP component

6) Clause 7, Control plane architecture

a) *Renumber clause 7.3.6 to 7.3.7, and renumber subsequent clauses accordingly*

b) *Add the following new clause 7.3.6:*

7.3.6 Directory service

The Directory service component is responsible for identifier resolution and coordination among peer Directory service components. The role of this component is to provide mappings between identifier spaces for other components.

NOTE 1 – All interfaces as shown in Table 7-1 below are not intended to be used in one instance of this component. Only Directory Request interface might be required for basic usage, but Distributed implementations might use more interfaces.

NOTE 2 – Directory service functions can be implemented in both distributed and centralized applications. In a centralized application, peer coordination interfaces of the DS component might be unused.

Table 7-1 – Directory service component interfaces

Input interface	Basic input parameters	Basic return parameters
Directory Request In	1) UNI/E-NNI Transport Resource Identifier; or 2) UNI/E-NNI Transport Resource Identifier alias; or 3) SNPP identifier; or 4) SNPP alias	1) SNPP identifier; or 2) UNI/E-NNI Transport Resource Identifier; or 3) UNI/E-NNI Transport Resource Identifier; or 4) SNPP identifier
Peer Coordination In	1) <UNI/E-NNI Transport Resource Identifier, SNPP identifier> 2) <UNI/E-NNI Transport Resource Identifier alias, UNI/E-NNI Transport Resource Identifier> 3) <SNPP identifier, UNI/E-NNI Transport Resource Identifier> 4) <SNPP alias, SNPP identifier> 5) <SNPP identifier, SNPP alias>	

Table 7-1 – Directory service component interfaces

Input interface	Basic input parameters	Basic return parameters
Directory Information In	1) <UNI/E-NNI Transport Resource Identifier, SNPP identifier> 2) <UNI/E-NNI Transport Resource Identifier alias, UNI/E-NNI Transport Resource Identifier> 3) <SNPP identifier, UNI/E-NNI Transport Resource Identifier> 4) <SNPP alias, SNPP identifier> 5) <SNPP identifier, SNPP alias>	
Output interface	Basic output parameters	Basic return parameters
Directory Request Out	1) UNI/E-NNI Transport Resource Identifier; or 2) UNI/E-NNI Transport Resource Identifier alias; or 3) SNPP identifier; or 4) SNPP alias	1) SNPP identifier; or 2) UNI/E-NNI Transport Resource Identifier; or 3) UNI/E-NNI Transport Resource Identifier; or 4) SNPP identifier
Peer Coordination Out	1) <UNI/E-NNI Transport Resource Identifier, SNPP identifier> 2) <UNI/E-NNI Transport Resource Identifier alias, UNI/E-NNI Transport Resource Identifier> 3) <SNPP identifier, UNI/E-NNI Transport Resource Identifier> 4) <SNPP alias, SNPP identifier> 5) <SNPP identifier, SNPP alias>	
Directory Information Out	1) <UNI/E-NNI Transport Resource Identifier, SNPP identifier> 2) <UNI/E-NNI Transport Resource Identifier alias, UNI/E-NNI Transport Resource Identifier> 3) <SNPP identifier, UNI/E-NNI Transport Resource Identifier> 4) <SNPP alias, SNPP identifier> 5) <SNPP identifier, SNPP alias>	

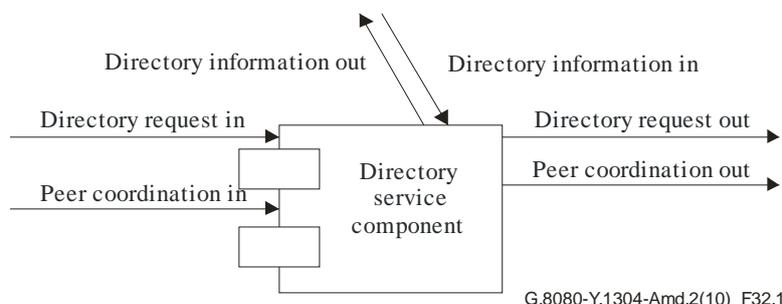


Figure 32-1 – Directory service component

Directory Request In/Out

This interface is used to get an SNPP identifier from a UNI/E-NNI Transport Resource Identifier or alias. This interface is also used to get UNI/E-NNI Transport Resource Identifier from a UNI Transport Resource Identifier alias or SNPP identifier. Directory request should be bidirectional. CC could initialize a Directory Request and send to/receive from DS component when it needs to decode DS.

Peer Coordination in

This interface is used to get directory information from peer Directory service component.

Peer Coordination out

This interface is used to transmit directory information to peer Directory service component.

Directory information in/out

This interface is used to receive/send directory information from other components which could include management plane applications, and equipment management functions (EMFs) on subnetworks (e.g., NEs).

c) *Add the following to the list at the end of clause 7.4:*

- For the Route Query interface between the connection controller and the routing controller, authenticated and secure information transfer, with the appropriate domain scope policy.

7) New clause 11.3

Add the following new clause 11.3:

11.3 Nested routing domains

CP protection and restoration domains are types of routing control domains. As such, they inherit the containment property of control domains. Coordination between the actions taken by two domains in a containment relationship to a resource failure is a matter of policy.

8) Appendix I

Remove Appendix I.

9) Appendix II

Remove Appendix II.

10) New Appendix VI

Add the following new Appendix VI.

Appendix VI

Combining protection and restoration domains

(This appendix does not form an integral part of this Recommendation)

The coordination between CP protection and restoration is performed by the control plane. CP protection and restoration domains are routing domains since they require path computation to create connections in a domain. Thus the relationship between protection and restoration domains is a containment relationship. It is possible for a protection domain and restoration domain to share the same routing controller scope.

When a fault (or repair) occurs, the smallest containing protection/restoration domain should act first, followed by successively larger protection/restoration domains should they be necessary. When the containing domain cannot fix the connection, it must notify the failure to the larger domains. Then the larger domain may use the rerouting or protection action to fix the failure.

What has been mentioned above is the general principle for protection/restoration domain interaction. For example, if the smallest domain where error occurs is a protection domain, a protection action is applied first. Only when it cannot fix the connection (the 2nd error), the connection failure is signalled to the immediate containing domain.

When the smallest domain where error occurs is a restoration domain, a rerouting action is applied first. If restoration fails, the connection failure is signalled to the larger domain. The larger domain is either restoration domain or protection domain. Subsequent restoration/protection actions are taken in the ever increasingly larger containment domains as needed.

Following is an example for this general principle. In a 1+1 SNCP, after a working connection failure is detected, the source and destination controllers are involved to complete the protection switching operation from the original working connection to protection connection. During the protection operation, there is no rerouting operation involved. If the protection connection fails, restoration becomes active because the containing domain is a rerouting domain. The control plane is in charge of the coordination between protection and restoration.

Figure VI.1 shows an example of the coordination between a rerouting domain and a protection domain. The rerouting domain contains the protection domain. After a working connection failure is detected (SNC [A, C, E, F]), the transport plane is involved to complete the protection switching operation from the original working connection to protection connection (SNC [A, B, D, F]). When the protection connection (SNC [A, B, D, F]) fails, connection controllers in the control plane activate the rerouting mechanism, and restoration is performed in the rerouting domain resulting in connection [G, H, I, J, K].


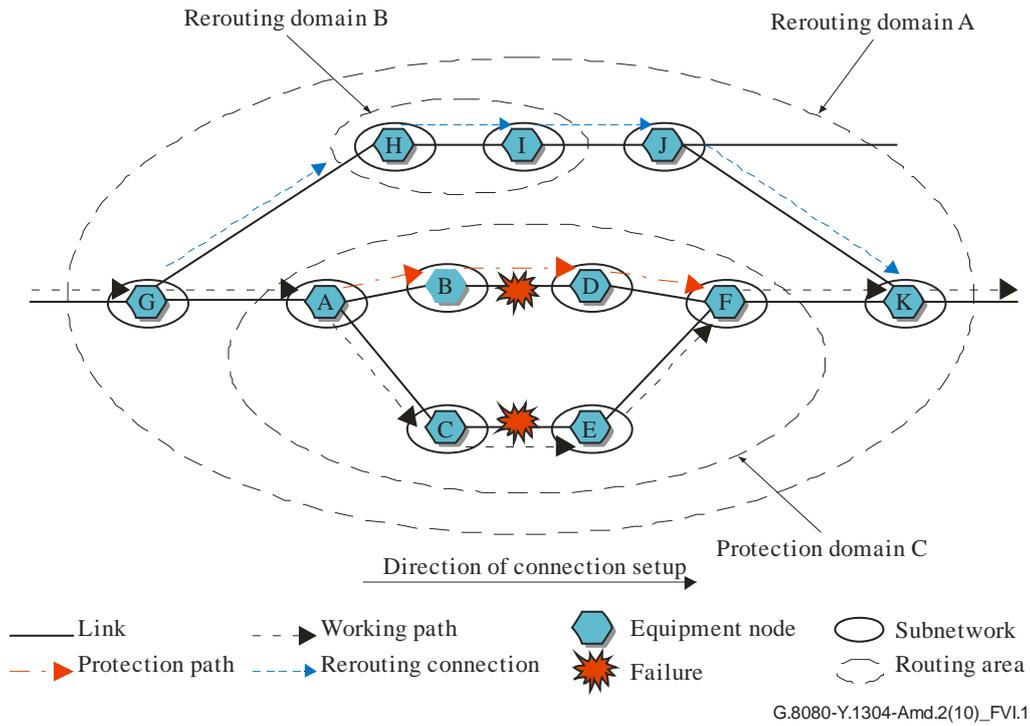



Figure VI.1 – Nested protection and restoration domains

Figure VI.2 shows the signalling flow of a rerouting scenario with source (or step-by-step) routing connection control after protection domain failure events corresponding to Figure VI.1.


Step 1: The protection mechanism is coordinated between node A and node F in protection domain C after a failure of working path.

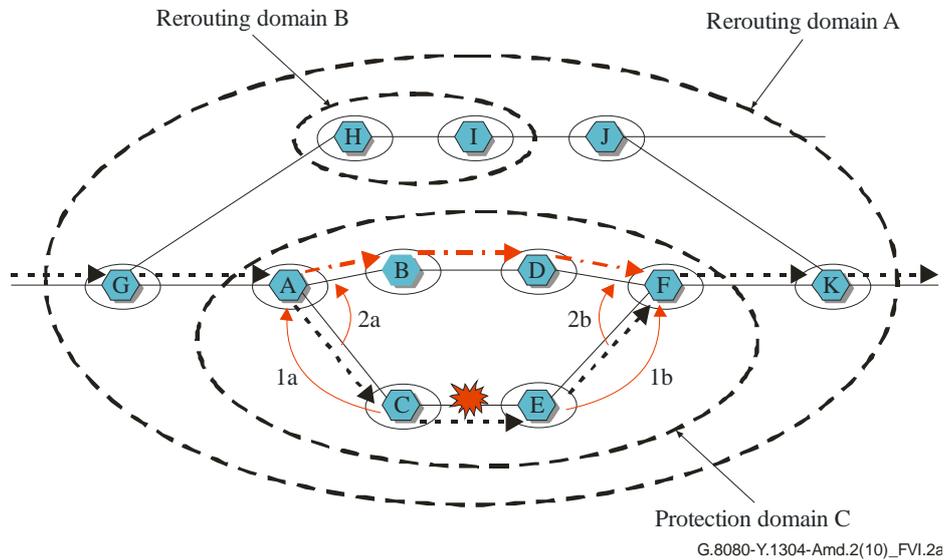

Step 2: Both node A and node F receive a failure notify after the protection path fails again.

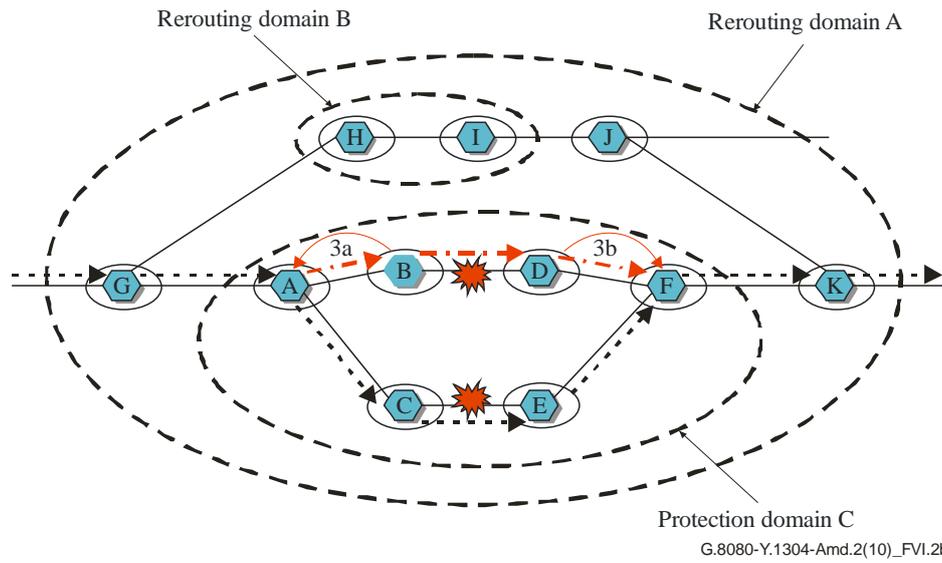

Step 3: If the protection domain cannot repair the connection, the connection failure is signalled to the containing restoration domain.

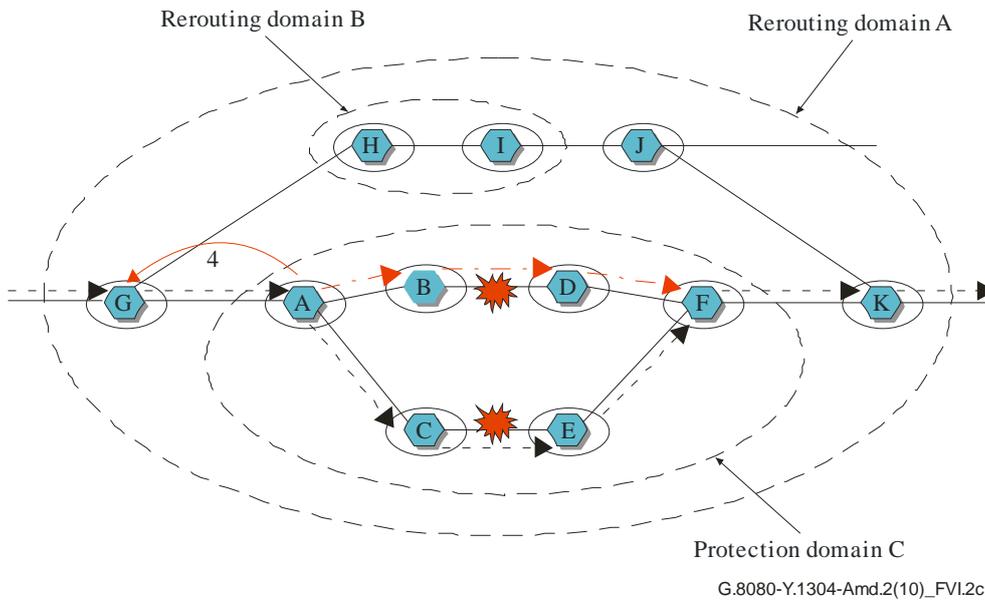

Step 4: Rerouting domain A creates the rerouting connection excluding protection domain C.


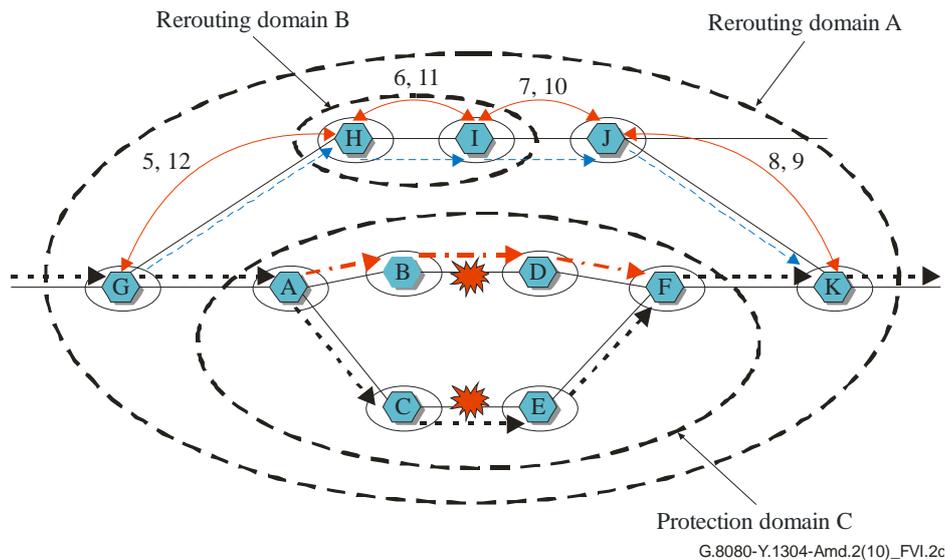


Figure VI.2 – Signalling flow of combination of protection and restoration

In Figure VI.3, the detailed sequence of operations using the source routing method is described after the protection path fails. This corresponds to steps 2-4 of Figure VI.2. The steps involved are listed below:

- 1) A bidirectional link failure notification generated by the link resource managers (LRM) arrives at the connection controller (CC) containing the failure link information. This occurs in node B or node D.
- 2) The link failure notification is forwarded to CC_A from CC_B and to CC_F from CC_D .
- 3) At both CC_A and CC_F , the NCCs are alerted to the failure of the protection path.
- 4) NCC_A identifies that there is not any additional assigned capacity to protect working path in the protection domain.
- 5) The failure is propagated outside of protection domain C to rerouting domain A. Protection domain failure notification is generated by the connection controller (CC), containing the crankback routing information which specifies the failure domain. The protection failure notification is forwarded to CC_G from CC_A .
- 6) RC_G is queried for rerouting connection with crankback routing information and returns the set of links excluding protection domain C.
- 7)-29) Steps 7 to 29 describe the flow of connection set-up using source routing algorithm which is identical to that described in clause V.2.3, Source and step-by-step routing.

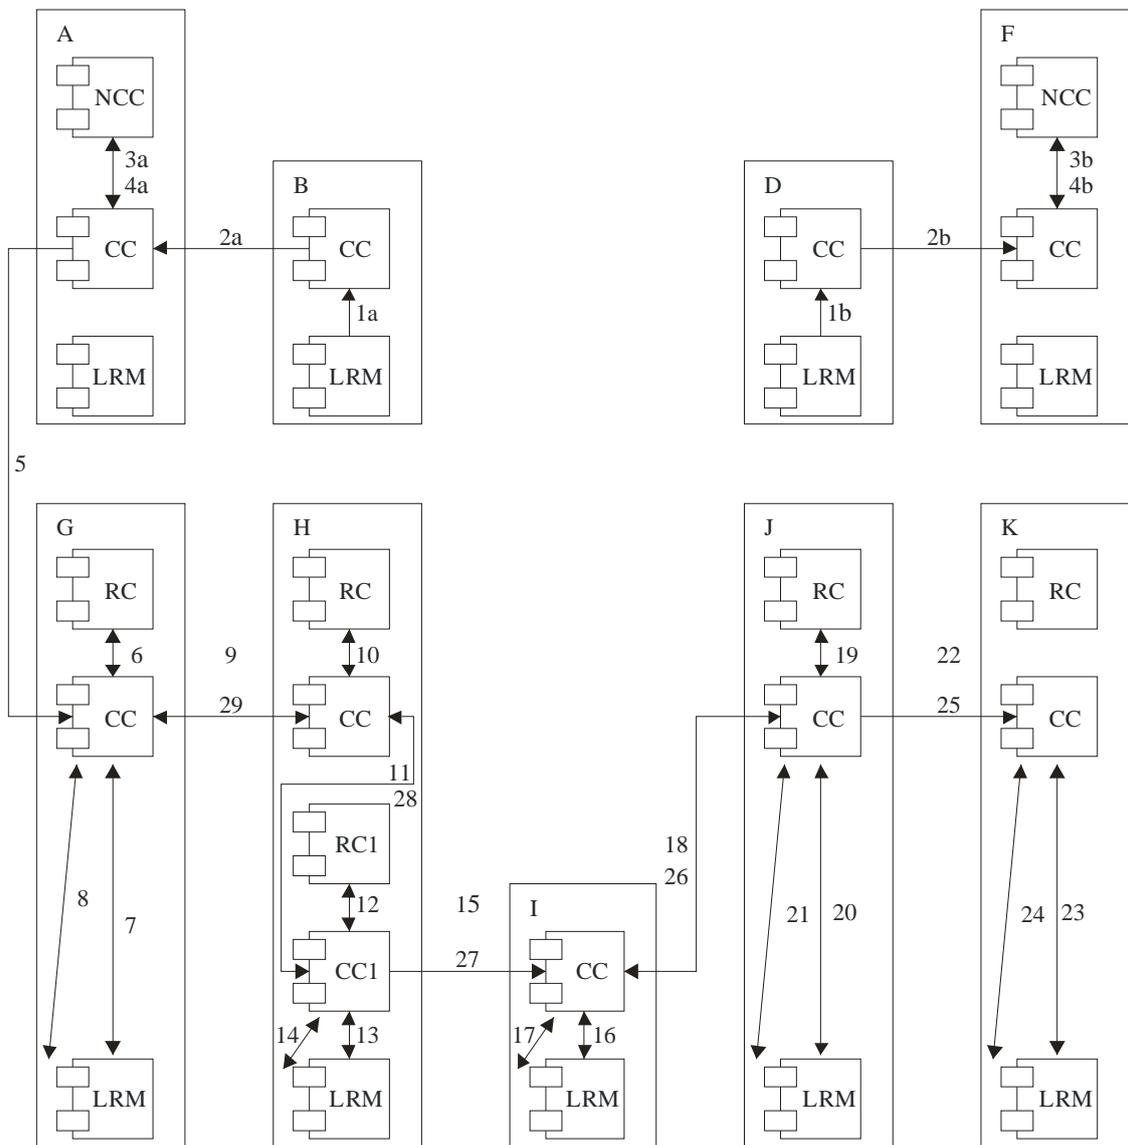

G.8080-Y.1304-Amd.2(10)_FV1.3

Figure VI.3 – Component interactions of combination of protection and restoration

11) Bibliography

In the Bibliography, remove Recommendation ITU-T G.8110.1/Y.1370.1.

12) New Appendix VII

Add the following new Appendix VII.


Appendix VII

Example of explicit multilayer routing topology

(This appendix does not form an integral part of this Recommendation)

In some situations, connection routing can benefit from a topology view that includes explicit detail from multiple layer networks. One example of this is an ODU layer network that contains within it subnetworks supported by transparent optical (OCh) layer networks.

If the OCh server layer network topology is projected into the ODU client layer, it is not possible to associate different routing attributes or constraints specific to the transparent optical subnetworks with that topology. Figure VII.1 shows an example of an explicit multilayer topology for such a network. In this example, the transitions from the ODU layer to the OCh layer are shown using transitional SNPP links with an adaptation/termination icon. This indicates the transition from ODUk to OTUk to OCh occurs between the routing areas connected by these links. The structure of the OCh layer topology is two rings interconnected via 3R regenerators. The presence of the regenerators is shown using transitional SNPP links with singleton layer processor icons (diamond shape). This indicates the presence of a client layer (OTU) dependent function between the ends of these links.

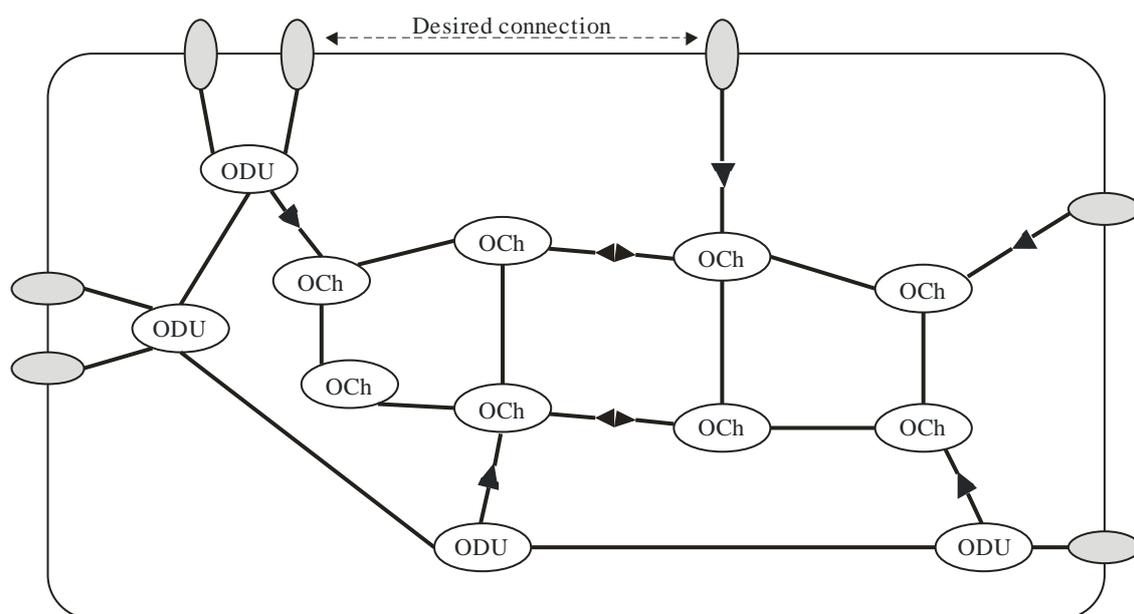

G.8080-Y.1304-Amd.2(10)_FVIII.1

Figure VII.1 – Explicit multilayer topology example

Attributes can be associated with the transitional SNPP links and OCh layer SNPP links that are specific to OCh layer network routing (e.g., modulation type, FEC type, wavelength, etc.). These OCh specific attributes would not be associated with the ODU SNPP links (i.e., those between a pair of ODU routing areas).

This topology may be used to calculate ODUk paths that cross both ODU and OCh routing areas and meet both ODU path constraints and, where necessary, OCh path constraints. This facilitates more optimal route selection across the entire network. The use of an explicit multilayer topology in this case is particularly straightforward since the relationship between ODUk, OTUk, and OCh is 1:1:1. Therefore potential concerns about allocating more server layer resources than are required by the client layer path do not arise.

ITU-T Y-SERIES RECOMMENDATIONS
**GLOBAL INFORMATION INFRASTRUCTURE, INTERNET PROTOCOL ASPECTS AND NEXT-
GENERATION NETWORKS**

GLOBAL INFORMATION INFRASTRUCTURE

General	Y.100–Y.199
Services, applications and middleware	Y.200–Y.299
Network aspects	Y.300–Y.399
Interfaces and protocols	Y.400–Y.499
Numbering, addressing and naming	Y.500–Y.599
Operation, administration and maintenance	Y.600–Y.699
Security	Y.700–Y.799
Performances	Y.800–Y.899

INTERNET PROTOCOL ASPECTS

General	Y.1000–Y.1099
Services and applications	Y.1100–Y.1199
Architecture, access, network capabilities and resource management	Y.1200–Y.1299

Transport **Y.1300–Y.1399**

Interworking	Y.1400–Y.1499
Quality of service and network performance	Y.1500–Y.1599
Signalling	Y.1600–Y.1699
Operation, administration and maintenance	Y.1700–Y.1799
Charging	Y.1800–Y.1899
IPTV over NGN	Y.1900–Y.1999

NEXT GENERATION NETWORKS

Frameworks and functional architecture models	Y.2000–Y.2099
Quality of Service and performance	Y.2100–Y.2199
Service aspects: Service capabilities and service architecture	Y.2200–Y.2249
Service aspects: Interoperability of services and networks in NGN	Y.2250–Y.2299
Numbering, naming and addressing	Y.2300–Y.2399
Network management	Y.2400–Y.2499
Network control architectures and protocols	Y.2500–Y.2599
Future networks	Y.2600–Y.2699
Security	Y.2700–Y.2799
Generalized mobility	Y.2800–Y.2899
Carrier grade open environment	Y.2900–Y.2999

For further details, please refer to the list of ITU-T Recommendations.

SERIES OF ITU-T RECOMMENDATIONS

Series A	Organization of the work of ITU-T
Series D	General tariff principles
Series E	Overall network operation, telephone service, service operation and human factors
Series F	Non-telephone telecommunication services
Series G	Transmission systems and media, digital systems and networks
Series H	Audiovisual and multimedia systems
Series I	Integrated services digital network
Series J	Cable networks and transmission of television, sound programme and other multimedia signals
Series K	Protection against interference
Series L	Construction, installation and protection of cables and other elements of outside plant
Series M	Telecommunication management, including TMN and network maintenance
Series N	Maintenance: international sound programme and television transmission circuits
Series O	Specifications of measuring equipment
Series P	Terminals and subjective and objective assessment methods
Series Q	Switching and signalling
Series R	Telegraph transmission
Series S	Telegraph services terminal equipment
Series T	Terminals for telematic services
Series U	Telegraph switching
Series V	Data communication over the telephone network
Series X	Data networks, open system communications and security
Series Y	Global information infrastructure, Internet protocol aspects and next-generation networks
Series Z	Languages and general software aspects for telecommunication systems