

International Telecommunication Union

**ITU-T**

TELECOMMUNICATION  
STANDARDIZATION SECTOR  
OF ITU

**G.811**

**Amendment 1**  
(04/2016)

SERIES G: TRANSMISSION SYSTEMS AND MEDIA,  
DIGITAL SYSTEMS AND NETWORKS

Digital networks – Design objectives for digital networks

---

Timing characteristics of primary reference clocks

**Amendment 1**

Recommendation ITU-T G.811 (1997) – Amendment 1

ITU-T



ITU-T G-SERIES RECOMMENDATIONS

**TRANSMISSION SYSTEMS AND MEDIA, DIGITAL SYSTEMS AND NETWORKS**

INTERNATIONAL TELEPHONE CONNECTIONS AND CIRCUITS	G.100–G.199
GENERAL CHARACTERISTICS COMMON TO ALL ANALOGUE CARRIER-TRANSMISSION SYSTEMS	G.200–G.299
INDIVIDUAL CHARACTERISTICS OF INTERNATIONAL CARRIER TELEPHONE SYSTEMS ON METALLIC LINES	G.300–G.399
GENERAL CHARACTERISTICS OF INTERNATIONAL CARRIER TELEPHONE SYSTEMS ON RADIO-RELAY OR SATELLITE LINKS AND INTERCONNECTION WITH METALLIC LINES	G.400–G.449
COORDINATION OF RADIOTELEPHONY AND LINE TELEPHONY	G.450–G.499
TRANSMISSION MEDIA AND OPTICAL SYSTEMS CHARACTERISTICS	G.600–G.699
DIGITAL TERMINAL EQUIPMENTS	G.700–G.799
DIGITAL NETWORKS	G.800–G.899
General aspects	G.800–G.809
<b>Design objectives for digital networks</b>	<b>G.810–G.819</b>
Synchronization, quality and availability targets	G.820–G.829
Network capabilities and functions	G.830–G.839
SDH network characteristics	G.840–G.849
Management of transport network	G.850–G.859
SDH radio and satellite systems integration	G.860–G.869
Optical transport networks	G.870–G.879
DIGITAL SECTIONS AND DIGITAL LINE SYSTEM	G.900–G.999
MULTIMEDIA QUALITY OF SERVICE AND PERFORMANCE – GENERIC AND USER-RELATED ASPECTS	G.1000–G.1999
TRANSMISSION MEDIA CHARACTERISTICS	G.6000–G.6999
DATA OVER TRANSPORT – GENERIC ASPECTS	G.7000–G.7999
PACKET OVER TRANSPORT ASPECTS	G.8000–G.8999
ACCESS NETWORKS	G.9000–G.9999

*For further details, please refer to the list of ITU-T Recommendations.*

# Recommendation ITU-T G.811

## Timing characteristics of primary reference clocks

### Amendment 1

#### Summary

Recommendation ITU-T G.811 outlines minimum requirements for timing devices used as primary reference clocks in synchronization networks. These networks include public switched telephone networks (PSTNs) and synchronous digital hierarchy (SDH) networks.

Amendment 1 to Recommendation ITU-T G.811 (1997) adds:

- A 10 MHz interface and a note in clause 9.
- 10 MHz jitter specification in clause 6.3.

#### History

Edition	Recommendation	Approval	Study Group	Unique ID*
1.0	ITU-T G.811	1976-10-08		<a href="http://handle.itu.int/11.1002/1000/10008">11.1002/1000/10008</a>
2.0	ITU-T G.811	1980-11-21		<a href="http://handle.itu.int/11.1002/1000/7783">11.1002/1000/7783</a>
3.0	ITU-T G.811	1984-10-19		<a href="http://handle.itu.int/11.1002/1000/4405">11.1002/1000/4405</a>
4.0	ITU-T G.811	1988-11-25		<a href="http://handle.itu.int/11.1002/1000/995">11.1002/1000/995</a>
4.0	ITU-T G.812	1988-11-25		<a href="http://handle.itu.int/11.1002/1000/996">11.1002/1000/996</a>
5.0	ITU-T G.811	1997-09-19	13	<a href="http://handle.itu.int/11.1002/1000/4197">11.1002/1000/4197</a>
5.0	ITU-T G.812	1998-06-01	13	<a href="http://handle.itu.int/11.1002/1000/4400">11.1002/1000/4400</a>
5.1	ITU-T G.811 (1997) Amd. 1	2016-04-13	13	<a href="http://handle.itu.int/11.1002/1000/12792">11.1002/1000/12792</a>
6.0	ITU-T G.812	2004-06-13	15	<a href="http://handle.itu.int/11.1002/1000/7335">11.1002/1000/7335</a>

---

\* To access the Recommendation, type the URL <http://handle.itu.int/> in the address field of your web browser, followed by the Recommendation's unique ID. For example, <http://handle.itu.int/11.1002/1000/11830-en>.

## FOREWORD

The International Telecommunication Union (ITU) is the United Nations specialized agency in the field of telecommunications, information and communication technologies (ICTs). The ITU Telecommunication Standardization Sector (ITU-T) is a permanent organ of ITU. ITU-T is responsible for studying technical, operating and tariff questions and issuing Recommendations on them with a view to standardizing telecommunications on a worldwide basis.

The World Telecommunication Standardization Assembly (WTSA), which meets every four years, establishes the topics for study by the ITU-T study groups which, in turn, produce Recommendations on these topics.

The approval of ITU-T Recommendations is covered by the procedure laid down in WTSA Resolution 1.

In some areas of information technology which fall within ITU-T's purview, the necessary standards are prepared on a collaborative basis with ISO and IEC.

## NOTE

In this Recommendation, the expression "Administration" is used for conciseness to indicate both a telecommunication administration and a recognized operating agency.

Compliance with this Recommendation is voluntary. However, the Recommendation may contain certain mandatory provisions (to ensure, e.g., interoperability or applicability) and compliance with the Recommendation is achieved when all of these mandatory provisions are met. The words "shall" or some other obligatory language such as "must" and the negative equivalents are used to express requirements. The use of such words does not suggest that compliance with the Recommendation is required of any party.

## INTELLECTUAL PROPERTY RIGHTS

ITU draws attention to the possibility that the practice or implementation of this Recommendation may involve the use of a claimed Intellectual Property Right. ITU takes no position concerning the evidence, validity or applicability of claimed Intellectual Property Rights, whether asserted by ITU members or others outside of the Recommendation development process.

As of the date of approval of this Recommendation, ITU had not received notice of intellectual property, protected by patents, which may be required to implement this Recommendation. However, implementers are cautioned that this may not represent the latest information and are therefore strongly urged to consult the TSB patent database at <http://www.itu.int/ITU-T/ipr/>.

© ITU 2016

All rights reserved. No part of this publication may be reproduced, by any means whatsoever, without the prior written permission of ITU.

# Recommendation ITU-T G.811

## Timing characteristics of primary reference clocks

### Amendment 1

*Editorial note: This is a complete-text publication. Modifications introduced by this amendment are shown in revision marks relative to Recommendation ITU-T G.811 (1997).*

#### 1 Scope

This Recommendation outlines the requirements for primary reference clocks (PRCs) suitable for synchronization supply to digital networks. These requirements apply under the normal environmental conditions specified for digital equipment.

A typical PRC provides the reference signal for the timing or synchronization of other clocks within a network or section of a network. In particular, the PRC can also provide the reference signal to the slave clock specified in Recommendation ITU-T G.812 within the network nodes where the PRC is located. This Recommendation defines the PRC output but it does not apply to the output of slave clock directly fed by a PRC. The long-term accuracy of the PRC should be maintained at 1 part in  $10^{11}$  or better with verification to coordinated universal time (UTC). A PRC may be realized as an autonomous clock, operating independently of other sources. Alternatively, the PRC may be realized as a non-autonomous clock which is disciplined by UTC-derived precision signals received from a radio or satellite system. In either case, the requirements for long-term accuracy and short-term stability, as specified in this Recommendation, apply.

The long-term accuracy of 1 part in  $10^{11}$  or better is adequate when a single PRC provides the reference synchronization signal to all other clocks within a network (synchronous mode of operation). In the pseudo-synchronous mode, i.e. not all clocks in the network have timing traceable to the same PRC, the long-term accuracy is dependent on the number of PRCs in that network.

When more than one PRC is used in a network, a statistical approach is needed to determine the long-term accuracy of each PRC in that network.

#### 2 References

The following ITU-T Recommendations and other references contain provisions which, through reference in this text, constitute provisions of this Recommendation. At the time of publication, the editions indicated were valid. All Recommendations and other references are subject to revision; all users of this Recommendation are therefore encouraged to investigate the possibility of applying the most recent edition of the Recommendations and other references listed below. A list of the currently valid ITU-T Recommendations is regularly published.

- [ITU-T G.703] Recommendation ITU-T G.703 (~~1994~~2016), *Physical/electrical characteristics of hierarchical digital interfaces.*
- [ITU-T G.783] Recommendation ITU-T G.783 (1997), *Characteristics of Synchronous Digital Hierarchy (SDH) equipment functional blocks.*
- [ITU-T G.810] Recommendation ITU-T G.810 (1996), *Definitions and terminology for synchronization networks.*
- [ITU-T G.812] Recommendation ITU-T G.812 (1988), *Timing requirements at the outputs of slave clocks suitable for plesiochronous operation of international digital links.*
- [ITU-T G.822] Recommendation ITU-T G.822 (1988), *Controlled slip rate objectives on an international digital connection.*

- [ITU-T G.823] Recommendation ITU-T G.823 (1993), *The control of jitter and wander within digital networks which are based on the 2048 kbit/s hierarchy.*
- [ITU-T G.824] Recommendation ITU-T G.824 (1993), *The control of jitter and wander within digital networks which are based on the 1544 kbit/s hierarchy.*
- [ITU-T G.825] Recommendation ITU-T G.825 (1993), *The control of jitter and wander within digital networks which are based on the synchronous digital hierarchy (SDH).*

### **3 Definitions**

The terms and definitions used in this Recommendation are contained in [ITU-T G.810].

### **4 Abbreviations and acronyms**

This Recommendation uses the following abbreviations and acronyms:

CMI Coded Mark Inversion

[ePRTC enhanced Primary Reference Time Clock](#)

FPM Flicker Phase Modulation

MTIE Maximum Time Interval Error

NE Network Element

OAM Operations and Maintenance

PLL Phase Locked Loop

PRC Primary Reference Clock

SDH Synchronous Digital Hierarchy

SEC SDH Equipment Clock

SSMB Synchronization Status Message Byte

STM Synchronous Transport Module

TDEV Time Deviation

UI Unit Interval

UTC Coordinated Universal Time

WFM White Frequency Modulation

### **5 Frequency accuracy**

The maximum allowable fractional frequency offset for observation times greater than one week is 1 part in  $10^{11}$ , over all applicable operational conditions.

### **6 Noise generation**

The noise generation of a PRC clock represents the amount of phase noise produced at its output. A suitable reference, for practical testing purposes, implies a performance level that is more stable than the output requirements. The ability of the clock to limit this noise is described by its frequency stability. The measures maximum time interval error (MTIE) and time deviation (TDEV) are useful for characterization of noise generation performance.

MTIE and TDEV are measured through an equivalent 10 Hz, first-order, low-pass measurement filter, at a maximum sampling time  $\tau_0$  of 1/30 seconds. The minimum measurement period for TDEV is

twelve times the integration period ( $T = 12\tau$ ). For measurements over longer observation periods, alternative filter bandwidth and sampling time may be required for practical considerations.

## 6.1 Wander

The wander, expressed in MTIE, measured using the independent clock configuration defined in Figure 2a of [ITU-T G.810] should have the following limits:

$$\begin{aligned} \text{MTIE: } & 0.275 \times 10^{-3}\tau + 0.025 \mu\text{s} & \text{for } & 0.1 < \tau \leq 1000 \text{ s} \\ & 10^{-5}\tau + 0.29 \mu\text{s} & \text{for } & \tau > 1000 \text{ s} \end{aligned}$$

The resultant requirements are shown in Figure 1.

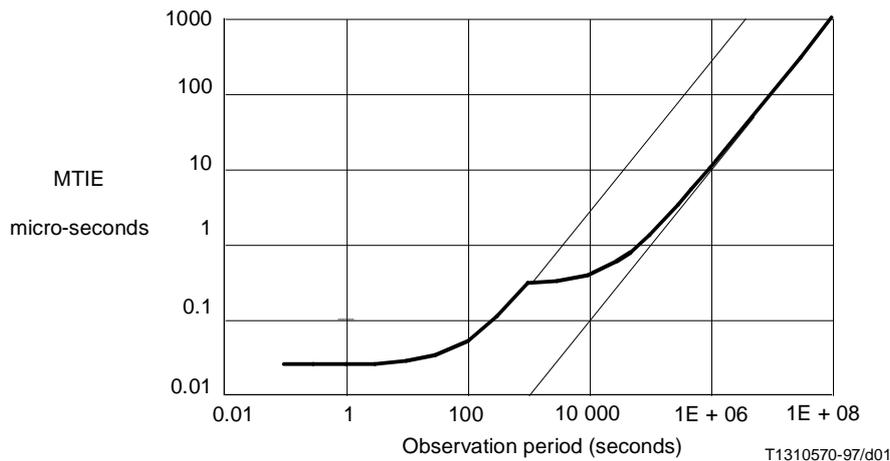


Figure 1/G.811 – MTIE as a function of an observation (integration) period  $\tau$

The wander, expressed in TDEV, measured using the independent clock configuration defined in Figure 2a of [ITU-T G.810] should have the following limits:

$$\begin{aligned} \text{TDEV: } & 3 \text{ ns} & \text{for } & 0.1 < \tau \leq 100 \text{ s} \\ & 0.03 \tau \text{ ns} & \text{for } & 100 < \tau \leq 1000 \text{ s} \\ & 30 \text{ ns} & \text{for } & 1000 < \tau < 10\,000 \text{ s} \end{aligned}$$

The resultant requirements are shown in Figure 2.

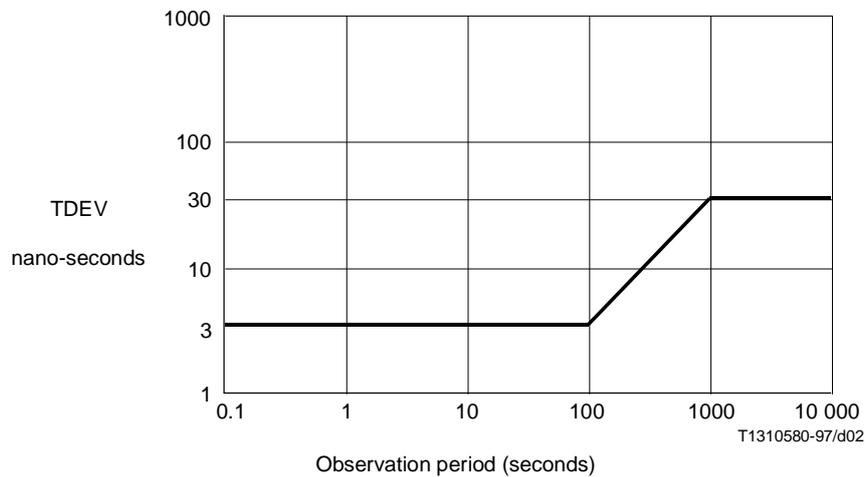


Figure 2/G.811 – TDEV as a function of an observation (integration) period  $\tau$

## 6.2 Jitter

While most specifications in this Recommendation are independent of the output interface at which they are measured, this is not the case for jitter production; jitter generation specifications must utilize existing specifications that are currently specified differently for different interface rates. These requirements are stated separately for the interfaces identified in clause 8. To be consistent with other jitter requirements, the specifications are in UIpp, where the unit interval (UI) corresponds to the reciprocal of the bit rate of the interface.

The intrinsic jitter at 2048 kHz and 2048 kbit/s output interfaces as measured over a 60-second interval shall not exceed 0.05 UIpp when measured through a single pole band-pass filter with corner frequencies at 20 Hz and 100 kHz.

The intrinsic jitter at 1544 kbit/s output interfaces as measured over a 60-second interval shall not exceed 0.015 UIpp when measured through a single pole band-pass filter with corner frequencies at 10 Hz and 40 kHz.

The intrinsic jitter at 10 MHz output interfaces as measured over a 60-second interval shall not exceed 0.01 UIpp when measured through a single pole band-pass filter with corner frequencies at 20 Hz and 100 kHz.

## 7 Phase discontinuity

Primary reference clocks need a very high level of reliability and are likely to include replication of the equipment in order to ensure the continuity of the output. However, any phase discontinuity, due to internal operations within the clock, should only result in a lengthening or shortening of the timing signal interval and must not, at the clock output, cause a phase discontinuity in excess of 1/8 UI (this refers to output signals at 1544 kbit/s, 2048 kbit/s or 2048 kHz).

## 8 Degradation of the performance of a PRC

If redundancy is applied and a clock frequency departs significantly from its nominal value, this should be detected and switching to an undegraded oscillator should then be effected. This switching should be accomplished before the MTIE or TDEV specification is exceeded.

## 9 Interfaces

The requirements in this Recommendation are related to reference points which may be internal to the equipment or network element (NE) in which the PRC is embedded and are therefore not necessarily available for measurement or analysis by the user. Consequently, the performance of the PRC is not specified at these internal reference points, but rather at the external interfaces of the equipment. The output interfaces specified for the equipment in which the PRC clock may be contained are:

- 2048 kHz interfaces according to clause ~~10-15~~ of [ITU-T G.703] with additional jitter and wander requirements as specified herein;
- 1544 kbit/s interfaces according to clause ~~27~~ of [ITU-T G.703] with additional jitter and wander requirements as specified herein;
- 2048 kbit/s interfaces according to clause ~~116~~ of [ITU-T G.703] with additional jitter and wander requirements as specified herein;
- 10 MHz interfaces according to [ITU-T G.703];

NOTE – 10 MHz interfaces may be available on autonomous PRCs. 10 MHz interfaces may be required in the future when evolving an existing autonomous PRC into an enhanced primary reference time clock (ePRTC). Such interfaces may provide an improvement in phase noise performance.

- other interfaces (such as sine wave 8 kHz to 5 MHz) are for further study.

Note that not all of the above interfaces may be implemented on all equipment.





## SERIES OF ITU-T RECOMMENDATIONS

Series A	Organization of the work of ITU-T
Series D	General tariff principles
Series E	Overall network operation, telephone service, service operation and human factors
Series F	Non-telephone telecommunication services
<b>Series G</b>	<b>Transmission systems and media, digital systems and networks</b>
Series H	Audiovisual and multimedia systems
Series I	Integrated services digital network
Series J	Cable networks and transmission of television, sound programme and other multimedia signals
Series K	Protection against interference
Series L	Environment and ICTs, climate change, e-waste, energy efficiency; construction, installation and protection of cables and other elements of outside plant
Series M	Telecommunication management, including TMN and network maintenance
Series N	Maintenance: international sound programme and television transmission circuits
Series O	Specifications of measuring equipment
Series P	Terminals and subjective and objective assessment methods
Series Q	Switching and signalling
Series R	Telegraph transmission
Series S	Telegraph services terminal equipment
Series T	Terminals for telematic services
Series U	Telegraph switching
Series V	Data communication over the telephone network
Series X	Data networks, open system communications and security
Series Y	Global information infrastructure, Internet protocol aspects and next-generation networks, Internet of Things and smart cities
Series Z	Languages and general software aspects for telecommunication systems