

ITU-T

G.8273.3/Y.1368.3

TELECOMMUNICATION
STANDARDIZATION SECTOR
OF ITU

Amendment 1
(11/2018)

SERIES G: TRANSMISSION SYSTEMS AND MEDIA,
DIGITAL SYSTEMS AND NETWORKS

Packet over Transport aspects – Synchronization, quality
and availability targets

SERIES Y: GLOBAL INFORMATION
INFRASTRUCTURE, INTERNET PROTOCOL ASPECTS,
NEXT-GENERATION NETWORKS, INTERNET OF
THINGS AND SMART CITIES

Timing characteristics of telecom transparent clocks
Amendment 1

Recommendation ITU-T G.8273.3/Y.1368.3 (2017) –
Amendment 1

ITU-T G-SERIES RECOMMENDATIONS
TRANSMISSION SYSTEMS AND MEDIA, DIGITAL SYSTEMS AND NETWORKS

INTERNATIONAL TELEPHONE CONNECTIONS AND CIRCUITS	G.100–G.199
GENERAL CHARACTERISTICS COMMON TO ALL ANALOGUE CARRIER-TRANSMISSION SYSTEMS	G.200–G.299
INDIVIDUAL CHARACTERISTICS OF INTERNATIONAL CARRIER TELEPHONE SYSTEMS ON METALLIC LINES	G.300–G.399
GENERAL CHARACTERISTICS OF INTERNATIONAL CARRIER TELEPHONE SYSTEMS ON RADIO-RELAY OR SATELLITE LINKS AND INTERCONNECTION WITH METALLIC LINES	G.400–G.449
COORDINATION OF RADIOTELEPHONY AND LINE TELEPHONY	G.450–G.499
TRANSMISSION MEDIA AND OPTICAL SYSTEMS CHARACTERISTICS	G.600–G.699
DIGITAL TERMINAL EQUIPMENTS	G.700–G.799
DIGITAL NETWORKS	G.800–G.899
DIGITAL SECTIONS AND DIGITAL LINE SYSTEM	G.900–G.999
MULTIMEDIA QUALITY OF SERVICE AND PERFORMANCE – GENERIC AND USER-RELATED ASPECTS	G.1000–G.1999
TRANSMISSION MEDIA CHARACTERISTICS	G.6000–G.6999
DATA OVER TRANSPORT – GENERIC ASPECTS	G.7000–G.7999
PACKET OVER TRANSPORT ASPECTS	G.8000–G.8999
Ethernet over Transport aspects	G.8000–G.8099
MPLS over Transport aspects	G.8100–G.8199
Synchronization, quality and availability targets	G.8200–G.8299
Service Management	G.8600–G.8699
ACCESS NETWORKS	G.9000–G.9999

For further details, please refer to the list of ITU-T Recommendations.

Recommendation ITU-T G.8273.3/Y.1368.3

Timing characteristics of telecom transparent clocks

Amendment 1

Summary

Recommendation ITU-T G.8273.3/Y.1368.3 defines the minimum requirements for telecom transparent clocks (T-TCs). These requirements apply under normal environmental conditions specified for the equipment.

This Recommendation includes: clock accuracy, noise generation, noise tolerance, noise transfer, and transient response for T-TCs.

Amendment 1 changes the notes in clauses 7.1.1, 7.1.2 and 7.13, and adds Appendix III.

History

Edition	Recommendation	Approval	Study Group	Unique ID*
1.0	ITU-T G.8273.3/Y.1368.3	2017-10-07	15	11.1002/1000/13327
1.1	ITU-T G.8273.3/Y.1368.3 (2017) Amd. 1	2018-11-29	15	11.1002/1000/13770

Keywords

PTP, phase and time synchronization, telecom profile, transparent clock.

* To access the Recommendation, type the URL <http://handle.itu.int/> in the address field of your web browser, followed by the Recommendation's unique ID. For example, <http://handle.itu.int/11.1002/1000/11830-en>.

FOREWORD

The International Telecommunication Union (ITU) is the United Nations specialized agency in the field of telecommunications, information and communication technologies (ICTs). The ITU Telecommunication Standardization Sector (ITU-T) is a permanent organ of ITU. ITU-T is responsible for studying technical, operating and tariff questions and issuing Recommendations on them with a view to standardizing telecommunications on a worldwide basis.

The World Telecommunication Standardization Assembly (WTSA), which meets every four years, establishes the topics for study by the ITU-T study groups which, in turn, produce Recommendations on these topics.

The approval of ITU-T Recommendations is covered by the procedure laid down in WTSA Resolution 1.

In some areas of information technology which fall within ITU-T's purview, the necessary standards are prepared on a collaborative basis with ISO and IEC.

NOTE

In this Recommendation, the expression "Administration" is used for conciseness to indicate both a telecommunication administration and a recognized operating agency.

Compliance with this Recommendation is voluntary. However, the Recommendation may contain certain mandatory provisions (to ensure, e.g., interoperability or applicability) and compliance with the Recommendation is achieved when all of these mandatory provisions are met. The words "shall" or some other obligatory language such as "must" and the negative equivalents are used to express requirements. The use of such words does not suggest that compliance with the Recommendation is required of any party.

INTELLECTUAL PROPERTY RIGHTS

ITU draws attention to the possibility that the practice or implementation of this Recommendation may involve the use of a claimed Intellectual Property Right. ITU takes no position concerning the evidence, validity or applicability of claimed Intellectual Property Rights, whether asserted by ITU members or others outside of the Recommendation development process.

As of the date of approval of this Recommendation, ITU had not received notice of intellectual property, protected by patents, which may be required to implement this Recommendation. However, implementers are cautioned that this may not represent the latest information and are therefore strongly urged to consult the TSB patent database at <http://www.itu.int/ITU-T/ipr/>.

© ITU 2019

All rights reserved. No part of this publication may be reproduced, by any means whatsoever, without the prior written permission of ITU.

Table of Contents

	Page
1 Scope.....	1
2 References.....	1
3 Definitions	2
3.1 Terms defined elsewhere	2
3.2 Terms defined in this Recommendation.....	2
4 Abbreviations and acronyms	2
5 Conventions	3
6 Physical layer frequency performance requirements.....	3
7 Packet layer performance requirements.....	4
7.1 Constant phase/time error and dynamic time error noise generation	4
7.2 Noise tolerance	5
7.3 Noise transfer.....	6
7.4 Packet layer transient response and holdover performance.....	6
8 Interfaces.....	7
8.1 Phase and time interfaces	7
8.2 Frequency interfaces.....	7
Annex A – Telecom transparent clock functional model	8
Appendix I – Traffic load test patterns	9
Appendix II – Residence time.....	11
Appendix III – Performance estimation for cascaded media converters acting as T-TCs.....	12
Bibliography.....	13

Recommendation ITU-T G.8273.3/Y.1368.3

Timing characteristics of telecom transparent clocks

Amendment 1

Editorial note: This is a complete-text publication. Modifications introduced by this amendment are shown in revision marks relative to Recommendation ITU-T G.8263/Y.1368.3 (2017).

1 Scope

This Recommendation specifies minimum requirements for time and phase synchronization devices used in synchronizing network equipment, which operates in the network architecture as defined in [ITU-T G.8271] and [ITU-T G.8275]. It supports time and/or phase synchronization distribution for packet-based networks. The telecom transparent clock (T-TC) must be operating in end-to-end transparent clock (TC) mode.

This Recommendation assumes operation within the framework specified in [ITU-T G.8273], and that the physical layer reference chain behaviors given in [ITU-T G.803] and [ITU-T G.8261] are followed. It is also assumed that the network limits given in [ITU-T G.8271.1] are met and that the profile given in [ITU-T G.8275.1] is applied.

This Recommendation allows for proper network operation when a network equipment clock is timed from another network equipment clock or a higher quality clock.

This Recommendation defines the minimum requirements for transparent clocks. These requirements apply under normal environmental conditions specified for the equipment.

Guidelines for testing are described in Appendix I.

This version of the Recommendation focuses on synchronized T-TCs with frequency reference provided by the physical layer based on ITU-T G.8262 EEC-Option 1 (and ITU-T G.813 SEC-Option 1 as the requirements are identical). ITU-T G.8262 EEC-Option 2 and ITU-T G.813 SEC-Option 2 are for further study. A T-TC without a frequency reference provided by the physical layer is for further study.

NOTE – This Recommendation does not modify the physical layer reference chain behaviour, according to [ITU-T G.803] and [ITU-T G.8261]. This Recommendation does not exclude the use of other physical layer clocks (e.g., ITU-T G.812 Type I) within the frequency transport network. The equipment specification of a T-TC assisted by a physical layer equipment clock, other than ITU-T G.8262 Option 1, such as ITU-T G.812 Type I, is for further study.

2 References

The following ITU-T Recommendations and other references contain provisions which, through reference in this text, constitute provisions of this Recommendation. At the time of publication, the editions indicated were valid. All Recommendations and other references are subject to revision; users of this Recommendation are therefore encouraged to investigate the possibility of applying the most recent edition of the Recommendations and other references listed below. A list of the currently valid ITU-T Recommendations is regularly published. The reference to a document within this Recommendation does not give it, as a stand-alone document, the status of a Recommendation.

[ITU-T G.703] Recommendation ITU-T G.703 (2016), *Physical/electrical characteristics of hierarchical digital interfaces*.

- [ITU-T G.781] Recommendation ITU-T G.781 (2017), *Synchronization layer functions*.
- [ITU-T G.803] Recommendation ITU-T G.803 (2000), *Architecture of transport networks based on the synchronous digital hierarchy (SDH)*.
- [ITU-T G.810] Recommendation ITU-T G.810 (1996), *Definitions and terminology for synchronization networks*.
- [ITU-T G.812] Recommendation ITU-T G.812 (2004), *Timing requirements of slave clocks suitable for use as node clocks in synchronization networks*.
- [ITU-T G.813] Recommendation ITU-T G.813 (2003), *Timing characteristics of SDH equipment slave clocks (SEC)*.
- [ITU-T G.8260] Recommendation ITU-T G.8260 (2015), *Definitions and terminology for synchronization in packet networks*.
- [ITU-T G.8261] Recommendation ITU-T G.8261/Y.1361 (2013), *Timing and synchronization aspects in packet networks*.
- [ITU-T G.8262] Recommendation ITU-T G.8262/Y.1362 (2015), *Timing characteristics of a synchronous Ethernet equipment slave clock*.
- [ITU-T G.8264] Recommendation ITU-T G.8264/Y.1364 (2017), *Distribution of timing information through packet networks*.
- [ITU-T G.8271] Recommendation ITU-T G.8271/Y.1366 (2017), *Time and phase synchronization aspects of packet networks*.
- [ITU-T G.8271.1] Recommendation ITU-T G.8271.1/Y.1366.1 (2017), *Network limits for time synchronization in packet networks*.
- [ITU-T G.8273] Recommendation ITU-T G.8273/Y.1368 (2013), *Framework of phase and time clocks*.
- [ITU-T G.8275] Recommendation ITU-T G.8275/Y.1369 (2017), *Architecture and requirements for packet-based time and phase distribution*.
- [ITU-T G.8275.1] Recommendation ITU-T G.8275.1/Y.1369.1 (2016), *Precision time protocol telecom profile for phase/time synchronization with full timing support from the network*.

3 Definitions

3.1 Terms defined elsewhere

Definitions related to synchronization are contained in [ITU-T G.810] and [ITU-T G.8260].

3.2 Terms defined in this Recommendation

None.

4 Abbreviations and acronyms

This Recommendation uses the following abbreviations and acronyms:

cTE	Constant phase/Time Error
dTE	Dynamic Time Error
EEC	synchronous Ethernet Equipment Clock
ESMC	Ethernet Synchronization Messaging Channel

GbE	Gigabit Ethernet
max TE	Maximum absolute Time Error
MTIE	Maximum Time Interval Error
NE	Network Element
PEC	Packet-based Equipment Clock
PP	Packet Processing
PPS	Pulse Per Second
PRTC	Primary Reference Time Clock
PTP	Precision Time Protocol
SDH	Synchronous Digital Hierarchy
SEC	SDH equipment slave clock
SSM	Synchronization Status Message
SyncE	Synchronous Ethernet
T-GM	Telecom Grandmaster
T-TC	Telecom Transparent Clock
TDEV	Time Deviation
TE	Time Error

5 Conventions

None.

6 Physical layer frequency performance requirements

The list of applicable physical layer frequency interfaces is provided in clause 8.2.

The following applies for the synchronous Ethernet (SyncE) and synchronous digital hierarchy (SDH) interfaces.

Synchronous Ethernet interfaces and synchronous Ethernet equipment clocks (EECs) used in combination with the telecom transparent clock (T-TC) are specified in [ITU-T G.8262], and generate and process Ethernet synchronization messaging channel (ESMC) messages as specified in [ITU-T G.8264].

Synchronous digital hierarchy interfaces and SDH equipment slave clocks (SECs) used in combination with the T-TC are specified in [ITU-T G.813], and generate and process synchronization status message (SSM) messages as specified in [ITU-T G.781].

NOTE – The T-TC model in this Recommendation does not exclude the use of other physical layer clocks (e.g., ITU-T G.812 Type I) within the equipment related to the operation between the physical layer input to physical layer output interface behaviour, in accordance to the existing ITU-T G.803 reference chain and ITU-T G.8261 network limits. In such cases, the equipment behaviour related to the interaction between the physical layer input and the precision time protocol (PTP) output is for further study.

7 Packet layer performance requirements

7.1 Constant phase/time error and dynamic time error noise generation

The noise generation of an T-TC represents the amount of noise produced at the output of the T-TC when there is an ideal input reference packet timing signal and, if the T-TC is supporting physical layer frequency reference, an ideal physical layer reference.

The noise generation is characterized by three parameters: maximum absolute time error ($\max|\text{TE}|$), constant phase/time error (cTE) and dynamic time error (dTE) noise generation.

To support different performance requirements at the end application specified in Table 1 of [ITU-T G.8271] using different network topologies and network technologies, the $\max|\text{TE}|$, cTE and dTE noise generation requirements for T-TCs are divided into two classes: Class A and Class B. A T-TC with physical layer support must meet the requirements stated in clauses 7.1.1, 7.1.2 and 7.1.3.

7.1.1 Maximum absolute time error generation

The time output of the T-TC should be accurate to within the $\max|\text{TE}|$. This value includes all the unfiltered noise components, i.e., the cTE and the dTE noise generation.

Table 1 – Maximum absolute time error

T-TC Class	Maximum absolute time error – $\max \text{TE} $ (ns)
A	100 ns
B	70 ns

NOTE – The values in Table 1 are valid for 1 pulse per second (PPS) interfaces and for 1GbE, 10GbE, 25GbE, 40GbE and 100GbE interfaces. Values for other interfaces are for further study. The values in Table 1 are valid for 1 Gigabit Ethernet (GbE) and 10 GbE interfaces. Values for signals above 10 GbE or below 1 GbE are for further study.

7.1.2 Constant phase/time error generation

At the PTP outputs, the cTE generation for Class A and Class B is shown in Table 2.

Table 2 – T-TC permissible range of cTE

T-TC Class	Permissible range of cTE(ns)
A	±50
B	±20

NOTE 1 – The values in Table 2 are valid for 1 PPS interfaces and for 1GbE, 10GbE, 25GbE, 40GbE and 100GbE interfaces. Values for other interfaces are for further study. The values in Table 2 are valid for 1 GbE and 10 GbE interfaces. Values for signals above 10 GbE or below 1 GbE are for further study.

NOTE 2 – Constant time error and the method to estimate are defined in [ITU-T G.8260]. For the purpose of testing the limits in Table 2, an estimate of constant time error should be obtained by averaging the time error sequence over 1000 s.

7.1.3 Dynamic time error low-pass filtered noise generation ($d\text{TE}_L$)

For a T-TC connected to a wander-free time reference at the PTP input, and, if the T-TC contains an EEC-Option 1 clock, a wander-free frequency reference at the SyncE/SDH input, the maximum time interval error (MTIE) at the PTP output, measured through a first order low-pass filter with bandwidth of 0.1 Hz, should have the limits in Table 2, if the temperature is constant (within ± 1 K).

The same limit applies to both Class A and Class B devices.

Table 3 – Dynamic time error noise generation (MTIE) for T-TC with constant temperature

MTIE limit (ns)	Observation interval τ (s)
40	$m < \tau \leq 1000$ (Note 1), (Note 2)
NOTE 1 – The minimum τ value m is determined by a packet rate of 16 packet per second ($m=1/16$). NOTE 2 – <u>The values in Table 3 are valid for 1 PPS interfaces and for 1GbE, 10GbE, 25GbE, 40GbE and 100GbE interfaces. Values for other interfaces are for further study. The values in this table are valid for 1 GbE and 10 GbE interfaces. Interface rates above 10 GbE and below 1 GbE are for further study.</u>	

When temperature effects are included, the MTIE requirement is defined in Table 4 for a T-TC. In this case, the maximum observation interval is increased to 10000 s.

Table 4 – Dynamic time error noise generation (MTIE) for T-TC with variable temperature

MTIE limit (ns)	Observation interval τ (s)
40	$m < \tau \leq 10000$ (Note 1), (Note 2)
NOTE 1 – The minimum τ value m is determined by a packet rate of 16 packet per second ($m=1/16$). NOTE 2 – <u>The values in Table 4 are valid for 1 PPS interfaces and for 1GbE, 10GbE, 25GbE, 40GbE and 100GbE interfaces. Values for other interfaces are for further study. The values in this table are valid for 1 GbE and 10 GbE interfaces. Interface rates above 10 GbE and below 1 GbE are for further study.</u>	

NOTE – Guidelines for variable temperature testing are described in Appendix II of [ITU-T G.8273].

The applicable time deviation (TDEV) is for further study.

7.1.4 Dynamic time error high-pass filtered noise generation (dTE_H)

For a T-TC Class A or Class B synchronized to EEC-Option 1 clock connected to a wander-free time reference at the PTP input, and a wander-free frequency reference at the SyncE/SDH input, the peak-to-peak time error at the T-TC output interfaces, measured over a 1000 s measurement interval, with a first-order high-pass filter of 0.1 Hz must be less than 70 ns.

NOTE – The value of 70 ns is a conservative limit based on the SEC/EEC noise generation specification. This is based on the assumption that most of this noise is generated by the high-pass filtered noise of the SEC/EEC oscillator. It is expected that implementations based on better clocks can result in significantly lower values. It is not intended and not assumed that the component of the high-pass filtered noise, due to timestamp granularity, is a major portion of the 70 ns.

7.2 Noise tolerance

The noise tolerance of a T-TC indicates the minimum dTE level at the input of the clock that should be accommodated while:

- not causing any alarms;
- not causing the clock to switch reference;
- not causing the clock to go into holdover.

NOTE 1 – PTP noise tolerance concerns clock recovery from PTP for T-TC synchronization purposes. The current scope of this Recommendation focuses on a case of T-TC synchronized by means of physical layer frequency synchronization; the case of synchronization provided by PTP is for further study.

NOTE 2 – There is no requirement related to cTE tolerance.

A T-TC for use in the full timing support profile should be capable of tolerating the following levels of dTE and phase wander:

- dTE tolerance on the PTP input is not applicable in the case of a T-TC with physical layer frequency synchronization assistance. The current scope of this Recommendation focuses on a case of T-TC synchronized by means of physical layer frequency synchronization; the case of synchronization provided by PTP is for further study;
- wander tolerance according to clause 9.1 of [ITU-T G.8262] at the SyncE input (applicable to the SyncE physical layer frequency synchronization input if used);
- wander tolerance according to clause 8.1 of [ITU-T G.813] at the SDH input (applicable to the SDH physical layer frequency synchronization input if used).

7.3 Noise transfer

7.3.1 PTP to PTP noise transfer

There is no filtering of PTP signal required in the T-TC. The T-TC is not permitted to amplify input time error on its output.

NOTE – The current scope of this Recommendation focuses on a case of T-TC synchronized by means of physical layer frequency synchronization; the case of synchronization provided by PTP for which this specification would become relevant, is for further study.

7.3.2 Physical layer frequency to PTP noise transfer

For the case of a T-TC with physical layer frequency synchronization assistance, the noise transferred to the output PTP signal (i.e., as observable on the residence time measurements) corresponds to the input physical layer frequency input signal filtered by a low-pass filter, whose corner frequency is between 1 Hz and 10 Hz, followed by a high-pass filter, whose corner frequency depends on the residence time (i.e., inverse of twice the residence time). In particular, it can be assumed that the residence time is controlled to be less than the PTP packet rate (1/16 of a second) and is typically in the order of 10 μ s – 10 ms, so that the high-pass corner frequency is between 8 Hz and 50 kHz (i.e., the Nyquist frequencies corresponding to 1/16 s and 10 μ s, respectively). This means that the noise of the input physical layer frequency is generally greatly reduced.

In the passband, the phase gain of the EEC should be smaller than 0.2 dB (2.3%).

NOTE – The above requirement applies to the case where a physical layer clock is implemented as per [ITU-T G.8262] Option 1 to assist the T-TC, where the filter bandwidth is between 1 Hz and 10 Hz. When a different physical layer clock is used with a lower filter bandwidth to assist the T-TC, such as [ITU-T G.812] Type I, the relevant filter bandwidth characteristics would apply.

7.4 Packet layer transient response and holdover performance

7.4.1 Transient response

7.4.1.1 PTP to PTP transient response

The PTP to PTP transient response requirements applicable to a T-TC are for further study.

7.4.1.2 Physical layer frequency to PTP transient response

For further study.

7.4.2 Holdover performance

A T-TC does not support time holdover.

8 Interfaces

The requirements in this Recommendation are related to reference points which may be internal to the equipment or network element (NE) in which the T-TC is embedded and are, therefore, not necessarily available for measurement or analysis by the user. Consequently, the performance of the T-TC is not specified at these internal reference points, but rather at the external interfaces of the equipment.

Not all of the interfaces below need to be implemented on all equipment.

8.1 Phase and time interfaces

The phase and time interfaces specified for the equipment in which the T-TC may be contained are:

- Ethernet interface carrying PTP messages;

NOTE – Ethernet interfaces can combine SyncE for frequency and PTP messages.

- other interfaces are for further study.

8.2 Frequency interfaces

The frequency interfaces specified for the equipment in which the T-TC may be contained are:

- 2048 kHz interfaces according to [ITU-T G.703] with additional jitter and wander requirements as specified herein;
 - 1544 kbit/s interfaces according to [ITU-T G.703] with additional jitter and wander requirements as specified herein;
 - 2048 kbit/s interfaces according to [ITU-T G.703] with additional jitter and wander requirements as specified herein;
 - synchronous transport module level-N (STM-N) traffic interfaces;
 - synchronous Ethernet interfaces;
- NOTE – Ethernet interfaces can combine PTP and SyncE.
- other interfaces are for further study.

Annex A

Telecom transparent clock functional model

(This annex forms an integral part of this Recommendation.)

Figure A.1 illustrates a transparent clock model.

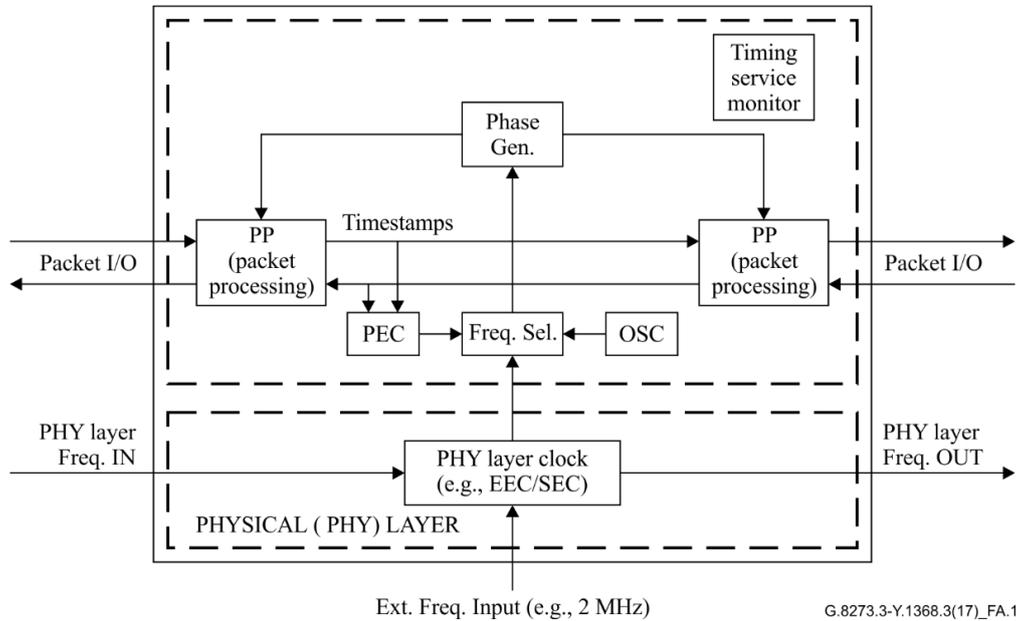


Figure A.1 – Transparent clock model

NOTE 1 – In Figure A.1, the physical layer frequency signal may be bidirectional for SyncE/SDH.

NOTE 2 – The "Physical layer clock" shown in Figure A.1 must comply with standard physical clock processing and management according to [ITU-T G.8262], [ITU-T G.8264] and [ITU-T G.781].

NOTE 3 – The implementation and use of a packet-based equipment clock (PEC) for a T-TC is optional.

NOTE 4 – This version of the Recommendation is based on physical layer support, and therefore it is required.

Figure A.1 shows a functional model of a telecom transparent clock. It is not intended to specify any specific implementation. Any implementation specific detail is outside the scope of this Recommendation.

The packet timing signal is processed by the packet processing blocks. The ingress timestamp for each Sync and Delay_req packet is sent to the egress packet processing blocks where it is used together with the egress timestamp to calculate the residence time for the frame. The timestamps are also sent to the PEC block for further processing. The frequency information carried in the timestamps is used in the PEC to generate the local frequency.

The frequency selector block may select either the frequency information recovered from the timestamps, or the frequency recovered from a physical layer clock (e.g., SyncE, SONET or SDH) or from a local oscillator.

The phase generator is used to generate the free-running time used in the packet processing (PP) blocks to generate the timestamps. The free-running time is not locked in time to any time reference, but is locked in frequency to the source selected by the freq. sel. block.

The timing service monitor is an optional feature which may provide monitoring of a timing service received by the clock according to key performance indicators. As an example, it may monitor the PTP timing service by analyzing the PTP timestamps and message rate from the PP block and raise an unusable alarm based on implementation specific criteria.

Appendix I

Traffic load test patterns

(This appendix does not form an integral part of this Recommendation.)

As the time error of a T-TC is affected by the size and asymmetry of the residence time calculation error, it is important to test the performance of a T-TC with cross traffic load.

The following traffic load patterns must be used when testing a T-TC. See Figure I.1 for a T-TC test set-up with cross traffic.

Cross traffic in both directions using maximum size frames and the same quality of service (QoS) class as the PTP traffic creating a 97% egress load on the PTP ports in bursts of 5 seconds. In addition to this, there should be an additional cross traffic load of 2% maximum frame sized frames of a lower priority than the PTP frames, creating overload on the egress ports. The traffic should be so that the 99% egress load happens only on one PTP port at a time to create the maximum asymmetry.

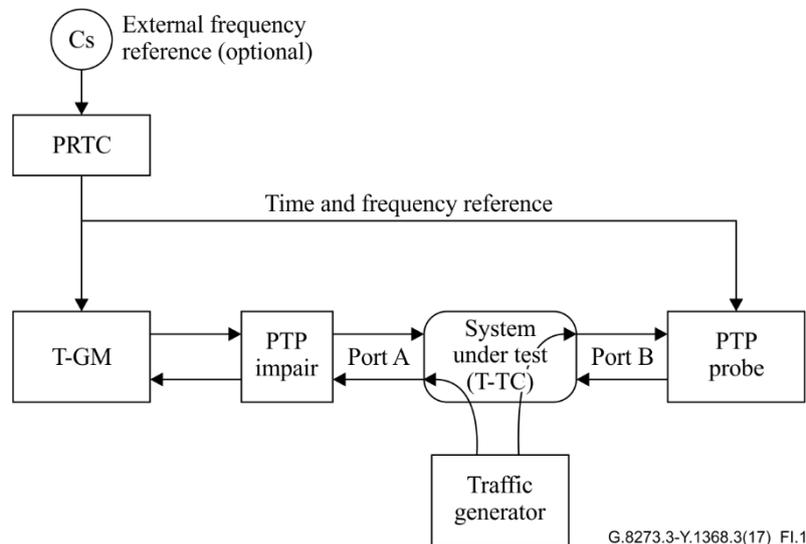


Figure I.1 – T-TC test set-up with cross traffic

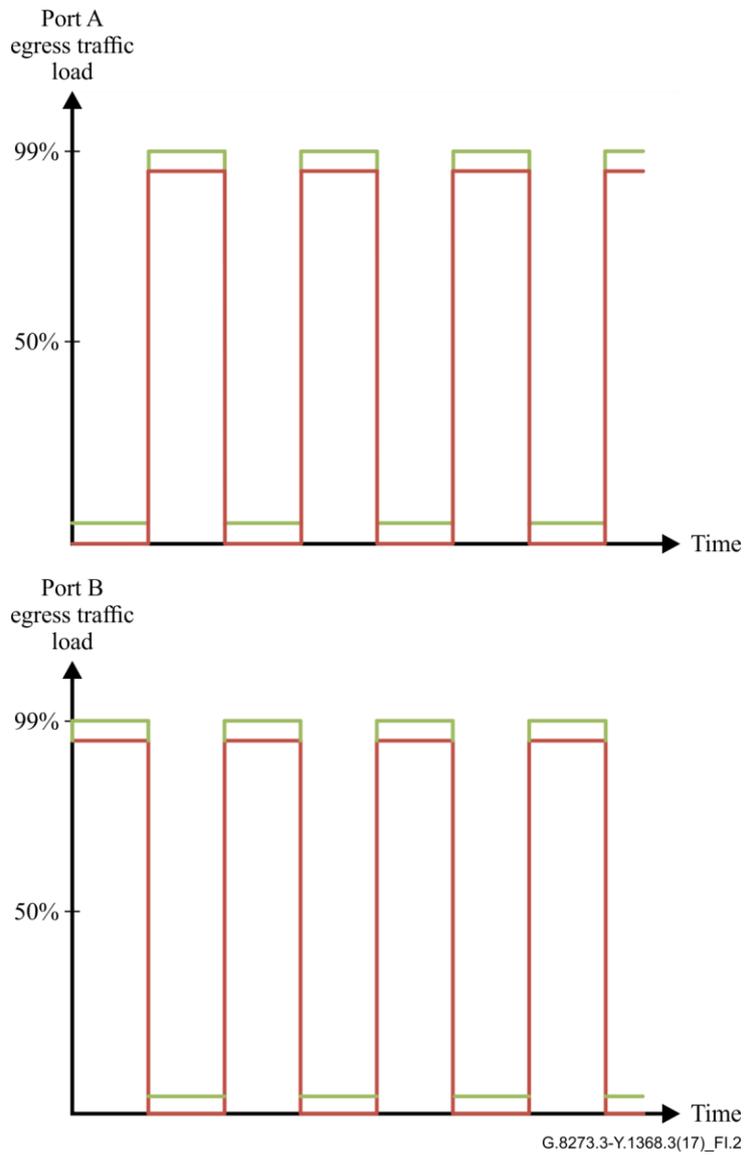


Figure I.2 – Cross traffic pattern

Figure I.2 shows cross traffic test patterns. Other test patterns are for further study.

Appendix II

Residence time

(This appendix does not form an integral part of this Recommendation.)

For the correct operation of a T-TC, the residence time (i.e., the time PTP event messages take to traverse the T-TC) needs to be controlled to be below a suitable value.

This is important, especially in case of cascaded T-TCs. One main reason is to control noise accumulation. As an example, during failures in the synchronous Ethernet network, a T-TC may operate with a frequency deviation of 2 ppm for a short period of time, and over 10 ms each T-TC would contribute a time error of 20 ns.

In addition, the control of residence time variation is important to limit the irregular inter-arrival period of the PTP messages received by a telecom boundary clock (T-BC) or by a telecom time slave clock (T-TSC) as this may impact their performance or lead to the generation of alarms.

A limit of 10 ms is generally indicated as suitable.

Appendix III

Performance estimation for cascaded media converters acting as T-TCs

(This appendix does not form an integral part of this Recommendation.)

[ITU-T G.8273] describes the "back-to-back" testing of devices such as media converters, where the connecting interface may not be Ethernet, and hence a suitable tester may not be available. This appendix is intended to describe the estimation of the budget to use for back-to-back testing of such devices, where each device is allocated the budget equivalent to a single T-TC. This is for further study.

Bibliography

- [b-ITU-T G.8272] Recommendation ITU-T G.8272/Y.1367 (2015), *Timing characteristics of primary reference time clocks*.
- [b-ITU-T G.8273.2] Recommendation ITU-T G.8273.2/Y.1368.2 (2017), *Timing characteristics of telecom boundary clocks and telecom time slave clocks*.

ITU-T Y-SERIES RECOMMENDATIONS

GLOBAL INFORMATION INFRASTRUCTURE, INTERNET PROTOCOL ASPECTS, NEXT-GENERATION NETWORKS, INTERNET OF THINGS AND SMART CITIES

GLOBAL INFORMATION INFRASTRUCTURE	
General	Y.100–Y.199
Services, applications and middleware	Y.200–Y.299
Network aspects	Y.300–Y.399
Interfaces and protocols	Y.400–Y.499
Numbering, addressing and naming	Y.500–Y.599
Operation, administration and maintenance	Y.600–Y.699
Security	Y.700–Y.799
Performances	Y.800–Y.899
INTERNET PROTOCOL ASPECTS	
General	Y.1000–Y.1099
Services and applications	Y.1100–Y.1199
Architecture, access, network capabilities and resource management	Y.1200–Y.1299
Transport	Y.1300–Y.1399
Interworking	Y.1400–Y.1499
Quality of service and network performance	Y.1500–Y.1599
Signalling	Y.1600–Y.1699
Operation, administration and maintenance	Y.1700–Y.1799
Charging	Y.1800–Y.1899
IPTV over NGN	Y.1900–Y.1999
NEXT GENERATION NETWORKS	
Frameworks and functional architecture models	Y.2000–Y.2099
Quality of Service and performance	Y.2100–Y.2199
Service aspects: Service capabilities and service architecture	Y.2200–Y.2249
Service aspects: Interoperability of services and networks in NGN	Y.2250–Y.2299
Enhancements to NGN	Y.2300–Y.2399
Network management	Y.2400–Y.2499
Network control architectures and protocols	Y.2500–Y.2599
Packet-based Networks	Y.2600–Y.2699
Security	Y.2700–Y.2799
Generalized mobility	Y.2800–Y.2899
Carrier grade open environment	Y.2900–Y.2999
FUTURE NETWORKS	Y.3000–Y.3499
CLOUD COMPUTING	Y.3500–Y.3999
INTERNET OF THINGS AND SMART CITIES AND COMMUNITIES	
General	Y.4000–Y.4049
Definitions and terminologies	Y.4050–Y.4099
Requirements and use cases	Y.4100–Y.4249
Infrastructure, connectivity and networks	Y.4250–Y.4399
Frameworks, architectures and protocols	Y.4400–Y.4549
Services, applications, computation and data processing	Y.4550–Y.4699
Management, control and performance	Y.4700–Y.4799
Identification and security	Y.4800–Y.4899
Evaluation and assessment	Y.4900–Y.4999

For further details, please refer to the list of ITU-T Recommendations.

SERIES OF ITU-T RECOMMENDATIONS

- Series A Organization of the work of ITU-T
- Series D Tariff and accounting principles and international telecommunication/ICT economic and policy issues
- Series E Overall network operation, telephone service, service operation and human factors
- Series F Non-telephone telecommunication services
- Series G Transmission systems and media, digital systems and networks**
- Series H Audiovisual and multimedia systems
- Series I Integrated services digital network
- Series J Cable networks and transmission of television, sound programme and other multimedia signals
- Series K Protection against interference
- Series L Environment and ICTs, climate change, e-waste, energy efficiency; construction, installation and protection of cables and other elements of outside plant
- Series M Telecommunication management, including TMN and network maintenance
- Series N Maintenance: international sound programme and television transmission circuits
- Series O Specifications of measuring equipment
- Series P Telephone transmission quality, telephone installations, local line networks
- Series Q Switching and signalling, and associated measurements and tests
- Series R Telegraph transmission
- Series S Telegraph services terminal equipment
- Series T Terminals for telematic services
- Series U Telegraph switching
- Series V Data communication over the telephone network
- Series X Data networks, open system communications and security
- Series Y Global information infrastructure, Internet protocol aspects, next-generation networks, Internet of Things and smart cities
- Series Z Languages and general software aspects for telecommunication systems