

I n t e r n a t i o n a l   T e l e c o m m u n i c a t i o n   U n i o n

# ITU-T

TELECOMMUNICATION  
STANDARDIZATION SECTOR  
OF ITU

# H.813

(11/2015)

SERIES H: AUDIOVISUAL AND MULTIMEDIA SYSTEMS

E-health multimedia services and applications – Personal  
health systems

---

## **Interoperability design guidelines for personal health systems: Health record network (HRN) interface**

Recommendation ITU-T H.813

ITU-T H-SERIES RECOMMENDATIONS  
AUDIOVISUAL AND MULTIMEDIA SYSTEMS

CHARACTERISTICS OF VISUAL TELEPHONE SYSTEMS	H.100–H.199
INFRASTRUCTURE OF AUDIOVISUAL SERVICES	
General	H.200–H.219
Transmission multiplexing and synchronization	H.220–H.229
Systems aspects	H.230–H.239
Communication procedures	H.240–H.259
Coding of moving video	H.260–H.279
Related systems aspects	H.280–H.299
Systems and terminal equipment for audiovisual services	H.300–H.349
Directory services architecture for audiovisual and multimedia services	H.350–H.359
Quality of service architecture for audiovisual and multimedia services	H.360–H.369
Telepresence	H.420–H.429
Supplementary services for multimedia	H.450–H.499
MOBILITY AND COLLABORATION PROCEDURES	
Overview of Mobility and Collaboration, definitions, protocols and procedures	H.500–H.509
Mobility for H-Series multimedia systems and services	H.510–H.519
Mobile multimedia collaboration applications and services	H.520–H.529
Security for mobile multimedia systems and services	H.530–H.539
Security for mobile multimedia collaboration applications and services	H.540–H.549
Mobility interworking procedures	H.550–H.559
Mobile multimedia collaboration inter-working procedures	H.560–H.569
BROADBAND, TRIPLE-PLAY AND ADVANCED MULTIMEDIA SERVICES	
Broadband multimedia services over VDSL	H.610–H.619
Advanced multimedia services and applications	H.620–H.629
Ubiquitous sensor network applications and Internet of Things	H.640–H.649
IPTV MULTIMEDIA SERVICES AND APPLICATIONS FOR IPTV	
General aspects	H.700–H.719
IPTV terminal devices	H.720–H.729
IPTV middleware	H.730–H.739
IPTV application event handling	H.740–H.749
IPTV metadata	H.750–H.759
IPTV multimedia application frameworks	H.760–H.769
IPTV service discovery up to consumption	H.770–H.779
Digital Signage	H.780–H.789
E-HEALTH MULTIMEDIA SERVICES AND APPLICATIONS	
<b>Personal health systems</b>	<b>H.810–H.819</b>
Interoperability compliance testing of personal health systems (HRN, PAN, LAN, TAN and WAN)	H.820–H.859
Multimedia e-health data exchange services	H.860–H.869

*For further details, please refer to the list of ITU-T Recommendations.*

## Recommendation ITU-T H.813

### Interoperability design guidelines for personal health systems: Health record network (HRN) interface

#### Summary

The Continua Design Guidelines (CDG) define a framework of underlying standards and criteria required to ensure the interoperability of devices and data used for personal connected health. It also contains design guidelines (DGs) that further clarify underlying standards or specifications by reducing options or by adding a missing feature to improve interoperability. These guidelines focus on the following interface:

- HRN-IF – Interface between wide area network (WAN) health devices and health record network (HRN) health devices

Recommendation ITU-T H.813 is part of the "ITU-T H.810 interoperability design guidelines for personal health systems" sub-series, as follows:

#### Mapping of CDG 2013, ITU-T H.810 and restructured ITU-T H.810-series

Part	Elements	Clauses in the 2013 CDG "Endorphin"	Clauses in ITU-T H.810 (2013)	Restructured ITU-T H.810-series (2015)
Part 0	System overview	Up to clause 3, plus Annex A and Appendix G	Up to clause 6, plus Annex A and Appendix V	ITU-T H.810 – System overview
Part 1	TAN/PAN/LAN	Clauses 4 to 7, Appendices C, D, M	Clauses 7 to 10, Appendices I, II, XI	ITU-T H.811 – TAN-PAN-LAN interface
Part 2	WAN	Clause 8, Appendices H, I, J, K	Clause 11; Appendices VI, VII, VIII, IX	ITU-T H.812 – WAN interface ITU-T H.812.1 – Observation upload ITU-T H.812.2 – Questionnaires ITU-T H.812.3 – Capability exchange ITU-T H.812.4 – Authenticated persistent session
Part 3	HRN	Clause 9, Appendices E, F, L	Clause 12, Appendices III, IV, X	ITU-T H.813 – HRN interface

#### History

Edition	Recommendation	Approval	Study Group	Unique ID*
1.0	ITU-T H.813	2015-11-29	16	<a href="http://handle.itu.int/11.1002/1000/12658">11.1002/1000/12658</a>

---

\* To access the Recommendation, type the URL <http://handle.itu.int/> in the address field of your web browser, followed by the Recommendation's unique ID. For example, <http://handle.itu.int/11.1002/1000/11830-en>.

## FOREWORD

The International Telecommunication Union (ITU) is the United Nations specialized agency in the field of telecommunications, information and communication technologies (ICTs). The ITU Telecommunication Standardization Sector (ITU-T) is a permanent organ of ITU. ITU-T is responsible for studying technical, operating and tariff questions and issuing Recommendations on them with a view to standardizing telecommunications on a worldwide basis.

The World Telecommunication Standardization Assembly (WTSA), which meets every four years, establishes the topics for study by the ITU-T study groups which, in turn, produce Recommendations on these topics.

The approval of ITU-T Recommendations is covered by the procedure laid down in WTSA Resolution 1.

In some areas of information technology which fall within ITU-T's purview, the necessary standards are prepared on a collaborative basis with ISO and IEC.

## NOTE

In this Recommendation, the expression "Administration" is used for conciseness to indicate both a telecommunication administration and a recognized operating agency.

Compliance with this Recommendation is voluntary. However, the Recommendation may contain certain mandatory provisions (to ensure, e.g., interoperability or applicability) and compliance with the Recommendation is achieved when all of these mandatory provisions are met. The words "shall" or some other obligatory language such as "must" and the negative equivalents are used to express requirements. The use of such words does not suggest that compliance with the Recommendation is required of any party.

## INTELLECTUAL PROPERTY RIGHTS

ITU draws attention to the possibility that the practice or implementation of this Recommendation may involve the use of a claimed Intellectual Property Right. ITU takes no position concerning the evidence, validity or applicability of claimed Intellectual Property Rights, whether asserted by ITU members or others outside of the Recommendation development process.

As of the date of approval of this Recommendation, ITU had not received notice of intellectual property, protected by patents, which may be required to implement this Recommendation. However, implementers are cautioned that this may not represent the latest information and are therefore strongly urged to consult the TSB patent database at <http://www.itu.int/ITU-T/ipr/>.

© ITU 2016

All rights reserved. No part of this publication may be reproduced, by any means whatsoever, without the prior written permission of ITU.

## Table of Contents

	Page
0 Introduction.....	vii
0.1 Organization .....	vii
0.2 Guideline releases and versioning .....	vii
0.3 What's New.....	vii
1 Scope.....	1
2 References.....	1
3 Definitions .....	1
4 Abbreviations and Acronyms .....	1
5 Conventions .....	2
6 HRN interface design guidelines .....	2
6.1 Architecture .....	2
6.1.1 Overview .....	2
6.1.2 Messaging infrastructure and transport standards.....	7
6.1.3 Messaging and selected standards.....	8
6.1.4 Data and selected standards.....	9
6.1.5 Security.....	9
6.1.6 Transport security.....	10
6.1.7 Document-level integrity, data origin authentication and non-repudiation.....	10
6.1.8 Consent management .....	11
6.1.9 Consent enforcement.....	13
6.1.10 Certified device classes .....	15
6.2 Design guidelines .....	16
6.2.1 Introduction .....	16
6.2.2 Messaging infrastructure and transport guidelines.....	17
6.2.3 Messaging guidelines .....	18
6.2.4 Data guidelines .....	23
6.2.5 Security guidelines .....	28
6.2.6 Consent management guidelines .....	29
6.2.7 Consent enforcement design guidelines .....	33
Appendix I Messaging implementation and technology.....	37
I.1 Overview .....	37
I.2 XDR and XDM metadata .....	37
I.3 Document source SOAP request/response messages .....	42

	<b>Page</b>
I.3.1 SOAP request message .....	42
I.3.2 SOAP response message .....	43
Appendix II Security recommendations .....	48
Appendix III ISO/IEEE 11073-10101 to SNOMED CT and UCUM .....	49
III.1 Observation types mapping to SNOMED CT .....	49
III.2 Events and attributes types mapping to SNOMED CT .....	56
III.3 Events and attributes not mapped to SNOMED CT .....	59
III.4 ISO/IEEE 11073-10101 Unit elements mapping to UCUM .....	70
Appendix IV Mapping from the Continua WAN to the HL7 personal health monitoring report object model .....	71
IV.1 Introduction .....	71
IV.2 Base mapping strategy .....	71
IV.3 Device information .....	71
IV.4 Observation information .....	71
IV.5 Device information .....	71
IV.6 Observation information .....	73
Bibliography .....	76

## List of Tables

	<b>Page</b>
Table 6-1 – HRN device classes .....	16
Table 6-2 – Guidelines for HRN device classes .....	16
Table 6-3 – Requirements for HRN transport using XDR .....	17
Table 6-4 – Requirements for HRN transport using XDM .....	18
Table 6-5 – General messaging guidelines .....	18
Table 6-6 – General messaging guidelines .....	19
Table 6-7 – PHM attachments guidelines .....	22
Table 6-8 – Patient identity mapping guidelines .....	23
Table 6-9 – Quality of service guidelines .....	23
Table 6-10 – General data format guidelines .....	23
Table 6-11 – General medication delivery guidelines .....	25
Table 6-12 – Adherence monitor specific guidelines (separate from general medication guidelines) .....	27
Table 6-13 – General security guidelines .....	28
Table 6-14 – General security guidelines .....	28

Table 6-15 – Integrity, data origin authentication and non-repudiation HRN sender guidelines .....	29
Table 6-16 – Integrity, data origin authentication and non-repudiation HRN receiver guidelines ...	29
Table 6-17 – Consent management guidelines for consent enabled HRN sender via XDR.....	29
Table 6-18 – Consent management guidelines for consent enabled HRN receiver via XDR .....	30
Table 6-19 – Consent management guidelines for consent enabled HRN sender via XDS.b .....	30
Table 6-20 – Consent management guidelines for consent enabled HRN receiver via XDS.b.....	33
Table 6-21 – Consent enforcement guidelines for consent enabled HRN sender via XDR .....	34
Table 6-22 – Consent enforcement guidelines for consent enabled HRN receiver via XDR.....	34
Table 6-23 – Consent enforcement guidelines for consent enabled HRN sender via XDS.b.....	35
Table 6-24 – Consent enforcement guidelines for consent enabled HRN receiver via XDS.b .....	36
Table I-1 – Element requirement .....	37
Table I-2 – XDS submission set metadata .....	38
Table I-3 – XDSDocumentEntry metadata .....	38
Table I-4 – XDS submission set metadata for the consent directive document .....	41
Table I-5 – XDSDocumentEntry metadata for the consent directive document .....	41
Table I-6 – The elements of the confidentiality code system .....	41
Table I-7 – The elements of the Continua Consent Directive code system.....	42
Table I-8 – The translation of the Confidentiality code system to the Continua Consent Directive code system .....	42
Table I-9 – OID Distribution for Continua Health Alliance .....	42
Table III-1 – Observation types mapping to SNOMED CT .....	49
Table III-2 – Events and attributes types mapping to SNOMED CT .....	56
Table III-3 – Events and attributes not mapped to SNOMED CT .....	59
Table III-4 – ISO/IEEE 11073-10101 Unit elements (MDC_PART_DIM) mapping to UCUM .....	70

## List of Figures

Figure 1-1 – HRN Interface in the Continua Architecture.....	1
Figure 6-1 – HRN interface .....	2
Figure 6-2 – Architecture .....	3
Figure 6-3 – HRN scope .....	3
Figure 6-4 – HRN topology .....	6
Figure 6-5 – Direct HRN messaging via XDR .....	7
Figure 6-6 – Indirect HRN Messaging via XDM .....	8

	<b>Page</b>
Figure 6-7 – Point-to-point interaction to exchange consent using IHE XDR at HRN-IF .....	12
Figure 6-8 – Request-response interaction to obtain consent using IHE XDS at HRN-IF.....	12
Figure 6-9 – SAML encapsulation and the overall protocol stack .....	13
Figure 6-10 – Point-to-point interaction to exchange encrypted PHMR documents along with consent using IHE XDR at HRN-IF .....	14
Figure 6-11 – Request-response interaction to obtain encrypted PHMR document along with consent document using IHE XDS at HRN-IF .....	15



## **0 Introduction**

The Continua Design Guidelines (CDG) defines a framework of underlying standards and criteria required to ensure the interoperability of devices and data used for personal connected health. It also contains design guidelines (DGs) that further clarify the underlying standards or specifications by reducing options or by adding missing features to improve interoperability. These guidelines focus on the following interface:

- HRN-IF – Interface between wide area network (WAN) health devices and health record network (HRN) health devices

This Recommendation is part of the ITU-T H.810 sub-series "ITU-T H.810 interoperability design guidelines for personal health systems". See [ITU-T H.810] for more details.

### **0.1 Organization**

This Recommendation is organized in the following manner.

**Clauses 1 to 5: Introduction and terminology** – These clauses provide useful background information to help understand the structure of the design specifications.

**Clause 6: HRN interface design guidelines** – This clause is an overview of the HRN-IF architecture and design guidelines for WAN devices and HRN devices implementing the HRN-IF.

### **0.2 Guideline releases and versioning**

Information on guideline releases and corresponding version numbers can be found in clause 0.2 of [ITU-T H.810].

### **0.3 What's new**

To see what is new in this release of the design guidelines refer to clause 0.3 of [ITU-T H.810].



## Recommendation ITU-T H.813


### Interoperability design guidelines for personal health systems: Health record network (HRN) interface

#### 1 Scope

This specification focuses on the following interface:

- **HRN-IF** – Interface between WAN health devices and health record network (HRN).

This interface is defined in the Continua architecture as described in clause 6 of [ITU-T H.810].

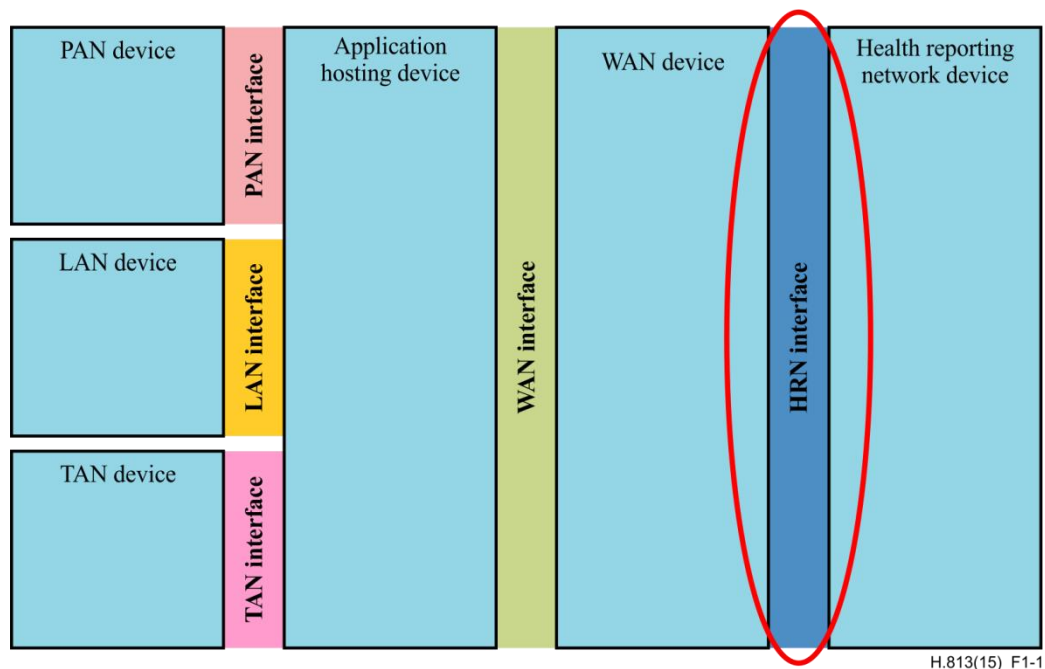

**Figure 1-1 – HRN interface in the Continua architecture**

#### 2 References

The following ITU-T Recommendations and other references contain provisions which, through reference in this text, constitute provisions of this Recommendation. At the time of publication, the editions indicated were valid. All Recommendations and other references are subject to revision; users of this Recommendation are therefore encouraged to investigate the possibility of applying the most recent edition of the Recommendations and other references listed below. A list of the currently valid ITU-T Recommendations is regularly published. The reference to a document within this Recommendation does not give it, as a stand-alone document, the status of a Recommendation.

[ITU-T H.810] Recommendation ITU-T H.810 (2015), *Interoperability design guidelines for personal health systems*.

All other referenced documents can be found in clause 2 of [ITU-T H.810].

#### 3 Definitions

This specification uses terms defined in [ITU-T H.810].

#### 4 Abbreviations and acronyms

This specification uses abbreviations and acronyms defined in [ITU-T H.810].

## 5 Conventions

This specification follows the conventions defined in [ITU-T H.810].


## 6 HRN interface design guidelines

### 6.1 Architecture

#### 6.1.1 Overview


The purpose of the HRN interface is to transfer patient information from a Continua WAN device (HRN sender) to either another WAN device or an electronic health record device (HRN receiver). The WAN device (HRN sender) can be the remote patient monitoring (RPM) server of a disease management service provider or the application server of an ageing independently or health and fitness service provider. The patient information for transfer may include a report summarizing the patient's current status, a detailed listing of specific patient results, readings from one or more personal health devices, or a combination of these. The electronic health record device may contain a hospital's enterprise health record (EHR), a physician's electronic medical record (EMR) or a personal health record (PHR) service used by the patient.

Figure 6-1 represents the HRN interface relative to the Continua end-to-end (E2E) architecture.

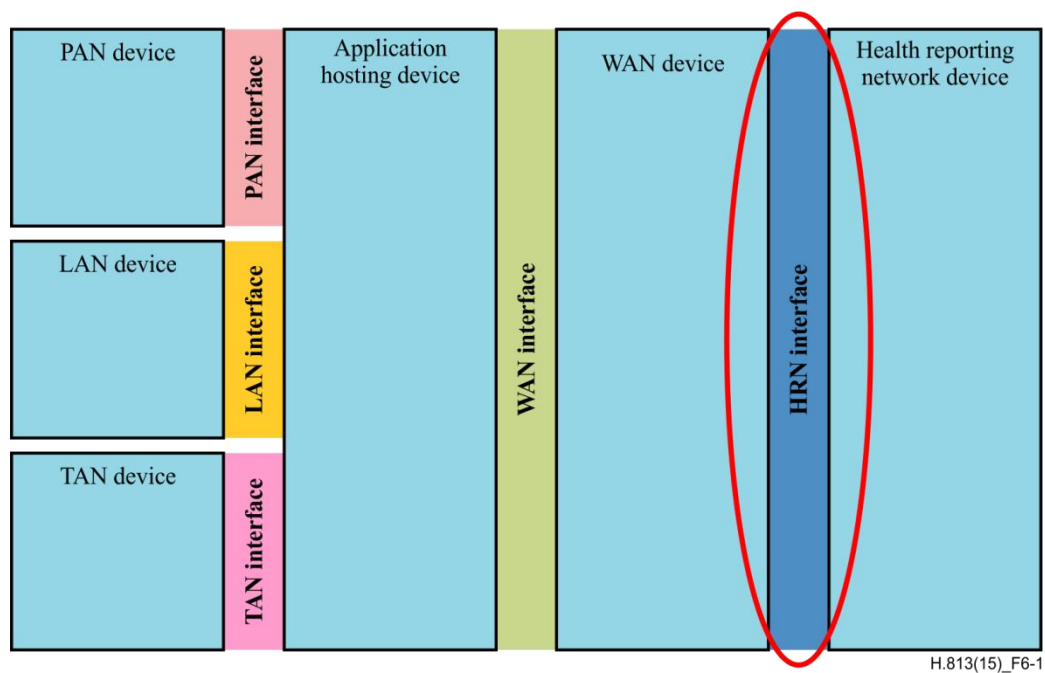

**Figure 6-1 – HRN interface**

At a high level, there are different functional blocks that make up the HRN interface. Figure 6-2 illustrates this view of the architecture.

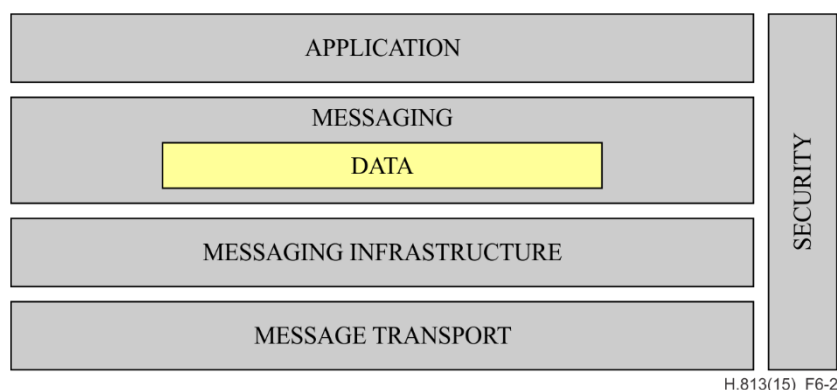


**Figure 6-2 – Architecture**

The applications block contains enterprise healthcare applications such as a remote patient monitoring (RPM) system hosted by a disease management service provider or an EMR system at a physician's office. The data block contends with the format of the actual data transmitted between the applications. It may be in coded format, free-text, or a combination of both.

The messaging block handles how data is packaged to ensure consistency and readability across multiple transport methods. The messaging infrastructure deals with the infrastructure needed to transport this information model, such as MLLP, FTP, web services and others. The message transport layer forms all the layers below the transport layer of the OSI stack. The security block ensures that the messages exchanged between applications are secure.

#### 6.1.1.1 Scope

The scope of the HRN interface guidelines is to describe how Continua-certified HRN-IF devices can send patient information to other Continua-certified HRN-IF devices or to non-Continua electronic health record (EHR) systems. Figure 6-3 is a high level picture of the scope for these guidelines.

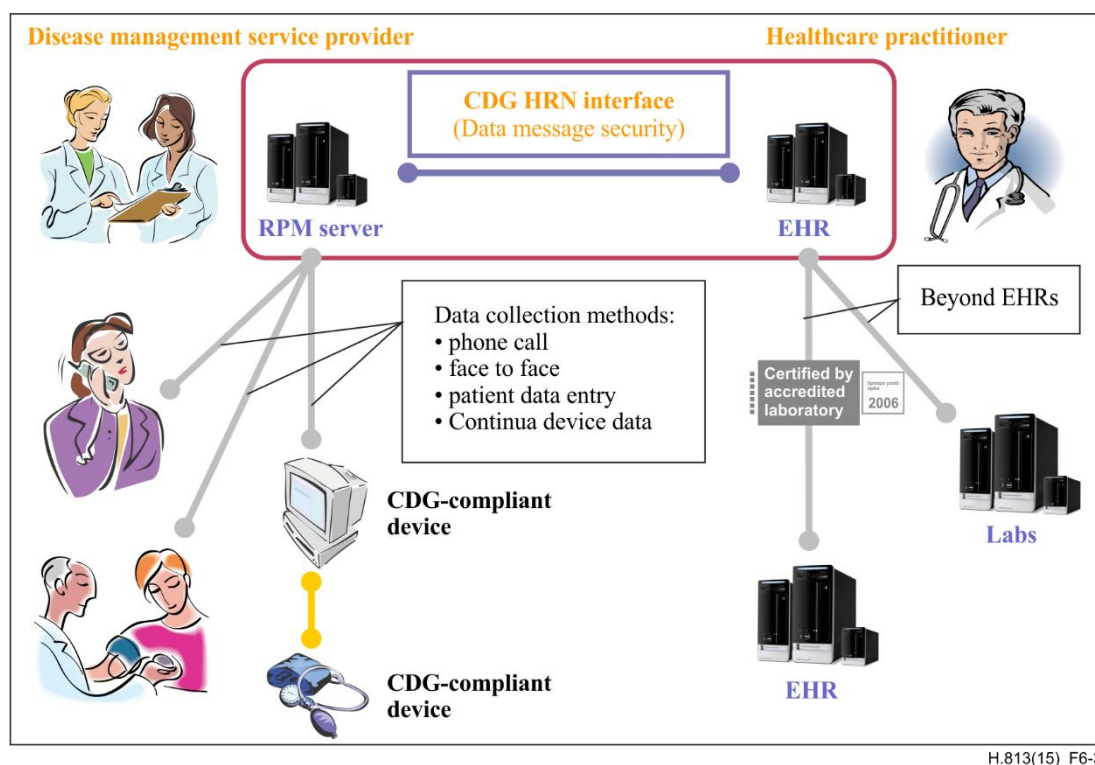

**Figure 6-3 – HRN scope**

The purpose of these guidelines is to establish the basic standards, rules and restrictions in the data, message and transport protocols necessary to enable the transfer of pertinent information from a WAN device with a HRN-IF (HRN sender) to another WAN device with a HRN-IF (HRN receiver) or to a healthcare practitioner, system or setting (HRN receiver). This pertinent information is obtained from the following sources:

**Personal healthcare devices:** This includes relevant vital measurements that the sending and receiving entities agree are relevant to the patient's condition.

**Remote patient monitoring (RPM) service provider:** This includes updates/notes/summary information that is sent by a remote monitoring service provider. The notes include information and progress updates relevant to the particular condition for which the patient is being monitored.

**Patient data entry:** This includes patient notes or notes interpreted by a nurse after talking to the patient.

**Identification/Demographics:** This may include patient identification information, device identification and other registration information.

#### 6.1.1.2 Chosen standards and profiles

**Data:** To facilitate the accurate transfer of both coded patient results from personal health devices and textual summary results from patient care-givers, the HL7 Personal Healthcare Monitoring Report document format standard was chosen.

NOTE – The data guidelines are based on the HL7 CDA R2 standard [HL7 CDA-PHMR], profiled by the *HL7 Personal Healthcare Monitoring (PHM) Implementation Guide*.

**Patient Identity:** To ensure that HRN senders and receivers can correctly associate personal health data with the right patient, the IHE patient identifier cross-reference (PIX) profile was selected. This profile provides a standards-based interface for managing identifiers across organizational and political domains.

HRN senders must implement the IHE patient identity feed transaction in order to provide the necessary information for cross-referencing. This cross-referencing must then be performed from a patient identifier cross-reference manager either within the destination's domain of control, or shared between the sending and receiving entities, such as in the case of an XDS-based healthcare information exchange (HIE).

Using an IHE PIX query of the cross-reference manager, senders and receivers are able to map between their local identifiers and those identifiers used for sharing/transfer.

The PIX profile is widely used in conjunction with the XDS family of specifications to implement integration scenarios within and between hospital enterprises, such as in the case of a disease management organization sending patient monitoring information to a healthcare information exchange. However, the profile is also applicable in the ageing independently and health and fitness domains, when a particular organization's local identifiers must be mapped to a receiving system's identifiers, such as in the case of a physical therapy organization sharing fitness data with a member's primary care physician.

It is important to note, however, that in certain circumstances, the use of a patient identity cross-reference manager may not be required or appropriate. For instance, in cases where there is no party suited to perform the management of patient cross-references (as in certain personal health record integration scenarios), the HRN sender and receiver must agree on a patient identification scheme that is suitable for their particular use case.

In general, PIX queries are most appropriately used for direct machine-to-machine interaction - where a system needs to locate a patient's global enterprise ID for reference against other clinical information stored against that ID. Here, the patient's ID assignment and device allocation is clearly known.

PDQ queries are likely to be most appropriate for user-driven interactions such as a physician searching for a patient's history alongside recent monitoring data, who may execute a search by name where a potential list of matches may be returned and then the physician drills further into each patient identity record to locate the exact match of information.

**Messaging:** A future is envisioned where patient information is sent between providers by various methods. These methods include: secure direct connection over the Internet, secure e-mail, delivery on portable media (data stick, etc.), through a messaging hub and through a data repository or RHIO/NHIN.

To facilitate this, a messaging standard capable of supporting all five transport methods with a minimal amount of rework was chosen. That is, once the first transport method is accomplished, incorporating additional transport methods requires less work.

In addition, because this interface is used to communicate with non-Continua certified electronic health records, a messaging standard supported by others that certify electronic health record systems was chosen.

For these reasons, the "Integrating the Healthcare Enterprise's (IHE) Cross-Enterprise Document Sharing (XDS)" profile was chosen.


**Transport protocol:** To accomplish secure direct communication of pertinent patient information between care-givers, the IHE cross-enterprise document reliable interchange (XDR) profile utilizes current standards such as SOAP 1.2 and MTOM.

To accomplish secure indirect communication of pertinent patient information between care-givers, the IHE cross-enterprise document media interchange (XDM) profile utilizes current standards such as Zip and S-MIME.

NOTE – Because the HRN sender and HRN receiver are likely to be on separate local networks, the HRN sender may send the patient information to the HRN receiver across the public Internet. Therefore, both the HRN sender and the HRN receiver may require Internet access and the equipment (hardware and software) necessary to securely send the patient's information across the Internet using the transport method detailed in these guidelines. If the HRN sender and HRN receiver are on the same secure network, or if a secure network connection exists between their networks (i.e., a VPN connection), then Internet connectivity is not required.

### **6.1.1.3 Topology**

The HRN interface defines a means of communication between a HRN sender (client component) and a HRN receiver (service component). The communication is initiated by the sender and the receiver acknowledges the receipt of the data (if the communication protocol allows, as XDR does).

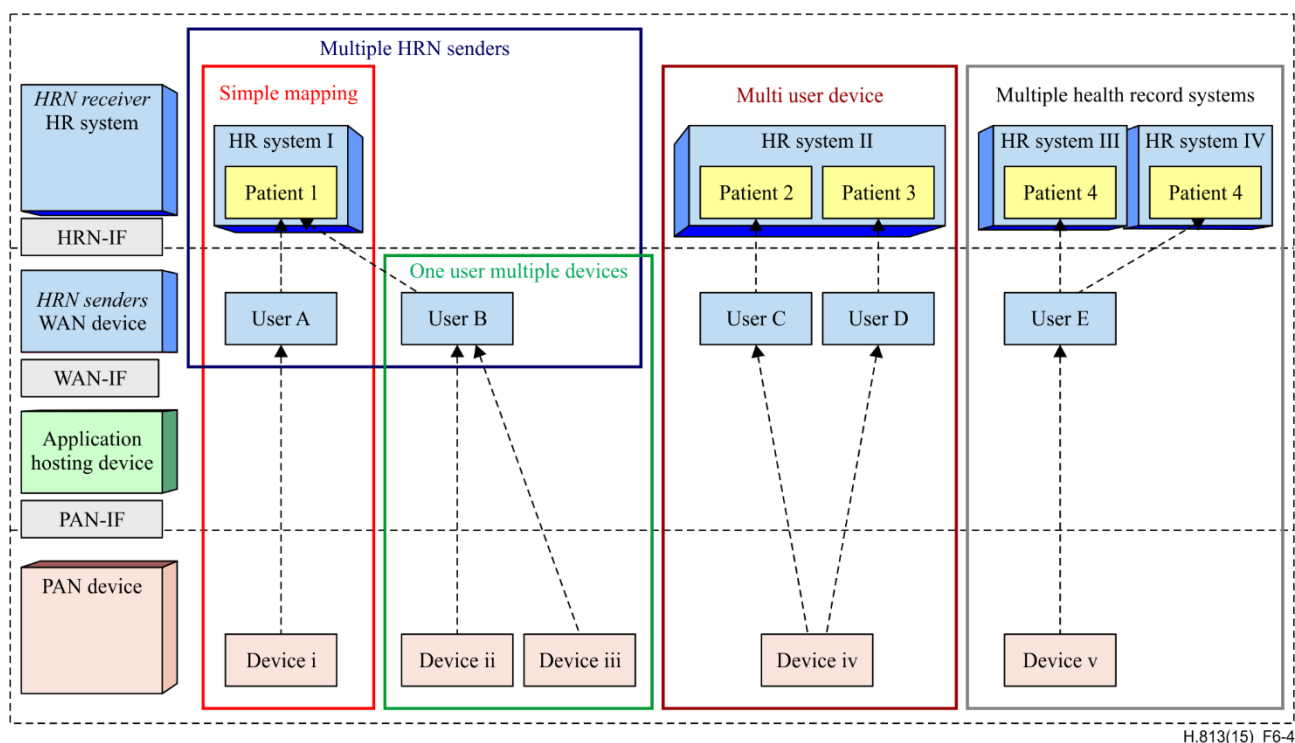

**Figure 6-4 – HRN topology**

Figure 6-4 displays the topology for the HRN interface communication. The context of communication is always related to a patient. The patient identification method is negotiated between the HRN sender and the HRN receiver through registration within a patient identity cross reference manager utilizing the IHE patient identity feed. It is important to note that the patient identification is not necessarily globally unique, but rather it is specific to the particular instance of HRN communication. For example, the same person can be identified differently in distinct HRN receiver systems and therefore, the appropriate patient identification should be used for each respective HRN interface communication. To this end, HRN senders are required to implement the IHE patient identity source actor, defined by transaction ITI-44: Patient Identity Feed HL7 V3 of the IHE IT Infrastructure (ITI) Technical Framework supplement, in order to provide HRN receivers with the patient information needed to create and maintain accurate cross-referencing. As illustrated in the HRN topology diagram (Figure 6-4), the HRN sender and HRN receiver must take into consideration various case scenarios when considering and communicating patient identification. These case scenarios include (but are not limited to):

- **Simple mapping** – where one PHM report containing data from a single device is sent to a single HRN receiver. The patient identifier to be used is obtained via a PIX query, an out-of-band agreement and/or provided previously to the HRN receiver via a patient identity feed HL7 V3 message.
- **One user multiple devices** – similar to the simple mapping case, data from multiple devices for a single patient is transferred over the HRN protocol within a single PHM report.
- **Multiple HRN senders** – this case describes the situation where the HRN receiver accepts PHM reports from multiple HRN senders for the same patient. Each sender delivers independent messages with the patient properly identified and with data from devices specific to that HRN sender.
- **Multi user device** – the HRN sender is delivering data for multiple patients in separate PHM reports for each patient, even though the data originated from a single device.
- **Multiple health providers** – in this case, the HRN sender delivers data for one patient from one (or more) device(s) to multiple HRN receivers. Each HRN receiver receives its own PHM




report for that patient. The pertinent information in these reports may be identical, however, each contains the patient identification agreed to and appropriate for the agreement between that HRN sender and that HRN receiver.

The above list describes some of the basic cases. The real world situation can be a combination of these described cases. For example, one patient's data can be present in reports from multiple HRN senders and submitted to several HRN receivers.

### 6.1.2 Messaging infrastructure and transport standards

The messaging infrastructure guidelines describe how the messages will be transported between the HRN sender and the HRN receiver. They also describe the infrastructure that will be necessary to accomplish the selected transport method (see Figure 6-5).

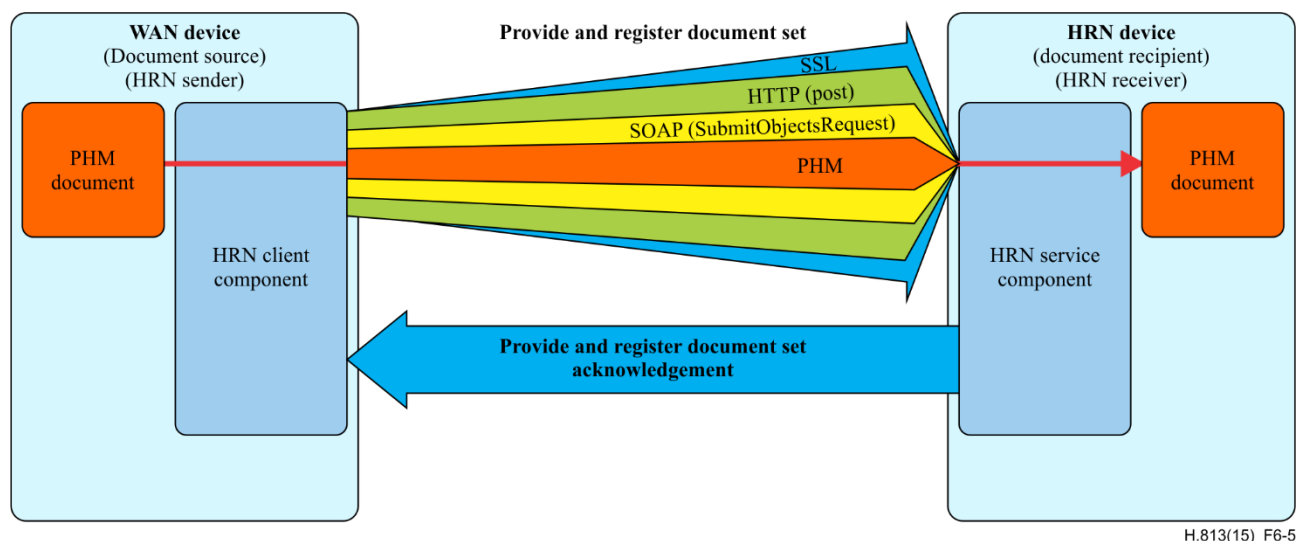


**Figure 6-5 – Direct HRN messaging via XDR**

For v1, the IHE's cross-enterprise document reliable interchange (XDR) [IHE ITI TFS XDR] profile was selected as the transport method for direct communications across the HRN interface. This profile is a member of IHE's XDS family of profiles. As such, it uses the same HTTP, SOAP 1.2, ebXML and MTOM standards set forth in IHE's XDS.b guidelines (for more details, see [IHE ITI TFS XDR]).

As noted in the overview above, special attention must be given to the infrastructure required to accomplish this transport method. The XDR profile contains no intermediate data repository or messaging hub. If the communication between the HRN sender and the HRN receiver will occur over the Internet, then the HRN receiver will need to be Internet-facing. In other words, the system receiving the messages on the HRN interface will need to be reachable from the HRN sender. If the HRN sender is not on the same secure network as the HRN receiver and a secure connection does not exist between their networks, then the HRN receiver will need to be reachable from anywhere on the Internet and its IP address accessible to everyone on the Internet.

From an implementation standpoint, the HRN receiver may be the provider's electronic health record system itself, or it may be a web-front-end system whose purpose is to securely carry the messages across the providers firewall boundary without exposing the electronic health record to the perils of the Internet. This second method provides additional security for the provider and patient data and therefore it should be duly considered by system integrators.

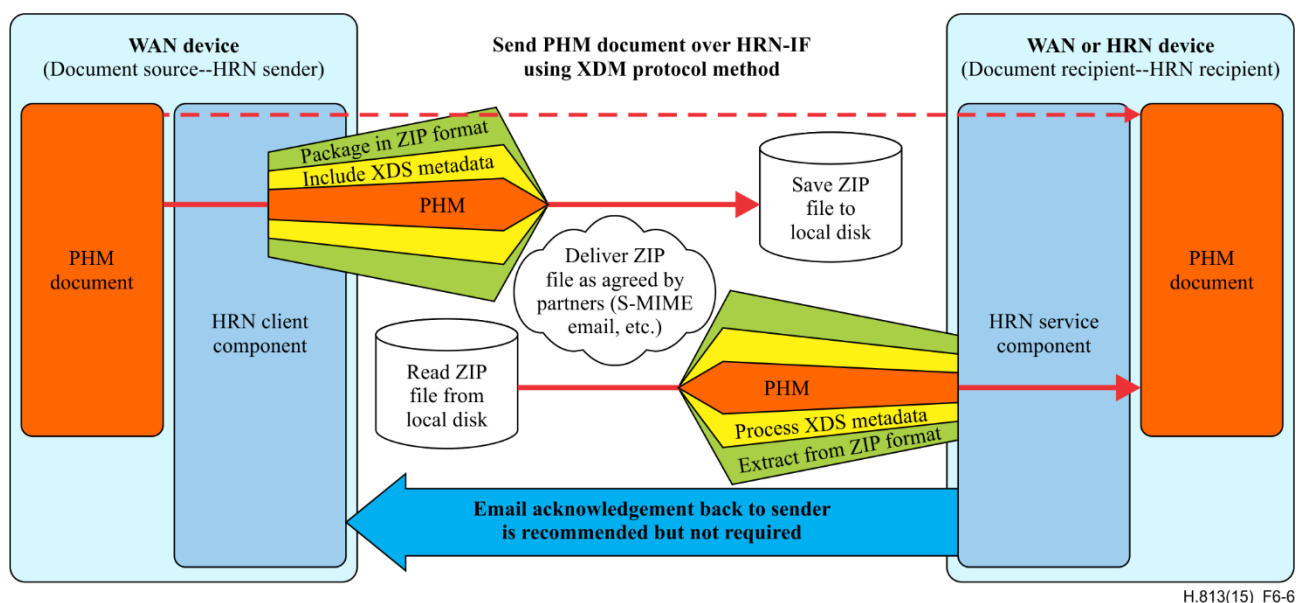

**Figure 6-6 – Indirect HRN messaging via XDM**

IHE's cross-enterprise document media interchange (XDM) profile [IHE ITI TFS XDM] was added in the 2013 CDG as the transport method for indirect communications (via e-mail or physical media) across the HRN interface. This profile is a member of IHE's XDS family of profiles. For more details, see [IHE ITI TFS XDM].

The infrastructure required to accomplish XDM is different and likely to be less complicated than for XDR.

Selecting which transport method (XDR or XDM) to use is left up to the system integrator. While XDR is clearly the more optimal choice because it provides faster communications, XDM can be much easier to implement, allowing the delivery of PHM reports to occur over an existing e-mail infrastructure with little, if any, new equipment or software.

### 6.1.3 Messaging and selected standards

For messaging and transport, the HRN-IF utilizes as its base the integrating the healthcare enterprise [IHE] cross-enterprise document sharing (XDS) family of profiles. This family of profiles thoroughly covers the spectrum of communication requirements for a large health information network such as a regional health information organization (RHIO). In particular, the XDR and XDM profiles from this family are used because they explicitly target a simple point-to-point exchange of documents. When combined with the IHE patient identifier cross-reference (PIX) profile, these profiles enable the safe transfer of a single document set against the correct patient identity.

An important aspect of the chosen standards is for a common set of meta-data that is specified and describes the PHM document being transmitted. This metadata is utilized by holders of the document to help determine how to handle the document without the need to open, resolve all referenced attached documents, parse and examine the contents. Thus, the meta-data allows the holders to rapidly determine the best way to handle a document quickly and easily.

This metadata takes the form of a concretely defined list of required information. The metadata contains pertinent data such as authorship description (e.g., person, role, institution), document description (e.g., date, time, language) and patient identification and demographics (PID, name, address).

This information is then mapped to the appropriate form of the specific transport. In v1, this information takes the form of XML that will map to the ebXML that overlays the simple object

access protocol (SOAP) envelope. Thus, it is present in the SOAP header and body clauses where it is easily accessible on reception (see Figure 6-5). With the addition of XDM (sending data via e-mail attachment or removable media) in this version of the guidelines, the meta-data is stored in the top-level directory of the exported file package that is created when the PHM document is exported for delivery via the XDM method. Because of this, the exported file package must first be opened or extracted before the meta-data can be accessed (see Figure 6-6). The particular file packaging format called out by XDM is the ZIP format. Applications and programming libraries to create and read ZIP files are widely available and on many operating systems. Licensing costs will need to be confirmed; but may be covered by the purchasing of the application or library used to create or read the ZIP file.

#### 6.1.4 Data and selected standards

The data transmitted from the HRN sender can be either summary, raw data or both. The summarization may be a result of analysis by an authentic disease management service provider. The data has multiple characteristics that include:

1. Representation of measurements captured by devices.
2. Representation of notes, summary and other kinds of narrative information that are added by care givers or by the user themselves.
3. Representation of graphs that are added by intermediary devices that represent the trends of a user's health.
4. Patient information that allows endpoints to catalogue the aforementioned data against existing patient records.

To accommodate the wide variety of data characteristics, the HL7 clinical document architecture (CDA) [HL7 CDA-PHMR] based format is chosen. The CDG specifies constraints on the CDA in accordance with requirements set forward by the HRN interface. These constraints are henceforth called the personal healthcare monitoring (PHM) report.

Wherever possible, the PHM report reuses the templates already set forth by a HL7 specification called continuity of care document (CCD) [HL7 CDA-CCD]. The reasons for reusing the CCD templates are:

1. The CCD templates already contain a number of constraints that are needed by the HRN interface.
2. The CCD is a harmonized specification of CDA (based on HL7 V3 RIM) and the ASTM E2369-05 standard specification for continuity of care record (CCR), (see [HL7 CDA-CCD]).
3. Since the CCD has gained relevance in the marketplace, it is best if the PHM report is derived from the CCD so that it is a lesser burden to the EHR implementations that are designed to work with the CCD.

The *HL7 PHM Report Implementation Guide* [HL7 CDA-PHMR] has an independent lifecycle under a project called the "Personal Health Monitoring Report" under the HL7 Structured Documents Workgroup (SDWG).

#### 6.1.5 Security

The five archetypal high-level areas of security requirements are a subset of 11.2.3 [b-ISO 27000] and are as follows:

- **Authorization** – Only fully identified and authenticated entities, equipped with access control credentials, should be able to avail themselves of services provided by systems.

- **Accountability** – Users should be fully accountable for (and unable to repudiate) their actions. It should be possible to determine, through a system's accountability features, who performed any given action and which actions have taken place in a specified interval.
- **Availability** – A system should be available for use when required for critical operations. Critical data should be available when required. The data and keys associated with encryption for the purposes of confidentiality should be recoverable.
- **Administration** – Responsible security policy authorities should have secure, usable interfaces for defining, maintaining, monitoring and modifying security policy information.
- **Assurance** – It should be possible to demonstrate to a sceptical observer that a system actually provides the claimed level of protection with periodic validation and that the protection is still effective.

#### **6.1.6 Transport security**

The HL7 clinical document architecture (CDA) [HL7 CDA-PHMR], which is the basis for PHM report implementation, relies on the transport mechanism to implement security and authentication. The CDA does provide confidentiality status information to aid the application systems in managing access to sensitive data.

The IHE XDS profile family assumes that a suitable security and privacy environment was established and that the relevant threats are managed by agreements and implemented by generic security mechanisms not unique to XDS.

For direct communications, the transport security of the HRN interface is accomplished by the adoption of the security solution from the IHE XDR profile and its prerequisite industry standards. For indirect communications via the IHE XDM profile, the transport security depends on the final delivery method employed. If the exported file is delivered to the HRN receiver via e-mail (the recommended method), then S-MIME is used to ensure security. However, the cases in which the ZIP-packaged PHM report is further stored on removable media (i.e., USB, drive, CD-ROM, etc.) or transferred via FTP are not covered in this guideline and require their own security considerations.

In addition, the XDS profiles assume that implementers of the document source and document recipient have in place an agreement that defines when they interchange the PHM data and how to manage the inconsistencies between security policies in both organizations. The XDS profiles further require the reconciliation of patient identification upon import of the document.

The CDG specifications for the HRN sender further narrow these framework provisions to allow reasonable design guidelines. However, it should be noted that the final security implementation must be designed by the communicating parties.

#### **6.1.7 Document-level integrity, data origin authentication and non-repudiation**

Integrity, data origin authentication and non-repudiation are important security properties for personal healthcare monitoring report (PHMR) documents exchanged over the HRN-IF. Through the use of transport security (TLS, IHE ATNA) basic integrity and node authentication is realized. However, non-repudiation requires additional measures such as a signature over the documents. This also strengthens the integrity property as a signature can protect the integrity of the document independent of how it is exchanged and thereby provides end-to-end integrity if it is exchanged multiple times.

For the HRN-IF integrity, data origin authentication and non-repudiation are realized through the use of IHE document digital signature content profile. IHE DSG allows signing of documents in a submission set exchanged using the protocols in [IHE ITI TF-1 XDM] and [IHE ITI TFS XDR].

**Non-repudiation enabled HRN sender** is a HRN sender that deploys security operations to assure that data integrity, data origin authentication and data origin non-repudiation properties are preserved when transmitting an observation document. **Non-repudiation enabled HRN receiver** is a HRN receiver that deploys security operations to assure that data integrity, data origin authentication and data origin non-repudiation properties are preserved when receiving an observation document. In other words, these security operations are mandatory only for non-repudiation enabled HRN senders and receivers. This makes the decision to apply such measures a business decision based on risk assessments. It is a choice of a HRN receiver to deploy these security constructs should the need arise to enable interoperability with non-repudiation enabled HRN senders.

### 6.1.8 Consent management


Consent in healthcare includes concepts like opt-in, opt-out and secondary use and enables patients to regulate which care providers have access to which health information. Capturing consent in digital form increases consistency, compliance and efficiency for both patients and care providers.

Consent management at the HRN-IF supports scenarios where a patient holds a consent policy at a WAN service which should also be applied at a HRN service. An example is a scenario where a patient defines his consent at a disease management organization and a condition occurs that requires involvement of another doctor. In such a case a nurse may, if permitted by the consent policy, forward his record together with the consent document allowing the receiver to use the information in accordance with the patient's consent policy. In a variant, a HRN service may seek additional consent from the patient. Instead of WAN to HRN exchanges, consent documents may also be exchanged from HRN to HRN services.

For the HRN-IF the scope is limited to the exchange of the consent documents between the HRN sender and HRN receiver. The creation and management of the consent documents is out of the scope of this design guideline. It is the assumption that patients have already given their consent, e.g., to a disease management organization.

The consent enabled HRN sender is a HRN sender that is capable of transmitting a patient consent document. The consent enabled HRN receiver is a HRN receiver that is capable of receiving a patient consent document. Support for consent management is mandatory for consent enabled HRN senders and receivers.


Consent management at the HRN-IF is based on the HL7 CDA R2 consent directive [HL7 CDA IG] to capture patient consent in a CDA consent document. Two types of interaction are provided to exchange consent documents. The first extends the existing IHE XDR transaction to exchange the PHMR document by including the consent document in the submission set.

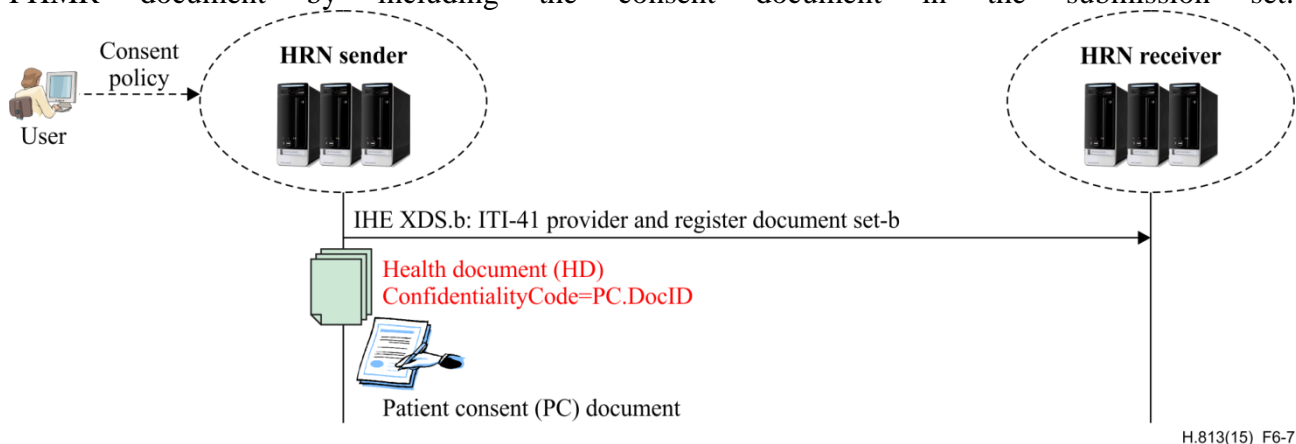

H.813(15)\_F6-7

Figure 6-7 provides an overview of this interaction. The IHE XDR profile is based on the ITI-41 Provider and Register document Set-b transaction. An exchange transaction here may concern a new consent document or update.

The second interaction follows a request/response structure to obtain the consent document separate from the PHMR document. This interaction may be used e.g., in cases where a reference to already shared consent documents suffices or situations where a consent document should be obtained because it is not available (anymore) for a particular patient or record. The HRN receiver uses IHE XDS to send a request for a given consent document to the HRN sender which then responds with the

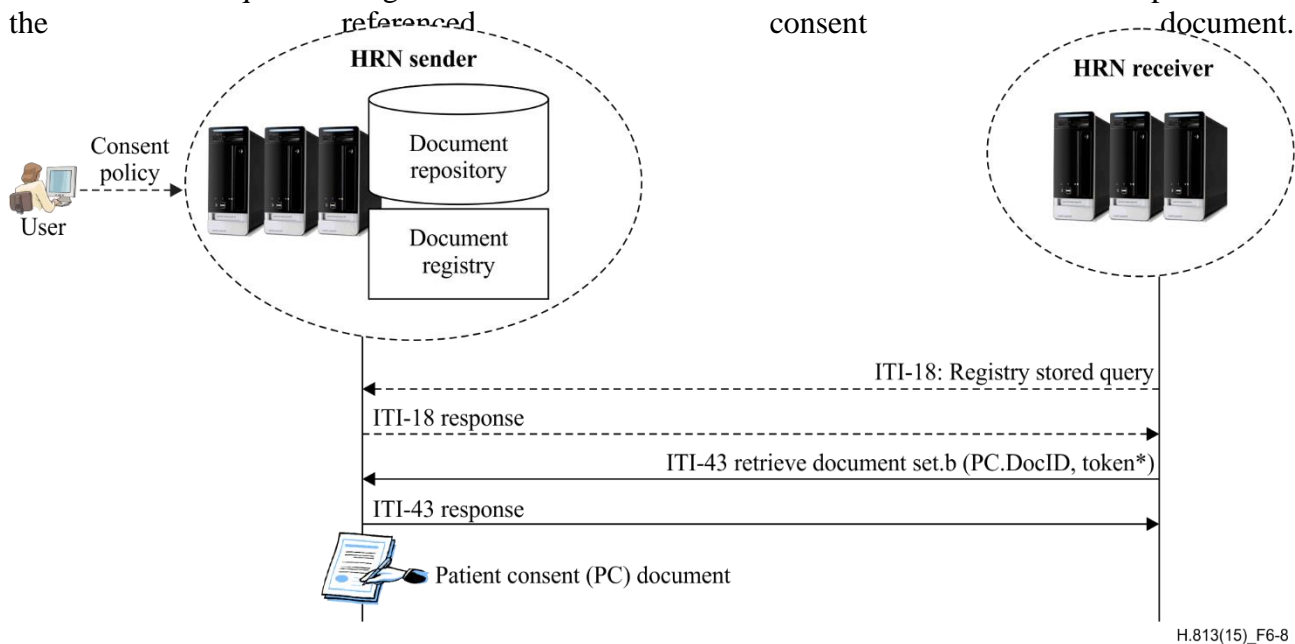


\* SAML token or SAML attribute token as defined by IHE XUA or IHE XUA++ respectively.


Figure 6-8 provides an overview of this request-response interaction. The IHE XDS profile employs the ITI-43 Retrieve Document Set.b transaction and the ITI-18 Registry Stored Query transaction to facilitate lookup document identifiers and location URLs.

A HRN sender has knowledge of the applicable patient consent for a PHMR document and signals this to a HRN receiver using the ConfidentialityCode field in the PHRM document, which identifies the applicable consent document, thereby associating the consent document to the health data.

To properly authenticate the requester and personalize the PHMR and patient consent document, the actual user (care provider) is authenticated rather than a HRN receiver device node. This allows for the selection and issuing of the appropriate consent, e.g., the consent based on or belonging to the functional role of a nurse or doctor. Such consent modified to the situation also allows for exceptions for particular users and records thereby tailoring the access to the record. The authentication uses IHE XUA to include a SAML token in the ITI-43 Retrieve Document Set.b request message (see Figure 6-9), which is used to request a consent document.

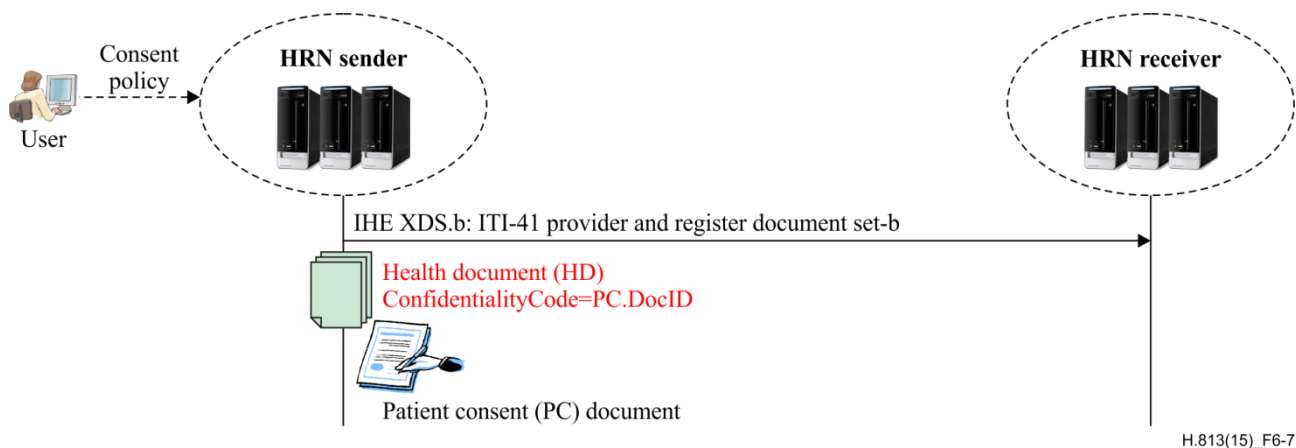


**Figure 6-7 – Point-to-point interaction to exchange consent using IHE XDR at HRN-IF**

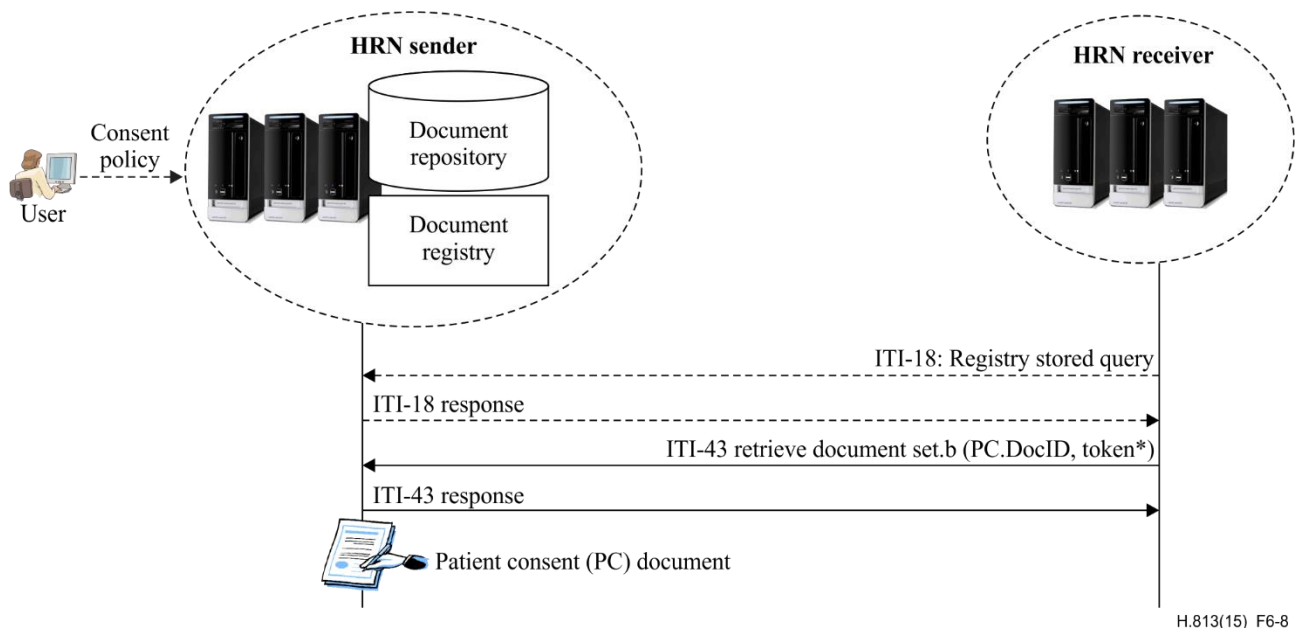

\* SAML token or SAML attribute token as defined by IHE XUA or IHE XUA++ respectively.

**Figure 6-8 – Request-response interaction to obtain consent using IHE XDS at HRN-IF**

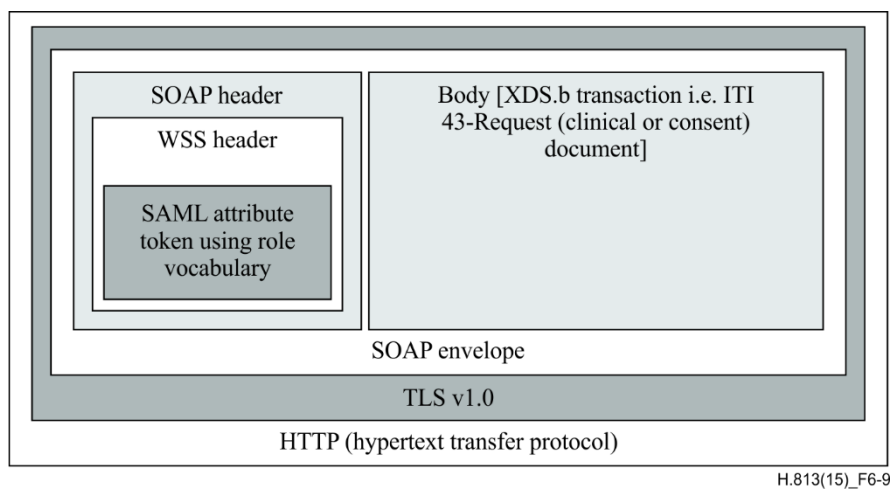

**Figure 6-9 – SAML encapsulation and the overall protocol stack**

### 6.1.9 Consent enforcement


The CDG enable the enforcement of patient consent through encryption on a consent enabled HRN device. The consent enabled HRN sender is a HRN sender that is capable of specifying patient consent according to HL7 CDA R2 consent directive [HL7 CDA IG], encrypting the PHMR document for a recipient(s) and transmitting them on the HRN-IF. The consent enabled HRN receiver is a HRN receiver that is capable of receiving patient consent documents and encrypted PHMR documents.

The IHE document encryption (DEN) profile is used to enable consent enforcement through encryption. IHE DEN enables encryption of a PHMR document for a specific recipient (e.g., doctor or nurse) at the consent enabled HRN receiver. This protects the privacy of the patient in an efficient manner and makes sure that the PHMR document is viewed only by the intended recipient. This prevents the viewing of the PHMR document by other individuals who may be working in the same organization e.g., administrative staff.

Figure 6-10 provides an overview of different steps employed in order to exchange encrypted PHMR document(s) on the HRN-IF using the IHE XDR profile. The only new feature that is added compared to Figure 6-7 (i.e., consent management guidelines) is the encryption of the PHMR document(s). The consent enabled HRN sender has to at least support the PKI based key management method from the IHE DEN profile. This means that the content encryption key is encrypted with the public key of the recipient. The consent enabled HRN sender may also support other key management methods such as password based key management methods. However, the consent enabled HRN receiver is required to support all key management methods specified in the IHE DEN profile. Before encrypting a PHMR document, the consent enabled HRN sender has to construct the XDS metadata for the PHMR document. A submission set is created which consists of an encrypted PHMR document and a patient consent document. The submission set is then




transported using the IHE XDR profile (i.e., ITI-41 Provider and Register Document Set.b).

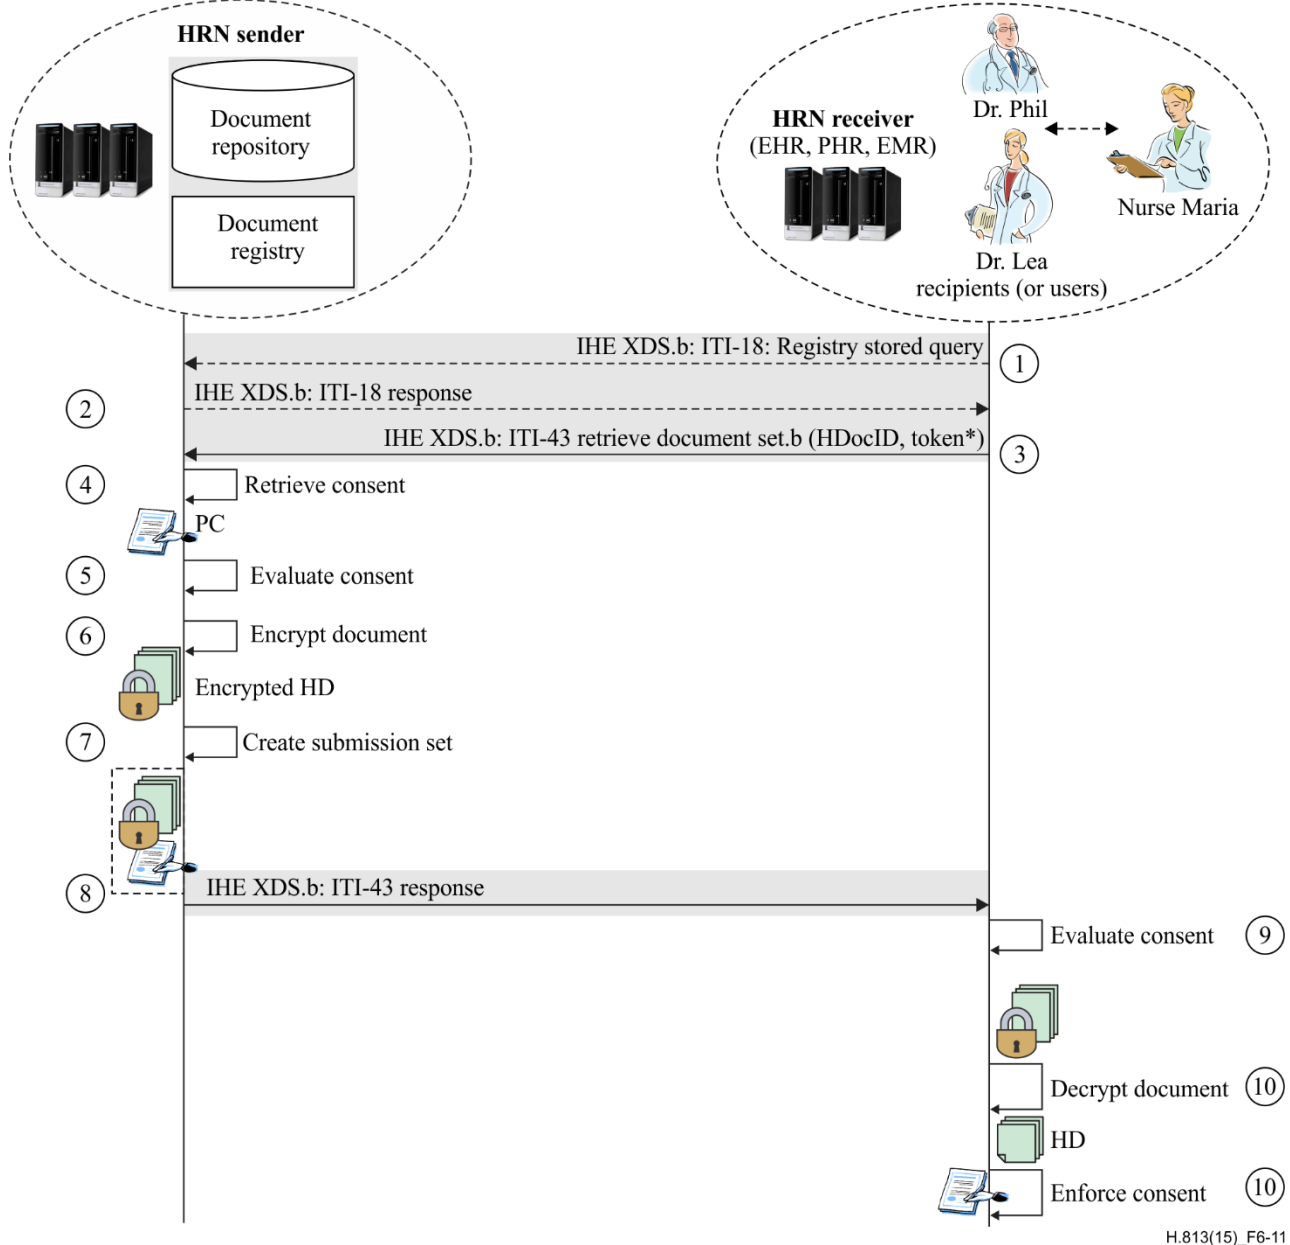


H.813(15)\_F6-11

Figure 6-11 shows the application of the IHE DEN profile during the request/response interaction in order to enable patient consent enforcement. The requester is being authenticated and the patient consent is being evaluated. If the result of the authentication and the evaluation of patient consent are positive, then a personalized consent document is created based on the functional role of the requester. The PHMR document is then encrypted for the requester and a submission set is created which consists of a personalized consent document and an encrypted PHMR document. The submission set is then transported through an ITI-43 Response transaction.

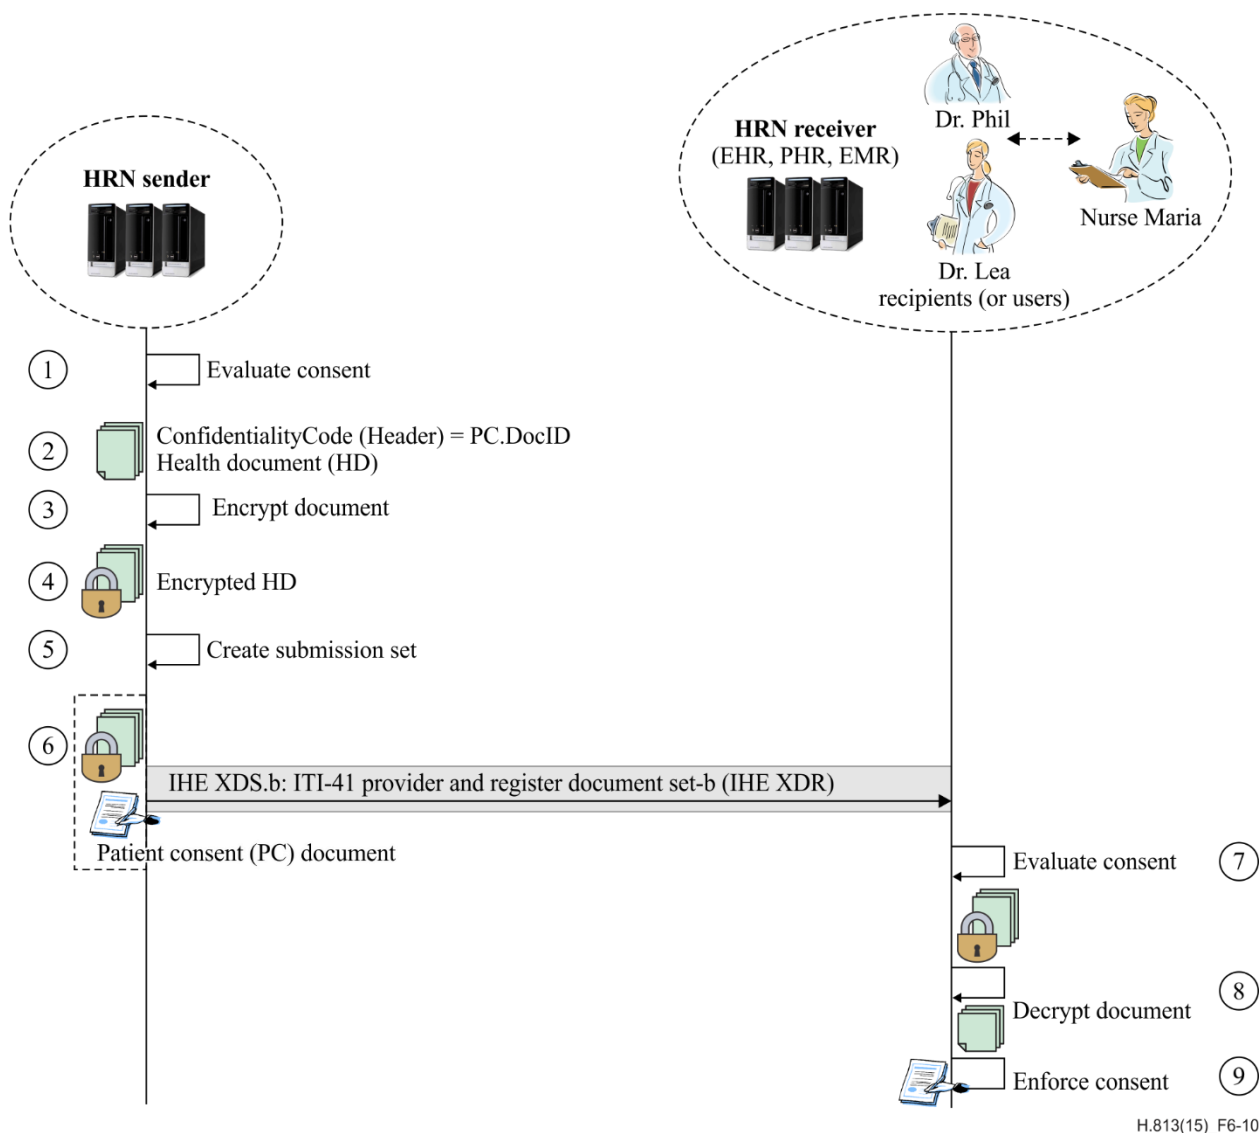

**Figure 6-10 – Point-to-point interaction to exchange encrypted PHMR documents along with consent using IHE XDR at HRN-IF<sup>1</sup>**

<sup>1</sup> The grey items have already been specified in a previous version of the CDG.

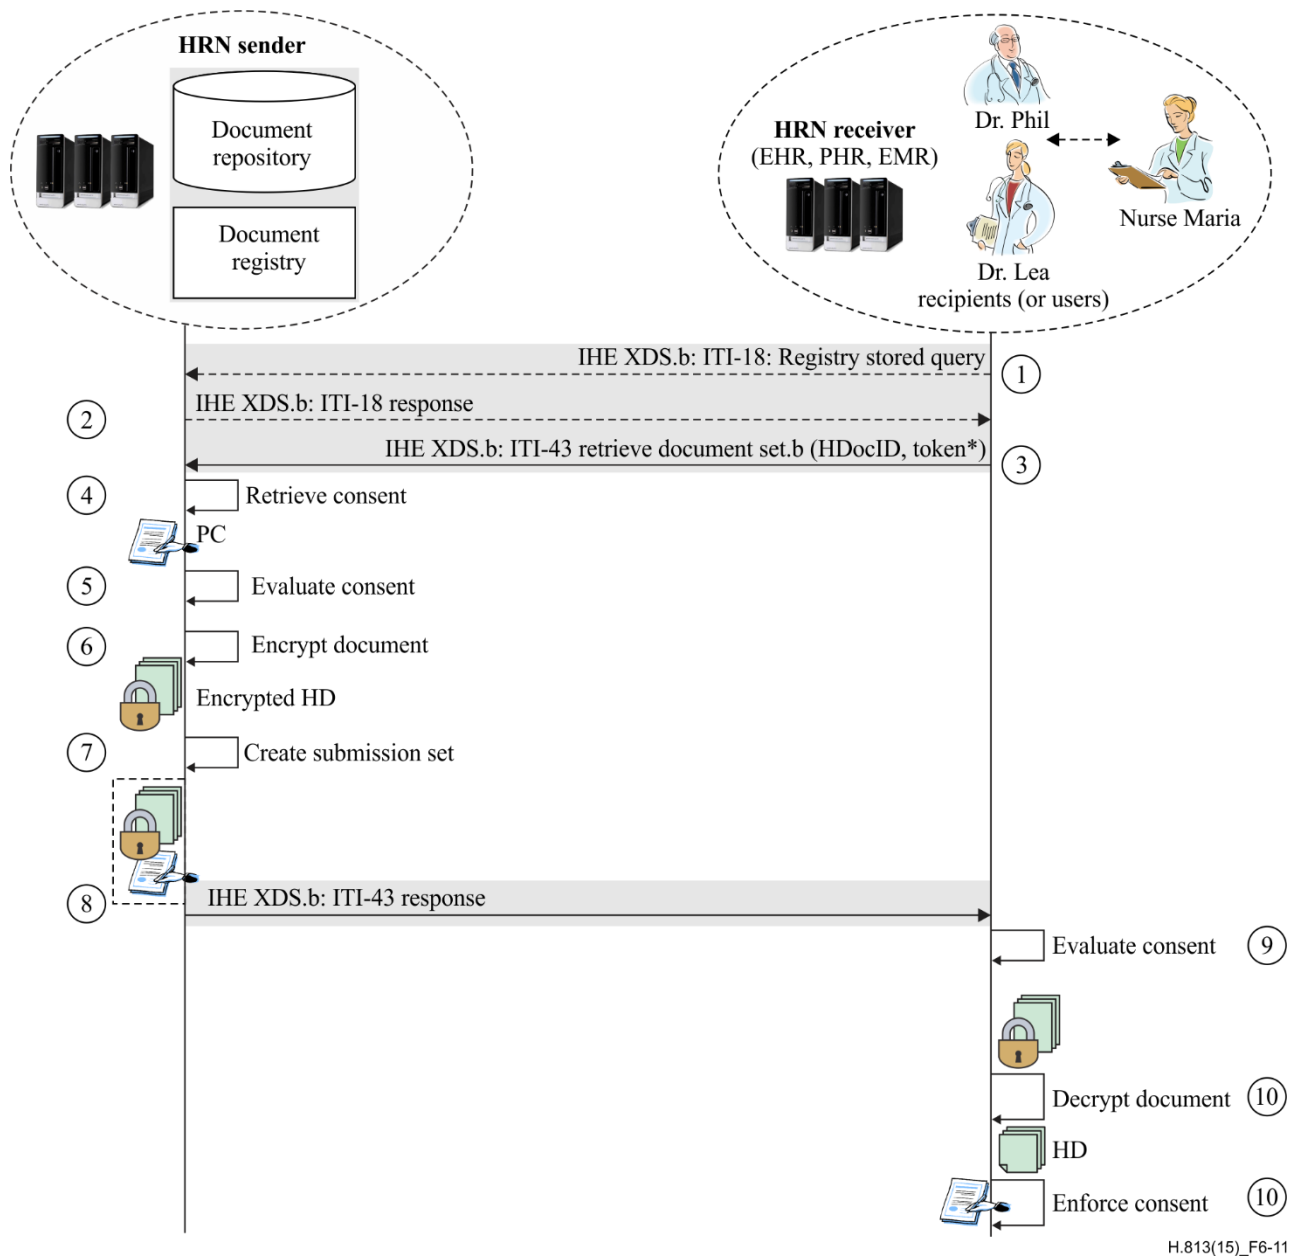

**Figure 6-11 – Request-response interaction to obtain encrypted PHMR document along with consent document using IHE XDS at HRN-IF<sup>2</sup>**

#### 6.1.10 Certified device classes

Table 6-1 shows the device classes defined for the HRN-IF interface design guidelines. At this time, the certification programme described in [ITU-T H.810] only provides certification for software components implementing HRN sender functionality. In contrast to the PAN interface, the HRN sender certification can just apply to a software implementation and does not require integration into an entire system.

<sup>2</sup> The grey items have already been specified in a previous version of the CDG.

**Table 6-1 – HRN device classes**

Device class	Network messaging
HRN sender device - Direct communication	Yes
HRN receiver device - Direct communication	Not certified
HRN sender device - Indirect communication	Yes
HRN receiver device - Indirect communication	Not Certified
Non-repudiation enabled HRN sender device	Yes
Non-repudiation enabled HRN receiver device	Not certified
Consent enabled HRN sender device- XDR	Yes
Consent enabled HRN receiver device- XDR	Not certified
Consent enabled HRN sender device- XDS.b	Yes
Consent enabled HRN receiver device- XDS.b	Not certified

Certification of HRN devices can be implemented by adhering to the appropriate guidelines indicated in Table 6-2.

**Table 6-2 – Guidelines for HRN device classes**

Device class	Relevant guidelines
HRN receiver device - Direct communication	6.2.2.1, 6.2.3.1, 6.2.3.3, 6.2.4, 6.2.5.1
HRN sender device - Direct communication	6.2.2.1, 6.2.3.1, 6.2.3.3, 6.2.4, 6.2.5.1
HRN receiver device - Indirect communication	6.2.2.2, 6.2.3.2, 6.2.3.3, 6.2.4, 6.2.5.2
HRN sender device - Indirect communication	6.2.2.2, 6.2.3.2, 6.2.3.3, 6.2.4, 6.2.5.2
Non-repudiation enabled HRN sender device	6.2.2.1, 6.2.3.1, 6.2.3.3, 6.2.4, 6.2.5.1, Table 6-15
Non-repudiation enabled HRN receiver device	6.2.2.1, 6.2.3.1, 6.2.3.3, 6.2.4, 6.2.5.1, Table 6-16
Consent enabled HRN sender device- XDR	6.2.2.1, 6.2.3.1, 6.2.3.3, 6.2.4, 6.2.5.1, Table 6-17, Table 6-21
Consent enabled HRN receiver device- XDR	6.2.2.1, 6.2.3.1, 6.2.3.3, 6.2.4, 6.2.5.1, Table 6-18, Table 6-22
Consent enabled HRN sender device- XDS.b	6.2.2.1, 6.2.3.1, 6.2.3.3, 6.2.4, 6.2.5.1, Table 6-23
Consent enabled HRN receiver device- XDS.b	6.2.2.1, 6.2.3.1, 6.2.3.3, 6.2.4, 6.2.5.1, Table 6-20, Table 6-24

## 6.2 Design guidelines

### 6.2.1 Introduction

The following clauses detail the specific rules, restrictions and guidelines for the Continua HRN interface.

In these requirements, the HRN sender refers to a Continua HRN-IF client component and the HRN receiver refers to a Continua HRN-IF service component. The component naming was preserved for clarity.

## 6.2.2 Messaging infrastructure and transport guidelines

### 6.2.2.1 Requirements for direct communications via XDR

**Table 6-3 – Requirements for HRN transport using XDR**

Name	Description	Comments
HRN_Message_Infrastructure_Profile	Continua HRN senders and receivers <b>shall</b> use the IHE XDR profile, for the transfer of messages between the HRN sender and HRN receiver	
HRN_Message_Infrastructure_Protocol	Continua HRN senders and receivers <b>shall</b> use HTTP and SOAP 1.2 for Internet connectivity	
HRN_Message_Infrastructure_Init_Connection	A Continua HRN sender <b>shall</b> initiate the connection to the HRN receiver	
HRN_Message_Infrastructure_Internet	Continua HRN receivers <b>shall</b> be reachable from their HRN senders. Therefore, the HRN receiver either <b>shall</b> be on the same secure network as the HRN sender or <b>shall</b> be on a network connected to the HRN senders network across a secure connection or <b>shall</b> be Internet-facing (i.e., reachable from the Internet)	
HRN_Message_Infrastructure_Sender_Topology	Continua HRN senders <b>shall</b> connect to one or multiple HRN receivers, sending only the relevant messages to each	This does not require connecting to multiple HRN receivers at the same time
HRN_Message_Infrastructure_Receiver_Topology	Continua HRN receivers <b>shall</b> be able to receive messages from multiple HRN senders concurrently	
HRN_Messaging_Infrastructure_Transport_Mode_Supported	Continua HRN senders and receivers <b>shall</b> utilize the XDR "on-line" mode of operation	The "on-line" mode is the v1 methodology
HRN_Messaging_Infrastructure_Transport_Mode_Not_Supported	Continua HRN senders and receivers <b>shall not</b> utilize the XDR "off-line" mode of operation	The "off-line" mode is not supported for the v1 HRN interface

### 6.2.2.2 Requirements for indirect communications via XDM

**Table 6-4 – Requirements for HRN transport using XDM**

Name	Description	Comments
HRN_Indirect_Message_Infrastructure_Profile	Continua HRN indirect communication senders and receivers <b>shall</b> implement the IHE XDM integration profile, for the indirect transfer of messages between the HRN sender and HRN receiver	
HRN_Indirect_Message_Infrastructure_Protocol	Continua HRN senders and receivers <b>shall</b> implement the "ZIP over Email transport" option	
HRN_Indirect_Message_Infrastructure_Privacy	Continua HRN senders and receivers <b>should</b> implement the "Basic Patient Privacy Enforcement" option	
HRN_Indirect_Message_Infrastructure_Response	Continua HRN senders and receivers <b>may</b> implement the "Zip over Email Response" option	
HRN_Indirect_Message_Infrastructure_Init_Connection	A Continua HRN sender <b>shall</b> initiate the communication with the HRN receiver	
HRN_Indirect_Message_Infrastructure_Sender_Topology	Continua HRN senders <b>shall</b> communicate with one or multiple HRN receivers, sending only the relevant messages to each	This allows, but does not require, communicating with multiple HRN receivers at the same time

### 6.2.3 Messaging guidelines

#### 6.2.3.1 Messaging guidelines for direct communications via XDR

**Table 6-5 – General messaging guidelines**

Name	Description	Comments
HRN_Messaging_Document_Source_Standard	Continua HRN senders <b>shall</b> implement the document source actor of the IHE cross-enterprise document reliable interchange (XDR) profile for sending PHM data	Primary v1 messaging/transport is based on IHE XDR profile and its referenced standards

**Table 6-5 – General messaging guidelines**

Name	Description	Comments
HRN_Messaging_Document_Recipient_Standard	Continua HRN receivers <b>shall</b> implement the document recipient actor of the IHE cross-enterprise document reliable interchange (XDR) profile for receiving PHM data	Primary v1 messaging/transport is based on IHE XDR profile and its referenced standards
HRN_Messaging_Mode_Supported	Continua HRN senders and receivers <b>shall</b> utilize the XDR "on-line" mode of operation	The "on-line" mode is the methodology
HRN_Messaging_Mode_Not_Supported	Continua HRN senders and receivers <b>shall not</b> utilize the XDR "off-line" mode of operation	The "off-line" mode is not supported for the HRN interface
HRN_Messaging_Transport_Exclusivity	Continua HRN senders and receivers <b>shall</b> utilize the transport mechanisms as defined in the XDR profile for all PHM exchanges	
HRN_Messaging_Message_Scope	The Continua HRN sender application <b>should not</b> include information that is not present within the PHM report	This requirement is necessary since the primary usage of message is designed to only transmit PHM information
HRN_Messaging_Meta_Data	The Continua HRN sender XDR meta-data <b>shall</b> be consistent with the included PHM report and its attachments	This is to ensure that any preprocessing based on the XDR meta-data is consistent with the PHM payload. Of primary concern are the patient ID, the document ID and the originator ID
HRN_Messaging_Atomic_Transaction	The Continua HRN sender and receiver exchange of the PHM document transaction <b>shall</b> be atomic in that it may only succeed or be "rolled back" in its entirety if it fails	The state and condition of both the sender and the receiver must be maintained in a consistent manner regardless of the success of the exchange. This also means that this transaction is complete and not dependent on another transaction to send the intended data

### 6.2.3.2 Messaging guidelines for indirect communications via XDM

**Table 6-6 – General messaging guidelines**

Name	Description	Comments
HRN_Indirect_Message_Sender	The Continua HRN sender <b>shall</b> implement the portable media creator actor of the XDM profile	
HRN_Indirect_Message_Receiver	The Continua HRN receiver <b>shall</b>	

**Table 6-6 – General messaging guidelines**

Name	Description	Comments
	implement the portable media importer actor of the XDM profile	
HRN_Indirect_Messaging_Document_Source_Standard	Continua HRN indirect communication senders <b>shall</b> implement the portable media creator of the cross-enterprise document media interchange (XDM) integration profile for sending PHM data	
HRN_Indirect_Messaging_Message_Scope_One_Report	The Continua HRN sender <b>shall</b> include exactly one submission set, including one PHM report document and associated metadata in the "Zip over Email" attachment	XDM allows for multiple documents and multiple patients to be sent. The CDG further restrains this to one PHM document on one patient, with all related attachments
HRN_Indirect_Messaging_Message_Scope	The contents of the submission set sent by the Continua HRN sender <b>shall</b> be related to the same patient	The XDM distribute document set on media transaction does not require that all the submission sets included in the media are relative to the same patient
HRN_Indirect_Messaging_Document_Source_Directory_Structure	The Continua HRN sender <b>shall</b> name the submission set directory that includes PHM report "SUBSET01"	
HRN_Indirect_Messaging_Attachment_Scope_Allowed_Content	The Continua HRN sender application <b>shall</b> include in the submission set ZIP file only the information that is relevant to the information within the PHM report	This requirement is necessary since the primary usage of the message is designed to only transmit PHM information
HRN_Indirect_Messaging_Message_Scope_Allowed_Content	The Continua HRN sender <b>shall</b> only include in the submission set files and directories that are required to transfer the submission set containing the PHM report and optional XML style sheet used to render the PHM report	There should not be contents that the HRN receiver would have to ignore. Especially, the attachment shall not include any executable files
HRN_Indirect_Messaging_Message_Scope_Restricted_Content	The Continua HRN sender <b>shall not</b> include in the submission set executable files and files that are configured to start automatically	Security related (executable files are allowed by XDM) Even when the PHM report would reference such a file and thus it would be allowed in the submission set –this is restricted and shall not be submitted
HRN_Indirect_Messaging_Meta_Data	The Continua HRN sender XDM meta-data <b>shall</b> be consistent with the included PHM report and its	This is to ensure that any preprocessing based on the XDM meta-data is consistent



**Table 6-6 – General messaging guidelines**

Name	Description	Comments
	attachments	with the PHM payload. Of primary concern are the patient ID, the document ID and the originator ID
HRN_Indirect_Messaging_Meta_Data_Compatibility	The Continua HRN indirect sender XDM <b>shall</b> include all information in the XDM meta data that is required by the HRN direct sender XDR	This means Register Document Set-b [ITI-42] metadata as required by the XDR specification in [IHE ITI TFS XDR]. The XDM would allow also the Register Document Set [ITI-14] of [IHE ITI TFS XDR], which may not be XDR compatible
HRN_Indirect_Messaging_Atomic_Transaction	The Continua HRN sender and receiver exchange of the PHM document transaction <b>shall</b> be atomic in that the included PHM report is complete and that none of the content relies on content from other messages in order to be understood	
HRN_Indirect_Message_Infrastructure_Internet	A Continua HRN sender <b>shall</b> either export the PHM "Zip over E-Mail" media as a one ZIP file or create an e-mail with the PHM report attached as a ZIP file using internal e-mail processing	This gives the sender flexibility to either create the e-mail with the attachment or export the ZIP package for manual attachment to an e-mail
HRN_Indirect_Message_Infrastructure_Internet_Email	If the Continua HRN sender exports the "Zip over E-Mail" it <b>shall</b> include the PHM report in the media that comply with the requirements of the XDM media format as a single-file ZIP package that can be attached to an e-mail message	
HRN_Indirect_Message_Infrastructure_Internet_Attachment	If the Continua HRN sender creates an e-mail with the XDM submission set attached, the submission set <b>shall</b> contain the PHM report in the prescribed format	
HRN_Indirect_Message_Infrastructure_Manual_Auditing	If a Continua HRN sender is used by a person manually creating the XDM "Zip over E-Mail" media, the HRN sender <b>shall</b> maintain an audit log of PHM documents exported for delivery that adheres to the IHE ATNA Auditing related clauses as defined for XDM	Auditing ATNA "Export" is required for the XDM. See the link in clause 3 for more details on ATNA [OASIS WS-I RM]. The manual e-mail option could skip the auditing step. This would not be a compliant or complete implementation
HRN_Indirect_Messaging_	Continua HRN receivers <b>may</b> send	This corresponds to the

**Table 6-6 – General messaging guidelines**

Name	Description	Comments
Infrastructure_Acknowledgement_Receiver	the HRN sender an indirect acknowledgement that the HRN sender message was received and processed using the "Zip over Email Response" option	protocol option "Zip over Email Response". For XDM, acknowledgement is recommended, but never required
HRN_Indirect_Messaging_Infrastructure_Acknowledgement_Sender	If the "Zip over Email Response" option is used the Continua HRN senders <b>should</b> send the document ID in the e-mail subject line in addition to the required subject XDM/1.0/DDM in the format: XDM/1.0/DDM/DocumentID	The document ID format is ASCII text. There is no failure handling mechanism beyond what standard e-mail provides and no consistent time-out standard is possible due to variability of how people read e-mail. Any concerns over whether or not a message was received should be handled manually
HRN_Indirect_Messaging_Infrastructure_Acknowledgement_Subject	If the Continua HRN receiver sends indirect acknowledgement using the "Zip over Email Response" option, the response message <b>should</b> include the subject line of the original e-mail message	The acknowledgment e-mail subject should contain the exact contents of the original e-mail's subject, prefixed by "RE:" (the way typical e-mail replies are handled)  NOTE – An e-mail return receipt only assures that the e-mail was correct, not that the attachment was readable or successfully imported. These require a further acknowledgement from the importer

### 6.2.3.3 Messaging guidelines applicable to both direct and indirect communications

**Table 6-7 – PHM attachments guidelines**

Name	Description	Comments
HRN_PHM_Attachments_Attachment_Completeness	Continua HRN senders <b>shall</b> communicate all attachments referenced or contained in the PHM report document	
HRN_PHM_Attachments_Message_Completeness	Continua HRN senders <b>shall</b> communicate all attachments specified in the PHM report in the same message	

**Table 6-8 – Patient identity mapping guidelines**

Name	Description	Comments
HRN_Patient_Identity_Mapping	Continua HRN senders <b>shall</b> implement the patient identity source actor of IHE ITI-44: Patient Identity Feed HL7 V3 in order to submit new patient identifiers to the HRN receiver or third party exchanges	
HRN_Device_Registration	Continua HRN senders <b>may</b> implement the patient identity source actor of IHE ITI-44: Patient Identity Feed HL7 V3 in order to submit a new device registration to the HRN receiver or third party exchanges	
HRN_Patient_Identity_Query	Continua HRN senders and receivers <b>may</b> implement the patient identifier cross-reference consumer actor of the IHE ITI-45: PIXV3 Query transaction in order to map between their local identifiers and the identifiers used for exchange	
HRN_Patient_Demographics_Query	Continua HRN receivers <b>may</b> implement the patient demographics consumer actor of the IHE ITI-47: Patient Demographics Query HL7 V3 transaction, using the patient name and demographics in order to correlate the record with its own local identifiers	

**Table 6-9 – Quality of service guidelines**

Name	Description	Comments
HRN_Transport_QoS_Best.Veryhigh	<p>Continua HRN senders and receivers <b>shall</b> implement the Continua <i>best.veryhigh</i> QoS bin using TCP as specified in clause 2, Basic functionality of [IETF RFC 4614]:</p> <ol style="list-style-type: none"> <li>1. [IETF RFC 793]</li> <li>2. [IETF RFC 1122]</li> <li>3. [IETF RFC 2460]</li> <li>4. [IETF RFC 2581]</li> <li>5. [IETF RFC 2873]</li> <li>6. [IETF RFC 2988]</li> </ol>	

#### 6.2.4 Data guidelines

**Table 6-10 – General data format guidelines**

Name	Description	Comments
HRN_Data_Standard	Continua HRN sender and receiver data format <b>shall</b> comply with [HL7 CDA-PHM]	

**Table 6-10 – General data format guidelines**

Name	Description	Comments
HRN_Data_Subject_Identity	Continua HRN senders <b>shall</b> uniquely identify a patient within for the HRN receiver domain in the /ClinicalDocument/recordTarget element	Assuring that patient ID is understood in the receiver
HRN_Data_Receiver_Identity	A Continua HRN sender <b>shall</b> identify a HRN receiver within the /ClinicalDocument/informationRecipient element	
HRN_Data_Receiver_As_Custodian	A Continua HRN sender <b>shall</b> specify /ClinicalDocument/custodian element	The receiver becomes a custodian of the document (Element Required in CDA)
HRN_Data_Author_Organization_Identity	Continua HRN senders <b>shall</b> identify the organization associated with HRN sender as the author of the PHM document in the /ClinicalDocument/author/assignedAuthor/representedOrganization element	
HRN_Data_Author_Device_Identity	Continua HRN senders <b>should</b> identify the AHD/WAN device in the role of HRN sender in the /ClinicalDocument/author/assignedAuthor/assignedAuthoringDevice element	
HRN_Data_Document_Identity	Continua HRN senders <b>shall</b> assign the document unique identifier in the /ClinicalDocument/id element according to guidelines for HL7 CDA documents [HL7 CDA]	CDA specification uses II (instance identifier) composed of a root and extension
HRN_Data_Measurement_Units	Continua HRN sender data format <b>shall</b> interpret the UCUM units of measure according to mapping in Tables III-1, III-2 and III-3	
HRN_Data_Original_Data_Authoring_Device_Identity	For all original data, Continua HRN senders <b>shall</b> include a reference to the originating personal health device identified by the unique device identifier	To comply with the recommendation in [b-CHA UI]. Continua devices use EUI-64 device identifier
HRN_Data_Processed_Data_Author_Identity	For processed data, Continua HRN senders <b>should</b> include a reference to the device that processed the data	Recommended by [b-CHA UI]  NOTE – This may propagate up to the authoring device as defined in HRN_Data_author_device_identity
HRN_Data_Coding_Snomed	Continua HRN sender <b>shall</b> use SNOMED CT coding for device data as identified in , Tables III-1, III-2 and III-3.	The effort was made to map all clinical data types and most events / alerts into SNOMED CT

**Table 6-10 – General data format guidelines**

Name	Description	Comments
HRN_Data_Coding_Mdc	Continua HRN sender <b>shall</b> use original MDC coding for device data that does not have identified SNOMED CT code in Tables III-1, III-2 and III-3.	Some events and alerts
HRN_Data_Coding_Unencoded_Bitmaps	Continua HRN sender <b>should</b> use local coding agreed upon with HRN receiver for device data that does not have either identified MDC or SNOMED CT code in Tables III-1, III-2 and III-3.	For example bitmap coded device data, manufacturer-specific error codes. HRN sender may also choose not to send such data. HRN receiver must gracefully handle cases when the coding is not supported
HRN_Data_Coding_Legacy_And_Manual_Data	Continua HRN sender <b>shall</b> transfer data from devices that do not provide MDC codes and manually entered data using SNOMED CT coding and if available using codes in the SNOMED-CT mapping in Tables III-1, III-2 and III-3.	To allow data from devices that do not provide MDC codes still to be transferred using SNOMED CT as if they were manual entries

**6.2.4.1 Data guidelines for devices related to medication delivery****Table 6-11 – General medication delivery guidelines**

Name	Description	Comments
HRN_Data_Medication_Section	If medication delivery data is communicated, the Continua HRN sender <b>shall</b> report the medication delivery in medications section (CCD templateId 2.16.840.1.113883.10.20.1.8)	The HL7 PHM report [HL7 CDA-PHMR] covers the vital signs and results. This section adds the medication delivery guidelines. Based on HL7 PHM report: This section if present SHALL conform to all the constraints specified in CCD
HRN_Data_Medication_Exclusive_Section	If Continua HRN sender is only submitting medication data and not submitting data in the vital signs nor the result sections, the HRN sender <b>shall</b> include an empty "Vital Signs" section that contains a text element noting this fact	To comply with the HL7 PHM report guideline [HL7 CDA-PHMR].
HRN_Data_Medication_Substance_Administration	The Continua HRN sender <b>shall</b> represent the medication delivery activity as the SubstanceAdministration	CCD Section 3.9.2.1.1 Medication activity [HL7 CDA-CCD].

**Table 6-11 – General medication delivery guidelines**

<b>Name</b>	<b>Description</b>	<b>Comments</b>
HRN_Data_Medication_Substance_Administration_Event	In the Continua HRN sender submitted data the value for "SubstanceAdministration / @moodCode" in a medication activity <b>shall</b> be "EVN"	
HRN_Data_Medication_Consumable	In the Continua HRN sender submitted data the medication definition <b>shall</b> be implemented as SubstanceAdministration /consumable, the target of which is a product template in accordance with the PHM report specification	To comply with the CCD template. The coding system shall be based on regional needs of the HRN sender and receiver. There is no universal medication coding
HRN_Data_Medication_Substance_Administration_Code	In the Continua HRN sender submitted data the value for the SubstanceAdministration /code <b>shall</b> contain the original MDC code if code is reported from the device	
HRN_Data_Medication_Device_Specific_Attributes	The Continua HRN sender <b>shall</b> transmit a device-specific attribute with no semantic CDA equivalent, as an entryRelationship containing an observation where observation/code contains the attribute type and observation/value contains the attribute value	An example is fast bolus delivery vs. slow bolus delivery. An attribute "fast" can be added using an observation linked via entryRelationship to a Substance administration
HRN_Data_Medication_Originating_Device_Specification	The Continua HRN sender <b>shall</b> represent the medication delivery device as the participant element of the SubstanceAdministration conforming to the constraints of a PHMR product instance reference	PHM Report IG: Chapter 3.5.4 of PHMR Product Instance Reference Also to comply with guideline: HRN_Data_original_data_authoring_device_identity [HL7 CDA-PHMR]

**Table 6-12 – Adherence monitor specific guidelines (separate from general medication guidelines)**

Name	Description	Comments
HRN_Data_Coding_Dosage_Dispensed	Continua HRN sender and receiver data format <b>shall</b> contain SubstanceAdministration/effectiveTime, SubstanceAdministration/doseQuantity, SubstanceAdministration/consumable and SubstanceAdministration/routeCode elements at a minimum	
HRN_Data_Medication_Delivery_Route	In the Continua HRN sender submitted data, the value for "SubstanceAdministration / routeCode" in a medication activity <b>shall</b> be one of the delivery routes from the HL7 RouteOfAdministration (2.16.840.1.113883.5.112) code system	For example, ingestion by swallowing orally is "PO" (internalId: 14735)
HRN_Data_Coding_Dosages_Scheduled_(Regimen)	Continua HRN sender and receiver data format <b>shall</b> use an HL7 substanceAdministration entry with a classCode of "SBADM" and a moodCode of "INT" for encoding dosage dispensed events in the PHRM	Restriction on the CCD template
HRN_Data_Coding_Question_Responses	Continua HRN sender and receiver data format <b>shall</b> comply with [HL7 CDA_R2_QA] (universal realm) for encoding question and response events in the PHRM	
HRN_Data_Coding_Question_Responses_Code_Systems	Continua HRN sender and receiver Observation/code <b>may</b> be selected from LOINC codeSystem 2.16.840.1.113883.6.1, or SNOMED CT codeSystem 2.16.840.1.113883.6.96, or International Classification of Functioning, Disability and Health (ICF) codeSystem 2.16.840.1.113883.6.254 and/or a local code system that identifies the question/response in a manner that is agreed to by the collaborating parties	Preference is for reuse of existing question/response code schemes, but allowance is made for rapid expansion and local schemes. This guideline is relaxed with the Framework for Questionnaire Assessments specification

## 6.2.5 Security guidelines

### 6.2.5.1 Security guidelines for direct communications via XDR

**Table 6-13 – General security guidelines**

Name	Description	Comments
HRN_Security_Communication	Continua HRN senders and receivers <b>shall</b> ensure all direct communication is done via specified XDR secure mechanism	
HRN_Security_Authentication	Continua HRN senders and receivers <b>shall</b> use a prior agreed upon XDR mechanism to ensure authentication	
HRN_Security_Auditing1	Continua HRN senders and receivers <b>shall</b> implement and adhere to audit trail and node identification (ATNA) clauses of the XDR profile	
HRN_Security_Cipher	Continua HRN senders and receivers <b>should</b> use an encryption cipher suite of TLS_RSA_WITH_AES_128_CBC_SHA	

### 6.2.5.2 Security guidelines for indirect communications via XDM

**Table 6-14 – General security guidelines**

Name	Description	Comments
HRN_Security_Communication	The secure communication between Continua sender and receiver is guided by: HRN_Indirect_Message_Infrastructure_privacy guideline (see Table 6-4)	
HRN_Security_Authentication	Continua HRN senders and receivers <b>shall</b> use a prior agreed upon mechanism to ensure authentication	Authentication is of both sender and receiver
HRN_Security_Auditing	The auditing of interaction between Continua HRN sender and receiver is guided by: HRN_Indirect_Message_Infrastructure_manual_auditing guideline (see Table 6-6)	

### 6.2.5.3 Security guidelines for integrity, data origin authentication and non-repudiation

NOTE – Other guidelines that are applicable for the non-repudiation enabled HRN sender and receiver are mentioned in Table 6-2.



**Table 6-15 – Integrity, data origin authentication and non-repudiation HRN sender guidelines**

Name	Description	Comments
HRN_Sender_Sign	Non-repudiation enabled HRN sender <b>shall</b> sign PHMR document(s) according to IHE document digital signature content profile	
HRN_Sender_Signature_Algorithm	Non-repudiation enabled HRN sender <b>shall</b> use RSA-SHA256 as the signature algorithm	[FIPS PUB 180-4] (using the cyphers compatible with [b-FIPS PUB 180-2])

**Table 6-16 – Integrity, data origin authentication and non-repudiation HRN receiver guidelines**

Name	Description	Comments
HRN_Receiver_Verify	Non-repudiation enabled HRN receiver <b>shall</b> verify PHMR document(s) according to the IHE documents digital signature content profile and only accept documents that pass the signature verification	
HRN_Receiver_Verification_Algorithm	Non-repudiation enabled HRN receiver <b>shall</b> support RSA-SHA256 signature algorithm	

### 6.2.6 Consent management guidelines

NOTE – Other guidelines that are applicable for the consent enabled HRN sender and receiver are mentioned in Table 6-2.

#### 6.2.6.1 Security guidelines for consent management

**Table 6-17 – Consent management guidelines for consent enabled HRN sender via XDR**

Name	Description	Comments
HRN_Sender_Consent_Document_Format_XDR	Consent enabled HRN sender <b>shall</b> comply with [HL7 CDA IG] to represent patient consent in a consent document	
HRN_Sender_Consent_Clinical_Document(s)_ConfidentialityCode_XDR	Consent enabled HRN sender <b>shall</b> set the confidentiality code value to "R" in the header of the PHMR document	
HRN_Sender_Consent_Clinical_Document(s)_Association_XDR	To associate PHMR documents(s) with the patient consent document, consent enabled HRN sender <b>shall</b> use the translation element of the confidentiality code system as defined in Table I.8	Consult Table I-6 for the elements of the confidentiality code system Consult Table I.7 for the elements of the Continua Consent Directive code system Consult Table I.9 for the Continua assigned OIDs

**Table 6-17 – Consent management guidelines for consent enabled HRN sender via XDR**

Name	Description	Comments
HRN_Sender_Consent_Transport_XDR	Consent enabled HRN sender <b>shall</b> use IHE XDR profile to send a consent document along with PHMR document(s)	The consent document and PHMR document(s) could be sent in the same submission set of the ITI-41 Provider and Register Document Set.b transaction
HRN_Sender_Consent_Personalization_XDR	Consent enabled HRN sender <b>may</b> personalize permissions in the consent document based on the identity or roles of the requester and/or jurisdictional and organizational security policies	The roles are indicated by an SAML attribute token. An example of personalization is the creation of a modified consent document with the permissions and authorizations based on the role of requester (e.g., doctor or nurse)
HRN_Sender_Audit_log_XDR	Consent enabled HRN sender <b>should</b> create audit events and send to audit repository using IHE ATNA in case of the occurrence of the following events: Release of PHMR document(s) Release of consent document(s)	IHE ATNA is covered by HRN security guideline named as: HRN_Security_Auditing1

**Table 6-18 – Consent management guidelines for consent enabled HRN receiver via XDR**

Name	Description	Comments
HRN_Receiver_Consent_Format_XDR	Consent enabled HRN receiver <b>shall</b> be able to receive, interpret and enforce HL7 CDA R2 consent directive patient consent document(s) [HL7 CDA IG]	
HRN_Receiver_Consent_Transport_XDR	Consent enabled HRN receiver <b>shall</b> use the IHE XDR profile to receive a consent document	The consent document could be received through the ITI-41 Provider and Register Document Set.b transaction alone or with the PHMR document(s) in the same submission set

**Table 6-19 – Consent management guidelines for consent enabled HRN sender via XDS.b**

Name	Description	Comments
HRN_Sender_Consent_Document_Format_XDS.b	Consent enabled HRN sender <b>shall</b> comply with [HL7 CDA IG] to represent patient consent in a consent document	

**Table 6-19 – Consent management guidelines for consent enabled HRN sender via XDS.b**

Name	Description	Comments
HRN_Sender_Source_Actor	Consent enabled HRN sender <b>shall</b> implement the document source actor of the IHE XDS.b profile	The source actor consequently supports the ITI-41 Provider and Register Document Set.b transaction
HRN_Sender_Repository_Actor	Consent enabled HRN sender <b>shall</b> implement the document repository actor of the IHE XDS.b profile	
HRN_Sender_Registry_Actor	Consent enabled HRN sender <b>shall</b> implement the document registry actor of the IHE XDS.b profile	Enables query and lookup of PHMR and consent documents through IHE ITI-18 registry stored query transaction
HRN_Sender_Consent_Clinical_Document(s)_ConfidentialityCode_XDS.b	Consent enabled HRN sender <b>shall</b> set the confidentiality code value to "R" in the header of the PHMR document	
HRN_Sender_Consent_Clinical_Document(s)_Association_XDS.b	To associate PHMR documents(s) with the patient consent document, consent enabled HRN sender <b>shall</b> use the translation element of the confidentiality code system as defined in Table I.8	Consult Table I-6 for the elements of the confidentiality code system Consult Table I.7 for the Continua Consent Directive code system Consult Table I.9 for the Continua assigned OIDs
HRN_Sender_Publishing_Repository	Consent enabled HRN sender <b>shall</b> make consent documents available in the document repository	See also HRN_Sender_Repository_Actor guideline
HRN_Sender_Publishing_Registry	Consent enabled HRN sender <b>shall</b> publish the XDS metadata for the published consent documents in the document registry	See also HRN_Sender_Registry_Actor guideline. This enables the search of the PHMR documents for a specific patient
HRN_Sender_Authentication	Consent enabled HRN sender <b>shall</b> authenticate the document consumer using the token as specified by IHE XUA in the request message	It facilitates the authentication of the user rather than the node and enables the personalization of consent documents.  The authentication functionality is part of the document repository actor implemented on the HRN sender. IHE XUA profile (ITI-18 Provide X-User Assertion) uses SAML token for authentication
HRN_Sender_Attribute_Authentication	Consent enabled HRN sender <b>may</b> authenticate the document consumer actor based on attribute token as specified by IHE XUA++ profile	This is to support roles and role based access control (RBAC) IHE XUA++ profile uses SAML attribute token. XUA++ refers to OASIS XSPA profile of SAML for healthcare

**Table 6-19 – Consent management guidelines for consent enabled HRN sender via XDS.b**

Name	Description	Comments
HRN_Sender_Response_Successful	Consent enabled HRN sender <b>shall</b> return patient consent document after successful authentication of the document consumer and successful verification that sending the document satisfies the patient consent policies	This is the positive response of the document repository actor after the reception of the retrieve document request according to ITI-43 Retrieve Document Set.b transaction
HRN_Sender_Response_Fail	Consent enabled HRN sender <b>shall</b> return a failure message if the document consumer fails to authenticate or document consumer fails to satisfy patient consent policies	This is a negative response from the document repository actor after the reception of the retrieve document request according to ITI-43 Retrieve Document Set.b transaction
HRN_Sender_Consent_Personlization_XDS.b	Consent enabled HRN sender <b>may</b> personalize permissions in the consent document based on the identity or roles of the requester and/or jurisdictional and organizational security policies	The roles are indicated by the SAML attribute token. An example of personalization is the creation of a modified consent document with the permissions and authorizations based on the role of requester (e.g., doctor or nurse)
HRN_Sender_Audit_log_XDS.b	Consent enabled HRN sender <b>should</b> create audit events and send to audit repository using IHE ATNA in case of the occurrence of the following events: Successful authentication Authentication failure Release of PHMR document(s) Release of consent document(s)	IHE ATNA is covered by HRN security guideline named as: HRN_Security_Auditing1

**Table 6-20 – Consent management guidelines for consent enabled HRN receiver via XDS.b**

Name	Description	Comments
HRN_Receiver_Consent_Format_XDS.b	Consent enabled HRN receiver <b>shall</b> be able to receive, interpret and enforce [HL7 CDA IG] patient consent document(s)	
HRN_Receiver_Consumer_Actor	Consent enabled HRN receiver <b>shall</b> implement document consumer actor of IHE XDS profile for retrieving consent documents from the document repository of the Continua HRN sender	ITI-43 Retrieve Document Set.b a transaction is used to retrieve the document set from the repository
HRN_Receiver_Registry_Query	Consent enabled HRN receiver <b>shall</b> use ITI-18 Registry Stored Query transaction to retrieve unique identifier(s) of a patient consent document	Use if the identifier and URL of the repository are unknown
HRN_Receiver_Authentication	Consent enabled HRN receiver <b>shall</b> authenticate to the Continua HRN sender using a token as specified by IHE XUA (cross-enterprise user assertion) profile	Token is sent in ITI-43 Retrieve Document Request for PHMR and/or consent document. The token is placed in the SOAP header. IHE XUA profile uses SAML token for authentication
HRN_Receiver_Attribute_Authentication	Consent enabled HRN receiver <b>may</b> authenticate to the Continua HRN sender using the attribute token as specified by IHE XUA++ profile	This is to realize role based access control IHE XUA++ uses SAML Attribute token. IHE XUA++ refers to the OASIS XSPA profile of SAML for healthcare

### 6.2.7 Consent enforcement design guidelines

NOTE – Other guidelines that are applicable for the Consent Enabled HRN sender and receiver are mentioned in Table 6-2.

### 6.2.7.1 Security guidelines for consent enforcement

**Table 6-21 – Consent enforcement guidelines for consent enabled HRN sender via XDR**

Name	Description	Comments
HRN_Sender_Content_Encryption_Actor_XDR	Consent enabled HRN sender <b>shall</b> encrypt PHMR document(s) in compliance with IHE document encryption (DEN) profile	IHE DEN is based on cryptographic message syntax (CMS) standard
HRN_Sender_Content_Encryption_Algorithm_XDR	Consent enabled HRN sender <b>shall</b> use AES-128 CBC for encryption of the document(s)	The algorithm used is identified through the ContentEncryptionAlgorithmI identifier in CMS
HRN_Sender_Encryption_Recipient_Binding_PKI_XDR	Consent enabled HRN sender <b>shall</b> implement PKI based key management method from IHE DEN profile	PKI based content key management method uses KeyTransRecipientInfo as CMS RecipientInfoType. This points to the public key or x.509 v3 certificate of the recipient
HRN_Sender_Encryption_Recipient_Binding_Other_XDR	Consent enabled HRN sender <b>may</b> implement other key management methods from IHE DEN profile	

**Table 6-22 – Consent enforcement guidelines for consent enabled HRN receiver via XDR**

Name	Description	Comments
HRN_Receiver_Consent_Evaluation_XDR	Consent enabled HRN receiver <b>shall</b> evaluate consent before decrypting the encrypted PHMR document(s)	E.g., determining that the recipient is using a document for the purpose authorized by the consent document and/or required infrastructure is available for the consent enforcement
HRN_Receiver_Content_Decryption_Actor_XDR	Consent enabled HRN receiver <b>shall</b> comply with content consumer actor of IHE DEN profile to decrypt document(s)	
HRN_Sender_Encryption_Recipient_Binding_XDR	Consent enabled HRN receiver <b>shall</b> support all key management methods specified by the IHE DEN profile	
HRN_Receiver_Content_Decryption_Algorithm_XDR	Consent enabled HRN receiver <b>shall</b> use AES-128 CBC decryption algorithm	The algorithm used is identified through the ContentEncryptionAlgorithmI identifier in CMS
HRN_Receiver_Consent_Enforcement_XDR	Consent enabled HRN receiver <b>shall</b> enforce consent preferences expressed in the consent document	E.g., prevents further disclosure of the content to the unauthorized entities

**Table 6-23 – Consent enforcement guidelines for consent enabled HRN sender via XDS.b**

<b>Name</b>	<b>Description</b>	<b>Comments</b>
HRN_Sender_Publishing_PHMR_Repository_XDS.b	Consent enabled HRN sender <b>shall</b> make PHMR document(s) available in the document repository	
HRN_Sender_Publishing_Registry_XDS.b	Consent enabled HRN sender <b>shall</b> publish the XDS metadata for the published PHMR document(s) in the document registry	
HRN_Sender_Content_Encryption_Actor_XDS.b	Consent enabled HRN sender <b>shall</b> encrypt PHMR document(s) in compliance with IHE DEN profile	
HRN_Sender_Response_Successful	Consent enabled HRN sender <b>shall</b> return encrypted PHMR document(s) after successful authentication of the document consumer and successful verification that sending the document satisfies the patient consent policies	The related consent management guidelines are: HRN_Sender_Authentication, HRN_Sender_Attribute_Authentication, HRN_Sender_Response_Successful and HRN_Sender_Response_Fail
HRN_Sender_Content_Encryption_Algorithm_XDS.b	Consent enabled HRN sender <b>shall</b> use AES-128 CBC for encryption of the PHMR document(s)	The algorithm used is identified through the ContentEncryptionAlgorithmIdentifier in CMS
HRN_Sender_Encryption_Recipient_Binding_PKI_XDS.b	Consent enabled HRN sender <b>shall</b> implement a PKI based key management method from the IHE DEN profile	PKI based content key management method uses KeyTransRecipientInfo as CMS RecipientInfoType. This points to the public key or x.509 v3 certificate of the recipient
HRN_Sender_Encryption_Recipient_Binding_Other_XDS.b	Consent enabled HRN sender <b>may</b> implement other key management methods from the IHE DEN profile	

**Table 6-24 – Consent enforcement guidelines for consent enabled HRN receiver via XDS.b**

Name	Description	Comments
HRN_Receiver_Registry_Query_XDS.b	Consent enabled HRN receiver <b>shall</b> use ITI-18 Registry Stored Query transaction to retrieve unique identifier(s) of a patient PHMR document(s)	The ITI-18 has already been specified in the consent management guidelines. See the guidelines HRN_Sender_Registry_Actor and HRN_Receiver_Registry_Query
HRN_Receiver_Re_Query_XDS.b	Consent enabled HRN receiver <b>shall</b> use ITI-43 Retrieve Document Set.b transaction to retrieve PHMR document(s)	ITI-43 has already been specified in the consent management guidelines. See the guideline HRN_Receiver_Consumer_Actor
HRN_Receiver_Consent_Evaluation_XDS.b	Consent enabled HRN receiver <b>shall</b> evaluate consent before decrypting an encrypted PHMR document	E.g., determining that the recipient is using the document for the purpose authorized by the consent document and/or required infrastructure is available for the consent enforcement
HRN_Receiver_Content_Decryption_Actor_XDS.b	Consent enabled HRN receiver <b>shall</b> comply with content consumer actor of the IHE document encryption profile to decrypt PHMR document(s)	
HRN_Sender_Encryption_Recipient_Binding_XDS.b	Consent enabled HRN receiver <b>shall</b> support all key management methods specified by the IHE DEN profile	
HRN_Receiver_Content_Decryption_Algorithm_XDS.b	Consent enabled HRN receiver <b>shall</b> use AES-128 CBC decryption algorithm	
HRN_Receiver_Consent_Enforcement_XDS.b	Consent enabled HRN receiver <b>shall</b> enforce the consent preferences expressed in the consent document	E.g., prevents further disclosure of the content to the unauthorized entities



## Appendix I

### Messaging implementation and technology

(This appendix does not form an integral part of this Recommendation.)

#### I.1 Overview

The XDR transaction (used for direct communication on the HRN interface) consists of the document source actor (HRN sender) transmitting a SOAP message to the document recipient actor (HRN receiver). Upon receipt, the document recipient actor replies by transmitting back an acknowledgement SOAP message.

For indirect HRN interface communication, XDM is used. XDM does not require the HRN receiver to send back an acknowledgement. However, an indirect, non-technical acknowledgement of each XDM communication is **strongly recommended**. Furthermore, in the case of auto-generated e-mail messages (where the HRN sender creates an e-mail message and attaches the ZIP file to it), it is **strongly recommended** that the subject of the message include a unique message identifier (not the patient ID) that can be included in the e-mail acknowledgement and identify which message is being acknowledged. Regardless of the media delivery method employed (e-mail, ftp, USB, CD-ROM, etc.), this non-technical acknowledgement **may** come in the form of an e-mail (or e-mail reply, if e-mail was the original media delivery method), telephone call or other method acceptable to both communicating partners. If the message is sent via e-mail, e-mail acknowledgement is preferred. The unique message identifier can be as simple as a counter that starts with 1 on the first XDM message ever sent and increments from there with each new XDM message from that XDM sender. It need not be unique across all XDM senders, only for that one XDM sender.

#### I.2 XDR and XDM metadata

The IHE profiles XDR and XDS organize their requirements based on concepts from the XDS family of profiles (of which XDR and XDM are members). Fundamentally, for the metadata, there are two primary pieces, the XDS submission set piece and the XDSDocumentEntry piece. The tables below show the HRN required entries for a conformant HRN transaction.

NOTE – While the profile discussions are in the terms below, when the actual SOAP envelope is constructed (for XDR messages); these terms are encoded in ebXML terms for electronic transfer.

References:

- Primary background is the IHE ITI TF-2 clause 4.1 [b-IHE ITI TF 2 R4] and IHE PCC working group mapping [b-IHE PCC TF 2]
- Implementation Guide for PHM Report Release 1.0 [HL7 CDA-PHMR]

**Table I.1 – Element requirement**

Code	Meaning
R	Required
R2	Required if known
O	Optional
N	Not Allowed

**Table I.2 – XDS submission set metadata**

Element	Req.	HRN PHM report mapping	Comments
availabilityStatus	(O)		See comment in the XDS DocumentEntry table
author	(R2)	/ClinicalDocument/author	See comment in the XDS DocumentEntry table
authorInstitution	(R2)	/ClinicalDocument/author/assignedAuthor/representedOrganization	
authorPerson	(O)	/ClinicalDocument/author/assignedAuthor/assignedPerson	
authorRole	(R2)	/ClinicalDocument/author/participationFunction	
authorSpecialty	(R2)	/ClinicalDocument/author/assignedAuthor/code	
comments	(O)		
contentTypeCode	(R)		The value of this element can be any value agreed upon by the two transaction participants
contentTypeCodeDisplay Name	(O)	"Subsequent evaluation" (R if contentTypeCode present)	The value of this element can be any value agreed upon by the two transaction participants
entryUUID	(R)	unique ID for submission set	
patientId	(R)	Mapped from /ClinicalDocument/recordTarget/patientRole/id	
sourceId	(R)	Unique OID assigned to the system that is submitting the submission set	
submissionTime	(R)	Message submission time	
title	(O)	/ClinicalDocument/title	
uniqueId	(R)	/ClinicalDocument/id	

NOTE – For the HRN-IF, the submission set may only contain a single PHM document.

**Table I.3 – XDSDocumentEntry metadata**

Element	Req.	HRN PHM report mapping	Comments
availabilityStatus	(O)		XDR and XDM are subsets of XDS that do not have Registry/Repository actors. Therefore, the requirement level is defined as "optional"

**Table I.3 – XSDDocumentEntry metadata**

<b>Element</b>	<b>Req.</b>	<b>HRN PHM report mapping</b>	<b>Comments</b>
author	(R2)	/ClinicalDocument/author	Composed of sub-elements (defined below): – authorInstitution – authorPerson – authorRole – authorSpeciality
authorInstitution	(R2)	/ClinicalDocument/author/ assignedAuthor/ representedOrganization	
authorPerson	(R2)	/ClinicalDocument/author/ assignedAuthor/assignedPerson	
authorRole	(R2)	/ClinicalDocument/author/ assignedAuthor/code	
authorSpecialty	(R2)	/ClinicalDocument/author/ participationFunction	
classCode	(R)		The value of this element can be any value agreed upon by the two transaction participants
classCodeDisplayName	(O)		(R if classCode present) The value of this element can be any value agreed upon by the two transaction participants
Comments	(O)		
confidentialityCode	(R)	/ClinicalDocument/ confidentialityCode	
confidentialityCode DisplayName	(O)	/ClinicalDocument/ confidentialityCode (R if confidentialityCode present)	
creationTime	(R)	/ClinicalDocument/effectiveTime	
entryUUID	(R)	unique ID for documentEntry	
eventCodeList	(O)	/ClinicalDocument/ documentationOf/serviceEvent/code	
eventCodeDisplay NameList	(O)	(R if eventCodeList present)	
formatCode	(R)	"urn:continua:phm:2008"	
formatCodeDisplay Name	(O)		
hash	(R)		
healthcareFacilityType Code	(R)		The value of this element can be any value agreed upon by the two transaction participants

**Table I.3 – XSDDocumentEntry metadata**

<b>Element</b>	<b>Req.</b>	<b>HRN PHM report mapping</b>	<b>Comments</b>
healthcareFacilityType CodeDisplayName	(R)		(R if healthcareFacilityTypeCode present) The value of this element can be any value agreed upon by the two transaction participants
intendedRecipient	(O)	/ClinicalDocument/ intendedRecipient	
languageCode	(R)	/ClinicalDocument/languageCode	
legalAuthenticator	(O)	/ClinicalDocument/ legalAuthenticator	Additional transformation is required as described in the mapping table of [b-IHE PCC TF 2]
contentType	(R)	text/xml	
parentDocument	(N)		Optional encoding, may come from <sup>3</sup> /ClinicalDocument/relatedD ocument/parentDocument
parentDocumentId	(N)		Optional encoding may come from /ClinicalDocument/relatedDocum ent/parentDocument/id
parentDocumentRelatio nship	(N)		Optional encoding may come from /ClinicalDocument/ relatedDocument/typeId
patientId	(R)	/ClinicalDocument/recordTarget/ patientRole/id	
practiceSettingCode	(R)		The value of this element can be any value agreed upon by the two transaction participants
practiceSettingCodeDis playName	(R)		(R if practiceSettingCode present) The value of this element can be any value agreed upon by the two transaction participants
serviceStartTime	(O)	/ClinicalDocument/ documentationOf/serviceEvent/ effectiveTime/low	Contained in PHM data
serviceStopTime	(O)	/ClinicalDocument/ documentationOf/serviceEvent/ effectiveTime/high	Contained in PHM data
size	(R)		

<sup>3</sup> What gets stored in the application may not be what gets sent. For example, version 1 is sent, version 2 is created but not sent, version 3 is created and sent. In this case, version 3 replaces version 1 in the "exchange", but version 2 in the application.

**Table I.3 – XDSDocumentEntry metadata**

Element	Req.	HRN PHM report mapping	Comments
sourcePatientId	(R)	/ClinicalDocument/recordTarget/patientRole/id	
sourcePatientInfo	(R)	/ClinicalDocument/recordTarget/patientRole/id	
title	(O)	/ClinicalDocument/title	
typeCode	(R)	/ClinicalDocument/code/@code	
typeCodeDisplayName	(R)	/ClinicalDocument/code/@displayName	
uniqueId	(R)	/ClinicalDocument/id	
URI	(O)		Not used for HRN as there is no expectation of document retrieval

**Table I.4 – XDS submission set metadata for the consent directive document**

Apart from those constraints listed in Table I.2 there are no additional constraints for the XDS submission set metadata for the consent directive document.

XDSDocumentEntry metadata requirements for consent directive documents are the same as those mentioned in Table I.3 for PHM documents, however exceptions are listed in in Table I.5.

**Table I.5 – XDSDocumentEntry metadata for the consent directive document**

Element	Req.	HRN PHM report mapping	Comments
classCode	(R)	57016-8	
codeSystem	(R)	2.16.840.1.113883.6.1	
codeSystemName	(R)	LOINC	
classCodeDisplayName	(O)	"Privacy Policy Acknowledgment Document"	
formatCode	(R)	"urn:continua:cd:2011"	

**Table I-6 – The elements of the confidentiality code system**

Name	Value	Comments
Code	"R"	
codeSystem	2.16.840.1.113883.5.25	
codeSystemName	"Confidentiality"	
displayName	"Restricted"	

**Table I.7 – The elements of the Continua Consent Directive code system**

Name	Value	Comments
Code	The value <b>shall</b> be the same as specified by [HL7 CDA IG].	
codeSystem	2.16.840.1.113883.3.1817.1.2.1	
codeSystemName	"Continua Consent Directive"	
displayName	ID of the consent document	

**Table I.8 – The translation of the Confidentiality code system to the Continua Consent Directive code system**

Name	Value	Comments
Code	"R"	
codeSystem	2.16.840.1.113883.5.25	
codeSystemName	"Confidentiality"	
displayName	"Restricted"	
translation	code="<ID of the consent document>" codeSystem=2.16.840.1.113883.3.1817.1.2.1 codeSystemName="Continua Consent Directive" displayName=ID of the consent document	"<>" is a placeholder for the ID of the consent document. Consult Table I.7 for the elements of the Continua Consent Directive code system.

**Table I.9 – OID distribution for Continua Health Alliance**

OID	Description	Comments
2.16.840.1.113883.3.1817	Organization OID: Continua Health Alliance	
2.16.840.1.113883.3.1817.1	Root OID for the Continua E2E Architecture	
2.16.840.1.113883.3.1817.1.2	Root OID for the E2E Security and Privacy	
2.16.840.1.113883.3.1817.1.3	Root OID for the PAN-IF	
2.16.840.1.113883.3.1817.1.4	Root OID for the LAN-IF	
2.16.840.1.113883.3.1817.1.5	Root OID for the TAN-IF	
2.16.840.1.113883.3.1817.1.6	Root OID for the WAN-IF	
2.16.840.1.113883.3.1817.1.7	Root OID for the HRN-IF	
2.16.840.1.113883.3.1817.1.2.1	E2E security and privacy: OID for the Continua Consent Directive code system	

### **I.3 Document source SOAP request/response messages**

#### **I.3.1 SOAP request message**

The SOAP request message consists of several parts:

- 1) SOAP header
  - a) The header is used for WS-Addressing information as in the following example XDR SOAP request message sent by document source actor [IHE ITI TFS XDR].
  - b) This information is useful for the identification of transmission source, target and desired processing.
- 2) SOAP body
  - c) The body contains the ebXML compatible mapping of the document meta-data in the form of a "ProvideAndRegisterDocumentSetRequest" message.
  - d) The meta-data is useful in quickly determining the ultimate document dispensation without actually examining the document.
  - e) The meta-data is constructed by encoding the XDS meta-data into the underlying ebXML transaction.
- 3) PHM document
  - f) The PHM document (and any other required files referenced by the PHM) would appear in the same message transmission as the SOAP envelope but separated in a message transmission optimization mechanism (MTOM) compatible manner.

### I.3.2 SOAP response message

The SOAP response consists of two simple parts:

- 1) SOAP header
  - a) The header is used for WS-Addressing information as in the example below.
  - b) This information is useful for matching the response to the corresponding request.
- 2) SOAP body
  - c) The body contains the ebXML compatible response.

#### Example XDR SOAP request message sent by document source actor<sup>4</sup>

```
<s:Envelope xmlns:s= "http://www.w3.org/2003/05/soap-envelope"
xmlns:a="http://www.w3.org/2005/08/addressing">
  <s:Header>
    <a:Action
      s:mustUnderstand="1">urn:ihe:iti:2007:ProvideAndRegisterDocumentSet-b</a:Action>
    <a:MessageID>urn:uuid:6d296e90-e5dc-43d0-b455-7c1f3eb35d83</a:MessageID>
    <a:ReplyTo>
      <a:Address>http://www.w3.org/2005/08/addressing/anonymous</a:Address>
    </a:ReplyTo>
    <a:To s:mustUnderstand="1">
      http://localhost:2647/XdsService/IHEXDSRepository.svc
    </a:To>
  </s:Header>
  <s:Body>
    <ProvideAndRegisterDocumentSetRequest
      xsi:schemaLocation="urn:ihe:iti:xds-b:2007 ../schema/IHE/XDS.b_DocumentRepository.xsd"
      xmlns="urn:ihe:iti:xds-b:2007" xmlns:xsi= "http://www.w3.org/2001/XMLSchema-instance"
      xmlns:lcm="urn:oasis:names:tc:ebxml-regrep:xsd:lcm:3.0"      xmlns:rsm="urn:oasis:names:tc:ebxml-
      regrep:xsd:rsm:3.0">
```

---

<sup>4</sup> Example supplied by IHE. IHE materials used in this document have been extracted from relevant copyrighted materials with permission of Integrating the Healthcare Enterprise (IHE) International. Copies of this standard may be retrieved from the IHE at <http://www.ihe.net>.

```

xmlns:rs="urn:oasis:names:tc:ebxml-regrep:xsd:rs:3.0">
  <lcm:SubmitObjectsRequest>
    <rim:RegistryObjectList>
      <rim:ExtrinsicObject id="Document01" mimeType="text/xml" objectType="urn:uuid:7edca82f-
054d-47f2-a032-9b2a5b5186c1">
        <rim:Slot name="creationTime">
          <rim:ValueList>
            <rim:Value>20051224</rim:Value>
          </rim:ValueList>
        </rim:Slot>
        <rim:Slot name="languageCode">
          <rim:ValueList>
            <rim:Value>en-us</rim:Value>
          </rim:ValueList>
        </rim:Slot>
        <rim:Slot name="serviceStartTime">
          <rim:ValueList>
            <rim:Value>200412230800</rim:Value>
          </rim:ValueList>
        </rim:Slot>
        <rim:Slot name="serviceStopTime">
          <rim:ValueList>
            <rim:Value>200412230801</rim:Value>
          </rim:ValueList>
        </rim:Slot>
        <rim:Slot name="sourcePatientId">
          <rim:ValueList>
            <rim:Value>ST-1000^^^&1.3.6.1.4.1.21367.2003.3.9&ISO</rim:Value>
          </rim:ValueList>
        </rim:Slot>
        <rim:Slot name="sourcePatientInfo">
          <rim:ValueList>
            <rim:Value>PID-3|ST-1000^^^&1.3.6.1.4.1.21367.2003.3.9&ISO</rim:Value>
            <rim:Value>PID-5|Doe^John^^^</rim:Value>
            <rim:Value>PID-7|19560527</rim:Value>
            <rim:Value>PID-8|M</rim:Value>
            <rim:Value>PID-11|100 Main St^Metropolis^IL^44130^USA</rim:Value>
          </rim:ValueList>
        </rim:Slot>
        <rim:Name>
          <rim:LocalizedString value="Physical"/>
        </rim:Name>
        <rim:Description/>
        <rim:Classification id="c101" classificationScheme="urn:uuid:93606bcf-9494-43ec-9b4e-
a7748d1a838d"
          classifiedObject="Document01">
          <rim:Slot name="authorPerson">
            <rim:ValueList>
              <rim:Value>Gerald Smitty</rim:Value>
            </rim:ValueList>
          </rim:Slot>
          <rim:Slot name="authorInstitution">
            <rim:ValueList>
              <rim:Value>Cleveland Clinic</rim:Value>
              <rim:Value>Parma Community</rim:Value>
            </rim:ValueList>
          </rim:Slot>
          <rim:Slot name="authorRole">
            <rim:ValueList>
              <rim:Value>Attending</rim:Value>
            </rim:ValueList>
          </rim:Slot>
          <rim:Slot name="authorSpecialty">
            <rim:ValueList>
              <rim:Value>Orthopedic</rim:Value>
            </rim:ValueList>
          </rim:Slot>
        </rim:Classification>
        <rim:Classification id="c102" classificationScheme="urn:uuid:41a5887f-8865-4c09-adf7-
e362475b143a"
          classifiedObject="Document01" nodeRepresentation="History and Physical">
          <rim:Slot name="codingScheme">
            <rim:ValueList>
              <rim:Value>Connect-a-thon classCodes</rim:Value>
            </rim:ValueList>
          </rim:Slot>
          <rim:Name>
            <rim:LocalizedString value="History and Physical"/>
          </rim:Name>
        </rim:Classification>

```



```

    <rim:Classification id="c103" classificationScheme="urn:uuid:f4f85eac-e6cb-4883-b524-
f2705394840f"
      classifiedObject="Document01" nodeRepresentation="1.3.6.1.4.1.21367.2006.7.101">
        <rim:Slot name="codingScheme">
          <rim:ValueList>
            <rim:Value>Connect-a-thon confidentialityCodes</rim:Value>
          </rim:ValueList>
        </rim:Slot>
        <rim:Name>
          <rim:LocalizedString value="Clinical-Staff"/>
        </rim:Name>
      </rim:Classification>
    <rim:Classification id="c104" classificationScheme="urn:uuid:a09d5840-386c-46f2-b5ad-
9c3699a4309d"
      classifiedObject="Document01" nodeRepresentation="CDAR2/IHE 1.0">
        <rim:Slot name="codingScheme">
          <rim:ValueList>
            <rim:Value>Connect-a-thon formatCodes</rim:Value>
          </rim:ValueList>
        </rim:Slot>
        <rim:Name>
          <rim:LocalizedString value="CDAR2/IHE 1.0"/>
        </rim:Name>
      </rim:Classification>
    <rim:Classification id="c105" classificationScheme="urn:uuid:f33fb8ac-18af-42cc-ae0e-
ed0b0bdb91e1"
      classifiedObject="Document01" nodeRepresentation="Outpatient">
        <rim:Slot name="codingScheme">
          <rim:ValueList>
            <rim:Value>Connect-a-thon healthcareFacilityTypeCodes</rim:Value>
          </rim:ValueList>
        </rim:Slot>
        <rim:Name>
          <rim:LocalizedString value="Outpatient"/>
        </rim:Name>
      </rim:Classification>
    <rim:Classification id="c106" classificationScheme="urn:uuid:cccf5598-8b07-4b77-a05e-
ae952c785ead"
      classifiedObject="Document01" nodeRepresentation="General Medicine">
        <rim:Slot name="codingScheme">
          <rim:ValueList>
            <rim:Value>Connect-a-thon practiceSettingCodes</rim:Value>
          </rim:ValueList>
        </rim:Slot>
        <rim:Name>
          <rim:LocalizedString value="General Medicine"/>
        </rim:Name>
      </rim:Classification>
    <rim:Classification id="c107" classificationScheme="urn:uuid:f0306f51-975f-434e-a61c-
c59651d33983"
      classifiedObject="Document01" nodeRepresentation="34108-1">
        <rim:Slot name="codingScheme">
          <rim:ValueList>
            <rim:Value>LOINC</rim:Value>
          </rim:ValueList>
        </rim:Slot>
        <rim:Name>
          <rim:LocalizedString value="Outpatient Evaluation And Management"/>
        </rim:Name>
      </rim:Classification>
    <rim:ExternalIdentifier id="ei01" registryObject="Document01"
      identificationScheme="urn:uuid:58a6f841-87b3-4a3e-92fd-a8ffeff98427"
      value="SELF-5^^^&1.3.6.1.4.1.21367.2005.3.7&ISO">
        <rim:Name>
          <rim:LocalizedString value="XDSDocumentEntry.patientId"/>
        </rim:Name>
    </rim:ExternalIdentifier>
    <rim:ExternalIdentifier id="ei02" registryObject="Document01"
      identificationScheme="urn:uuid:2e82c1f6-a085-4c72-9da3-8640a32e42ab"
      value="1.3.6.1.4.1.21367.2005.3.9999.32">
        <rim:Name>
          <rim:LocalizedString value="XDSDocumentEntry.uniqueId"/>
        </rim:Name>
    </rim:ExternalIdentifier>
  </rim:ExtrinsicObject>
  <rim:RegistryPackage id="SubmissionSet01">
    <rim:Slot name="submissionTime">
      <rim:ValueList>
        <rim:Value>20041225235050</rim:Value>
      </rim:ValueList>

```

```

</rim:Slot>
<rim:Name>
  <rim:LocalizedString value="Physical"/>
</rim:Name>
<rim:Description>
  <rim:LocalizedString value="Annual physical"/>
</rim:Description>
<rim:Classification id="c108" classificationScheme="urn:uuid:a7058bb9-b4e4-4307-ba5b-
e3f0ab85e12d"
  classifiedObject="SubmissionSet01">
  <rim:Slot name="authorPerson">
    <rim:ValueList>
      <rim:Value>Sherry Dopplemeyer</rim:Value>
    </rim:ValueList>
  </rim:Slot>
  <rim:Slot name="authorInstitution">
    <rim:ValueList>
      <rim:Value>Cleveland Clinic</rim:Value>
      <rim:Value>Berea Community</rim:Value>
    </rim:ValueList>
  </rim:Slot>
  <rim:Slot name="authorRole">
    <rim:ValueList>
      <rim:Value>Primary Surgon</rim:Value>
    </rim:ValueList>
  </rim:Slot>
  <rim:Slot name="authorSpecialty">
    <rim:ValueList>
      <rim:Value>Orthopedic</rim:Value>
    </rim:ValueList>
  </rim:Slot>
</rim:Classification>
<rim:Classification id="c109"
  classificationScheme="urn:uuid:aa543740-bdda-424e-8c96-df4873be8500"
  classifiedObject="SubmissionSet01" nodeRepresentation="History and Physical">
  <rim:Slot name="codingScheme">
    <rim:ValueList>
      <rim:Value>Connect-a-thon contentTypeCodes</rim:Value>
    </rim:ValueList>
  </rim:Slot>
  <rim:Name>
    <rim:LocalizedString value="History and Physical"/>
  </rim:Name>
</rim:Classification>
<rim:ExternalIdentifier id="ei03" registryObject="SubmissionSet01"
  identificationScheme="urn:uuid:96fdda7c-d067-4183-912e-bf5ee74998a8"
  value="1.3.6.1.4.1.21367.2005.3.9999.33">
  <rim:Name>
    <rim:LocalizedString value="XDSSubmissionSet.uniqueId"/>
  </rim:Name>
</rim:ExternalIdentifier>
<rim:ExternalIdentifier id="ei04" registryObject="SubmissionSet01"
  identificationScheme="urn:uuid:554ac39e-e3fe-47fe-b233-965d2a147832"
  value="3670984664">
  <rim:Name>
    <rim:LocalizedString value="XDSSubmissionSet.sourceId"/>
  </rim:Name>
</rim:ExternalIdentifier>
<rim:ExternalIdentifier id="ei05" registryObject="SubmissionSet01"
  identificationScheme=
    "urn:uuid:6b5aea1a-874d-4603-a4bc-96a0a7b38446"
  value="SELF-5^^^&1.3.6.1.4.1.21367.2005.3.7&ISO">
  <rim:Name>
    <rim:LocalizedString value="XDSSubmissionSet.patientId"/>
  </rim:Name>
</rim:ExternalIdentifier>
</rim:RegistryPackage>
<rim:Classification id="c110" classifiedObject="SubmissionSet01"
  classificationNode="urn:uuid:a54d6aa5-d40d-43f9-88c5-b4633d873bdd"/>
<rim:Association id="as01" associationType="HasMember"
  sourceObject="SubmissionSet01" targetObject="Document01">
  <rim:Slot name="SubmissionSetStatus">
    <rim:ValueList>
      <rim:Value>Original</rim:Value>
    </rim:ValueList>
  </rim:Slot>
</rim:Association>
</rim:RegistryObjectList>
</lcm:SubmitObjectsRequest>
<Document id="Document01">UjBsR09EbGhjZ0dTRQUxNQUFBUUNBRU1tQ1p0dU1GUxhEUzhi</Document>

```

```

    </ProvideAndRegisterDocumentSetRequest>
  </s:Body>
</s:Envelope>

```

### Example XDR SOAP response message sent by document recipient actor<sup>5</sup>

```

<s:Envelope                                     xmlns:s="http://www.w3.org/2003/05/soap-envelope"
  xmlns:a="http://www.w3.org/2005/08/addressing">
  <s:Header>
    <a:Action s:mustUnderstand="1">
      urn:ihe:iti:2007:ProvideAndRegisterDocumentSet-bResponse
    </a:Action>
    <a:RelatesTo>urn:uuid:6d296e90-e5dc-43d0-b455-7c1f3eb35d83</a:RelatesTo>
  </s:Header>
  <s:Body>
    <rs:RegistryResponse                       xsi:schemaLocation="urn:oasis:names:tc:ebxml-regrep:xsd:rs:3.0
    ../schema/ebRS/rs.xsd"
      status="urn:oasis:names:tc:ebxml-regrep:ResponseStatusType:Success"
    xmlns:rs="urn:oasis:names:tc:ebxml-regrep:xsd:rs:3.0"
    xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"/>
  </s:Body>
</s:Envelope>

```

---

<sup>5</sup> Example supplied by IHE

## Appendix II

### Security recommendations

(This appendix does not form an integral part of this design guideline.)

XDR and XDM have security considerations that require participant attention. The primary considerations are ensuring that the node to which the HRN sender is transmitting is the correct/authorized node and that the document is not intercepted/examined/altered while in transmission.

As XDR and XDM are the simplified members of the XDS family of profiles, they have some simplifying assumptions that make this more straightforward.

**CONF-PHMR-1:** The base consideration is that this movement of personal health information is not ad hoc. That is, the document source and document recipient have a prior knowledge of each other and have each reached a comfort level that the other is a satisfactory partner in this transaction with all its social, business and legal ramifications.

**CONF-PHMR-2:** An additional consideration is that this transaction is a point-to-point private transaction between the two parties with no other parties involved.

The first assumption allows for the participants to work out specifics of the transfer (such as transport method, IP address, key certificates, e-mail addresses, etc.) as part of their formal arrangements. The second assumption allows for common cryptographic techniques to supply the rest of the puzzle.

XDR requires the usage of transport level security (TLS) as the minimum transmission security. In server environments, this is quite often the underlying technology already operational at the participant's site HTTPS implementation. Thus, by utilizing HTTPS for the SOAP message exchange, the security requirements are met. A cipher suite of TLS\_RSA\_WITH\_AES\_128\_CBC\_SHA is recommended.

For XDM, transmission security depends on the exact delivery method chosen. For e-mail transfers, S-MIME is required.

## Appendix III

### ISO/IEEE 11073-10101 to SNOMED CT and UCUM

(This appendix does not form an integral part of this design guideline.)

#### III.1 Observation types mapping to SNOMED CT

NOTE – Even though the final ISO/IEEE 11073 Reference IDs and numeric code assignments have not all been finalized at the present time, the following table provides adequate guidance to map IEEE device terminology into SNOMED CT.

**Table III.1 – Observation types mapping to SNOMED CT**

Description	ISO/IEEE 11073-10101	SNOMED CT					Notes
		Concept ID	Preferred term description ID	Description text	Fully specified name ID	Supplemental concept ID (Description ID – text)	
Plasma glucose level (-10417)	MDC_CONC_GLU_CAPILLARY_PLASMA 2::29116	434911002	2774413018	Plasma glucose concentration	2774414012	122554006   Capillary blood specimen (specimen)	
Plasma glucose level (-10417)	MDC_CONC_GLU_VENOUS_PLASMA 2::29124	434911002	2774413018	Plasma glucose concentration	2774414012	122555007   Venous blood specimen (specimen) 119298005   Mixed venous blood specimen (specimen)	
Plasma glucose level (-10417)	MDC_CONC_GLU_ARTERIAL_PLASMA 2::29132	434911002	2774413018	Plasma glucose concentration	2774414012	122552005   Arterial blood specimen (specimen)	
Plasma glucose level (-10417)	CONC_GLU_UNDETERMINED_PLASMA 2::29296	434911002	2774413018	Plasma glucose concentration	2774414012	N/A	

**Table III.1 – Observation types mapping to SNOMED CT**

Description	ISO/IEEE 11073-10101	SNOMED CT					Notes
		Concept ID	Preferred term description ID	Description text	Fully specified name ID	Supplemental concept ID (Description ID – text)	
Blood glucose level (-10417)	MDC_CONC_GLU_CAPILLARY_WHOLEBLOOD 2::29112	434912009	2774415013	Blood glucose concentration	2774416014	122554006   Capillary blood specimen (specimen) 119298005   Mixed venous blood specimen (specimen)	
Blood glucose level (-10417)	MDC_CONC_GLU_VENOUS_WHOLEBLOOD 2::29120	434912009	2774415013	Blood glucose concentration	2774416014	122555007   Venous blood specimen (specimen) 119298005   Mixed venous blood specimen (specimen)	
Blood glucose level (-10417)	MDC_CONC_GLU_ARTERIAL_WHOLEBLOOD 2::29128	434912009	2774415013	Blood glucose concentration	2774416014	122552005   Arterial blood specimen (specimen) 119298005   Mixed venous blood specimen (specimen)	
Plasma glucose level (-10417)	MDC_CONC_GLU_UNDETERMINED_WHOLEBLOOD 2::29292	434912009	2774415013	Blood glucose concentration	2774416014	N/A	
Glucose control measurement (-10417)	MDC_CONC_GLU_CONTROL 2::29136	434913004	2774417017	Glucose concentration in quality control reagent	2774418010		
Interstitial fluid glucose level (-10417)	MDC_CONC_GLU_ISF 2::29140	434910001	2774412011	Interstitial fluid glucose concentration	2774411016		

**Table III.1 – Observation types mapping to SNOMED CT**

Description	ISO/IEEE 11073-10101	SNOMED CT					Notes
		Concept ID	Preferred term description ID	Description text	Fully specified name ID	Supplemental concept ID (Description ID – text)	
Haemoglobin A1C finding (-10417)	MDC_CONC_HBA1C 2::29148	365845005	489331011	Haemoglobin A1C - diabetic control finding	772274010		
Coagulation ratio - INR (-10418)	MDC_RATIO_INR_COAG 2::29188	165581004	257472014	International normalised ratio	165581004		
Prothrombin time (-10418)	MDC_TIME_PD_COAG 2::29192	396451008	1776384018	Prothrombin time			
Coagulation quick value (-10418)	MDC_QUICK_VALUE_COAG 2::29196						
International Sensitivity Index - ISI (-10418)	MDC_ISI_COAG 2::29200						
INR Control Measurement (-10418)	MDC_COAG_CONTROL 2::29204						
Body mass (weight) (-20601)	MDC_MASS_BODY_ACTUAL 2::57664	27113001	45352010	Body weight	757644016		
Body height (-10415)	MDC_LEN_BODY_ACTUAL 2::57668	50373000	495662010	Body height measure	788154012		
Body mass index (-10415)	MDC_RATIO_MASS_BODY_LEN_SQ 2::57680	60621009	100716012	Body mass index	799594012		
Systolic pressure (-10407)	MDC_PRESS_BLD_NONINV_SYS 2::18949	271649006	106507015	Systolic blood pressure	664067013		

**Table III.1 – Observation types mapping to SNOMED CT**

Description	ISO/IEEE 11073-10101			SNOMED CT			Notes
		Concept ID	Preferred term description ID	Description text	Fully specified name ID	Supplemental concept ID (Description ID – text)	
Diastolic pressure (-10407)	MDC_PRESS_BLD_NONINV_DIA 2::18950	271650006	406508013	Diastolic blood pressure	664068015		
Mean arterial pressure (-10407)	MDC_PRESS_BLD_NONINV_MEAN 2::18951	6797001	500884018	Mean blood pressure	807753012	NOTE – Must be rendered as mean blood press not mean arterial pressure	
Pulse (-10407)	MDC_PULS_RATE_NON_INV 2::18474	78564009	130365016	Pulse rate	819518016		
Body water (-10420)	MDC_BODY_WATER	251837008	375163013	Total body water (observable entity)			
Body fat (-10420)	MDC_BODY_FAT	248361005	370758016	Total body fat (observable entity)			
Body fat free (-10420)	MDC_BODY_FAT_FREE	248363008	370760019	Fat-free mass (observable entity)			
Heart rate (-10406)	MDC_ECG_HEART_RATE	364075005	487210016	Heart rate (observable entity)			
Body temperature (-10408)	MDC_TEMP_BODY 2::19292	386725007	1480858013	Body temperature	1460904011		



**Table III.1 – Observation types mapping to SNOMED CT**

Description	ISO/IEEE 11073-10101	SNOMED CT					Notes
		Concept ID	Preferred term description ID	Description text	Fully specified name ID	Supplemental concept ID (Description ID – text)	
Body temperature (Finger) (-10408)	MDC_TEMP_FINGER 2::57360	433588001	2771281010	Temperature of digit of hand	2760794019		
Body temperature (Ear) (-10408)	MDC_TEMP_EAR 2::57356	415974002	2534421019	Tympanic temperature	2530951014		
Body temperature (Toe) (-10408)	MDC_TEMP_TOE 2::57376	433776001	2768039016	Temperature of toe	2745011013		
Body temperature (Gastro) (-10408)	MDC_TEMP_GIT 2::57384	431598003	2769062014 (US)	Temperature of esophagus	2747764015	2769063016 (UK) Temperature of oesophagus	
Body temperature (Armpit) (-10408)	MDC_TEMP_AXILLA 2::57380	415882003	2534419012	Auxiliary temperature	2530949010		
Body temperature (Oral) (-10408)	MDC_TEMP_ORAL 2::57352	415945006	2534418016	Oral temperature	253094019		
Body temperature (Rectal) (-10408)	MDC_TEMP_RECT 2::57348	307047009	450211011	Rectal temperature	703520017		

**Table III.1 – Observation types mapping to SNOMED CT**

Description	ISO/IEEE 11073-10101	SNOMED CT					Notes
		Concept ID	Preferred term description ID	Description text	Fully specified name ID	Supplemental concept ID (Description ID – text)	
Body temperature (Tympanic) (-10408)	MDC_TEMP_TYMP 2::19320	415974002	2534421019	Tympanic temperature	2530951014		
SpO2 (-10404)	MDC_PULS_OXIM_SAT_O2 2::19384	431314004	2772010012	Peripheral oxygen saturation	2735642016	2767654013 / SpO2 - saturation of peripheral oxygen	
Pulse rate (-10404)	MDC_PULS_OXIM_PULS_RATE 2::18458	78564009	130365016	Pulse rate	819518016		
Pulse amplitude (-10404)	MDC_PULS_OXIM_PERF_REL 2::19376  Or  MDC_SAT_O2_QUAL 2::19248	431591009	2769937011	Pulse waveform amplitude using pulse oximetry	2736894010		
Plethysmographic waveform (-10404)	MDC_PULS_OXIM_PLETH 2::19380	250864000	373962018	Plethysmographic waveform	641309010		
Peak expiratory flow (-10421)	MDC_FLOW_AWAY_EXP_FORCED_PEAK 2::21512	251940009	375280019	Serial peak expiratory flow rate	642506016		
Personal best of PEF (-10421)	MDC_FLOW_AWAY_EXP_FORCED_PEAK_PB 2::21513	251936000	375276012	Best ever peak expiratory flow rate	642501014		

**Table III.1 – Observation types mapping to SNOMED CT**

Description	ISO/IEEE 11073-10101			SNOMED CT			Notes
		Concept ID	Preferred term description ID	Description text	Fully specified name ID	Supplemental concept ID (Description ID – text)	
Forced expiratory volume over 1 second (-10421)	MDC_VOL_AWAY_EXP_FORCED_1S 2::21514	59328004	498401010	Forced expired volume in 1 second	798158012		
Forced expiratory volume over 6 seconds (-10421)	MDC_VOL_AWAY_EXP_FORCED_EXP_6S 2::21515	165041004	256687019	Forced expired volume	546438012	The duration shall express 6s interval	New SNOMED concept is needed for MDC code.

### III.2 Events and attributes types mapping to SNOMED CT

NOTE – Even though the final ISO/IEEE 11073 Reference IDs and numeric code assignments have not been all finalized at the present time, the following table provides adequate guidance to map IEEE device terminology into SNOMED CT.

**Table III.2 – Events and attributes types mapping to SNOMED CT**

Description	ISO/IEEE 11073-10101	Concept ID	Description ID	SNOMED CT	Fully specified name ID	Supplemental concept ID (Description ID – text)	Notes
				Description text			
Sample location (-10417)	MDC_CTXT_GLU_SAMPLE LOCATION 128:29236						
Sample location attribute (-10417)	Finger MDC_CTXT_GLU_SAMPLE LOCATION_FINGER 128::29240	125685002	473565013	Digit of hand structure	729542015		
Sample location attribute (-10417)	Alternative Site Testing (AST) MDC_CTXT_GLU_SAMPLE LOCATION_AST 128::29244						
Sample location attribute (-10417)	Earlobe MDC_CTXT_GLU_SAMPLE LOCATION_EARLOBE 128::29248	113327001	383219015	Pinna structure	648683014		
Control solution indicator attribute (-10417)	Control Solution MDC_CTXT_GLU_SAMPLE LOCATION_CTRL SOLUTION 128::29252						Mapped via observation of type: MDC_CONC_GLU_CONTROL

**Table III.2 – Events and attributes types mapping to SNOMED CT**

Description	ISO/IEEE 11073-10101	SNOMED CT					Notes
		Concept ID	Description ID	Description text	Fully specified name ID	Supplemental concept ID (Description ID – text)	
Measurement condition (-10417)	MDC_CTXT_GLU_MEAL 128:29256						
Measurement condition attribute (-10417)	MDC_CTXT_GLU_MEAL_P REPRANDIAL Pre-Prandial (or Pre-Meal) 128::29260	307165006	450357011	Before meal	703654021		
Measurement condition attribute (-10417)	MDC_CTXT_GLU_MEAL_P OSTPRANDIAL Post-Prandial (or Post-Meal) 128::29264	225758001	339227016	After food	613042015		
Measurement condition attribute (-10417)	MDC_CTXT_GLU_MEAL_F ASTING 128::29268	16985007	478017015	Fasting	744117012		
Measurement condition attribute (-10417)	MDC_CTXT_GLU_MEAL_B EDTIME 128::29300	307155000	450339010	Before sleeping	703641017		Bedtime
Measurement condition attribute (-10417)	MDC_CTXT_GLU_MEAL_C ASUAL 128::29272	255226008	380387010	Random	646234012		
Tester (-10417)	MDC_CTXT_GLU_TESTER 128:29276						
Tester attribute (-10417)	MDC_CTXT_GLU_TESTER _SELF 128::29280						Mapped via HL7 CDA information model

**Table III.2 – Events and attributes types mapping to SNOMED CT**

Description	ISO/IEEE 11073-10101			SNOMED CT			Notes
		Concept ID	Description ID	Description text	Fully specified name ID	Supplemental concept ID (Description ID – text)	
Tester attribute (-10417)	MDC_CTXT_GLU_TESTER_HCP 128::29284						Mapped via HL7 CDA information model
Tester attribute (-10417)	MDC_CTXT_GLU_TESTER_LAB 128::29288						Mapped via HL7 CDA information model
SpO2 – fast-response (-10404)	MDC_MODALITY_FAST 2::19508	433204000	2768695014	Rate of sampling of peripheral oxygen saturation by device	2743645015	NOTE – This must be used in conjunction with 277748003 Fast (qualifier value)	The final IEEE 11073 ReferenceIDs and numeric code assignments have not been assigned at the present time.
SpO2 – slow-response (-10404)	MDC_MODALITY_SLOW 2::19512	433204000	2768695014	Rate of sampling of peripheral oxygen saturation by device	2743645015	NOTE – This must be used in conjunction with 255361000 Slow (qualifier value)	The final IEEE 11073 ReferenceIDs and numeric code assignments have not been assigned at the present time.
SpO2 – spot-check (-10404)	MDC_MODALITY_SPOT 2::19516	431314004	2772010012	Peripheral oxygen saturation	2735642016	2767654013 / SpO2 – saturation of peripheral oxygen	The final IEEE 11073 ReferenceIDs and numeric code assignments have not been assigned at the present time.
SpO2 – precise pulse (-10404)	MDC_TRIG_BEAT_MAX_I NRUSH 2::53259						The final IEEE 11073 ReferenceIDs and numeric code assignments have not been assigned at the present time.

### III.3 Events and attributes not mapped to SNOMED CT

NOTE – Even though the final ISO/IEEE 11073 Reference IDs and numeric code assignments have not all been finalized at the present time, the following table provides an indication of IEEE device terminology that was not mapped into SNOMED CT.

**Table III.3 – Events and attributes not mapped to SNOMED CT**

Description	ISO/IEEE 11073-10101		SNOMED CT		Notes
		Concept ID	Description ID	Description text	
Pulse events (-10404)	MDC_TRIG 2::53250				
Pulse events (-10404)	MDC_TRIG_BEAT 2::53251 Value for attribute MDC_TRIG				
Compound blood pressure measurement (-10407)	MDC_PRESS_BLD_NONINV 2::18948				
SpO2 threshold conditions (-20601)	MDC_ATTR_MSMT_STAT 1::2375				
Alarm condition (-10404)	MDC_ATTR_AL_COND 1::2476				
SpO2 threshold conditions (-10404)	MDC_ATTR_AL_OP_STAT 1::2310				
SpO2 threshold conditions (-10404)	MDC_ATTR_LIMIT_CURR 1::2356				
SpO2 threshold conditions (-10404)	MDC_ATTR_AL_OP_TEXT_STRING 1::2478				

**Table III.3 – Events and attributes not mapped to SNOMED CT**

Description	ISO/IEEE 11073-10101	SNOMED CT			Notes
		Concept ID	Description ID	Description text	
Pulse event placeholder (-10404)	MDC_METRIC_NOS 2::61439				
Pulse characteristics event (-10404)	Event: MDC_PULS_OXIM_PULS_CHAR 2::19512				
Pulse characteristics event (-10404)	Value for attribute MDC_PULS_OXIM_PULS_CHAR  Attributes (not coded) Perfusion or quality of the detected pulse is marginal – pulse-qual-marginal Perfusion or quality of the detected pulse is minimal – pulse-qual-minimal Perfusion or quality of the detected pulse is unacceptable – pulse-qual-unacceptable				Bit values will need local coding
Pulse device and sensor conditions (-10404)	Event: MDC_PULS_OXIM_DEV_STATUS 2::19532				



**Table III.3 – Events and attributes not mapped to SNOMED CT**

Description	ISO/IEEE 11073-10101		SNOMED CT		Notes
		Concept ID	Description ID	Description text	
Pulse device and sensor conditions (-10404)	Value for attribute MDC_PULS_OXIM_DEV_STATUS  Attributes: Agent reports that the sensor is disconnected from the instrument. – sensor-disconnected Agent reports that the sensor is malfunctioning or faulty. – sensor-malfunction Agent reports that the sensor is not properly attached or has been dislodged, preventing accurate measurement. – sensor-displaced An unsupported sensor is connected to the Agent – sensor-unsupported Agent reports that sensor is not connected to the user – sensor-off Signal analysis is currently in progress prior to measurement availability – sensor-searching Agent reports that there is interference due to ambient light or electrical phenomena – sensor-interference Agent determines that a questionable pulse is detected – signal-pulse-questionable Agent detects a non-pulsatile signal – signal-non-pulsatile Agent reports that the signal is erratic or is not plausible – signal-erratic Agent reports a consistently low perfusion condition exists – signal-low-perfusion Agent reports a poor signal exists, possibly affecting accuracy – signal-poor Agent reports that the incoming signal cannot be analyzed or is inadequate for producing a				Bit values will need local coding

63

Rec. ITU-T H.813 (11/2015)

**Table III.3 – Events and attributes not mapped to SNOMED CT**

Description	ISO/IEEE 11073-10101	SNOMED CT			Notes
		Concept ID	Description ID	Description text	
Medication (insulin) event (-10417)	Event: MDC_CTXT_MEDICATION 128::29188				
Medication (insulin) event (-10417)	MDC_CTXT_MEDICATION_RAPIDACTI NG 128::29192 Value for attribute MDC_CTXT_MEDICATION				
Medication (insulin) event (-10417)	MDC_CTXT_MEDICATION_SHORTACTI NG 128::29196 Value for attribute MDC_CTXT_MEDICATION				
Medication (insulin) event (-10417)	MDC_CTXT_MEDICATION_INTERMEDI ATEACTING 128::29200 Value for attribute MDC_CTXT_MEDICATION				
Medication (insulin) event (-10417)	MDC_CTXT_MEDICATION_LONGACTI NG 128::29204 Value for attribute MDC_CTXT_MEDICATION				
Medication (insulin) event (-10417)	MDC_CTXT_MEDICATION_PREMIX 128::29208 Value for attribute MDC_CTXT_MEDICATION				

**Table III.3 – Events and attributes not mapped to SNOMED CT**

Description	ISO/IEEE 11073-10101		SNOMED CT		Notes
		Concept ID	Description ID	Description text	
Subjective health event (-10417)	Event: MDC_CTXT_GLU_HEALTH 128::29212				
Subjective health event (-10417)	MDC_CTXT_GLU_HEALTH_MINOR 128::29216 Value for attribute MDC_CTXT_GLU_HEALTH				
Subjective health event (-10417)	MDC_CTXT_GLU_HEALTH_MAJOR 128::29220 Value for attribute MDC_CTXT_GLU_HEALTH				
Subjective health event (-10417)	MDC_CTXT_GLU_HEALTH_MENSES 128::29224 Value for attribute MDC_CTXT_GLU_HEALTH				
Subjective health event (-10417)	MDC_CTXT_GLU_HEALTH_STRESS 128::29228 Value for attribute MDC_CTXT_GLU_HEALTH				
Subjective health event (-10417)	MDC_CTXT_GLU_HEALTH_NONE 128::29232 Value for attribute MDC_CTXT_GLU_HEALTH				
Exercise activity (-10417)	MDC_CTXT_GLU_EXERCISE 128::29152				

**Table III.3 – Events and attributes not mapped to SNOMED CT**

Description	ISO/IEEE 11073-10101	SNOMED CT		Notes
		Concept ID	Description ID	Description text
Dietary intake event (-10417)	Event: MDC_CTXT_GLU_CARB 128::29156			
Dietary intake event (-10417)	MDC_CTXT_GLU_CARB_BREAKFAST 128::29160 Value for attribute MDC_CTXT_GLU_CARB			
Dietary intake event (-10417)	MDC_CTXT_GLU_CARB_LUNCH 128::29164 Value for attribute MDC_CTXT_GLU_CARB			
Dietary intake event (-10417)	MDC_CTXT_GLU_CARB_DINNER 128::29168 Value for attribute MDC_CTXT_GLU_CARB			
Dietary intake event (-10417)	MDC_CTXT_GLU_CARB_SNACK 128::29172 Value for attribute MDC_CTXT_GLU_CARB			
Dietary intake event (-10417)	MDC_CTXT_GLU_CARB_DRINK 128::29176 Value for attribute MDC_CTXT_GLU_CARB			
Dietary intake event (-10417)	MDC_CTXT_GLU_CARB_SUPPER 128::29180 Value for attribute MDC_CTXT_GLU_CARB			

**Table III.3 – Events and attributes not mapped to SNOMED CT**

Description	ISO/IEEE 11073-10101	SNOMED CT			Notes
		Concept ID	Description ID	Description text	
Dietary intake event (-10417)	MDC_CTXT_GLU_CARB_BRUNCH 128::29184 Value for attribute MDC_CTXT_GLU_CARB				
Meter status (-10417)	MDC_GLU_METER_DEV_STATUS 128::29144				
Fixed medication dispensed event (-10472)	MDC_AI_MED_DISPENSED_FIXED 130::13312				Mapped via the HL7 CDA medication section
Variable medication dispensed Event (-10472)	MDC_AI_MED_DISPENSED_VARIABLE 130::13313				Mapped via the HL7 CDA medication section [ANSI/HL7 CDA]
User feedback event (-10472)	MDC_AI_MED_FEEDBACK 130::13315				Mapped via the HL7 Framework for Questionnaire Assessments (Universal Realm) [HL7 CDA R2 QA]
Status reporter event (-10472)	Value for attribute MDC_AI_MED_STATUS 130::13314				
Body fat (-10420)	MDC_BODY_FAT 2::57676				
Body water (-10420)	MDC_BODY_WATER 2::57692				

**Table III.3 – Events and attributes not mapped to SNOMED CT**

Description	ISO/IEEE 11073-10101	SNOMED CT			Notes
		Concept ID	Description ID	Description text	
Fat free mass (-10420)	MDC_MASS_BODY_FAT_FREE 2::57684				
Soft lean mass (-10420)	MDC_MASS_BODY_SOFT_LEAN 2::57688				
Heart rate (-10406)	MDC_ECG_HEART_RATE 2::16770				
Instantaneous heart rate (-10406)	MDC_ECG_HEART_RATE_INSTANT 128::21982				
R-R interval (-10406)	MDC_ECG_TIME_PD_RR_GL 2::16168				
ECG lead unspecified (-10406)	MDC_ECG_ELEC_POTL 2::256				
ECG lead augmented voltage foot (aVF) (-10406)	MDC_ECG_ELEC_POTL_AVF 2::320				
ECG lead augmented voltage left (aVL) (-10406)	MDC_ECG_ELEC_POTL_AVL 2::319				
ECG lead augmented voltage right (aVR) (-10406)	MDC_ECG_ELEC_POTL_AVR 2::318				
ECG lead I (-10406)	MDC_ECG_ELEC_POTL_I 2::257				
ECG lead II (-10406)	MDC_ECG_ELEC_POTL_II 2::258				

**Table III.3 – Events and attributes not mapped to SNOMED CT**

Description	ISO/IEEE 11073-10101	SNOMED CT			Notes
		Concept ID	Description ID	Description text	
ECG lead III (-10406)	MDC_ECG_ELEC_POTL_III 2::317				
ECG lead V1 (-10406)	MDC_ECG_ELEC_POTL_V1 2::259				
ECG lead V2 (-10406)	MDC_ECG_ELEC_POTL_V2 2::260				
ECG lead V3 (-10406)	MDC_ECG_ELEC_POTL_V3 2::261				
ECG lead V4 (-10406)	MDC_ECG_ELEC_POTL_V4 2::262				
ECG lead V5 (-10406)	MDC_ECG_ELEC_POTL_V5 2::263				
ECG lead V6 (-10406)	MDC_ECG_ELEC_POTL_V6 2::264				
ECG device status (-10406)	Event: MDC_ECG_DEV_STAT 128::21976				

**Table III.3 – Events and attributes not mapped to SNOMED CT**

Description	ISO/IEEE 11073-10101		SNOMED CT		Notes
		Concept ID	Description ID	Description text	
ECG device status (-10406)	<p>Value for attribute MDC_ECG_DEV_STAT</p> <p>Attributes:</p> <p>Agent reports loss of lead wire or electrode connection (lead unspecified). – leadwire-loss</p> <p>Agent reports loss of lead signal (lead unspecified). – leadsignal-loss</p> <p>Agent reports loss of lead wire or electrode connection (first lead). – leadwire-loss-first-lead</p> <p>Agent reports loss of lead signal (first lead). – leadsignal-loss-first-lead</p> <p>Agent reports loss of lead wire or electrode connection (second lead). – leadwire-loss-second-lead</p> <p>Agent reports loss of lead signal (second lead). – leadsignal-loss-second-lead</p> <p>Agent reports loss of lead wire or electrode connection (third lead). – leadwire-loss-third-lead</p> <p>Agent reports loss of lead signal (third lead). – leadsignal-loss-third-lead</p>				
ECG context data trigger event (-10406)	<p>Event:</p> <p>MDC_ECG_EVT_CTXT_GEN</p> <p>128:: 21977</p>				



**Table III.3 – Events and attributes not mapped to SNOMED CT**

Description	ISO/IEEE 11073-10101	SNOMED CT			Notes
		Concept ID	Description ID	Description text	
ECG context data trigger event (-10406)	Value for attribute MDC_ECG_EVT_CTXT_GEN  MDC_ECG_EVT_CTXT_USER 128::21978				
ECG context data trigger event (-10406)	Value for attribute MDC_ECG_EVT_CTXT_GEN  MDC_ECG_EVT_CTXT_PERIODIC 128::21979				
ECG context data trigger event (-10406)	Value for attribute MDC_ECG_EVT_CTXT_GEN  MDC_ECG_EVT_CTXT_DETECTED 128::21980				
ECG context data trigger event (-10406)	Value for attribute MDC_ECG_EVT_CTXT_GEN  MDC_ECG_EVT_CTXT_EXTERNAL 128::21981				

### III.4 ISO/IEEE 11073-10101 Unit elements mapping to UCUM

Table III.4 – ISO/IEEE 11073-10101 Unit elements (MDC\_PART\_DIM) mapping to UCUM

11073 Reference ID	Symbol (informative)	UCUM unit code (case sensitive)
MDC_DIM_PERCENT	%	%
MDC_DIM_BEAT_PER_MIN	Bpm	{ beat }/min
MDC_DIM_MMHG	mmHg	mm[Hg]
MDC_DIM_KILO_PASCAL	kPa	kPa
MDC_DIM_DEGC	°C	Cel
MDC_DIM_FAHR	°F	[degF]
MDC_DIM_KILO_G	kg	kg
MDC_DIM_LB	lb	[lb_av]
MDC_DIM_CENTI_M	cm	cm
MDC_DIM_INCH	in	[in_i]
MDC_DIM_KG_PER_M_SQ	kg/m <sup>2</sup>	kg/m2
MDC_DIM_MILLI_MOLE_PER_L	mmol/L	mmol/L
MDC_DIM_KCAL	Cal	[Cal]
MDC_DIM_MILLI_G_PER_DL	mg/dL	mg/dL
MDC_DIM_DIMLESS		1
MDC_DIM_MILLI_L	mL	mL
MDC_DIM_MILLI_G	mg	mg
MDC_DIM_INTL_UNIT	IU	[iU]
MDC_DIM_L_PER_MIN	L/min	L/min
MDC_DIM_L	L	L
MDC_DIM_MICRO_SEC	us	us
MDC_DIM_MILLI_SEC	ms	ms
MDC_DIM_MILLI_VOLT	mV	mV
MDC_DIM_PER_SEC	s-1	/s
MDC_DIM_TICK	tick	

## Appendix IV

### Mapping from the Continua WAN to the HL7 personal health monitoring report object model

(This appendix does not form an integral part of this design guideline.)

#### IV.1 Introduction

The Continua HRN interface utilizes the personal healthcare monitoring report (PHMR) [HL7 CDA-PHMR] document to convey information to HR systems. As the PHMR is meant to be a report detailing a wide assortment of patient-centred information, the information conveyed could be from a myriad of data sources. These data sources may be in-home devices but they can also be information gathered at other points in the complete health care spectrum.

This document is based on the HL7 V3 architecture and is a derivative of the clinical document architecture release 2 (CDA R2). As such, it is a structured XML based file that has specified clauses for various types of health information.

Placing the data derived from WAN interface messages (PCD-01) entails placing the data in specific document clauses in their proper format. Along with any desired data from other sources, this total set of information would comprise a single PHMR document.

The discussion that follows centres on the WAN interface and only gives guidance on how to place WAN interface derived data in the report.

#### IV.2 Base mapping strategy

At a high level, information is split up and reported in various clauses of the PHRM depending on the type of data and the type of device.

#### IV.3 Device information

Information on the device itself is placed in the *Medical Equipment* clause of the PHMR. This device information should be formatted into a *Device Definition Organizer* element. At a minimum, the data should include the system type, system model, system manufacturer, system ID, production specification and whether the device is regulated.

#### IV.4 Observation information

The PHRM specifies that the blood pressure, temperature, O2 saturation, respiratory rate and pulse observation data be conveyed in the *Vital Signs* clause. All other information is conveyed in the *Results* clause.

For Continua HRN usage, the CDG place some additional constraints on the data reported. The guidelines contain a table of mappings from IEE MDC codes to SNOMED codes.

If the value being reported is contained in the guideline mapping table, then the measurement must be reported using the SNOMED code and there should be a translation code element that specifies the corresponding (probably original) IEEE MDC code.

If the value being reported is not contained in the guideline mapping table, then the observation is simply reported using the IEEE MDC code.

#### IV.5 Device information

```
<section>
  <templateId root="2.16.840.1.113883.10.20.1.7"/>
  <templateId root="2.16.840.1.113883.10.20.9.1"/>
```

```

<code code="46264-8" codeSystem="2.16.840.1.113883.6.1"/>
<title>Medical Equipment</title>
<text>
  <!-- Device information -->
  <table border="1" width="100%">
    <tbody>
      <tr>
        <th>System Type</th>
        <th>System Model</th>
        <th>System Manufacturer</th>
        <th>System ID</th>
        <th>Production Spec</th>
        <th>Regulated</th>
      </tr>
      <tr>
        <td>Blood Pressure Monitor</td>
        <td>Pulse Master 2000</td>
        <td>Acme</td>
        <td>1F-3E-46-78-9A-BC-DE-F1</td>
        <td>
          Unspecified:
          Serial Number: 584216<br/>
          Part Number: 69854<br/>
          Hardware Revision: 2.1<br/>
          Software Revision: 1.1<br/>
          Protocol Revision: 1.0<br/>
          Prod Spec GMDN:
        </td>
        <td>Regulated</td>
      </tr>
    </tbody>
  </table>
</text>
<entry typeCode="COMP">
  <organizer classCode="CLUSTER" moodCode="EVN">
    <templateId root="2.16.840.1.113883.10.20.9.4"/>
    <statusCode code="completed"/>
    <effectiveTime value="20080801104033-0600"/>
    <participant typeCode="SBJ">
      <participantRole classCode="MANU">
        <templateId root="2.16.840.1.113883.10.20.1.52"/>
        <templateId root="2.16.840.1.113883.10.20.9.9"/>
        <id root="1.2.840.10004.1.1.1.0.0.1.0.0.1.2680"
assigningAuthorityName="EUI-64" extension="1A-34-46-78-9A-BC-DE-F3"/>
        <code nullFlavor="OTH">
          <originalText>Regulated Device</originalText>
        </code>
        <playingDevice>
          <code
codeSystem="2.16.840.1.113883.6.24" codeSystemName="MDC" displayName="Blood
Pressure Monitor">
            <translation
code="32033000"
codeSystem="2.16.840.1.113883.6.96" codeSystemName="SNOMED
CT"
displayName="Arterial pressure monitor"/>
            <translation code="???" codeSystem="GMDN-OID">
              <!--move Production spec GMDN here from the
manufacturerModelName-->
            </translation>
          </code>
        </playingDevice>
        <code
codeSystem="2.16.840.1.113883.6.24" codeSystemName="MDC" displayName="Blood Pressure Monitor">
          <translation
code="32033000"
codeSystem="2.16.840.1.113883.6.96" codeSystemName="SNOMED
CT"
displayName="Arterial pressure monitor"/>
        </code>
      </participantRole>
    </participant>
  </organizer>
</entry>

```

```

        </translation>
    </code>
    <manufacturerModelName>
        <!-- these will be unstructured, the text below is an
example (no shalls for the labels used below)-->
        Model: Pulse Master 2000
        Serial number:584216
        Part number: 69854
        Hardware revision: 2.1
        Software revision: 1.1
        Protocol revision: 1.0
        Unspecified (free text comment):
    </manufacturerModelName>
</playingDevice>
<scopingEntity>
    <desc>Acme</desc>
</scopingEntity>
</participantRole>
</participant>
<component>
    <observation classCode="OBS" moodCode="EVN">
        <!--... all our device observations go here -->
        <code/>
    </observation>
</component>
</organizer>
</entry>
</section>

```

## IV.6 Observation information

```

<section>
<templateId root="2.16.840.1.113883.10.20.1.16"/>
<templateId root="2.16.840.1.113883.10.20.9.2"/>
<code code="8716-3" codeSystem="2.16.840.1.113883.6.1"/>
<title>Vital Signs</title>
<text>
    <paragraph>Thermometer Results</paragraph>
    <table border="1" width="100%">
        <tBody>
            <tr>
                <th>Date/Time</th>
                <th>Body Temp</th>
                <th>Finger Temp</th>
                <th>Oral Temp</th>
            </tr>
            <tr>
                <td>20080501104033</td>
                <td>99.9 deg F</td>
                <td>88.8 deg F</td>
                <td>37.5 deg C</td>
            </tr>
        </tBody>
    </table>
</text>
<entry typeCode="DRIV">
    <organizer classCode="CLUSTER" moodCode="EVN">
        <!-- Vital sign data/ Test Groups -->
        <!-- A VITAL SIGNS ORGANIZER IS USED TO GROUP RELATED -->
        <templateId root="2.16.840.1.113883.10.20.1.35"/>
        <id root="b606a959-baab-4836-84a8-97c4e9857533"/>
        <code code="46680005" codeSystem="2.16.840.1.113883.6.96"
displayName="Vital signs"/>
        <statusCode code="completed"/>
    </organizer>
</entry>

```

```

    <component>
      <observation classCode="OBS" moodCode="EVN">
        <templateId root="2.16.840.1.113883.10.20.1.31"/>
        <id root="975c2f3b-2bd4-4e45-aed1-84af9ff51b10"/>
        <code code="386725007" codeSystem="2.16.840.1.113883.6.96"
codeSystemName="SNOMED CT" displayName="Body Temperature">
          <translation code="MDC_TEMP_BODY"
codeSystem="2.16.840.1.113883.6.24" codeSystemName="MDC" displayName="Body
Temperature"/>
        </code>
        <statusCode code="completed"/>
        <effectiveTime value="20080501104033-0600"/>
        <value xsi:type="PQ" value="99.9" unit="[degF]"/>
        <participant typeCode="DEV">
          <participantRole>
            <id root="1.2.840.10004.1.1.1.0.0.1.0.0.1.2680"
assigningAuthorityName="EUI-64" extension="1A-34-46-78-9A-BC-DE-F3"/>
          </participantRole>
        </participant>
      </observation>
    </component>
    <component>
      <observation classCode="OBS" moodCode="EVN">
        <templateId root="2.16.840.1.113883.10.20.1.31"/>
        <templateId root="2.16.840.1.113883.10.20.9.8"/>
        <id root="975c2f3b-2bd4-4e45-aed1-84af9ff51b10"/>
        <code code="433588001" codeSystem="2.16.840.1.113883.6.96"
codeSystemName="SNOMED CT" displayName="Temperature of digit of hand">
          <translation code="MDC_TEMP_FINGER"
codeSystem="2.16.840.1.113883.6.24" codeSystemName="MDC" displayName="Finger
Temperature"/>
        </code>
        <statusCode code="completed"/>
        <effectiveTime value="20080501104033-0600"/>
        <value xsi:type="PQ" value="88.8" unit="[degF]"/>
        <participant typeCode="DEV">
          <participantRole>
            <id root="1.2.840.10004.1.1.1.0.0.1.0.0.1.2680"
assigningAuthorityName="EUI-64" extension="1A-34-46-78-9A-BC-DE-F3"/>
          </participantRole>
        </participant>
      </observation>
    </component>
    <component>
      <observation classCode="OBS" moodCode="EVN">
        <templateId root="2.16.840.1.113883.10.20.1.31"/>
        <templateId root="2.16.840.1.113883.10.20.9.8"/>
        <id root="975c2f3b-2bd4-4e45-aed1-84af9ff51b10"/>
        <code code="415945006" codeSystem="2.16.840.1.113883.6.96"
codeSystemName="SNOMED CT" displayName="Oral Temperature">
          <translation code="MDC_TEMP_ORAL"
codeSystem="2.16.840.1.113883.6.24" codeSystemName="MDC" displayName="Oral
Temperature"/>
        </code>
        <statusCode code="completed"/>
        <effectiveTime value="20080501104033-0600"/>
        <value xsi:type="PQ" value="37.5" unit="Cel"/>
        <participant typeCode="DEV">
          <participantRole>
            <id root="1.2.840.10004.1.1.1.0.0.1.0.0.1.2680"
assigningAuthorityName="EUI-64" extension="1A-34-46-78-9A-BC-DE-F3"/>
          </participantRole>
        </participant>
      </observation>
    </component>

```

```
        </component>
    </organizer>
</entry>
</section>
```

## **Bibliography**

See [ITU-T H.810 (2015)] for a list of non-normative references and publications that contain further background information.





## SERIES OF ITU-T RECOMMENDATIONS

Series A	Organization of the work of ITU-T
Series D	General tariff principles
Series E	Overall network operation, telephone service, service operation and human factors
Series F	Non-telephone telecommunication services
Series G	Transmission systems and media, digital systems and networks
<b>Series H</b>	<b>Audiovisual and multimedia systems</b>
Series I	Integrated services digital network
Series J	Cable networks and transmission of television, sound programme and other multimedia signals
Series K	Protection against interference
Series L	Environment and ICTs, climate change, e-waste, energy efficiency; construction, installation and protection of cables and other elements of outside plant
Series M	Telecommunication management, including TMN and network maintenance
Series N	Maintenance: international sound programme and television transmission circuits
Series O	Specifications of measuring equipment
Series P	Terminals and subjective and objective assessment methods
Series Q	Switching and signalling
Series R	Telegraph transmission
Series S	Telegraph services terminal equipment
Series T	Terminals for telematic services
Series U	Telegraph switching
Series V	Data communication over the telephone network
Series X	Data networks, open system communications and security
Series Y	Global information infrastructure, Internet protocol aspects, next-generation networks, Internet of Things and smart cities
Series Z	Languages and general software aspects for telecommunication systems