

International Telecommunication Union

ITU-T

TELECOMMUNICATION
STANDARDIZATION SECTOR
OF ITU

K.21

Amendment 1
(06/2020)

SERIES K: PROTECTION AGAINST INTERFERENCE

Resistibility of telecommunication equipment
installed in customer premises to overvoltages and
overcurrents

Amendment 1

Recommendation ITU-T K.21 (2019) – Amendment 1

ITU-T



Recommendation ITU-T K.21

Resistibility of telecommunication equipment installed in customer premises to overvoltages and overcurrents

Amendment 1

Summary

Recommendation ITU-T K.21 specifies resistibility requirements and test procedures for telecommunication equipment that is attached to or installed within a customer's premises.

Overvoltages or overcurrents covered by this Recommendation include surges due to lightning on or near the line plant, short-term induction from adjacent alternating current (a.c.) power lines or railway systems, earth potential rise due to power faults, direct contact between telecommunication lines and power lines, and electrostatic discharges (ESDs). The sources for overvoltages in internal lines are mainly inductive coupling caused by lightning currents being conducted in nearby lightning strikes or lightning currents being conducted by nearby conductors.

Changes compared with Recommendation ITU-T K.21 (2018) include:

- added special resistibility requirements
- added DC insulation resistance test;
- added Test 7.10
- changes to some test labels.

Amendment 1 refers to Annex A, which applies to special environments, in particular primary protection that has a poor earth connection that does not meet the requirements of Recommendation ITU-T K.66. This condition is simulated by increasing the STP earth resistance (R1) from zero to 100. Readers have overlooked this change, possibly because the test circuit diagram is in Recommendation ITU-T K.44. To alert readers of this, a text note has been inserted in the Comments column.

History

Edition	Recommendation	Approval	Study Group	Unique ID*
1.0	ITU-T K.21	1988-11-25		11.1002/1000/1390
2.0	ITU-T K.21	1996-10-18	5	11.1002/1000/3881
3.0	ITU-T K.21	2000-10-06	5	11.1002/1000/5153
4.0	ITU-T K.21	2003-07-29	5	11.1002/1000/6493
5.0	ITU-T K.21	2008-04-13	5	11.1002/1000/9401
6.0	ITU-T K.21	2011-11-13	5	11.1002/1000/11421
7.0	ITU-T K.21	2015-04-22	5	11.1002/1000/12404
8.0	ITU-T K.21	2016-06-29	5	11.1002/1000/12868
9.0	ITU-T K.21	2016-12-14	5	11.1002/1000/13127
10.0	ITU-T K.21	2017-07-29	5	11.1002/1000/13273
11.0	ITU-T K.21	2018-10-22	5	11.1002/1000/13630
12.0	ITU-T K.21	2019-07-14	5	11.1002/1000/13951
12.1	ITU-T K.21 (2019) Amd. 1	2020-06-29	5	11.1002/1000/14290

Keywords

1.2/50-8/20, 10/700, customer premises equipment, Ethernet, external port, internal port, overvoltage, overcurrent, power contact, power induction, power over Ethernet (PoE), resistibility, surges, telecommunication equipment, transverse/differential, universal serial bus (USB).

* To access the Recommendation, type the URL <http://handle.itu.int/> in the address field of your web browser, followed by the Recommendation's unique ID. For example, <http://handle.itu.int/11.1002/1000/11830-en>.

FOREWORD

The International Telecommunication Union (ITU) is the United Nations specialized agency in the field of telecommunications, information and communication technologies (ICTs). The ITU Telecommunication Standardization Sector (ITU-T) is a permanent organ of ITU. ITU-T is responsible for studying technical, operating and tariff questions and issuing Recommendations on them with a view to standardizing telecommunications on a worldwide basis.

The World Telecommunication Standardization Assembly (WTSA), which meets every four years, establishes the topics for study by the ITU-T study groups which, in turn, produce Recommendations on these topics.

The approval of ITU-T Recommendations is covered by the procedure laid down in WTSA Resolution 1.

In some areas of information technology which fall within ITU-T's purview, the necessary standards are prepared on a collaborative basis with ISO and IEC.

NOTE

In this Recommendation, the expression "Administration" is used for conciseness to indicate both a telecommunication administration and a recognized operating agency.

Compliance with this Recommendation is voluntary. However, the Recommendation may contain certain mandatory provisions (to ensure, e.g., interoperability or applicability) and compliance with the Recommendation is achieved when all of these mandatory provisions are met. The words "shall" or some other obligatory language such as "must" and the negative equivalents are used to express requirements. The use of such words does not suggest that compliance with the Recommendation is required of any party.

INTELLECTUAL PROPERTY RIGHTS

ITU draws attention to the possibility that the practice or implementation of this Recommendation may involve the use of a claimed Intellectual Property Right. ITU takes no position concerning the evidence, validity or applicability of claimed Intellectual Property Rights, whether asserted by ITU members or others outside of the Recommendation development process.

As of the date of approval of this Recommendation, ITU had not received notice of intellectual property, protected by patents, which may be required to implement this Recommendation. However, implementers are cautioned that this may not represent the latest information and are therefore strongly urged to consult the TSB patent database at <http://www.itu.int/ITU-T/ipr/>.

© ITU 2020

All rights reserved. No part of this publication may be reproduced, by any means whatsoever, without the prior written permission of ITU.

Table of Contents

	Page
1 Scope	1
2 References.....	1
3 Definitions	2
3.1 Terms defined elsewhere.....	2
3.2 Terms defined in this Recommendation.....	2
4 Abbreviations and acronyms	2
4.1 Symbols	2
5 Conventions	2
6 Tests.....	3
Annex A – Special resistibility requirements	27
A.1 Introduction	27
A.2 Special resistibility requirements	27
Bibliography.....	31

Recommendation ITU-T K.21

Resistibility of telecommunication equipment installed in customer premises to overvoltages and overcurrents

Amendment 1

Editorial note: This is a complete-text publication. Modifications introduced by this amendment are shown in revision marks relative to Recommendation ITU-T K.21 (2019).

1 Scope

This Recommendation specifies resistibility requirements and test procedures for telecommunication equipment that is attached to or installed within a customer's premises. The requirements of this Recommendation assume that earthing and bonding is in accordance with [ITU-T K.66].

The types of equipment covered by this Recommendation include all types of telecommunication equipment, e.g., modems, telephones, routers, implementations of digital subscriber lines and personal computers.

NOTE – Associated equipment containing ports with a low surge impedance to earth connected by short cables, e.g., printers using universal serial bus (USB) cables, may be susceptible to damage due to circulating earth currents. Refer to [ITU-T K.66] and [b-ITU-T K.85] for methods of protection.

This Recommendation applies to both external and internal ports. [ITU-T K.44], covering basic test methods and test circuits, is an integral part of this Recommendation. This Recommendation should be read in conjunction with [ITU-T K.11] and [ITU-T K.39].

2 References

The following ITU-T Recommendations and other references contain provisions which, through reference in this text, constitute provisions of this Recommendation. At the time of publication, the editions indicated were valid. All Recommendations and other references are subject to revision; users of this Recommendation are therefore encouraged to investigate the possibility of applying the most recent edition of the Recommendations and other references listed below. A list of the currently valid ITU-T Recommendations is regularly published. The reference to a document within this Recommendation does not give it, as a stand-alone document, the status of a Recommendation.

- [ITU-T K.11] Recommendation ITU-T K.11 (2009), *Principles of protection against overvoltages and overcurrents*.
- [ITU-T K.39] Recommendation ITU-T K.39 (1996), *Risk assessment of damages to telecommunication sites due to lightning discharges*.
- [ITU-T K.44] Recommendation ITU-T K.44 (2018), *Resistibility tests for telecommunication equipment exposed to overvoltages and overcurrents – Basic Recommendation*.
- [ITU-T K.66] Recommendation ITU-T K.66 (2011), *Protection of customer premises from overvoltages*.
- [IEC 61000-4-2] IEC 61000-4-2 (2008), *Electromagnetic compatibility (EMC) – Part 4-2: Testing and measurement techniques – Electrostatic discharge immunity test*.

3 Definitions

3.1 Terms defined elsewhere

This Recommendation uses terms defined in [ITU-T K.44].

3.2 Terms defined in this Recommendation

None.

4 Abbreviations and acronyms

This Recommendation uses the following abbreviations and acronyms:

a.c.	alternating current
CWG	Combination Wave Generator
d.c.	direct current
dpf	dedicated power feed
ESD	Electrostatic Discharge
MSPD	Multiservice Surge Protective Device
n/a	not applicable
PE	Protective Earth
PoE	Power over Ethernet
STP	Special Test Protector
STP _E	Ethernet Shielded Twisted Pair
USB	Universal Serial Bus
UTP _E	Ethernet Unshielded Twisted Pair Ethernet

4.1 Symbols

This Recommendation uses the following symbols:

f	frequency
I	current
R	resistance
t	duration
$U_{a.c.}$	alternating current voltage
$U_{a.c.(max)}$	maximum alternating current voltage
U_c	charging voltage
$U_{c(max)}$	maximum charging voltage
U_{rms}	root mean square voltage
$W_{sp(max)}$	maximum specific energy

5 Conventions

Conventions and symbols used in this Recommendation are defined in [ITU-T K.44].

6 Tests

A summary of the tests applicable to equipment installed in a customer's premises is given in Table 1. The numbers given in the "Port type" columns, e.g., 2.2.1a, refer to the "Test No." of Tables 2 to 5. The words "under study" mean that ITU-T is still studying this test. The test conditions applicable to the four ports – symmetric, coaxial, dedicated power feed and mains power – are given in Tables 2 to 5. The test conditions for electrostatic discharge (ESD) are given in Table 6. The test conditions for internal cable ports are given in Table 7. For information on the headings and terms used in the tables, refer to clause 10 of [ITU-T K.44].

Refer to clause 5.2 of [ITU-T K.44] on selecting the enhanced resistibility requirement.

NOTE 1 – The port to external port test for the basic test level does not apply when the equipment is designed to always be used with a connection to earth.

NOTE 2 – The external port test applies to ports used to connect externally attached equipment to equipment installed within the same building. The mains power contact test does not apply in this situation. Where the equipment external to the building is installed in the "inherently protected" area shown in Figure 3 of [b-ITU-T K.71], the internal port test can be applied.

NOTE 3 – The power induction test does not apply to ports used to connect to antennas installed within the scope of [b-ITU-T K.71].

NOTE 4 – The internal port tests in Table 7 apply to ports connected by short cables, e.g., USB and printer cables. Table 7 does not apply to ports connected infrequently, e.g., for maintenance ports.

Table 1a – Applicable tests for external ports

Test type	No. of pairs simultaneously tested	Test connections	Primary protection	Port type			
				Symmetric port	Co-axial port	Dedicated power feed port	Mains power port
Lightning/voltage	Single	Transverse/differential	No	2.1.1a	3.1.1	4.1.1a	5.1.1a
		Port to earth	No	2.1.1b	n/a	4.1.1b	5.1.1b
		Port to external port	No	2.1.1c	n/a	4.1.1c	5.1.1c
		Coordination/Transverse/differential	Yes	2.1.2a	3.1.2	4.1.2a	5.1.2a
		Coordination/Port to earth	Yes	2.1.2b	n/a	4.1.2b	5.1.2b
		Coordination/Port to external port	Yes	2.1.2c	n/a	4.1.2c	5.1.2c
	Multiple	Port to earth	No	2.1.3a	n/a	n/a	n/a
		Port to external port	No	2.1.3b	n/a	n/a	n/a
		Port to earth	Yes	2.1.4a	n/a	n/a	n/a
		Port to external port	Yes	2.1.4b	n/a	n/a	n/a
	Ethernet unshielded twisted pair (UTP _E)	Port to earth	No	2.1.8	n/a	n/a	n/a
		Transverse/differential	No	2.1.7	n/a	n/a	n/a
		Voltage impulse test	No	2.1.10	n/a	n/a	n/a
		Power over Ethernet (PoE)	No	2.1.11	n/a	n/a	n/a
	Ethernet shielded twisted pair (STP _E)	Shield to earth	No	2.1.9		n/a	n/a
		Port to earth	No	2.1.8		n/a	n/a

Table 1a – Applicable tests for external ports

Test type	No. of pairs simultaneously tested	Test connections	Primary protection	Port type			
				Symmetric port	Co-axial port	Dedicated power feed port	Mains power port
Lightning current	Single	Port to earth	No	2.1.5a	n/a	4.1.5a	n/a
		Port to external port	No	2.1.5b	n/a	4.1.5b	n/a
	Multiple	Port to earth	No	2.1.6a, 2.1.10	n/a	n/a	n/a
		Port to external port	No	2.1.6b	n/a	n/a	n/a
		Transverse/differential	n/a	n/a	3.1.3	n/a	n/a
		Shield to earth	n/a	n/a	3.1.4	n/a	n/a
		Shield to external port	n/a	n/a	3.1.5	n/a	n/a
Power induction and earth potential rise	Single	Transverse/differential	No	2.2.1a	Under study	4.2.1a	n/a
		Port to earth	No	2.2.1b	n/a	4.2.1b	5.2.1 under study
		Port to external port	No	2.2.1c	n/a	4.2.1c	5.2.1 under study
		Coordination Transverse/differential	Yes	2.2.2a	Under study	4.2.2a	n/a
		Coordination port to earth	Yes	2.2.2b	n/a	4.2.2b	n/a
		Coordination port to external port	Yes	2.2.2c	n/a	4.2.2c	n/a
Neutral potential rise	Single	Port to earth	No	n/a	n/a	n/a	5.2.2a
		Port to external port	No	n/a	n/a	n/a	5.2.2b
Mains power contact	Single	Transverse/differential	No	2.3.1a	n/a	4.3.1a	n/a
		Port to earth	No	2.3.1b	n/a	4.3.1b	n/a
		Port to external port	No	2.3.1c	n/a	4.3.1c	n/a
		Ethernet port	No	2.4			
n/a not applicable.							

Table 1b – Lightning test conditions for ports connected to internal cables

No. of pairs simultaneously tested	Test connection	Primary protection	Unshielded cable	Shielded cable	PoE feed	DC powered equipment	DC power source
Single	Shielded cable to earth	No		7.2			
	USB shielded cable to earth	No		7.3			
	Screen/ shield connection high current test	No		7.4			
	Ethernet transverse/differential	No	7.7	7.7			
	Twisted pair port transverse/differential	No	7.10	7.10			
	DC powered equipment port	No				7.8	
	DC power source port	No					7.9
Multiple	Unshielded cable with symmetric pairs	No	7.1				
	PoE Mode A and Mode B transverse/differential testing	No			7.5		
	Ethernet longitudinal/common mode withstand test	No	7.6				

Table 2a – Lightning test conditions for ports connected to external symmetric pair cables

Test No.	Test description	Test circuit and waveform (see figures in Annex A of [ITU-T K.44])	Basic test levels (also see clause 7 of [ITU-T K.44])	Enhanced test levels (also see clauses 5 and 7 of [ITU-T K.44])	Number of tests	Primary protection (see clause 8 of [ITU-T K.44])	Acceptance criteria (see clause 9 of [ITU-T K.44])	Comments
2.1.1a	Single pair, lightning, inherent, transverse/differential	A.3-1 and A.6.1-1 (a and b) 10/700	$U_{c(max)} = 1.5 \text{ kV}$ $R = 25 \Omega$	$U_{c(max)} = 1.5 \text{ kV}$ $R = 25 \Omega$	Alternating ± 5 surges (60 s between successive surges)	None	A	<p>Test 2.1.1 does not apply when the equipment is designed to always be used with primary protection and the operator agrees. If this test is not performed, the appropriate test from Table 7 applies.</p> <p>If the inherent protection of the port under test contains surge protective devices (SPDs) that are connected to a protective earth (PE), a $U_{c(max)}$ of 1.5 kV shall be used instead of 6 kV.</p> <p>If the equipment has an insulated case, the 6 kV test is applied with the equipment wrapped in conductive foil and the foil is connected to the generator return.</p> <p>When the equipment contains high current-carrying components that eliminate the need for primary protection, this test does not apply.</p> <p>(Lower voltage level testing also required for each test – see clause 7.3 of [ITU-T K.44].)</p>
2.1.1b	Single pair, lightning, inherent, port to earth	A.3-1 and A.6.1-2 10/700	$U_{c(max)} = 1.5 \text{ kV}$ $R = 25 \Omega$	$U_{c(max)} = 6 \text{ kV}$ See comments $R = 25 \Omega$				
2.1.1c	Single pair, lightning, inherent, port to external port	A.3-1 and A.6.1-3 10/700	$U_{c(max)} = 1.5 \text{ kV}$ $R = 25 \Omega$	$U_{c(max)} = 6 \text{ kV}$ See comments $R = 25 \Omega$				

Table 2a – Lightning test conditions for ports connected to external symmetric pair cables

Test No.	Test description	Test circuit and waveform (see figures in Annex A of [ITU-T K.44])	Basic test levels (also see clause 7 of [ITU-T K.44])	Enhanced test levels (also see clauses 5 and 7 of [ITU-T K.44])	Number of tests	Primary protection (see clause 8 of [ITU-T K.44])	Acceptance criteria (see clause 9 of [ITU-T K.44])	Comments
2.1.2a	Single pair, lightning, coordination, transverse/differential	A.3-1 and A.6.1-1 (a and b) 10/700	$U_{c(max)} = 4 \text{ kV}$ $R = 25 \Omega$	$U_{c(max)} = 6 \text{ kV}$ $R = 25 \Omega$	Alternating ± 5 surges (60 s between successive surges)	Special test protector (STP); see clause 8.4 of [ITU-T K.44]. When performing the external port to external port test, also add an STP/primary protector to the untested port.	A When the test is performed with $U_c = U_{c(max)}$, the STP must operate. It may also operate with a voltage of $U_c < U_{c(max)}$	When the equipment contains high current-carrying components that eliminate the need for primary protection, refer to clause 10.1.1 of [ITU-T K.44]. (Lower voltage level testing also required for each test – see clause 7.3 of [ITU-T K.44].)
2.1.2b	Single pair, lightning, coordination, port to earth	A.3-1 and A.6.1-2 10/700	$U_{c(max)} = 4 \text{ kV}$ $R = 25 \Omega$	$U_{c(max)} = 6 \text{ kV}$ $R = 25 \Omega$				
2.1.2c	Single pair, lightning, coordination, port to external port	A.3-1 and A.6.1-3 10/700	$U_{c(max)} = 4 \text{ kV}$ $R = 25 \Omega$	$U_{c(max)} = 6 \text{ kV}$ $R = 25 \Omega$				
2.1.3a	Multiple pair, lightning, inherent, port to earth	A.3-1 and A.6.1-4 10/700	$U_{c(max)} = 1.5 \text{ kV}$ $R = 25 \Omega$	$U_{c(max)} = 1.5 \text{ kV}$ $R = 25 \Omega$	Alternating ± 5 surges (60 s between successive surges)	None	A	The multiple pairs test is simultaneously applied to 100% of the pairs in the same street cable, but limited to a maximum of eight pairs. This test does not apply when the equipment is designed to be always used with primary protection. When the equipment contains high current-carrying components that eliminate the need for primary protection, this test does not apply.
2.1.3b	Multiple pair, lightning, inherent, port to external port	A.3-1 and A.6.1-5 10/700	$U_{c(max)} = 1.5 \text{ kV}$ $R = 25 \Omega$	$U_{c(max)} = 1.5 \text{ kV}$ $R = 25 \Omega$				

Table 2a – Lightning test conditions for ports connected to external symmetric pair cables

Test No.	Test description	Test circuit and waveform (see figures in Annex A of [ITU-T K.44])	Basic test levels (also see clause 7 of [ITU-T K.44])	Enhanced test levels (also see clauses 5 and 7 of [ITU-T K.44])	Number of tests	Primary protection (see clause 8 of [ITU-T K.44])	Acceptance criteria (see clause 9 of [ITU-T K.44])	Comments
2.1.4a	Multiple pair, lightning, port to earth	A.3-1 and A.6.1-4 10/700	$U_{c(max)} = 4 \text{ kV}$ $R = 25 \Omega$	$U_{c(max)} = 6 \text{ kV}$ $R = 25 \Omega$	Alternating ± 5 surges (60 s between successive surges)	Agreed primary protector. When performing the external port to external port test, also add an STP/primary protector to the untested port.	A	The multiple pairs test is simultaneously applied to 100% of the pairs in the same street cable, but limited to a maximum of eight pairs. When the equipment contains high current-carrying components that eliminate the need for primary protection, do not remove these components and do not add primary protection. (Lower voltage level testing also required for each test – see clause 7.3 of [ITU-T K.44].)
2.1.4b	Multiple pair, lightning, port to external port	A.3-1 and A.6.1-5 10/700	$U_{c(max)} = 4 \text{ kV}$ $R = 25 \Omega$	$U_{c(max)} = 6 \text{ kV}$ $R = 25 \Omega$				

Table 2a – Lightning test conditions for ports connected to external symmetric pair cables

Test No.	Test description	Test circuit and waveform (see figures in Annex A of [ITU-T K.44])	Basic test levels (also see clause 7 of [ITU-T K.44])	Enhanced test levels (also see clauses 5 and 7 of [ITU-T K.44])	Number of tests	Primary protection (see clause 8 of [ITU-T K.44])	Acceptance criteria (see clause 9 of [ITU-T K.44])	Comments
2.1.5a	Single pair, lightning current, port to earth	A.3-4 and A.6.1-2 8/20	$I = 1 \text{ kA/wire}$ $R = 0 \Omega$	$I = 5 \text{ kA/wire}$ $R = 0 \Omega$	Alternating ± 5 surges (60 s between successive surges)	None	A	This test only applies when the equipment contains high current-carrying components that eliminate the need for primary protection. Do not remove these components. The multiple pairs test is simultaneously applied to 100% of the pairs in the same street cable, but limited to a maximum of eight pairs.
2.1.5b	Single pair, lightning current, port to external port	A.3-4 and A.6.1-3 8/20	$I = 1 \text{ kA/wire}$ $R = 0 \Omega$	$I = 5 \text{ kA/wire}$ $R = 0 \Omega$				
2.1.6a	Multiple pair, lightning current, port to earth	A.3-4 and A.6.1-4 8/20	$I = 1 \text{ kA/wire}$ Limited to 6 kA total $R = 0 \Omega$	$I = 5 \text{ kA/wire}$ Limited to 30 kA total $R = 0 \Omega$				
2.1.6b	Multiple pair, lightning current, port to external port	A.3-4 and A.6.1-5 8/20	$I = 1 \text{ kA/wire}$ Limited to 6 kA total (Note 1) $R = 0 \Omega$	$I = 5 \text{ kA/wire}$ Limited to 30 kA total (Note 1) $R = 0 \Omega$				
2.1.7	Ethernet transverse/differential	A.3-5 and A.6.7-5 1.2/50-8/20 combination wave generator (CWG) $R_1 = 10 \Omega$ and $R_2 = 10 \Omega$	$U_{c(\max)} = 2\,500 \text{ V}$	$U_{c(\max)} = 6\,000 \text{ V}$	Alternating ± 5 surges (60 s between successive surges)	None	A	

Table 2a – Lightning test conditions for ports connected to external symmetric pair cables

Test No.	Test description	Test circuit and waveform (see figures in Annex A of [ITU-T K.44])	Basic test levels (also see clause 7 of [ITU-T K.44])	Enhanced test levels (also see clauses 5 and 7 of [ITU-T K.44])	Number of tests	Primary protection (see clause 8 of [ITU-T K.44])	Acceptance criteria (see clause 9 of [ITU-T K.44])	Comments
2.1.8	Ethernet longitudinal/ common mode to transverse/ differential mode conversion tests	A.3-5 and A.6.7-4 1.2/50-8/20 CWG $R = 10 \Omega$	$U_{c(max)} = 2\,500 \text{ V}$	$U_{c(max)} = 6\,000 \text{ V}$	Alternating ± 5 surges (60 s between successive surges)	None	A	
2.1.9	Screen/shield connection high current test	A.3-5 and A.6.7-6 1.2/50-8/20 CWG $R = 5 \Omega$	$U_{c(max)} = 2\,500 \text{ V}$	$U_{c(max)} = 6\,000 \text{ V}$	Alternating ± 5 surges (60 s between successive surges)	None (see Note 2)	A	
2.1.10	UTP _E port rated impulse voltage test	A.3-5 and A.6.7-3a 1.2/50-8/20 CWG $R = 5 \Omega$	$U_{c(max)} = 2\,500 \text{ V}$ surge	$U_{c(max)} = 6\,000 \text{ V}$ surge	Alternating ± 5 surges (60 s between successive surges)	None (Note 2)	A	There shall be no insulation breakdown during the test and the post-test resistance shall be at least 2 M Ω when measured at 500 V d.c.; see Figure A.6.7-3. Monitor the impulse voltage to detect insulation breakdown or voltage protector operation.
2.1.11	PoE Mode A and Mode B transverse/ differential test	A.3-5 and A.6.7-2 1.2/50-8/20 CWG $R_1 = 10 \Omega$ and $R_2 = 10 \Omega$	$U_{c(max)} = 2\,500 \text{ V}$	$U_{c(max)} = 6\,000 \text{ V}$	Alternating ± 5 surges (60 s between successive surges)	None	A	

NOTE 1 – Peak current is set by the weaker of the ports under test and the external port coupled to earth.
 NOTE 2 – When the cabling is fitted with SPDs, the equipment user and manufacturer may use different test conditions upon mutual agreement; this topic is currently under study.
I: current; *R*: resistance; $U_{c(max)}$: maximum charging voltage.

Table 2b – Power induction and earth potential rise test conditions for ports connected to external symmetric pair cables

Test No.	Test description	Test circuit (see figures in Annex A of [ITU-T K.44])	Basic test levels (also see clause 7 of [ITU-T K.44])	Enhanced test levels (also see clauses 5 and 7 of [ITU-T K.44])	Number of tests	Primary protection (see clause 8 of [ITU-T K.44])	Acceptance criteria (see clause 9 of [ITU-T K.44])	Comments
2.2.1a	Power induction, inherent, transverse/differential	A.3-6 and A.6.1-1 (a and b)	$W_{sp(max)} = 0.2 \text{ A}^2\text{s}$ $f = 16\frac{2}{3} \text{ Hz, 50 Hz or 60 Hz}$ $U_{a.c.(max)} = 600 \text{ V}$ $R = 600 \Omega$ $t = 0.2 \text{ s}$	$W_{sp(max)} = 0.2 \text{ A}^2\text{s}$ $f = 16\frac{2}{3} \text{ Hz, 50 Hz or 60 Hz}$ $U_{a.c.(max)} = 600 \text{ V}$ $R = 600 \Omega$ $t = 0.2 \text{ s}$	5	None	A	<p>This test does not apply when the equipment is designed to be always used with primary protection and the operator agrees.</p> <p>When the equipment contains high current-carrying components that eliminate the need for primary protection, this test does not apply.</p>
2.2.1b	Power induction and earth potential rise, inherent, port to earth	A.3-6 and A.6.1-2						
2.2.1c	Power induction and earth potential rise, inherent, port to external port	A.3-6 and A.6.1-3						
2.2.2a	Power induction inherent/coordination, transverse/differential	A.3-6 and A.6.1-1 (a and b)	$W_{sp(max)} = 1 \text{ A}^2\text{s}$ $f = 16\frac{2}{3} \text{ Hz, 50 Hz or 60 Hz}$ $U_{a.c.(max)} = 600 \text{ V}$ $R = 600 \Omega$ $t = 1.0 \text{ s}$ (Note 1)	$W_{sp(max)} = 10 \text{ A}^2\text{s}$ $f = 16\frac{2}{3} \text{ Hz, 50 Hz or 60 Hz}$ $U_{a.c.(max)} = 1\,500 \text{ V}$ $R = 200 \Omega$ $t_{(max)} = 2 \text{ s}$ $t = \frac{W_{sp} \times R^2}{(U_{a.c.})^2} \quad (6-1)$ (Note 2)	5	Special test protector (STP); see clause 8.4 of [ITU-T K.44]. When performing the external port to external port test, also add an STP/primary protector to the untested port.	A	<p>If the equipment port has inherent primary protection, which eliminates the need for external primary protection, refer to clause 10.1.3 of [ITU-T K.44].</p>
2.2.2b	Power induction and earth potential rise, inherent/coordination, port to earth	A.3-6 and A.6.1-2						
2.2.2c	Power induction and earth potential rise, inherent/coordination, port to external earth	A.3-6 and A.6.1-3						

Table 2b – Power induction and earth potential rise test conditions for ports connected to external symmetric pair cables

Test No.	Test description	Test circuit (see figures in Annex A of [ITU-T K.44])	Basic test levels (also see clause 7 of [ITU-T K.44])	Enhanced test levels (also see clauses 5 and 7 of [ITU-T K.44])	Number of tests	Primary protection (see clause 8 of [ITU-T K.44])	Acceptance criteria (see clause 9 of [ITU-T K.44])	Comments
2.3.1a	Mains power contact, inherent, transverse/differential	A.3-6 and A.6.1-1 (a and b)	$U_{a.c.} = 230 \text{ V}$ $f = 50 \text{ Hz}$ $t = 15 \text{ min}$ for each test resistor $R = 10 \text{ } \Omega, 20 \text{ } \Omega, 40 \text{ } \Omega, 80 \text{ } \Omega, 160 \text{ } \Omega, 300 \text{ } \Omega, 600 \text{ } \Omega$ and $1\ 000 \text{ } \Omega$ See acceptance criteria column.	$U_{a.c.} = 230 \text{ V}$ $f = 50 \text{ Hz}$ $t = 15 \text{ min}$ for each test resistor $R = 10 \text{ } \Omega, 20 \text{ } \Omega, 40 \text{ } \Omega, 80 \text{ } \Omega, 160 \text{ } \Omega, 300 \text{ } \Omega, 600 \text{ } \Omega$ and $1\ 000 \text{ } \Omega$ See acceptance criteria column.	1	None	For basic level: criterion B. For enhanced level: criterion A for test resistors $160 \text{ } \Omega, 300 \text{ } \Omega, 600 \text{ } \Omega,$ and $1\ 000 \text{ } \Omega$; criterion B for the other resistor values.	In some situations, the test may be performed with a reduced number of current limit resistors. Refer to item 11, clause 7.2 of [ITU-T K.44] and clause I.1.4 of [ITU-T K.44] for guidance on selecting the necessary size of resistors. When the equipment is designed to be always used with primary protection, and the operator agrees, perform this test with the STP installed. (Note 3) If the equipment port has inherent primary protection, which eliminates the need for external primary protection, refer to clause 10.1.4 of [ITU-T K.44].
2.3.1b	Mains power contact, inherent, port to earth	A.3-6 and A.6.1-2						
2.3.1c	Mains power contact, inherent, port to external port	A.3-6 and A.6.1-3						
2.4	Ethernet port DC insulation resistance	A.6.7-3	$U_{DC} = \pm 500 \text{ V DC}$	$U_{DC} = \pm 500 \text{ V DC}$	2	None	Insulation resistance $> 2 \text{ M}\Omega$	Test in both polarities, Ensures no port to earth conduction up to 350 V AC

Table 2b – Power induction and earth potential rise test conditions for ports connected to external symmetric pair cables

Test No.	Test description	Test circuit (see figures in Annex A of [ITU-T K.44])	Basic test levels (also see clause 7 of [ITU-T K.44])	Enhanced test levels (also see clauses 5 and 7 of [ITU-T K.44])	Number of tests	Primary protection (see clause 8 of [ITU-T K.44])	Acceptance criteria (see clause 9 of [ITU-T K.44])	Comments
<p>NOTE 1 – The test conditions for Test 2.2.2 (basic test level) may be adapted to the local conditions, by variation of the test parameters within the following limits, so that $I^2t = 1 \text{ A}^2\text{s}$ is fulfilled:</p> <p>$U_{\text{a.c.}(\text{max})} = 300 \text{ V} \dots 600 \text{ V}$, selected to meet local conditions;</p> <p>$t \leq 1.0 \text{ s}$, selected to meet local conditions;</p> <p>$R \leq 600 \Omega$, is to be calculated according to Equation 6-2:</p> $R = U_{\text{a.c.}(\text{max})} \sqrt{t} \tag{6-2}$ <p>NOTE 2 – For Test 2.2.2 (enhanced test level), the equipment shall comply with the specified criterion for all voltage–duration combinations bounded (on and below) by the $10 \text{ A}^2\text{s}$ voltage–duration curve in Figure 1. The curve in Figure 1 is defined by Equation 6-1 and the boundary conditions in this table.</p> <p>NOTE 3 – The a.c. mains voltage and frequency for Test 2.3.1 may be changed to the local mains supply voltage and frequency values. For a.c. test voltage values other than 230 V, the test resistor values should be adjusted to provide the same prospective short-circuit current values that occur in the 230 V test condition.</p> <p>t: duration; $U_{\text{a.c.}}$: alternating current voltage; $U_{\text{a.c.}(\text{max})}$: maximum alternating current voltage; $W_{\text{sp}(\text{max})}$ maximum specific energy; f: frequency</p>								

Table 3a – Lightning test conditions for ports connected to external coaxial cables

Test No.	Test description	Test circuit and waveform (see figures in Annex A of [ITU-T K.44])	Basic test levels (also see clause 7 of [ITU-T K.44])	Enhanced test levels (also see clauses 5 and 7 of [ITU-T K.44])	Number of tests	Primary protection (see clause 8 of [ITU-T K.44])	Acceptance criteria (see clause 9 of [ITU-T K.44])	Comments
3.1.1	Lightning, inherent, transverse/differential	A.3-5 and A.6.2-1 1.2/50 – 8/20 CWG	$U_{c(max)} = 1.0 \text{ kV}$ $R = 0 \Omega$	$U_{c(max)} = 1.5 \text{ kV}$ $R = 0 \Omega$	Alternating ± 5 surges (60 s between successive surges)	None	A	This test does not apply when the equipment is designed to be always used with primary protection. When the equipment contains high current-carrying components that eliminate the need for primary protection, this test does not apply. (Lower voltage level testing also required – see clause 7.3 of [ITU-T K.44].)
3.1.2	Lightning, coordination, transverse/differential	A.3.5 and A.6.2-1 1.2/50 – 8/20 CWG	$U_{c(max)} = 4 \text{ kV}$ $R = 0 \Omega$	$U_{c(max)} = 6 \text{ kV}$ $R = 0 \Omega$	Alternating ± 5 surges (60 s between successive surges)	Special test protector (STP); see clause 8.4 of [ITU-T K.44]. When performing the external port to external port test, also add an STP/primary protector to the untested port.	A When the test is performed with $U_c = U_{c(max)}$, the STP must operate. It may also operate with a voltage of $U_c < U_{c(max)}$	When the equipment contains high current-carrying components that eliminate the need for primary protection, refer to clause 10.2 of [ITU-T K.44]. (Lower voltage level testing also required – see clause 7.3 of [ITU-T K.44].)
3.1.3	Lightning, current, transverse/differential	A.3.4 and A.6.2-1 8/20	$I = 1 \text{ kA}$	$I = 5 \text{ kA}$	Alternating ± 5 surges (60 s between successive surges)	None	A	This test only applies when the equipment contains high current-carrying components that eliminate the need for primary protection. Do not remove these components.

Table 3a – Lightning test conditions for ports connected to external coaxial cables

Test No.	Test description	Test circuit and waveform (see figures in Annex A of [ITU-T K.44])	Basic test levels (also see clause 7 of [ITU-T K.44])	Enhanced test levels (also see clauses 5 and 7 of [ITU-T K.44])	Number of tests	Primary protection (see clause 8 of [ITU-T K.44])	Acceptance criteria (see clause 9 of [ITU-T K.44])	Comments
3.1.4	Lightning shield test, port to earth	A.3.4 and A.6.2-2 8/20	$I = 4$ kA (Note 1) $I = 2$ kA (Note 2)	$I = 20$ kA (Note 1) $I = 5$ kA (Note 2)	Alternating ± 5 surges (60 s between successive surges)	STP; see clause 8.4 of [ITU-T K.44]. When performing the external port to external port test, also add an STP/primary protector to the untested port.	A	Only applies to earthed equipment and equipment without isolation capacitors in the coaxial cable path.
3.1.5	Lightning shield test, port to external port	A.3.4 and A.6.2-3 8/20	$I = 4$ kA (Note 1) $I = 2$ kA (Note 2)	$I = 20$ kA (Note 1) $I = 5$ kA (Note 2)	Alternating ± 5 surges (60 s between successive surges)	STP; see clause 8.4 of [ITU-T K.44]. When performing the external port to external port test, also add an STP/primary protector to the untested port.	A	Only applies to earthed equipment and equipment without isolation capacitors in the coaxial cable path.

NOTE 1 – Equipment designed to be connected to antennas or equipment exposed to direct lightning currents, e.g., connected to antennas or equipment mounted on a tower.
NOTE 2 – Applicable equipment not covered by Note 1.

Table 3b – Power induction and earth potential rise test conditions for ports connected to external coaxial cables

NOTE – The test conditions for earth potential rise are under study.

Table 4a – Lightning test conditions for ports connected to external d.c. or a.c. dedicated power feeding cables

Test No.	Test description	Test circuit and waveform (see figures in Annex A of [ITU-T K.44])	Basic test levels (also see clause 7 of [ITU-T K.44])	Enhanced test levels (also see clauses 5 and 7 of [ITU-T K.44])	Number of tests	Primary protection (see clause 9 of [ITU-T K.44])	Acceptance criteria (see clause 9 of [ITU-T K.44])	Comments
4.1.1a	Single pair, lightning, inherent, transverse/differential	A.3-1 and A.6.3-1 (a and b) 10/700	$U_{c(max)} = 1.5 \text{ kV}$ $R = 25 \Omega$	$U_{c(max)} = 1.5 \text{ kV}$ $R = 25 \Omega$	Alternating ± 5 surges (60 s between successive surges)	None	A	<p>Test 4.1.1 does not apply when the equipment is designed to be always used with primary protection and the operator agrees. If this test is not performed, the appropriate test from Table 7 applies.</p> <p>If the inherent protection of the port under test contains SPDs that are connected to earth, a $U_{c(max)}$ of 1.5 kV shall be used instead of 6 kV.</p> <p>If the equipment has an insulated case, the 6 kV test is applied with the equipment wrapped in conductive foil and the foil is connected to the generator return.</p> <p>When the equipment contains high current-carrying components that eliminate the need for primary protection, this test does not apply. (Lower voltage level testing also required for each test – see clause 7.3 of [ITU-T K.44].)</p>
4.1.1b	Single pair, lightning, inherent, port to earth	A.3-1 and A.6.3-2 10/700	$U_{c(max)} = 1.5 \text{ kV}$ $R = 25 \Omega$	$U_{c(max)} = 6 \text{ kV}$ $R = 25 \Omega$				
4.1.1c	Single pair, lightning, inherent, port to external port	A.3-1 and A.6.3-3 10/700	$U_{c(max)} = 1.5 \text{ kV}$ $R = 25 \Omega$	$U_{c(max)} = 6 \text{ kV}$ $R = 25 \Omega$				

Table 4a – Lightning test conditions for ports connected to external d.c. or a.c. dedicated power feeding cables

Test No.	Test description	Test circuit and waveform (see figures in Annex A of [ITU-T K.44])	Basic test levels (also see clause 7 of [ITU-T K.44])	Enhanced test levels (also see clauses 5 and 7 of [ITU-T K.44])	Number of tests	Primary protection (see clause 9 of [ITU-T K.44])	Acceptance criteria (see clause 9 of [ITU-T K.44])	Comments
4.1.2a	Single pair, lightning, coordination, transverse/differential	A.3-1 and A.6.3-1 (a and b) 10/700	$U_{c(max)} = 4 \text{ kV}$ $R = 25 \Omega$	$U_{c(max)} = 6 \text{ kV}$ $R = 25 \Omega$	Alternating ± 5 surges (60 s between successive surges)	Special test protector (STP); see clause 8.4 of [ITU-T K.44]. When performing the external port to external port test, also add an STP/primary protector to the untested port.	A (Note) When the test is performed with $U_c = U_{c(max)}$, the STP must operate. It may also operate with a voltage of $U_c < U_{c(max)}$	When the equipment contains high current-carrying components that eliminate the need for primary protection, do not remove these components and do not add primary protection. During the test, this protection must operate at $U_c = U_{c(max)}$. If the primary protector is a clamping type device, use the test circuit and test levels specified in Test 4.1.5. (Lower voltage level testing also required – see clause 7.3 of [ITU-T K.44].)
4.1.2b	Single pair, lightning, coordination, port to earth	A.3-1 and A.6.3-2 10/700	$U_{c(max)} = 4 \text{ kV}$ $R = 25 \Omega$	$U_{c(max)} = 6 \text{ kV}$ $R = 25 \Omega$				
4.1.2c	Single pair, lightning, coordination, port to external port	A.3-1 and A.6.3-3 10/700	$U_{c(max)} = 4 \text{ kV}$ $R = 25 \Omega$	$U_{c(max)} = 6 \text{ kV}$ $R = 25 \Omega$				
4.1.3	Multiple pair, lightning, inherent, port to earth and port to external port		n/a	n/a				
4.1.4	Multiple pair, lightning, port to earth and port to external port		n/a	n/a				

Table 4a – Lightning test conditions for ports connected to external d.c. or a.c. dedicated power feeding cables

Test No.	Test description	Test circuit and waveform (see figures in Annex A of [ITU-T K.44])	Basic test levels (also see clause 7 of [ITU-T K.44])	Enhanced test levels (also see clauses 5 and 7 of [ITU-T K.44])	Number of tests	Primary protection (see clause 9 of [ITU-T K.44])	Acceptance criteria (see clause 9 of [ITU-T K.44])	Comments
4.1.5a	Single pair, lightning current, port to earth	A.3-4 and A.6.3-2 8/20	$I = 1 \text{ kA/wire}$ $R = 0 \Omega$	$I = 5 \text{ kA/wire}$ $R = 0 \Omega$	Alternating ± 5 surges (60 s between successive surges)	None	A	This test only applies when the equipment contains high current-carrying components that eliminate the need for primary protection. Do not remove these components.
4.1.5b	Single pair, lightning current, port to external port	A.3-4 and A.6.3-3 8/20	$I = 1 \text{ kA/wire}$ $R = 0 \Omega$	$I = 5 \text{ kA/wire}$ $R = 0 \Omega$				
4.1.6	Multiple pair, lightning current		n/a	n/a				

NOTE – As there is little knowledge of the agreed primary protector, it is not possible to give guidance. In the interim, test conditions for symmetric pair ports have been provided.

Table 4b – Power induction and earth potential rise test conditions for ports connected to external d.c. or a.c. dedicated power feeding cables

Test No.	Test description	Test circuit (see figures in Annex A of [ITU-T K.44])	Basic test levels (also see clause 7 of [ITU-T K.44])	Enhanced test levels (also see clauses 5 and 7 of [ITU-T K.44])	Number of tests	Primary protection (see clause 8 of [ITU-T K.44])	Acceptance criteria (see clause 9 of [ITU-T K.44])	Comments
4.2.1a	Power induction, inherent, transverse/differential	A.3-6 and A.6.3-1 (a and b)	$W_{sp(max)} = 0.2 \text{ A}^2\text{s}$ $f = 16\frac{2}{3} \text{ Hz, } 50 \text{ Hz}$ or 60 Hz $U_{a.c.(max)} = 600 \text{ V}$ $R = 600 \Omega$ $t = 0.2 \text{ s}$	$W_{sp(max)} = 0.2 \text{ A}^2\text{s}$ $f = 16\frac{2}{3} \text{ Hz, } 50 \text{ Hz or } 60 \text{ Hz}$ $U_{a.c.(max)} = 600 \text{ V}$ $R = 600 \Omega$ $t = 0.2 \text{ s}$	5	None	A	This test does not apply when the equipment is designed to be always used with primary protection and the operator agrees. When the equipment contains high current-carrying components that eliminate the need for primary protection, this test does not apply.
4.2.1b	Power induction and earth potential rise, inherent, port to earth	A.3-6 and A.6.3-2						
4.2.1c	Power induction and earth potential rise, inherent, port to external port	A.3-6 and A.6.3-3						
4.2.2a	Power induction, inherent/coordination, transverse/differential	A.3-6 and A.6.3-1 (a and b)	$W_{sp(max)} = 1 \text{ A}^2\text{s}$ $f = 16\frac{2}{3} \text{ Hz, } 50 \text{ Hz}$ or 60 Hz $U_{a.c.(max)} = 600 \text{ V}$ $R = 600 \Omega$ $t = 1.0 \text{ s}$ (Note 1)	$W_{sp(max)} = 10 \text{ A}^2\text{s}$ $f = 16\frac{2}{3} \text{ Hz, } 50 \text{ Hz or } 60 \text{ Hz}$ $U_{a.c.(max)} = 1 \text{ 500 V}$ $R = 200 \Omega$ $t_{(max)} = 2 \text{ s}$ $t = \frac{W_{sp} \times R^2}{(U_{a.c.})^2} \text{ (6-1)}$ (Note 2)	5	Special test protector (STP); see clause 8.4 of [ITU-T K.44]. When performing the external port to external port test, also add an STP/primary protector to the untested port.	A	When the equipment contains high current-carrying components that eliminate the need for primary protection, do not remove these components and do not add primary protection.
4.2.2b	Power induction and earth potential rise, inherent/coordination, port to earth	A.3-6 and A.6.3-2						
4.2.2c	Power induction and earth potential rise, inherent/coordination,	A.3-6 and A.6.3-3						

Table 4b – Power induction and earth potential rise test conditions for ports connected to external d.c. or a.c. dedicated power feeding cables

Test No.	Test description	Test circuit (see figures in Annex A of [ITU-T K.44])	Basic test levels (also see clause 7 of [ITU-T K.44])	Enhanced test levels (also see clauses 5 and 7 of [ITU-T K.44])	Number of tests	Primary protection (see clause 8 of [ITU-T K.44])	Acceptance criteria (see clause 9 of [ITU-T K.44])	Comments
	port to external port							
4.3.1a	Mains power contact, inherent, transverse/differential	A.3-6 and A.6.3-1 (a and b)	$U_{a.c.} = 230 \text{ V}$ $f = 50 \text{ Hz}$ $t = 15 \text{ min}$ for each test resistor $R = 10 \text{ } \Omega, 20 \text{ } \Omega, 40 \text{ } \Omega, 80 \text{ } \Omega, 160 \text{ } \Omega, 300 \text{ } \Omega, 600 \text{ } \Omega$ and $1\ 000 \text{ } \Omega$ See acceptance criteria column. (Note 3)	$U_{a.c.} = 230 \text{ V}$ $f = 50 \text{ Hz}$ $t = 15 \text{ min}$ for each test resistor $R = 10 \text{ } \Omega, 20 \text{ } \Omega, 40 \text{ } \Omega, 80 \text{ } \Omega, 160 \text{ } \Omega, 300 \text{ } \Omega, 600 \text{ } \Omega$ and $1\ 000 \text{ } \Omega$ See acceptance criteria column. (Note 3)	1	None	For basic level: criterion B. For enhanced level: criterion A for test resistors $160 \text{ } \Omega, 300 \text{ } \Omega, 600 \text{ } \Omega$ and $1\ 000 \text{ } \Omega$; criterion B for the other resistor values.	In some situations, the test may be performed with a reduced number of current limit resistors. Refer to item 11, clauses 7.2 and I.1.4 of [ITU-T K.44] for guidance on selecting the necessary size of resistors. When the equipment is designed to be always used with primary protection, and the operator agrees, perform this test with the STP installed.
4.3.1b	Mains power contact, inherent, port to earth	A.3-6 and A.6.3-2						
4.3.1c	Mains power contact, inherent, port to external port	A.3-6 and A.6.3-3						

NOTE 1 – The test conditions for Test 4.2.2 (basic test level) may be adapted to the local conditions, by variation of the test parameters within the following limits, so that $I^2t = 1 \text{ A}^2\text{s}$ is fulfilled:

$U_{a.c.(\text{max})} = 300 \text{ V} \dots 600 \text{ V}$, selected to meet local conditions;

$t \leq 1.0 \text{ s}$, selected to meet local conditions;

$R \leq 600 \text{ } \Omega$, is to be calculated according to Equation 6-2:

$$R = U_{a.c.(\text{max})} \sqrt{t} \tag{6-2}$$

NOTE 2 – For Test 4.2.2 (enhanced test level), the equipment shall comply with the specified criterion for all voltage–duration combinations bounded (on and below) by the $10 \text{ A}^2\text{s}$ voltage–duration curve in Figure 1. The curve in Figure 1 is defined by Equation 6-1 and the boundary conditions in this table.

NOTE 3 – The a.c. mains voltage and frequency for Test 4.3.1 may be changed to the local mains supply voltage and frequency values. For a.c. test voltage values other than 230 V , the test resistor values should be adjusted to provide the same prospective short-circuit current values that occur in the 230 V test condition.

Table 5 – Test conditions for mains power ports

Test No.	Test description	Test circuit and waveform (see figures in Annex A of [ITU-T K.44])	Basic test levels (also see clause 7 of [ITU-T K.44]) (Note 1)	Enhanced test levels (also see clauses 5 and 7 of [ITU-T K.44]) (Note 1)	Number of tests	Primary protection (see clause 8 of [ITU-T K.44])	Acceptance criteria (see clause 9 of [ITU-T K.44])	Comments
5.1.1a	Lightning, inherent, transverse/differential	A.3-5 and A.6.4-1 1.2/50-8/20 CWG	$U_{c(max)} = 2.5 \text{ kV}$ $R = 0 \Omega$	$U_{c(max)} = 6.0 \text{ kV}$ $R = 0 \Omega$	Alternating ± 5 surges (60 s) between successive surges)	None	A	This test does not apply when the equipment is designed to be always used with primary protection and the operator agrees. (Lower voltage level testing also required – see clause 7.3 of [ITU-T K.44].)
5.1.1b	Lightning, inherent, port to earth	A.3-5 and A.6.4-2 1.2/50-8/20 CWG	$U_{c(max)} = 2.5 \text{ kV}$ $R = 0 \Omega$	$U_{c(max)} = 6.0 \text{ kV}$ $R = 0 \Omega$				
5.1.1c	Lightning, inherent, port to external port	A.3-5 and A.6.4-3 1.2/50-8/20 CWG	$U_{c(max)} = 2.5 \text{ kV}$ $R = 0 \Omega$	$U_{c(max)} = 6.0 \text{ kV}$ $R = 0 \Omega$				
5.1.2a	Lightning, inherent/coordination, transverse/differential	A.3-5 and A.6.4-1 1.2/50-8/20 CWG	$U_{c(max)} = 6.0 \text{ kV}$ $R = 0 \Omega$	$U_{c(max)} = 10.0 \text{ kV}$ $R = 0 \Omega$	Alternating ± 5 surges (60 s) between successive surges)	Agreed primary protector (mains) (Note 2). When performing the external port to external port test, also add an STP/primary protector to the untested port.	A	(Lower voltage level testing also required – see clause 7.3 of [ITU-T K.44].)
5.1.2b	Lightning, inherent/coordination, port to earth	A.3-5 and A.6.4-2 1.2/50-8/20 CWG	$U_{c(max)} = 6.0 \text{ kV}$ $R = 0 \Omega$	$U_{c(max)} = 10.0 \text{ kV}$ $R = 0 \Omega$				
5.1.2c	Lightning, inherent/coordination, port to external port	A.3-5 and A.6.4-3 1.2/50-8/20 CWG	$U_{c(max)} = 6.0 \text{ kV}$ $R = 0 \Omega$	$U_{c(max)} = 10.0 \text{ kV}$ $R = 0 \Omega$				

Table 5 – Test conditions for mains power ports

Test No.	Test description	Test circuit and waveform (see figures in Annex A of [ITU-T K.44])	Basic test levels (also see clause 7 of [ITU-T K.44]) (Note 1)	Enhanced test levels (also see clauses 5 and 7 of [ITU-T K.44]) (Note 1)	Number of tests	Primary protection (see clause 8 of [ITU-T K.44])	Acceptance criteria (see clause 9 of [ITU-T K.44])	Comments
5.2.1	Earth potential rise	A.3-5 and A.6.4-1 1.2/50-8/20 CWG	Under study	Under study	5	None	A	
5.2.2a	Neutral potential rise, inherent, port to earth	A.3-5 and A.6.4-2 a.c.	$U_{(AC)} = 600 \text{ V}$ $f = 50 \text{ Hz}$ or 60 Hz $t = 1 \text{ s}$ $R = 200 \Omega$	$U_{(AC)} = 1\,500 \text{ V}$ $f = 50 \text{ Hz}$ or 60 Hz $t = 1 \text{ s}$ $R = 200 \Omega$	5	None	A	This test applies only when the equipment is to be installed with a TT or IT mains system and the operator requests it.
5.2.2b	Neutral potential rise, inherent, port to external port	A.3-5 for and A.6.4-3 a.c.						
NOTE 1 – The tests in this table apply to both mains-powered equipment and the combination of portable power supplies and equipment for portable supply-powered equipment.								
NOTE 2 – The total lead length used to connect the agreed primary protector shall be 1 m.								

Table 6 – Test conditions for electrostatic discharge applied to the enclosure

Test No.	Test description	Test circuit	Basic test level (Note)	Enhanced test level (Note)	Number of tests	Primary protection	Acceptance criteria (see clause 9 of [ITU-T K.44])
6.1a	Air discharge	[IEC 61000-4-2]	Level 3 (8 kV)	Level 4 (15 kV)	5	n/a	A
6.1b	Contact discharge	[IEC 61000-4-2]	Level 3 (6 kV)	Level 4 (8 kV)	5	n/a	A
NOTE – The test applies to the equipment enclosure.							

Table 7 – Lightning test conditions for ports connected to internal cables
(Test exemptions for short cables are under study)

Test No.	Test description (Note 1)	Test circuit and waveform (see figures in Annex A of [ITU-T K.44])	Basic test levels (also see clause 7 of [ITU-T K.44])	Enhanced test levels (also see clauses 5 and 7 of [ITU-T K.44])	Number of tests	Primary protection (see clause 8 of [ITU-T K.44])	Acceptance criteria (see clause 9 of [ITU-T K.44])	Comments
7.1	Unshielded cable with symmetric pairs	A.3-5 and A.6.5-1 1.2/50-8/20 CWG $R = 10 \Omega$ (The value of R is independent of the number of conductors)	$U_{c(max)} = 1 \text{ kV}$	$U_{c(max)} = 1.5 \text{ kV}$	Alternating ± 5 surges (60 s between successive surges)	None	A	The test is applied simultaneously to all symmetric cable pairs connected to the equipment port under test except for unshielded Ethernet ports. (Lower voltage level testing also required – see clause 7.3 of [ITU-T K.44].)
7.2	Shielded cable to earth	A.3-5 and A.6.5-2 1.2/50-8/20 CWG $R = 0 \Omega$ The value of R is independent of the number of conductors	$U_{c(max)} = 1 \text{ kV}$	$U_{c(max)} = 1.5 \text{ kV}$	Alternating ± 5 surges (60 s between successive surges)	None	A	(Lower voltage level testing also required – see clause 7.3 of [ITU-T K.44].)
7.3	USB shielded cable to earth	A.3-5 and A.6.5-2 1.2/50-8/20 CWG $R = 0 \Omega$	$U_{c(max)} = 100 \text{ V}$	$U_{c(max)} = 150 \text{ V}$	Alternating ± 5 surges (60 s between successive surges)	None	A	Test is performed with the supplied cable (not the 20 m cable specified in Figure A.6.5-2). (Lower voltage level testing also required – see clause 7.3 of [ITU-T K.44].)

Table 7 – Lightning test conditions for ports connected to internal cables

(See clause 6, NOTE 5, for exemptions)


Test No.	Test description	Test circuit and waveform (see figures in Annex A of [ITU-T K.44])	Basic test levels (also see clause 7 of [ITU-T K.44])	Intermediate test levels (also see clause 7 of [ITU-T K.44])	Enhanced test levels (also see clause 7 of [ITU-T K.44])	Number of tests	Primary protection (clause 8 of [ITU-T K.44])	Acceptance criteria (clause 9 of [ITU-T K.44])	Comments
7.4	Screen/shield connection high current test	A.3-5 and A.6.7-6 1.2/50-8/20 CWG R = 5 Ω	$U_{c(max)} = 2.5 \text{ kV}$	$U_{c(max)} = 4.0 \text{ kV}$	$U_{c(max)} = 6.0 \text{ kV}$	Alternating ±5 surges (60 s between successive surges)	None	A	
7.5	PoE Mode A and Mode B transverse/differential test	A.3-5 and A.6.7-2 1.2/50-8/20 CWG R1 = 10 Ω and R2 = 10 Ω	$U_{c(max)} = 2.5 \text{ kV}$	$U_{c(max)} = 4.0 \text{ kV}$	$U_{c(max)} = 6.0 \text{ kV}$	Alternating ±5 surges (60 s between successive surges)	None	A	
7.6	Ethernet longitudinal /common mode withstand test	A.3-5 and A.6.7-3a 1.2/50-8/20 CWG R = 5 Ω	$U_{c(max)} = 2.5 \text{ kV}$	$U_{c(max)} = 4.0 \text{ kV}$	$U_{c(max)} = 6.0 \text{ kV}$	Alternating ±5 surges (60 s between successive surges)	None (Note 2)	A	There shall be no insulation breakdown during the test and the post-test resistance shall be at least 2 MΩ when measured at 500 V d.c. (see Figure A.6.7-3). Monitor the impulse voltage to detect insulation breakdown or voltage protector operation.
7.7	Ethernet transverse/differential	A.3-5 and A.6.7-5 1.2/50-8/20 CWG	$U_{c(max)} = 2.5 \text{ kV}$	$U_{c(max)} = 4.0 \text{ kV}$	$U_{c(max)} = 6.0 \text{ kV}$	Alternating ±5 surges (60 s between successive surges)	None	A	

Table 7 – Lightning test conditions for ports connected to internal cables
(Test exemptions for short cables are under study)

Test No.	Test description (Note 1)	Test circuit and waveform (see figures in Annex A of [ITU-T K.44])	Basic test levels (also see clause 7 of [ITU-T K.44])	Enhanced test levels (also see clauses 5 and 7 of [ITU-T K.44])	Number of tests	Primary protection (see clause 8 of [ITU-T K.44])	Acceptance criteria (see clause 9 of [ITU-T K.44])	Comments
7.8	DC powered equipment port	A.3-5 (1.2/50-8/20 CWG) and A.6.6-1a Coupling element: 10 Ω + 9 μF in series	$U_{c(max)} = 1 \text{ kV}$	$U_{c(max)} = 1.5 \text{ kV}$	Alternating ±5 surges (60 s between successive surges)	None	A	See [ITU-T K.44] clauses 7.1.1 and 10.5.3
7.9	DC power source port	A.3-5 (1.2/50-8/20 CWG) and A.6.6-1b Coupling element: 10 Ω + 9 μF in series	$U_{c(max)} = 1 \text{ kV}$	$U_{c(max)} = 1.5 \text{ kV}$	Alternating ±5 surges (60 s between successive surges)	None	A	See [ITU-T K.44] clauses 7.1.1 and 10.5.4
7.10	Twisted pair port transverse/differential	A.3-5 and A.6.7-5 1.2/50-8/20 CWG	$U_{c(max)} = 1 \text{ kV}$	$U_{c(max)} = 1.5 \text{ kV}$	Alternating ±5 surges (60 s between successive surges)	None	A	

NOTE 1 – For equipment without an earth connection, wrap the equipment in foil and connect the foil to the generator return.

NOTE 2 – When the cabling is fitted with SPDs, the equipment user and manufacturer may use different test conditions upon mutual agreement; this topic is currently under study.

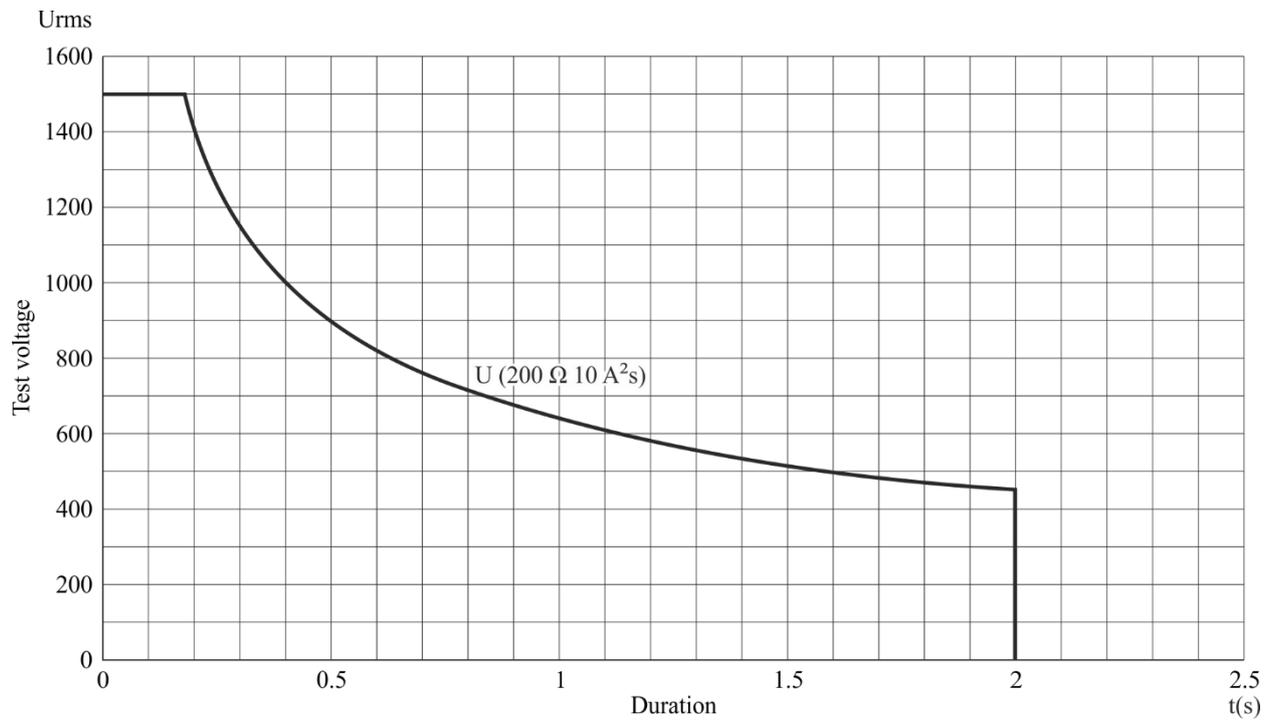

Test voltage versus duration for a specific energy and source resistance

K.21(11)_F01

Figure 1 – Test voltage versus duration to give 10 A²s with 200 Ω

Annex A

Special resistibility requirements

(This annex forms an integral part of this Recommendation.)

A.1 Introduction

There are circumstances where even the enhanced resistibility requirements are not sufficient for customer premises due to environmental conditions, national regulations, economic and technical considerations, installation standards or reliability of service requirements. Network operators may then request the special resistibility requirement.

The special resistibility requirement applies when all of the following conditions coexist:

- IT or TT power system;
- earthing and bonding is not installed in compliance with [ITU-T K.66];
- primary protection is not installed in compliance with [ITU-T K.66] when required by a risk assessment;
- there is difficulty in installing multiservice surge protective devices (MSPDs).

In this case, the network operator may need to request special resistibility requirements. Some guidance and possible test levels are provided in clause A.2.

Informative clause A.2 contains both test descriptions and requirements for special resistibility requirements. It is proposed that the test requirements, described in [ITU-T K.44] clause 7, Test conditions, be amended as indicated.

A.2 Special resistibility requirements

Clause A.1 specifies when these special resistibility requirements are necessary.

Table A.2-1 provides special requirements that are used to ensure safety and resistibility when bonding cannot be achieved.

These special requirements are in addition to the enhanced ITU-T K.21 tests and apply to equipment with both earthed SPDs and without earthed SPDs.

To ensure the safety of the customer, without appropriate earthing and bonding, the equipment shall contain port to port isolation as given in Table A.2-1. To ensure safety with earthed SPDs, appropriate earthing and bonding is required.

Table A.2-1a – Special lightning test conditions for ports connected to external symmetric pair cables

Test No.	Test description	Test circuit and waveform (see [ITU-T K.44] Annex A figures)	Special test levels (also see [ITU-T K.44] clauses 5 and 7)	Number of tests	Primary protection	Acceptance criteria	Comments
2.1.2a	Single port, lightning, coordination, transverse/differential	A.3-1 and A.6.1-1 (a and b) 10/700	$U_{c(max)} = 4 \text{ kV}$ $R = 25 \text{ } \Omega$ $R_1 = 100 \text{ } \Omega$	5 of each polarity	Special test protector; see [ITU-T K.44] clause 8.4.	A When the test is performed with $U_c = U_{c(max)}$, the special test protector must operate. It may also operate with a voltage of $U_c < U_{c(max)}$.	When the equipment contains high current-carrying components which eliminate the need for primary protection, refer to [ITU-T K.44] clause 10.1.1. Ethernet port tests are under study. <u>The STP earthing resistance R_1 increased to $100 \text{ } \Omega$ simulates the condition that this test intends.</u>
2.1.2b	Single port, lightning, coordination, port to earth	A.3-1 and A.6.1-2 10/700	$U_{c(max)} = 13 \text{ kV}$ $R = 25 \text{ } \Omega$ $R_1 = 100 \text{ } \Omega$				
2.1.2c	Single port, lightning, coordination, port to external port	A.3-1 and A.6.1-3 10/700	$U_{c(max)} = 13 \text{ kV}$ $R = 25 \text{ } \Omega$ $R_1 = 100 \text{ } \Omega$				

Table A.2-1b – Special lightning test conditions for mains power ports

Test No.	Test description	Test circuit and waveform (see [ITU-T K.44] Annex A figures)	Special test levels (also see [ITU-T K.44] clauses 5 and 7)	Number of tests	Primary protection	Acceptance criteria	Comments
5.1.1a	Lightning, inherent, transverse/differential	A.3-5 and A.6.4-1 combination wave generator	$U_{c(max)} = 10 \text{ kV}$ $R = 0 \Omega$	5 of each polarity	None When performing the external port to symmetric pair port test, also add an STP/primary protector to the untested port. $R_1 = 100 \Omega$ for the untested port.	A	
5.1.1b	Lightning, inherent, port to earth	A.3-5 and A.6.4-2 combination wave generator	$U_{c(max)} = 10 \text{ kV}$ $R = 0 \Omega$				
5.1.1c	Lightning, inherent, port to external port	A.3-5 and A.6.4-3 combination wave generator	$U_{c(max)} = 10 \text{ kV}$ $R = 0 \Omega$				

Table A.2-1c – Special lightning test conditions for ports connected to internal cables

Test No.	Test description	Test circuit and waveform (see figures in Annex A)	Special test levels (also see clauses 5 and 7)	Number of tests	Primary protection	Acceptance criteria	Comments
7.1	Unshielded cable	Internal POTS line transverse/differential Figures A.3-5 and A.6.1-1 (a and b) Combination wave generator $R = 2 \Omega$ Figures A.3-1 and A.6.1-1 (a and b) 10/700 $R = 25 \Omega$, 300 V GDT generator coupling, no STP	$U_{c(max)} = 4 \text{ kV (10 A}^2\text{s)}$ OR $U_{c(max)} = 8 \text{ kV (10 A}^2\text{s)}$	5 of each polarity	None	A	Only applies to POTS ports.

Table A.2-1c – Special lightning test conditions for ports connected to internal cables

Test No.	Test description	Test circuit and waveform (see figures in Annex A)	Special test levels (also see clauses 5 and 7)	Number of tests	Primary protection	Acceptance criteria	Comments
		Internal POTS line to earth Figures A.3-5 and A.6.5-1. Combination wave generator R = 10 Ω Figures A.3-1 and 6.5-1 10/700 R = 25 Ω	$U_{c(max)} = 10 \text{ k V}$ AND $U_{c(max)} = 13 \text{ k V}$				
7.2	Shielded cable port (includes coaxial cable ports)	Figures A.3-5 (Combination wave generator) and A.6.5-2 R = 0 Ω	$U_{c(max)} = 10 \text{ kV}$	Alternating ±5 surges (60 s between successive surges)	None	A	(Lower voltage level testing also required – see [ITU-T K.44] clause 7.3)
NOTE – For equipment without an earth connection, wrap the equipment in foil and connect the foil to the generator return.							

Bibliography

- [b-ITU-T K.71] Recommendation ITU-T K.71 (2011), *Protection of customer antenna installations*.
- [b-ITU-T K.85] Recommendation ITU-T K.85 (2011), *Requirements for the mitigation of lightning effects on home networks installed in customer premises*.

SERIES OF ITU-T RECOMMENDATIONS

Series A	Organization of the work of ITU-T
Series D	Tariff and accounting principles and international telecommunication/ICT economic and policy issues
Series E	Overall network operation, telephone service, service operation and human factors
Series F	Non-telephone telecommunication services
Series G	Transmission systems and media, digital systems and networks
Series H	Audiovisual and multimedia systems
Series I	Integrated services digital network
Series J	Cable networks and transmission of television, sound programme and other multimedia signals
Series K	Protection against interference
Series L	Environment and ICTs, climate change, e-waste, energy efficiency; construction, installation and protection of cables and other elements of outside plant
Series M	Telecommunication management, including TMN and network maintenance
Series N	Maintenance: international sound programme and television transmission circuits
Series O	Specifications of measuring equipment
Series P	Telephone transmission quality, telephone installations, local line networks
Series Q	Switching and signalling, and associated measurements and tests
Series R	Telegraph transmission
Series S	Telegraph services terminal equipment
Series T	Terminals for telematic services
Series U	Telegraph switching
Series V	Data communication over the telephone network
Series X	Data networks, open system communications and security
Series Y	Global information infrastructure, Internet protocol aspects, next-generation networks, Internet of Things and smart cities
Series Z	Languages and general software aspects for telecommunication systems