



INTERNATIONAL TELECOMMUNICATION UNION

ITU-T

TELECOMMUNICATION
STANDARDIZATION SECTOR
OF ITU

Q.2962

(07/96)

SERIES Q: SWITCHING AND SIGNALLING

Broadband ISDN – B-ISDN application protocols for
access signalling

**Digital subscriber signalling system No. 2 –
Connection characteristics negotiation during
call/connection establishment phase**

ITU-T Recommendation Q.2962

(Previously CCITT Recommendations)

ITU-T Q-SERIES RECOMMENDATIONS

SWITCHING AND SIGNALLING

SIGNALLING IN THE INTERNATIONAL MANUAL SERVICE	Q.1–Q.3
INTERNATIONAL AUTOMATIC AND SEMI-AUTOMATIC WORKING	Q.4–Q.59
FUNCTIONS AND INFORMATION FLOWS FOR SERVICES IN THE ISDN	Q.60–Q.99
CLAUSES APPLICABLE TO ITU-T STANDARD SYSTEMS	Q.100–Q.119
SPECIFICATION OF SIGNALLING SYSTEMS No. 4 AND No. 5	Q.120–Q.249
SPECIFICATIONS OF SIGNALLING SYSTEM No. 6	Q.250–Q.309
SPECIFICATIONS OF SIGNALLING SYSTEM R1	Q.310–Q.399
SPECIFICATIONS OF SIGNALLING SYSTEM R2	Q.400–Q.499
DIGITAL EXCHANGES	Q.500–Q.599
INTERWORKING OF SIGNALLING SYSTEMS	Q.600–Q.699
General considerations	Q.600–Q.609
Logic procedures	Q.610–Q.697
Interworking of Signalling Systems No. 7 and No. 6	Q.698
Interworking between Digital Subscriber Signalling System No. 1 and Signalling System No. 7	Q.699
SPECIFICATIONS OF SIGNALLING SYSTEM No. 7	Q.700–Q.849
DIGITAL SUBSCRIBER SIGNALLING SYSTEM No. 1	Q.850–Q.999
PUBLIC LAND MOBILE NETWORK	Q.1000–Q.1099
INTERWORKING WITH SATELLITE MOBILE SYSTEMS	Q.1100–Q.1199
INTELLIGENT NETWORK	Q.1200–Q.1999
BROADBAND ISDN	Q.2000–Q.2999
General aspects of B-ISDN	Q.2000–Q.2099
B-ISDN ATM adaptation layer	Q.2100–Q.2599
Common aspects of B-ISDN application protocols for access signalling and network signalling and interworking	Q.2600–Q.2699
B-ISDN application protocols of the network	Q.2700–Q.2899
B-ISDN application protocols for access signalling	Q.2900–Q.2999

For further details, please refer to ITU-T List of Recommendations.

**DIGITAL SUBSCRIBER SIGNALLING SYSTEM No. 2 – CONNECTION
CHARACTERISTICS NEGOTIATION DURING CALL/CONNECTION
ESTABLISHMENT PHASE**

Summary

This Recommendation defines the operation of the Digital Subscriber Signalling System No. 2 (DSS 2) for the handling of the Connection characteristics negotiation during Call/Connection establishment phase, that may be supported, as a network option, at the T_B or at the coincident S_B and T_B reference point of the User to Network Interface of the Broadband Integrated Services Digital Network (B-ISDN). The Connection characteristics negotiation capability defined in this Recommendation enables in particular the negotiation of cell rate traffic parameters using an alternative set of values given in an Alternative ATM traffic descriptor information element, or negotiation of cell rate traffic parameters by using a minimum acceptable traffic descriptor information element containing minimum acceptable traffic parameter values.

Source

ITU-T Recommendation Q.2962 was prepared by ITU-T Study Group 11 (1993-1996) and was approved under the WTSC Resolution No. 1 procedure on the 9th of July 1996.

FOREWORD

ITU (International Telecommunication Union) is the United Nations Specialized Agency in the field of telecommunications. The ITU Telecommunication Standardization Sector (ITU-T) is a permanent organ of the ITU. The ITU-T is responsible for studying technical, operating and tariff questions and issuing Recommendations on them with a view to standardizing telecommunications on a worldwide basis.

The World Telecommunication Standardization Conference (WTSC), which meets every four years, establishes the topics for study by the ITU-T Study Groups which, in their turn, produce Recommendations on these topics.

The approval of Recommendations by the Members of the ITU-T is covered by the procedure laid down in WTSC Resolution No. 1 (Helsinki, March 1-12, 1993).

In some areas of information technology which fall within ITU-T's purview, the necessary standards are prepared on a collaborative basis with ISO and IEC.

NOTE

In this Recommendation, the expression "Administration" is used for conciseness to indicate both a telecommunication administration and a recognized operating agency.

© ITU 1996

All rights reserved. No part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the ITU.

CONTENTS

	Page
1 Scope	1
2 References	1
3 Definitions	1
4 Abbreviations	2
5 Description	2
6 Operational requirements	2
6.1 Provision and withdrawal	2
6.2 Requirements on the originating network side	2
6.3 Requirements on the destination network side	2
7 Primitive definitions and state definitions	2
7.1 Primitive definitions	2
7.2 State definitions	2
8 Coding requirements	3
8.1 Messages	3
8.1.1 Modification of messages in Q.2962	3
8.2 Information elements	4
8.2.1 Alternative ATM traffic descriptor	4
8.2.2 Minimum acceptable ATM traffic descriptor	5
9 Signalling procedures at the coincident S _B and T _B reference point	7
9.1 Negotiating the connection characteristics at the origination interface	7
9.1.1 Negotiation request (originating interface)	7
9.1.2 Traffic parameter negotiation procedures (originating interface)	7
9.1.3 Negotiation acceptance (originating interface)	8
9.2 Negotiating the connection characteristics at the destination interface	9
9.2.1 Negotiation request (destination interface)	9
9.2.2 Traffic parameter negotiation procedures (destination interface)	9
9.2.3 Negotiation confirmation (destination interface)	10
10 Procedures at the T _B reference point for interworking with private B-ISDNs	10
11 Interworking with other networks	10
12 Interactions with supplementary services	10
13 Parameter values	10
14 Dynamic description (SDLs)	10

	Page
Appendix I – Message flow diagram for negotiation	11
Appendix II – Guidelines for the use of the instruction indicator	11

Recommendation Q.2962

DIGITAL SUBSCRIBER SIGNALLING SYSTEM No. 2 – CONNECTION CHARACTERISTICS NEGOTIATION DURING CALL/CONNECTION ESTABLISHMENT PHASE

(Geneva, 1996)

1 Scope

This Recommendation specifies the procedures for negotiation of connection characteristics by means of the digital subscriber Signalling System No. 2 (DSS 2) protocol at the T_B reference point or coincident S_B and T_B reference point (as defined in Recommendation I.413) of the Broadband Integrated Services Digital Network (B-ISDN).

This Recommendation specifies the signalling protocol to negotiate the cell rate traffic parameters that are specified in Recommendations Q.2931 and Q.2961 for basic call/connection control. The capability described in this Recommendation is also applicable for negotiating the connection characteristics for the first party of a point-to-multipoint call/connections as specified in Recommendation Q.2971. The capabilities in this Recommendation are only applicable during the call/connection establishment phase.

This Recommendation is part of the DSS 2 family of ITU-T Recommendations. It specifies extensions to Recommendations Q.2931, Q.2961 and Q.2971; it does not repeat states, information elements, messages and procedures contained therein but only specifies extensions related to traffic parameter negotiation.

2 References

The following Recommendations and other references contain provisions which, through reference in this text, constitute provisions of this Recommendation. All references are subject to revision; all users of this Recommendation are therefore encouraged to investigate the possibility of applying the most recent edition of the references listed below. A list of currently valid ITU-T Recommendations is regularly published.

- [1] ITU-T Recommendation Q.2931 (1995), *Broadband Integrated Services Digital Network (B-ISDN) – Digital Subscriber Signalling System No. 2 (DSS 2) – User Network Interface (UNI) layer 3 specification for basic call/connection control.*
- [2] ITU-T Recommendation Q.2971 (1995), *Broadband Integrated Services Digital Network (B-ISDN) – Digital Subscriber Signalling System No. 2 (DSS 2) – User Network Interface layer 3 specification for point-to-multipoint call/connection control.*
- [3] ITU-T Recommendation I.327 (1993), *B-ISDN functional architecture.*
- [4] ITU-T Recommendation Q.2961 (1995), *Broadband Integrated Services Digital Network (B-ISDN) – Digital Subscriber Signalling System No. 2 (DSS 2) – Additional traffic parameters.*

3 Definitions

The definitions of Annex J/Q.2931 [1] apply.

4 Abbreviations

For the purposes of this Recommendation, the following abbreviations are used.

ATM Asynchronous Transfer Mode

B-ISDN Broadband Integrated Services Digital Network

DSS 2 Digital Subscriber Signalling System No. 2

5 Description

This Recommendation specifies the signalling protocol for negotiation of connection characteristics for point-to-point call/connections and for the first party of point-to-multipoint call/connections. The negotiation capabilities are only applicable during the call/connection establishment phase. In particular, the following capabilities are specified:

- negotiation of connection characteristics using an alternative traffic descriptor; and
- negotiation of cell rate traffic parameters using a minimum traffic descriptor.

In the case of the use of the alternative ATM traffic descriptor information element, the parameters of the information element are handled as a single entity whereas the minimum acceptable ATM traffic descriptor information element allows the specification of a range of values for parameters which are handled independently. The use of the alternative ATM traffic descriptor information element allows negotiation of all traffic parameters whereas the use of the minimum acceptable ATM traffic descriptor is restricted to negotiation of peak cell rates.

6 Operational requirements

6.1 Provision and withdrawal

It is a user and a network option to provide the procedures described in this Recommendation. If implemented, the procedures of this Recommendation may be provided as a subscription option to the served user on the origination side.

6.2 Requirements on the originating network side

See 6.1.

6.3 Requirements on the destination network side

See 6.1.

7 Primitive definitions and state definitions

7.1 Primitive definitions

Clause 8/Q.2931 [1] shall apply.

7.2 State definitions

No additional states to those specified in Recommendations Q.2931 [1] and Q.2961 [4] are required.

8 Coding requirements

8.1 Messages

This clause provides an overview of the message structure, which highlights the functional definition and information content (i.e. semantics) of each message. Each definition includes:

- 1) A brief description of the message direction and use, including whether the message has:
 - a) local significance, i.e. relevant only in the originating or terminating access;
 - b) access significance, i.e. relevant in the originating and terminating access, but not in the network;
 - c) dual significance, i.e. relevant in either the originating or terminating access and in the network; or
 - d) global significance, i.e. relevant in the originating and terminating access and in the network.
- 2) A table listing the codeset 0 information elements. For each information element, the table indicates:
 - a) the reference of this Recommendation describing the information element;
 - b) the direction in which it may be sent; i.e. user-to-network ("u -> n"), network-to-user ("n -> u"), or both;

NOTE – The user-network terminology in this clause refers to the interface structures between B-ISDN terminal equipment and B-ISDN public network (TE – local CRF), and between B-ISDN customer network and B-ISDN public network (customer network – local CRF); the terms TE, customer network and local CRF are being used as defined in Recommendation I.327.

 - c) whether inclusion is mandatory ("M") or optional ("O"), with a reference to notes explaining the circumstances under which the information element shall be included; and
 - d) the length of the information element (or permissible range of lengths), in octets, where "*" denotes an undefined maximum length, which may be network or service dependent.
- 3) Further explanatory notes, as necessary.

8.1.1 Modification of messages in Q.2962

Table 8-1 lists the existing Q.2931 messages that have had their contents modified to support connection characteristics negotiation during the establishment phase of the call/connection.

TABLE 8-1/Q.2962
Modified Q.2931 messages

Message	Reference
SETUP	8.1.1.1
CONNECT	8.1.1.2

8.1.1.1 SETUP

This message is sent by the calling user to the network and by the network to the called user to initiate B-ISDN call and connection establishment. See Table 8-2 for additions to the structure of this message shown in Table 3-8/Q.2931 and in 8.1/Q.2961.

TABLE 8-2/Q.2962
SETUP message additional content

Message type: SETUP				
Significance: Global				
Direction: Both				
Information element	Reference	Direction	Type	Length
Alternative ATM traffic descriptor	8.2.1	Both	O (Note)	4 - 30
Minimum acceptable ATM traffic descriptor	8.2.2	Both	O (Note)	4 - 20
NOTE – Either the alternative ATM traffic descriptor information element or minimum acceptable ATM traffic descriptor information element, but not both, shall be included in the SETUP message when traffic parameters are negotiable.				

8.1.1.2 CONNECT

This message is sent by the called user to the network and by the network to the calling user to indicate call/connection acceptance by the called user. See Table 8-3 for additions to the structure of this message shown in Table 3-2/Q.2931 and in 8.1/Q.2961.

TABLE 8-3/Q.2962
CONNECT message additional content

Message type: CONNECT				
Significance: Global				
Direction: Both				
Information element	Reference	Direction	Type	Length
ATM traffic descriptor	4.5.6/Q.2931 4.1/Q.2961	Both	O (Note)	4 - 30
NOTE – Included to specify the traffic parameter values allocated for the call/connection if one or more traffic parameters were negotiable in the SETUP message.				

8.2 Information elements

8.2.1 Alternative ATM traffic descriptor

The purpose of the alternative ATM traffic descriptor information element is to specify an alternative ATM traffic descriptor for the negotiation of traffic parameters during call/connection setup.

The alternative ATM traffic descriptor information element is coded as shown in Figure 8-1. The maximum length of this information element is 30 octets.

Bits								Octet
8	7	6	5	4	3	2	1	
Alternative ATM traffic descriptor information element identifier								1
1	0	0	0	0	0	1	0	
1 Ext	Coding standard		Information element instruction field					2
			Flag	Reserved	Action indicator			
Length of alternative ATM traffic descriptor contents								3
								4
Further octets as contents of ATM traffic descriptor (Figure 4-13/Q.2931 and Figure 1/Q.2961)								5*
								/
								17*

FIGURE 8-1/Q.2962

Alternative ATM traffic descriptor information element

The alternative ATM traffic descriptor information element can have any combination of traffic parameters that is allowed for the ATM traffic descriptor information element for the specified broadband bearer capability. Within a single SETUP message, the combination of traffic parameters may be different for these two information elements. The alternative bandwidth requirements must be reduced compared to those originally requested.

8.2.2 Minimum acceptable ATM traffic descriptor

The purpose of the minimum acceptable ATM traffic descriptor information element is to specify the minimum acceptable ATM traffic parameters in the negotiation of traffic parameters during call/connection setup. The minimum acceptable ATM traffic parameters are the lowest values that the user is willing to accept for the call/connection.

The minimum acceptable ATM traffic descriptor information element is coded as shown in Figure 8-2. The maximum length of this information element is 20 octets.

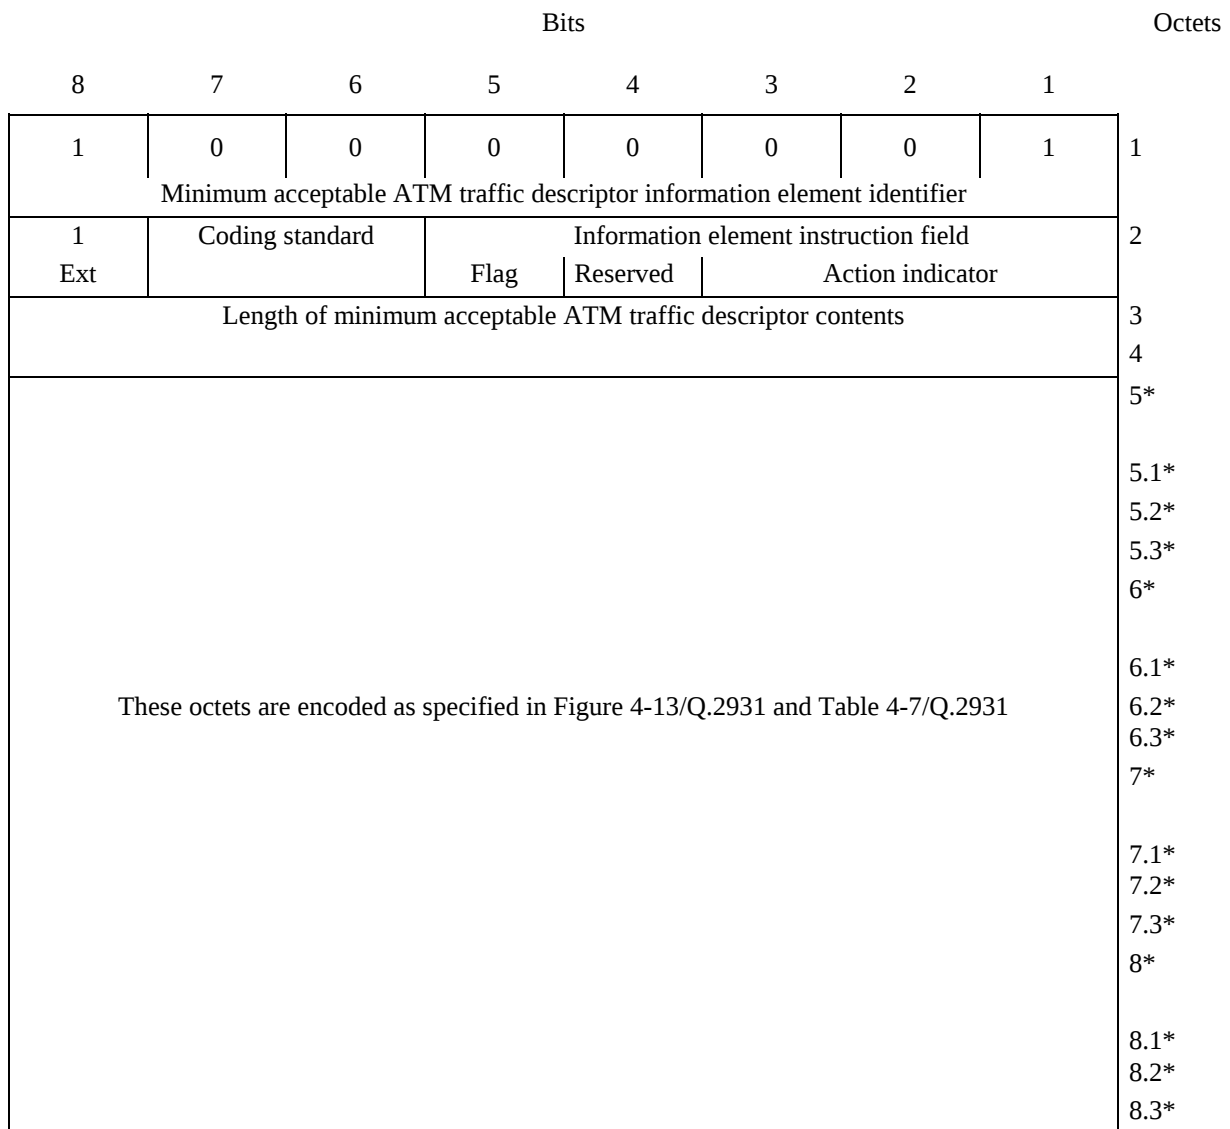


FIGURE 8-2/Q.2962

Minimum acceptable ATM traffic descriptor information element

In a SETUP message, a peak cell rate traffic parameter [i.e. forward peak cell rate (CLP=0), forward peak cell rate (CLP=0+1), backward peak cell rate (CLP=0), or backward peak cell rate (CLP=0+1)] is allowed in the minimum acceptable ATM traffic descriptor information element only if the corresponding peak cell rate parameter is in the ATM traffic descriptor information element of the SETUP message (e.g. if there is no forward peak cell rate (CLP=0) parameter in the ATM traffic descriptor information element of a SETUP message then the forward peak cell rate (CLP=0) is not allowed in the minimum acceptable ATM traffic descriptor information element of the SETUP message).

9 Signalling procedures at the coincident S_B and T_B reference point

9.1 Negotiating the connection characteristics at the origination interface

9.1.1 Negotiation request (originating interface)

The user initiates the negotiation of the connection characteristics by including in addition to the ATM traffic descriptor information element, either the minimum acceptable ATM traffic descriptor information element or the alternative ATM traffic descriptor information element, but not both, in the SETUP message. In the case of the use of the alternative ATM traffic descriptor information element, the parameters of the information element are handled as a single entity whereas the minimum acceptable ATM traffic descriptor information element allows the specification of a range of values for parameters which are handled independently. If a minimum acceptable ATM traffic descriptor information element is used, the peak cell rates indicated shall be less than the corresponding peak cell rates specified in the ATM traffic descriptor information element.

If point-to-multipoint procedures are supported, the user may initiate negotiation for the first party of a point-to-multipoint call. If the user initiates negotiation, the user shall send ADD PARTY messages only if the link is in the active state. If an ADD PARTY message is received for a call for which the SETUP message contained either a minimum acceptable ATM traffic descriptor information element or an alternative ATM traffic descriptor information element while in the call delivered state an ADD PARTY REJECT message with a cause information element indicating cause No. 111, "protocol error, unspecified", shall be sent in response.

9.1.2 Traffic parameter negotiation procedures (originating interface)

When both the minimum acceptable ATM traffic descriptor and the alternative ATM traffic descriptor information elements are present in a SETUP message, the call shall be rejected as specified in 5.4.2/Q.2931 with cause No. 73, "unsupported combination of traffic parameters".

If the parameters of the alternative ATM traffic descriptor information element or minimum acceptable ATM traffic descriptor information element are not according to the allowed combinations as specified in 8.2.1 and 8.2.2 respectively, the network shall handle these information elements as if they were non-mandatory information elements with content error as specified in 5.6.8/Q.2931.

When the minimum acceptable ATM traffic descriptor information element is included in the SETUP message and the network is able to provide the traffic parameter values specified in the ATM traffic descriptor information element, the network shall progress the connection establishment request with both the ATM traffic descriptor information element and the minimum acceptable ATM traffic descriptor information element.

When the alternative ATM traffic descriptor information element is included in the SETUP message and the network is able to provide the traffic parameter values specified in the ATM traffic descriptor information element and the network is able to provide the traffic parameter values specified in the alternative ATM traffic descriptor information element, the network shall progress the call/connection establishment request with both the ATM traffic descriptor information element and the alternative ATM traffic descriptor information element.

When the alternative ATM traffic descriptor information element is included in the SETUP message and the network is able to provide the traffic parameter values specified in the ATM traffic descriptor information element and the network is not able to provide the traffic parameter values specified in the alternative ATM traffic descriptor information element, the network shall progress the call/connection establishment request with the ATM traffic descriptor information element and without the alternative ATM traffic descriptor information element.

If the network is not able to provide some of the cell rates indicated in the ATM traffic descriptor information element and the minimum acceptable ATM traffic descriptor information element is included, the procedures of 9.1.2.1 shall apply.

If the network is not able to provide some of the cell rates indicated in the ATM traffic descriptor information element and alternative ATM traffic descriptor information element is included, the procedures of 9.1.2.2 shall apply.

When the OAM traffic descriptor information element is present, the allocation of bandwidth for OAM flow is based on the ATM traffic descriptor agreed in the CONNECT message. Since the OAM flow allocation is bidirectional (see Note 2 of Table 4-22/Q.2931), the available user cell rate in one direction can be affected by negotiation of bandwidth in the other direction.

9.1.2.1 Minimum acceptable ATM traffic parameter negotiation

If the network is not able to provide some of the cell rates indicated in the ATM traffic descriptor information element but able to provide at least their corresponding cell rates in the minimum acceptable ATM traffic descriptor information element, the network shall progress the connection establishment request after adjusting the cell rates indication in the ATM traffic descriptor information element. The adjusted parameter values will support at least the corresponding minimum acceptable values. If some of the parameters in the minimum acceptable ATM traffic descriptor information element are still less than the corresponding parameters in the modified ATM traffic descriptor information element, then the call/connection shall be progressed with the minimum acceptable ATM traffic descriptor information element containing all such parameters, in addition to the modified ATM traffic descriptor information element. Otherwise, the call shall progress with the modified ATM traffic descriptor information element and without the minimum acceptable ATM traffic descriptor information element.

If the network is not able to provide at least the cell rates indicated in the minimum acceptable ATM traffic descriptor information element, the network shall reject the connection establishment request, as specified in 5.4.2/Q.2931 with cause No. 37, "user cell rate unavailable".

9.1.2.2 Alternative traffic parameter negotiation

If the network is not able to provide the ATM traffic descriptor indicated in the ATM traffic descriptor information element but able to provide the ATM traffic descriptor indicated in the alternative ATM traffic descriptor information element, the network shall progress the connection establishment request by using the contents of the alternative ATM traffic descriptor information element as the ATM traffic descriptor.

If the network can provide neither the ATM traffic descriptor indicated in the ATM traffic descriptor information element nor the ATM traffic descriptor indicated in the alternative ATM traffic descriptor information element, the network shall reject the connection establishment request, as specified in 5.4.2/Q.2931 with cause No. 37, "user cell rate unavailable".

9.1.3 Negotiation acceptance (originating interface)

Upon receiving an indication that the request has been accepted, the network shall send a CONNECT message across the UNI and enter the active state. The message returned to the user shall contain the ATM traffic descriptor information element indicating the cell rates finally allocated to the connection.

If no ATM traffic descriptor information element is included in the CONNECT message, the connection characteristics specified in the ATM traffic descriptor information element sent in the SETUP message shall apply.

9.2 Negotiating the connection characteristics at the destination interface

9.2.1 Negotiation request (destination interface)

The network shall send a SETUP message containing, in addition to the ATM traffic descriptor information element, either the minimum acceptable ATM traffic descriptor information element or the alternative ATM traffic descriptor information element when traffic parameters are negotiable.

9.2.2 Traffic parameter negotiation procedures (destination interface)

If the user is able to provide the connection characteristics specified in the ATM traffic descriptor information element, the user shall progress the connection establishment request.

If the user is not able to provide some of the cell rates indicated in the ATM traffic descriptor information element and the minimum acceptable ATM traffic descriptor information element is included, the procedures of 9.2.2.1 shall apply.

If the user is not able to provide the ATM traffic descriptor indicated by the ATM traffic descriptor information element and the alternative ATM traffic descriptor information element is included, the procedures of 9.2.2.2 shall apply.

When the OAM traffic descriptor information element is present, the allocation of bandwidth for OAM flow is based on the ATM traffic descriptor agreed in the CONNECT message. Since the OAM flow allocation is bidirectional (see Note 2 of Table 4-22/Q.2931) the available user cell rate in one direction can be affected by negotiation of bandwidth in the other direction.

9.2.2.1 Minimum acceptable traffic parameter negotiation

If the user is not able to provide some of the cell rates indicated in the ATM traffic descriptor information element but able to provide at least their corresponding cell rates in the minimum acceptable ATM traffic descriptor information element, the user shall progress the connection establishment request.

If the user is not able to provide at least the cell rates indicated in the minimum acceptable ATM traffic descriptor information element, the user shall reject the connection establishment request, as specified in 5.4.2/Q.2931 with cause No. 47, "Resources not available, unspecified".

9.2.2.2 Alternative traffic parameter negotiation

If the user is not able to provide the ATM traffic descriptor indicated by the ATM traffic descriptor information element but able to provide the ATM traffic descriptor indicated by the alternative ATM traffic descriptor information element, the user shall progress the connection establishment request on the basis of the alternative ATM traffic descriptor information element.

If the user can provide neither the ATM traffic descriptor indicated by the ATM traffic descriptor information element nor the ATM traffic descriptor indicated by the alternative ATM traffic descriptor information element, the user shall reject the connection establishment request, as specified in 5.4.2/Q.2931 with cause No. 47, "Resources not available, unspecified".

9.2.3 Negotiation confirmation (destination interface)

When the user receives a SETUP message and wishes to accept the request, the user responds with a CONNECT message and enters the appropriate connection state. The message returned by the user shall contain the ATM traffic descriptor information element with the accepted connection characteristics. The ATM traffic descriptor information element shall contain the same set of parameters as received in the ATM traffic descriptor information element, if negotiation has proceeded on the basis of the minimum acceptable ATM traffic descriptor information element, or the alternative ATM traffic descriptor information element if this has been used for negotiation.

If no ATM traffic descriptor information element is included in the CONNECT message, the connection characteristics specified in the ATM traffic descriptor information element sent in the SETUP message shall apply.

If the user rejects the request, it will send the appropriate message (RELEASE COMPLETE) and enter the null state.

10 Procedures at the T_B reference point for interworking with private B-ISDNs

The procedures of clause 9 apply.

11 Interworking with other networks

Negotiation procedures are terminated at interworking points with other networks. An interworking unit can apply the procedures of 9.2 in order to obtain an acceptable ATM traffic descriptor to allow interworking to proceed.

12 Interactions with supplementary services

There are no interactions with supplementary services.

13 Parameter values


None required.

14 Dynamic description (SDLs)

None required.

Appendix I

Message flow diagram for negotiation

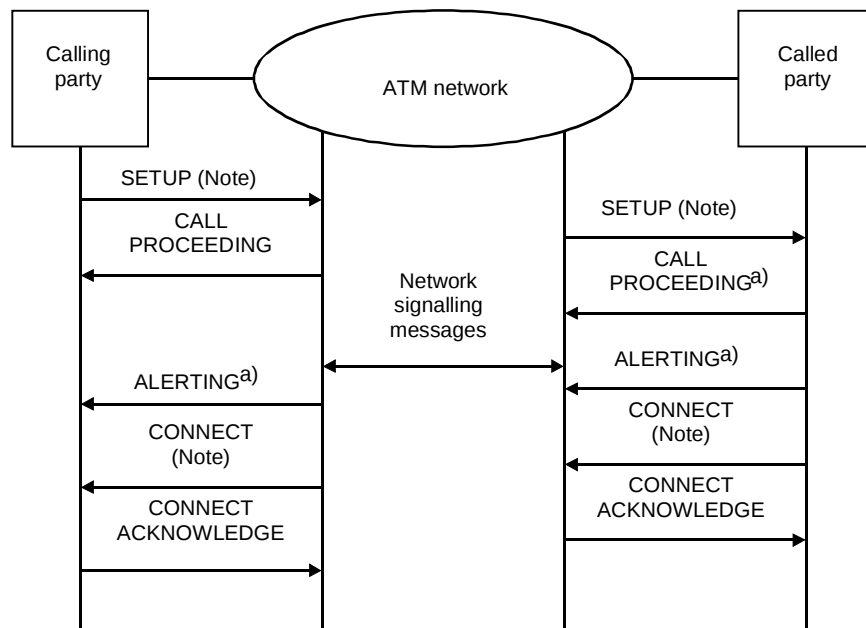

T1176640-95

a) Optional message.

NOTE – Additional information elements are included for negotiation.

FIGURE A-I/Q.2962
Successful ATM connection establishment

Appendix II

Guidelines for the use of the instruction indicator

It is suggested that the instruction indicator for the alternative ATM traffic descriptor and minimum acceptable ATM traffic descriptor information elements be encoded to indicate "discard, proceed and report status".

ITU-T RECOMMENDATIONS SERIES

Series A	Organization of the work of the ITU-T
Series B	Means of expression
Series C	General telecommunication statistics
Series D	General tariff principles
Series E	Telephone network and ISDN
Series F	Non-telephone telecommunication services
Series G	Transmission systems and media
Series H	Transmission of non-telephone signals
Series I	Integrated services digital network
Series J	Transmission of sound-programme and television signals
Series K	Protection against interference
Series L	Construction, installation and protection of cables and other elements of outside plant
Series M	Maintenance: international transmission systems, telephone circuits, telegraphy, facsimile and leased circuits
Series N	Maintenance: international sound-programme and television transmission circuits
Series O	Specifications of measuring equipment
Series P	Telephone transmission quality
Series Q	Switching and signalling
Series R	Telegraph transmission
Series S	Telegraph services terminal equipment
Series T	Terminal equipment and protocols for telematic services
Series U	Telegraph switching
Series V	Data communication over the telephone network
Series X	Data networks and open system communication
Series Z	Programming languages



* 9 5 7 4 *

Printed in Switzerland

Geneva, 1996