



INTERNATIONAL TELECOMMUNICATION UNION

ITU-T

TELECOMMUNICATION
STANDARDIZATION SECTOR
OF ITU

Q.664

INTERWORKING OF SIGNALLING SYSTEMS

LOGIC PROCEDURES FOR INTERWORKING OF SIGNALLING SYSTEM No. 7 (TUP) TO No. 7 (TUP)

ITU-T Recommendation Q.664

(Extract from the *Blue Book*)


NOTES

1 ITU-T Recommendation Q.664 was published in Fascicle VI.6 of the *Blue Book*. This file is an extract from the *Blue Book*. While the presentation and layout of the text might be slightly different from the *Blue Book* version, the contents of the file are identical to the *Blue Book* version and copyright conditions remain unchanged (see below).

2 In this Recommendation, the expression “Administration” is used for conciseness to indicate both a telecommunication administration and a recognized operating agency.

Recommendation Q.664

LOGIC PROCEDURES FOR INTERWORKING OF SIGNALLING SYSTEM No. 7 (TUP) TO No. 7 (TUP)

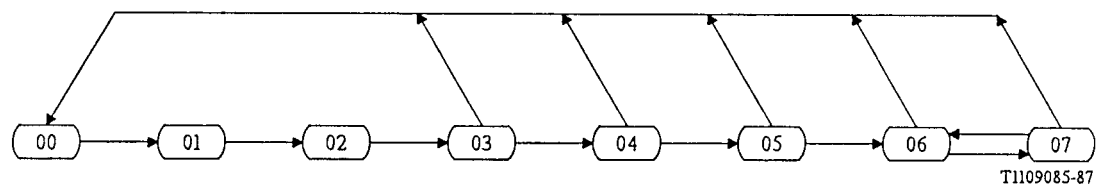

State number	State description	Sheet reference
00	Idle	1, 2, 4
01	Wait for service provided FITE	1
02	Wait for CPCI-FITE	1
03	Wait for continuity FITE	2
04	Wait for address-complete	3
05	Wait for answer	3
06	Answered	4
07	Clear-back	4

FIGURE 1/Q.664

State overview diagram for interworking of Signalling System No. 7 (TUP) to No. 7 (TUP)

FIGURE 2/Q.664

(Reserved for future notes)

Connector
reference


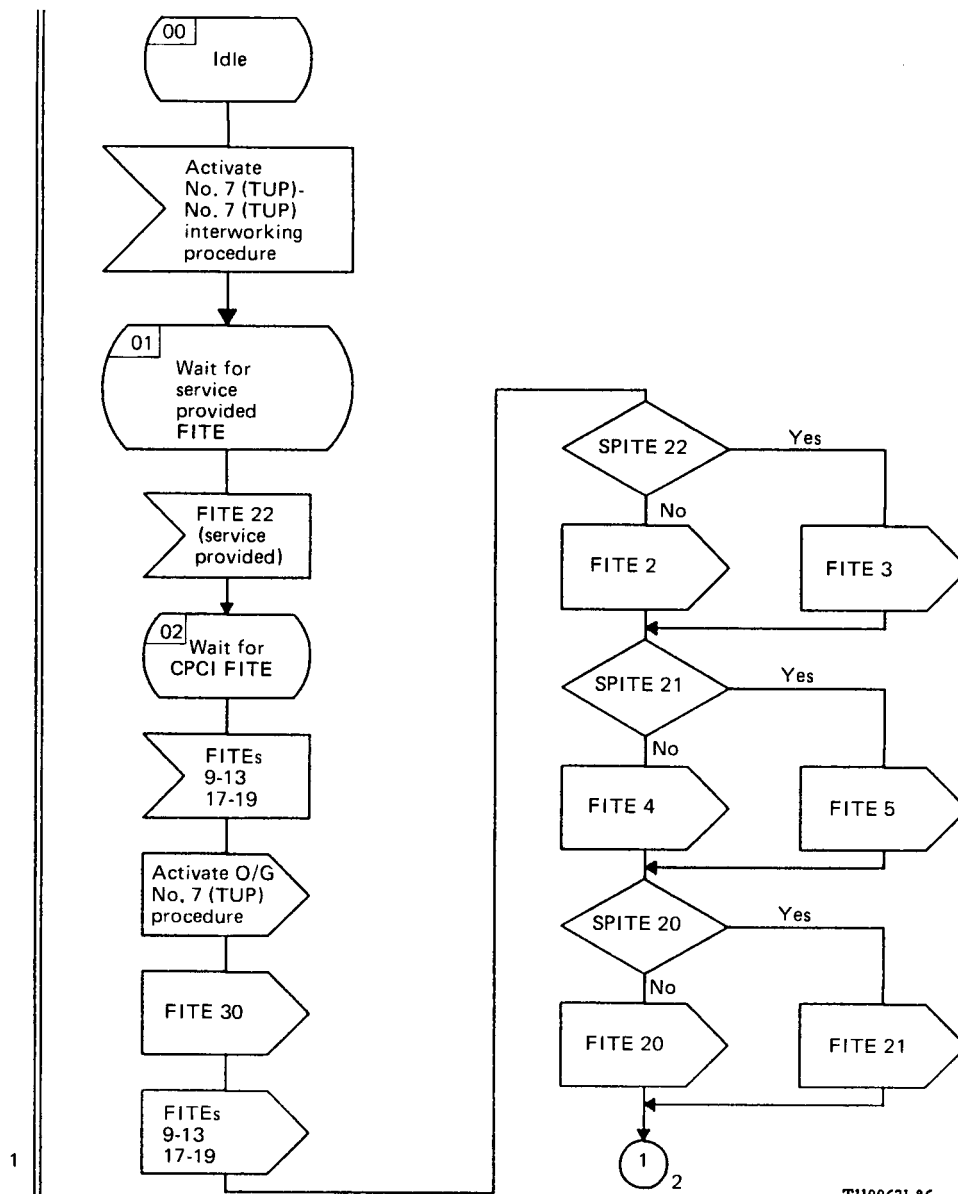


FIGURE 3/Q.664 (Sheet 1 of 4)

Interworking of Signalling System No. 7 (TUP) to No. 7 (TUP)

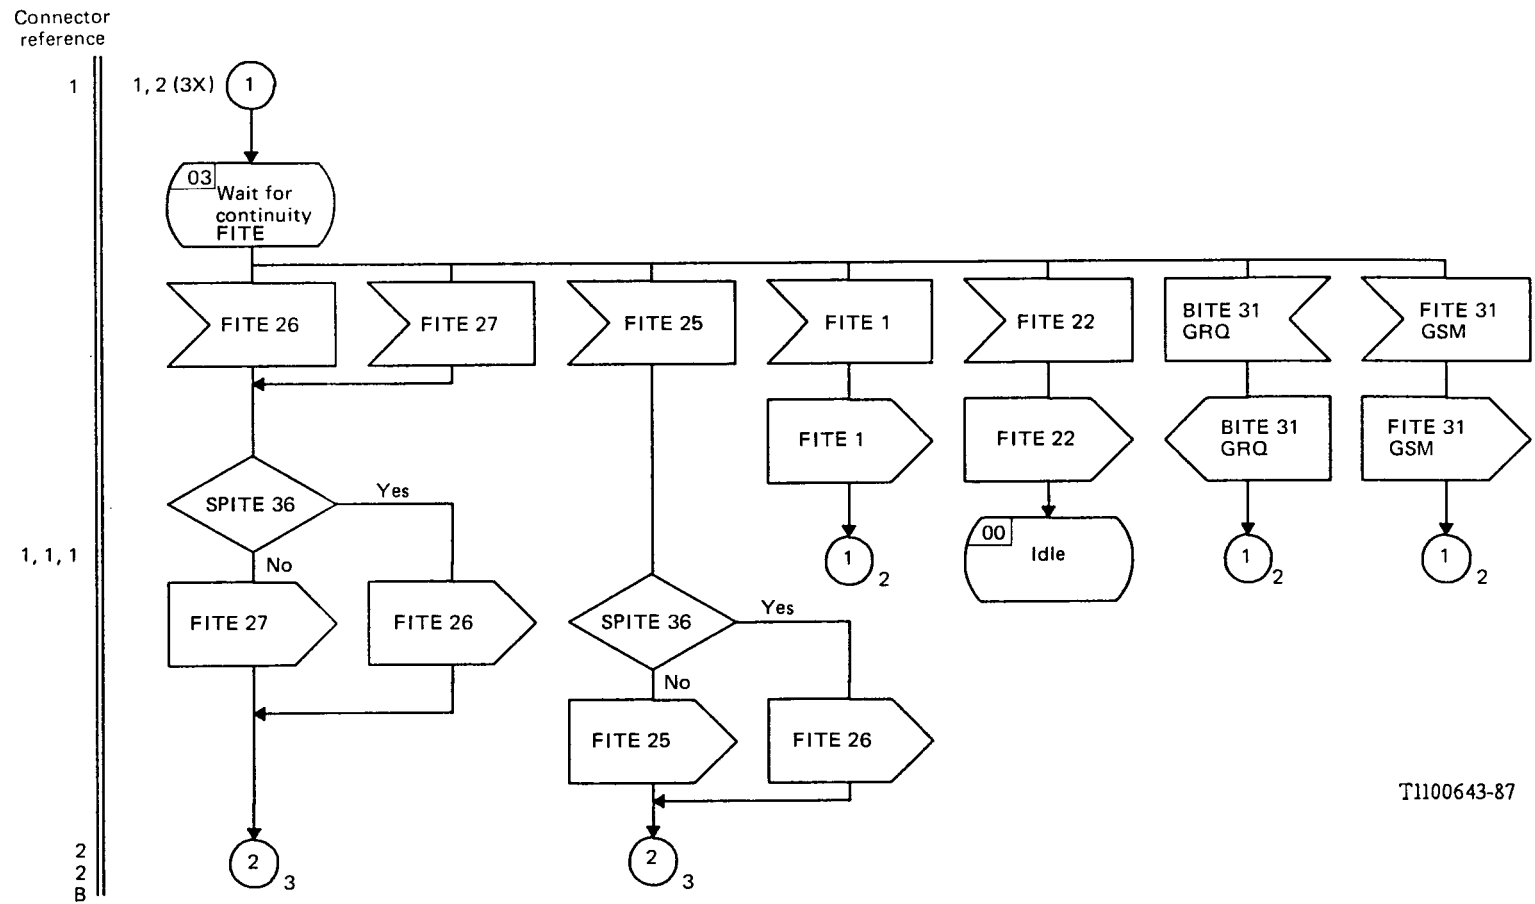

T1100643-87

FIGURE 3/Q.664 (Sheet 2 of 4)

Interworking of Signalling System No. 7 (TUP) to No. 7 (TUP)


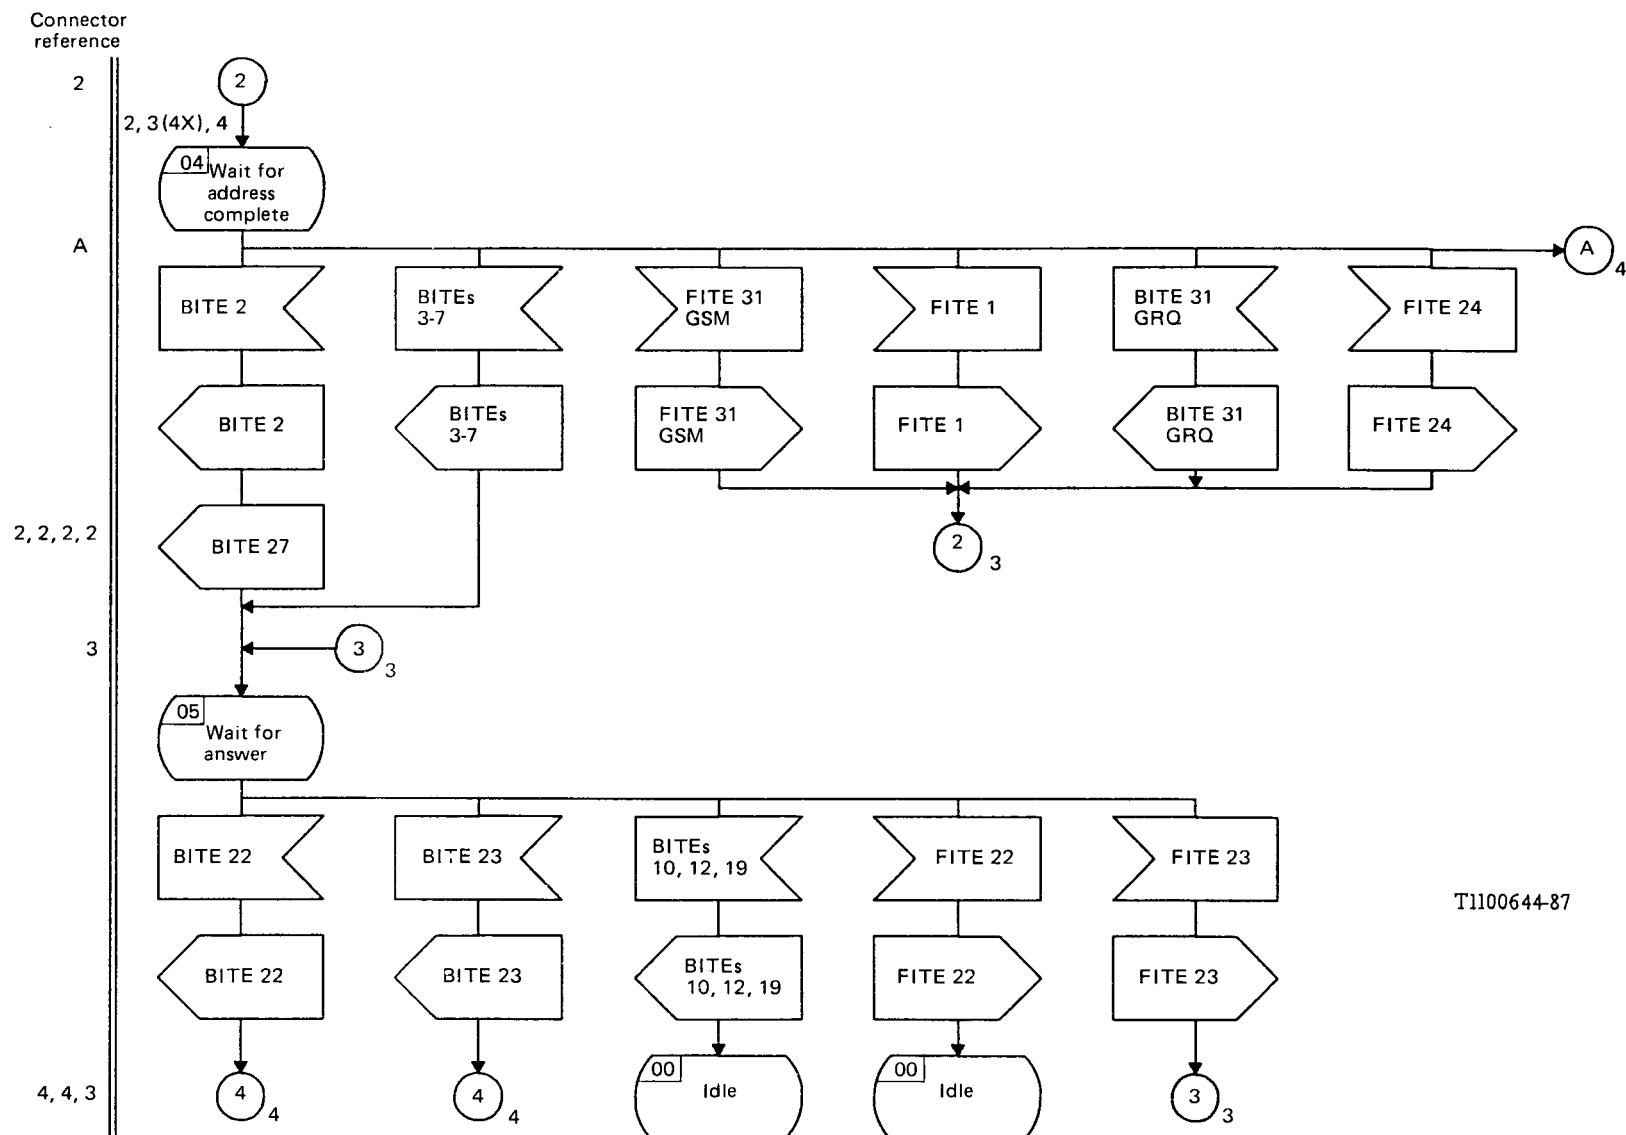


FIGURE 3/Q.664 (Sheet 3 of 4)

Interworking of Signalling System No. 7 (TUP) to No. 7 (TUP)

Connector
reference

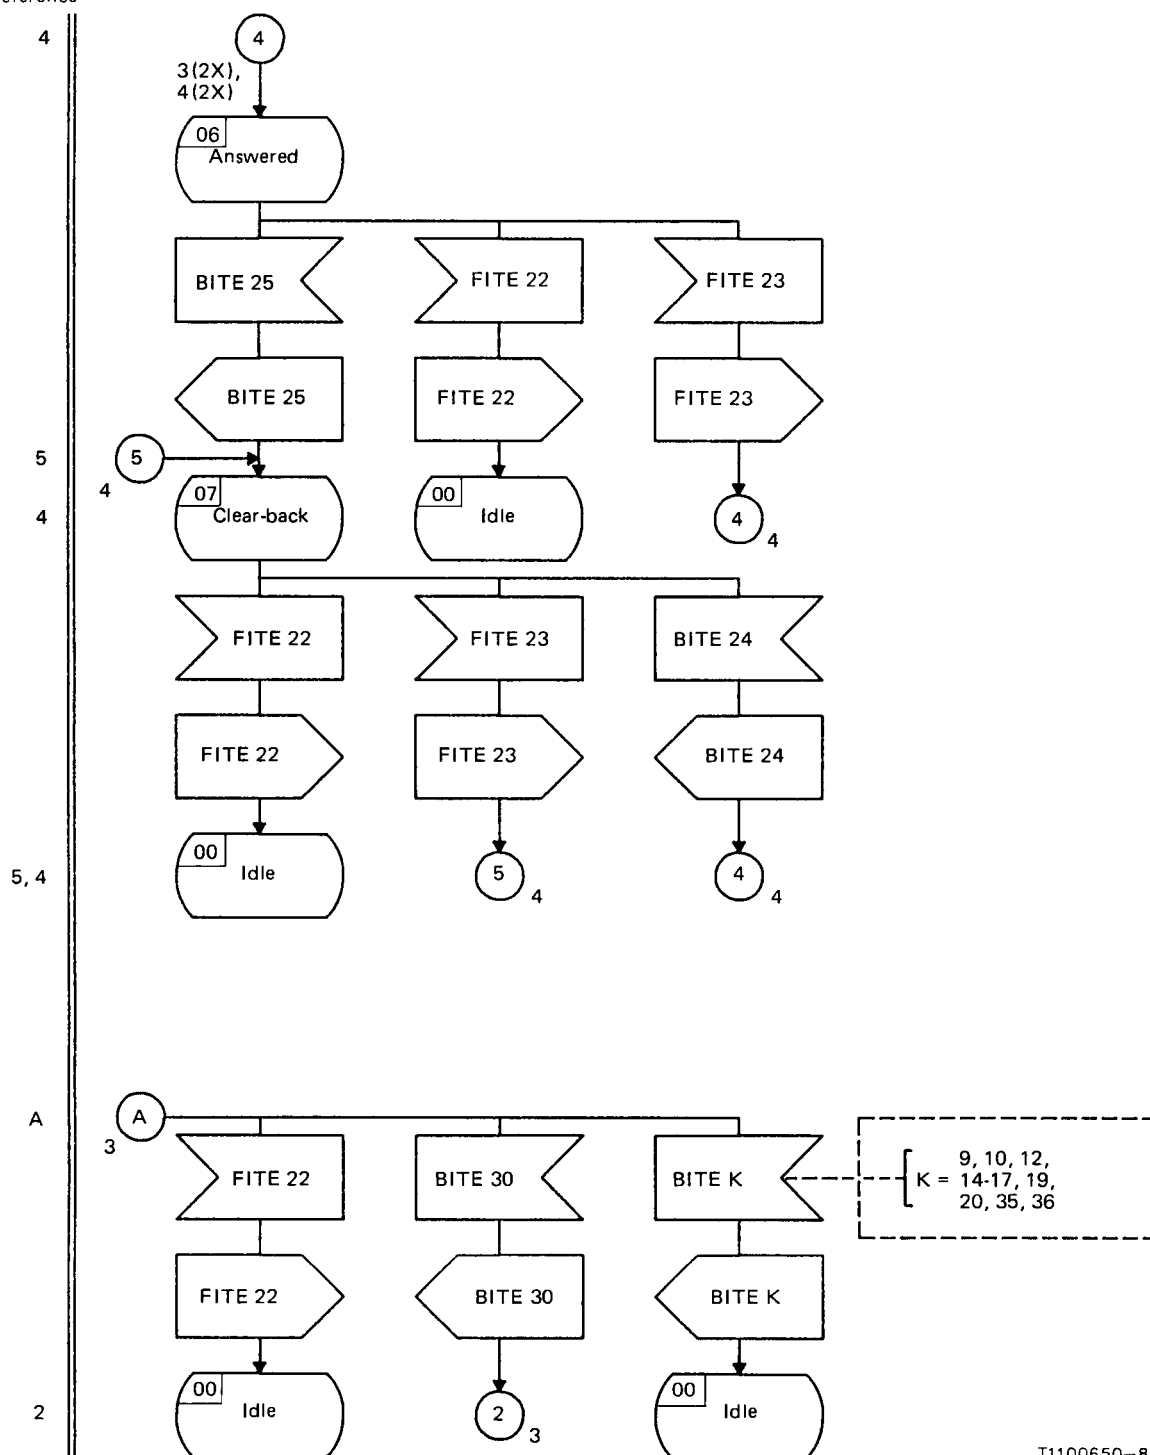

T1100650-85

FIGURE 3/Q.664 (Sheet 4 of 4)
Interworking of Signalling System No. 7 (TUP) to No. 7 (TUP)