



INTERNATIONAL TELECOMMUNICATION UNION

ITU-T

TELECOMMUNICATION
STANDARDIZATION SECTOR
OF ITU

Q.674

INTERWORKING OF SIGNALLING SYSTEMS

**LOGIC PROCEDURES FOR
INTERWORKING OF SIGNALLING
SYSTEM R1 TO R2**

ITU-T Recommendation Q.674


(Extract from the *Blue Book*)

NOTES

- 1 ITU-T Recommendation Q.674 was published in Fascicle VI.6 of the *Blue Book*. This file is an extract from the *Blue Book*. While the presentation and layout of the text might be slightly different from the *Blue Book* version, the contents of the file are identical to the *Blue Book* version and copyright conditions remain unchanged (see below).
- 2 In this Recommendation, the expression “Administration” is used for conciseness to indicate both a telecommunication administration and a recognized operating agency.

Recommendation Q.674

LOGIC PROCEDURES FOR INTERWORKING OF SIGNALLING SYSTEM R1 TO R2

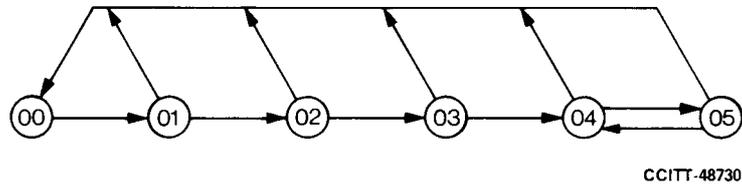

<i>State number</i>	<i>State description</i>	<i>Sheet reference</i>
00	Idle	1, 2
01	Wait for ST-FITE	1
02	Wait for address-complete	1
03	Wait for answer	2
04	Answered	2
05	Clear-back	2

FIGURE 1/Q.674

State overview diagram for interworking of Signalling System R1 to R2


Procedures not shown

The following procedure not directly relevant to interworking, is not shown in the logic procedures:

P₁ - Procedure for repeat attempt.

FIGURE 2/Q.674

Notes to interworking of Signalling System R1 to R2

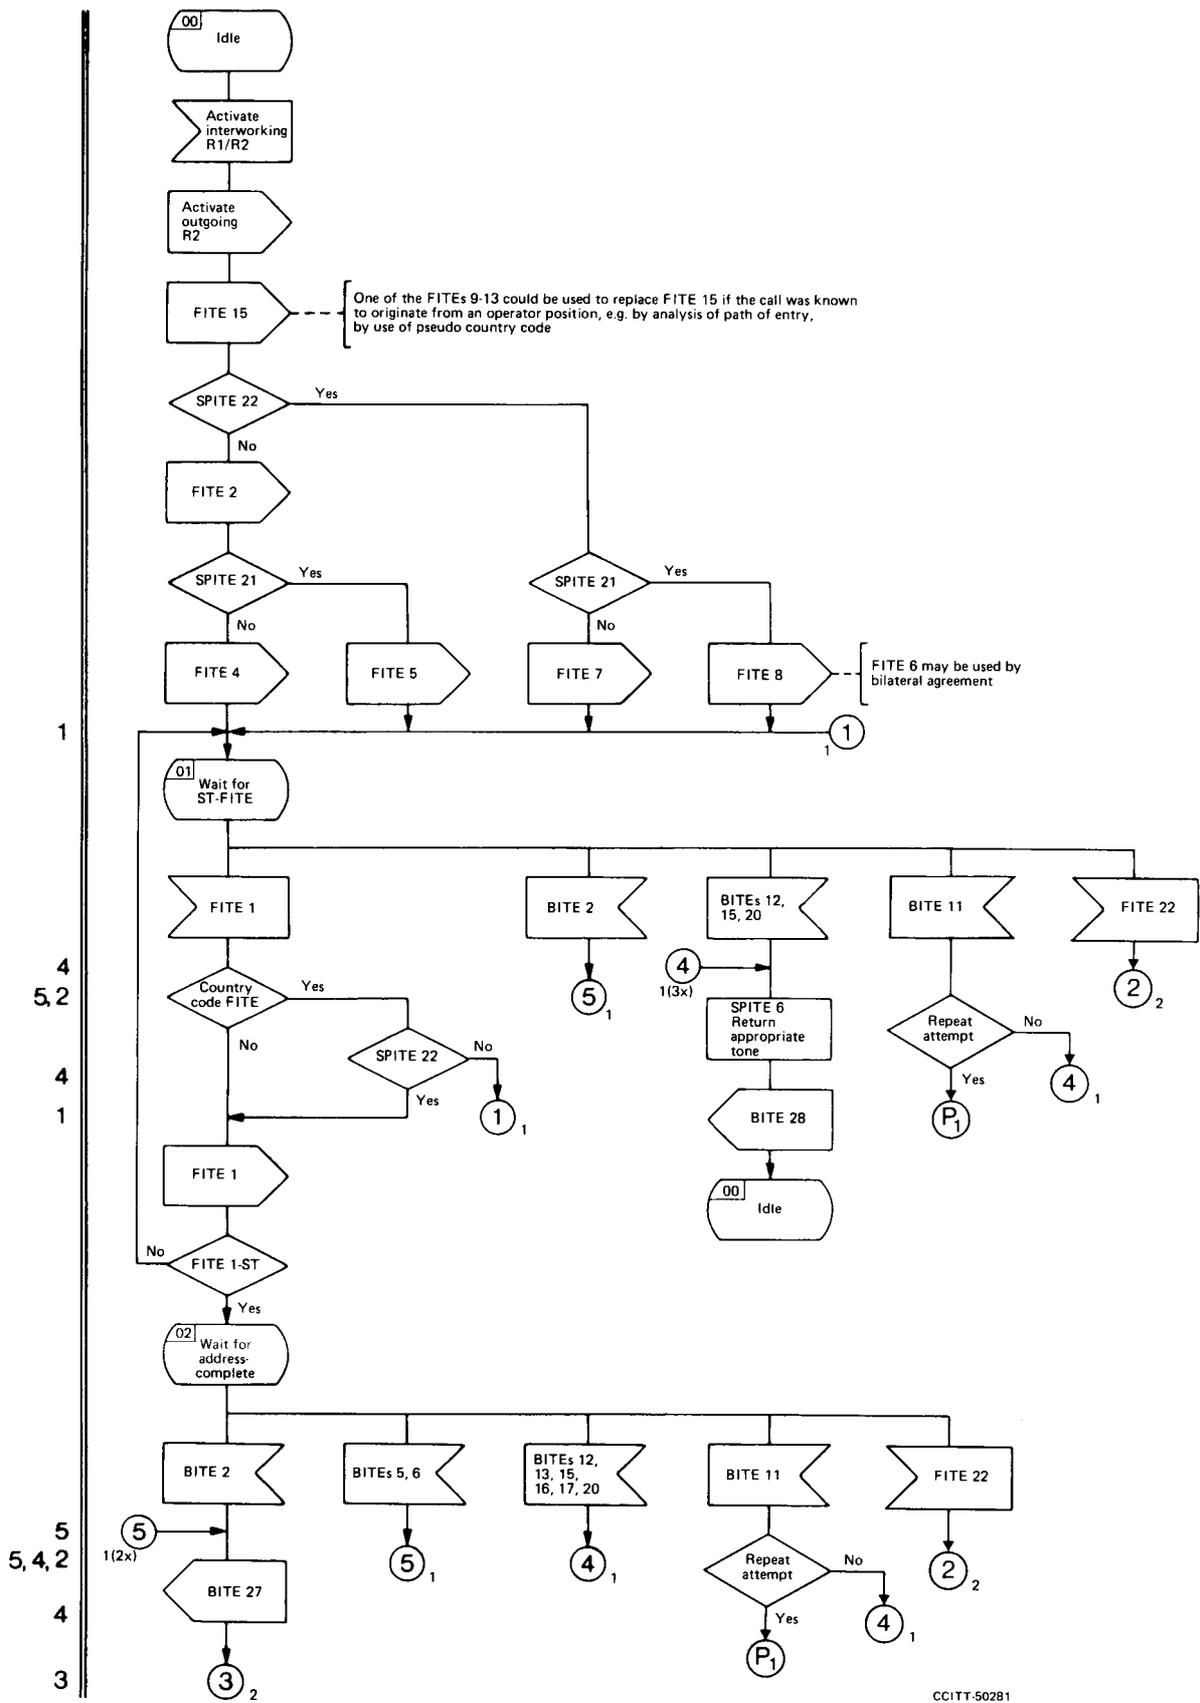

CCITT-50281

FIGURE 3/Q.674 (Sheet 1 of 2)

Interworking of Signalling System R1 to R2

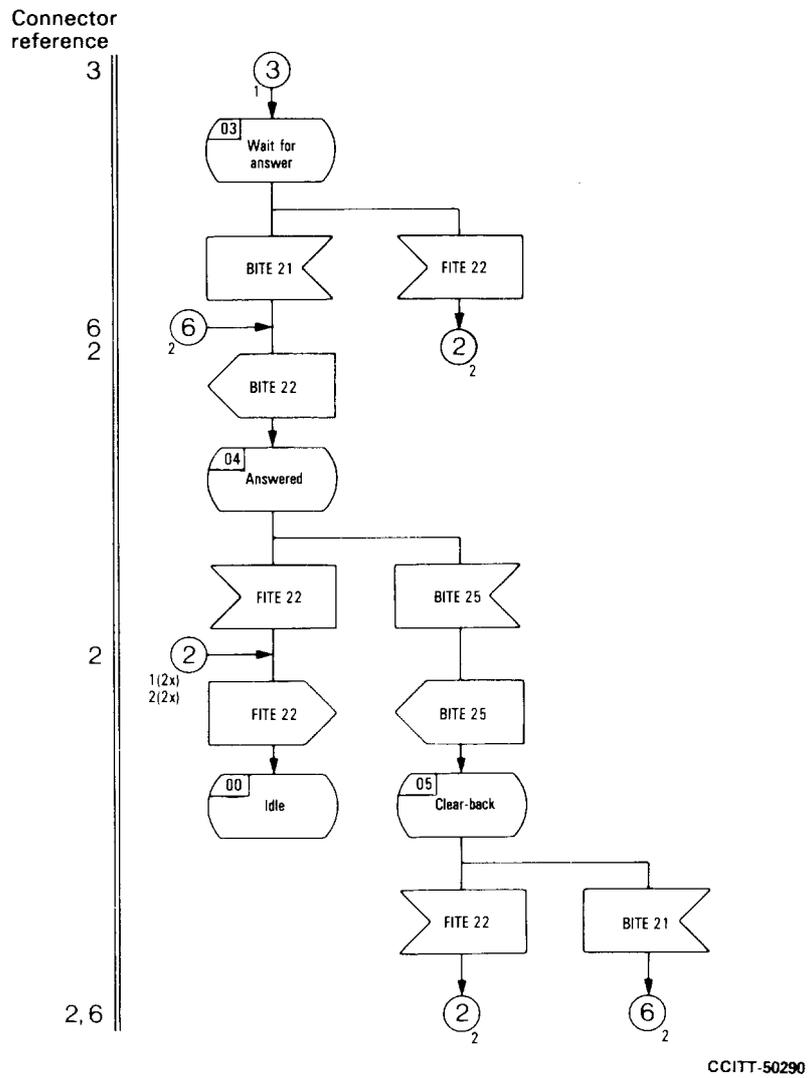


FIGURE 3/Q.674 (Sheet 2 of 2)
Interworking of Signalling System R1 to R2