TELECOMMUNICATION STANDARDIZATION SECTOR

OF ITU

X.902

(11/95)

DATA NETWORKS AND OPEN SYSTEM COMMUNICATIONS OPEN DISTRIBUTED PROCESSING

INFORMATION TECHNOLOGY OPEN DISTRIBUTED PROCESSING REFERENCE MODEL: FOUNDATIONS

ITU-T Recommendation X.902

(Previously "CCITT Recommendation")

FOREWORD

ITU (International Telecommunication Union) is the United Nations Specialized Agency in the field of telecommunications. The ITU Telecommunication Standardization Sector (ITU-T) is a permanent organ of the ITU. Some 179 member countries, 84 telecom operating entities, 145 scientific and industrial organizations and 38 international organizations participate in ITU-T which is the body which sets world telecommunications standards (Recommendations).

The approval of Recommendations by the Members of ITU-T is covered by the procedure laid down in WTSC Resolution No. 1 (Helsinki, 1993). In addition, the World Telecommunication Standardization Conference (WTSC), which meets every four years, approves Recommendations submitted to it and establishes the study programme for the following period.

In some areas of information technology which fall within ITU-T's purview, the necessary standards are prepared on a collaborative basis with ISO and IEC. The text of ITU-T Recommendation X.902 was approved on 21st of November 1995. The identical text is also published as ISO/IEC International Standard 10746-2.

NOTE

In this Recommendation, the expression "Administration" is used for conciseness to indicate both a telecommunication administration and a recognized operating agency.

© ITU 1996

All rights reserved. No part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the ITU.

ITU-T X-SERIES RECOMMENDATIONS

DATA NETWORKS AND OPEN SYSTEM COMMUNICATIONS

(February 1994)

ORGANIZATION OF X-SERIES RECOMMENDATIONS

Subject area	Recommendation Series
PUBLIC DATA NETWORKS	
Services and Facilities	X.1-X.19
Interfaces	X.20-X.49
Transmission, Signalling and Switching	X.50-X.89
Network Aspects	X.90-X.149
Maintenance	X.150-X.179
Administrative Arrangements	X.180-X.199
OPEN SYSTEMS INTERCONNECTION	
Model and Notation	X.200-X.209
Service Definitions	X.210-X.219
Connection-mode Protocol Specifications	X.220-X.229
Connectionless-mode Protocol Specifications	X.230-X.239
PICS Proformas	X.240-X.259
Protocol Identification	X.260-X.269
Security Protocols	X.270-X.279
Layer Managed Objects	X.280-X.289
Conformance Testing	X.290-X.299
INTERWORKING BETWEEN NETWORKS	
General	X.300-X.349
Mobile Data Transmission Systems	X.350-X.369
Management	X.370-X.399
MESSAGE HANDLING SYSTEMS	X.400-X.499
DIRECTORY	X.500-X.599
OSI NETWORKING AND SYSTEM ASPECTS	
Networking	X.600-X.649
Naming, Addressing and Registration	X.650-X.679
Abstract Syntax Notation One (ASN.1)	X.680-X.699
OSI MANAGEMENT	X.700-X.799
SECURITY	X.800-X.849
OSI APPLICATIONS	
Commitment, Concurrency and Recovery	X.850-X.859
Transaction Processing	X.860-X.879
Remote Operations	X.880-X.899
OPEN DISTRIBUTED PROCESSING	X.900-X.999

CONTENTS

Sum	nmary					
Intro	oduction					
1	Scope					
2	Normative references					
	2.1 Identical Recommendations International Standards					
3	Definitions					
	 3.1 Definitions from other Recommendations International Standards					
4	Abbreviations					
5	Categorization of concepts					
6	Basic interpretation concepts					
7	Basic linguistic concepts					
8	Basic modelling concepts					
9	Specification concepts					
,	9.1 Composition					
	9.3 Decomposition					
10	Organizational concepts					
11	Properties of systems and objects					
	11.1 Transparencies					
	11.2 Policy concepts					
	11.3 Temporal properties					
12	Naming concepts					
13	Concepts for behaviour					
	13.1 Activity structure					
	13.2 Contractual behaviour					
	13.3 Causality					
	13.5 Dependability					
14	Management concepts					
15	ODP approach to conformance					
13	15.1 Conformance to ODP standards					
	15.2 Testing and reference points					
	15.3 Classes of reference points					
	15.4 Change of configuration					
	15.5 The conformance testing process					
	15.6 The result of testing					
	15.7 Relation between reference points					

Summary

This Recommendation | International Standard contains the definition of the concepts and analytical framework for normalized description of (arbitrary) distributed processing systems. It introduces the principles of conformance to ODP standards and the way in which they are applied. This is only to a level of detail sufficient to support Rec. X.903 | ISO/IEC 10746-3 and to establish requirements for new specification techniques.

Introduction

The rapid growth of distributed processing has led to a need for a coordinating framework for the standardization of Open Distributed Processing (ODP). This Reference Model of ODP provides such a framework. It creates an architecture within which support of distribution, interworking, and portability can be integrated.

The Reference Model of Open Distributed Processing (RM-ODP), ITU-T Recs. X.901 to X.904 | ISO/IEC 10746, is based on precise concepts derived from current distributed processing developments and, as far as possible, on the use of formal description techniques for specification of the architecture.

The RM-ODP consists of:

- ITU-T Rec. X.901 | ISO/IEC 10746-1: Overview: Contains a motivational overview of ODP, giving scoping, justification and explanation of key concepts, and an outline of the ODP architecture. It contains explanatory material on how the RM-ODP is to be interpreted and applied by its users, who may include standards writers and architects of ODP systems. It also contains a categorization of required areas of standardization expressed in terms of the reference points for conformance identified in ITU-T Rec. X.903 | ISO/IEC 10746-3. This part is not normative.
- ITU-T Rec. X.902 | ISO/IEC 10746-2: Foundations: Contains the definition of the concepts and analytical framework for normalized description of (arbitrary) distributed processing systems. It introduces the principles of conformance to ODP standards and the way in which they are applied. This is only to a level of detail sufficient to support ITU-T Rec. X.903 | ISO/IEC 10746-3 and to establish requirements for new specification techniques. This part is normative.
- ITU-T Rec. X.903 | ISO/IEC 10746-3: Architecture: Contains the specification of the required characteristics that qualify distributed processing as open. These are the constraints to which ODP standards must conform. It uses the descriptive techniques from ITU-T Rec. X.902 | ISO/IEC 10746-2. This part is normative.
- ITU-T Rec. X.904 | ISO/IEC 10746-4: Architectural semantics: Contains a formalization of the ODP modelling concepts defined in this Recommendation | International Standard (clauses 8 and 9). The formalization is achieved by interpreting each concept in terms of the constructs of the different standardized formal description techniques. This part is normative.

This Recommendation | International Standard does not contain any annexes.

INTERNATIONAL STANDARD

ITU-T RECOMMENDATION

INFORMATION TECHNOLOGY – OPEN DISTRIBUTED PROCESSING – REFERENCE MODEL: FOUNDATIONS

1 Scope

This ITU-T Recommendation | International Standard covers the concepts which are needed to perform the modelling of ODP systems (see clauses 5 to 14), and the principles of conformance to ODP systems (see clause 15).

The concepts defined in clauses 5 to 15 are used in the Reference Model of Open Distributed Processing to support the definitions of:

- a) the structure of the family of standards which are subject to the Reference Model;
- b) the structure of distributed systems which claim compliance with the Reference Model (the configuration of the systems);
- c) the concepts needed to express the combined use of the various standards supported;
- d) the basic concepts to be used in the specifications of the various components which make up the open distributed system.

2 Normative references

The following Recommendations and International Standards contain provisions which, through reference in this text, constitute provisions of this Recommendation | International Standard. At the time of publication, the editions indicated were valid. All Recommendations and Standards are subject to revision, and parties to agreements based on this Recommendation | International Standard are encouraged to investigate the possibility of applying the most recent edition of the Recommendations and Standards listed below. Members of IEC and ISO maintain registers of currently valid International Standards. The Telecommunication Standardization Bureau of the ITU maintains a list of currently valid ITU-T Recommendations.

2.1 Identical Recommendations | International Standards

- ITU-T Recommendation X.903 (1995) | ISO/IEC 10746-3:1996, Information technology - Open distributed processing - Reference Model: Architecture.

3 Definitions

For the purposes of this Recommendation | International Standard, the following definitions apply.

3.1 Definitions from other Recommendations | International Standards

There are no definitions from other Recommendations | International Standards in this Recommendation | International Standard.

3.2 Background definitions

- **3.2.1 distributed processing**: Information processing in which discrete components may be located in different places, and where communication between components may suffer delay or may fail.
- **3.2.2 ODP standards**: This Reference Model and those standards that comply with it, directly or indirectly.
- **3.2.3 open distributed processing**: Distributed processing designed to conform to ODP standards.
- **3.2.4 ODP system**: A system (see 6.5) which conforms to the requirements of ODP standards.

3.2.5 information: Any kind of knowledge, that is exchangeable amongst users, about things, facts, concepts and so on, in a universe of discourse.

Although information will necessarily have a representation form to make it communicable, it is the interpretation of this representation (the meaning) that is relevant in the first place.

- **3.2.6 data**: The representation forms of information dealt with by information systems and users thereof.
- **3.2.7 viewpoint** (**on a system**): A form of abstraction achieved using a selected set of architectural concepts and structuring rules, in order to focus on particular concerns within a system.

4 Abbreviations

For the purposes of this Recommendation | International Standard, the following abbreviations apply:

ODP Open Distributed Processing
OSI Open Systems Interconnection

PICS Protocol Implementation Conformance Statement
PIXIT Protocol Implementation Extra Information for Testing

RM-ODP Reference Model of Open Distributed Processing

TP Transaction Processing

5 Categorization of concepts

The modelling concepts defined in this Recommendation | International Standard are categorized as follows:

- a) *Basic interpretation concepts:* Concepts for the interpretation of the modelling constructs of any ODP modelling language. These concepts are described in clause 6.
- b) *Basic linguistic concepts:* Concepts related to languages; the grammar of any language for the ODP Architecture must be described in terms of these concepts. These concepts are described in clause 7.
- c) Basic modelling concepts: Concepts for building the ODP Architecture; the modelling constructs of any language must be based on these concepts. These concepts are described in clause 8.
- d) Specification concepts: Concepts related to the requirements of the chosen specification languages used in ODP. These concepts are not intrinsic to distribution and distributed systems, but they are requirements to be considered in these specification languages. These concepts are described in clause 9.
- e) Structuring concepts: Concepts that emerge from considering different issues in distribution and distributed systems. They may or may not be directly supported by specification languages adequate for dealing with the problem area. Specification of objects and functions that directly support these concepts must be made possible by the use of the chosen specification languages. These concepts are described in clauses 10 to 14.
- f) *Conformance concepts:* Concepts necessary to explain the notions of conformance to ODP standards and of conformance testing. These concepts are defined in clause 15.

ITU-T Recommendation X.903 | ISO/IEC 10746-3 uses the concepts in this Recommendation | International Standard to specify the characteristics for distributed processing to be open. It is organized as a set of viewpoint languages. Each viewpoint language refines concepts from the set defined in this Recommendation | International Standard. It is not necessary for all viewpoint languages to adopt the same notations. Different notations may be chosen as appropriate to reflect the requirements of the viewpoint. These notations may be natural, formal, textual or graphical. However, it will be necessary to establish correspondences between the various languages to ensure overall consistency.

6 Basic interpretation concepts

Although much of the ODP Architecture is concerned with defining formal constructs, the semantics of the architectural model and any modelling languages used have to be described. These concepts are primarily meta-concepts, i.e. concepts which apply generally to any form of modelling activity. It is not intended that these concepts will be formally defined, nor that they be used as the basis of formal definition of other concepts.

Any modelling activity identifies:

- a) elements of the universe of discourse;
- b) one or more pertinent levels of abstraction.

The elements of the universe of discourse are entities and propositions.

- **6.1 Entity**: Any concrete or abstract thing of interest. While in general the word entity can be used to refer to anything, in the context of modelling it is reserved to refer to things in the universe of discourse being modelled.
- **6.2 Proposition**: An observable fact or state of affairs involving one or more entities, of which it is possible to assert or deny that it holds for those entities.
- **6.3 Abstraction**: The process of suppressing irrelevant detail to establish a simplified model, or the result of that process.
- **6.4 Atomicity**: An entity is atomic at a given level of abstraction if it cannot be subdivided at that level of abstraction.

Fixing a given level of abstraction may involve identifying which elements are atomic.

- **6.5 System**: Something of interest as a whole or as comprised of parts. Therefore a system may be referred to as an entity. A component of a system may itself be a system, in which case it may be called a subsystem.
- NOTE For modelling purposes, the concept of system is understood in its general, system-theoretic sense. The term "system" can refer to an information processing system but can also be applied more generally.
- **6.6** Architecture (of a system): A set of rules to define the structure of a system and the interrelationships between its parts.

7 Basic linguistic concepts

Whatever the concepts or semantics of a modelling language for the ODP Architecture, it will be expressed in some syntax, which may include linear text or graphical conventions. It is assumed that any suitable language will have a grammar defining the valid set of symbols and well-formed linguistic constructs of the language. The following concepts provide a common framework for relating the syntax of any language used for the ODP Architecture to the interpretation concepts.

7.1 Term: A linguistic construct which may be used to refer to an entity.

The reference may be to any kind of entity including a model of an entity or another linguistic construct.

7.2 Sentence: A linguistic construct containing one or more terms and predicates; a sentence may be used to express a proposition about the entities to which the terms refer.

A predicate in a sentence may be considered to refer to a relationship between the entities referred to by the terms linked.

8 Basic modelling concepts

The detailed interpretation of the concepts defined in this clause will depend on the specification language concerned, but these general statements of concept are made in a language-independent way to allow the statements in different languages to be interrelated.

The basic concepts are concerned with existence and activity: the expression of what exists, where it is and what it does.

8.1 Object: A model of an entity. An object is characterized by its behaviour (see 8.6) and, dually, by its state (see 8.7). An object is distinct from any other object. An object is encapsulated, i.e. any change in its state can only occur as a result of an internal action or as a result of an interaction (see 8.3) with its environment (see 8.2).

An object interacts with its environment at its interaction points (see 8.11).

Depending on the viewpoint, the emphasis may be placed on behaviour or on state. When the emphasis is placed on behaviour, an object is informally said to perform functions and offer services (an object which makes a function available is said to offer a service). For modelling purposes, these functions and services are specified in terms of the behaviour of the object and of its interfaces (see 8.4). An object can perform more than one function. A function can be performed by the cooperation of several objects.

ISO/IEC 10746-2: 1996 (E)

NOTES

- 1 The concepts of service and function are used informally to express the purpose of a piece of standardization. In the ODP family of standards, function and service are expressed formally in terms of the specification of the behaviour of objects and of the interfaces which they support. A "service" is a particular abstraction of behaviour expressing the guarantees offered by a service provider.
 - 2 The expression "use of a function" is a shorthand for the interaction with an object which performs the function.
- **8.2** Environment (of an object): The part of the model which is not part of that object.

NOTE – In many specification languages, the environment can be considered to include at least one object which is able to participate without constraint in all possible interactions (see 8.3), representing the process of observation.

8.3 Action: Something which happens.

Every action of interest for modelling purposes is associated with at least one object.

The set of actions associated with an object is partitioned into **internal actions** and **interactions**. An internal action always takes place without the participation of the environment of the object. An interaction takes place with the participation of the environment of the object.

NOTES

- 1 "Action" means "action occurrence". Depending on context, a specification may express that an action has occurred, is occurring or may occur.
 - 2 The granularity of actions is a design choice. An action need not be instantaneous. Actions may overlap in time.
- 3 Interactions may be labelled in terms of cause and effect relationships between the participating objects. The concepts that support this are discussed in 13.3.
- 4 An object may interact with itself, in which case it is considered to play at least two roles in the interaction, and may be considered, in this context, as being a part of its own environment.
- 5 Involvement of the environment represents observability. Thus, interactions are observable whereas internal actions are not observable, because of object encapsulation.
- **8.4 Interface**: An abstraction of the behaviour of an object that consists of a subset of the interactions of that object together with a set of constraints on when they may occur.

Each interaction of an object belongs to a unique interface. Thus, the interfaces of an object form a partition of the interactions of that object.

NOTES

- 1 An interface constitutes the part of an object behaviour that is obtained by considering only the interactions of that interface and by hiding all other interactions. Hiding interactions of other interfaces will generally introduce non-determinism as far as the interface being considered is concerned.
- 2 The phrase "an interface between objects" is used to refer to the binding (see 13.4.2) between interfaces of the objects concerned.
- **8.5 Activity**: A single-headed directed acyclic graph of actions, where occurrence of each action in the graph is made possible by the occurrence of all immediately preceding actions (i.e. by all adjacent actions which are closer to the head).
- **8.6 Behaviour (of an object):** A collection of actions with a set of constraints on when they may occur.

The specification language in use determines the constraints which may be expressed. Constraints may include for example sequentiality, non-determinism, concurrency or real-time constraints.

A behaviour may include internal actions.

The actions that actually take place are restricted by the environment in which the object is placed.

NOTES

- 1 The composition (see 9.1) of a collection of objects implicitly yields an equivalent object representing the composition. The behaviour of this object is often referred to simply as the behaviour of the collection of objects.
 - 2 Action and activity are degenerate cases of behaviour.
 - 3 In general, several sequences of interactions are consistent with a given behaviour.
- **8.7 State (of an object)**: At a given instant in time, the condition of an object that determines the set of all sequences of actions in which the object can take part.

Since, in general, behaviour includes many possible series of actions in which the object might take part, knowledge of state does not necessarily allow the prediction of the sequence of actions which will actually occur.

State changes are effected by actions; hence a state is partially determined by the previous actions in which the object took part.

Since an object is encapsulated, its state cannot be changed directly from the environment, but only indirectly as a result of the interactions in which the object takes part.

8.8 Communication: The conveyance of information between two or more objects as a result of one or more interactions, possibly involving some intermediate objects.

NOTES

- 1 Communications may be labelled in terms of a cause and effect relationship between the participating objects. Concepts to support this are discussed in 13.3.
 - 2 Every interaction is an instance of a communication.
- **8.9 Location in space**: An interval of arbitrary size in space at which an action can occur.
- **8.10** Location in time: An interval of arbitrary size in time at which an action can occur.

NOTES

- 1 The extent of the interval in time or space is chosen to reflect the requirements of a particular specification task and the properties of a particular specification language. A single location in one specification may be subdivided in either time or space (or both) in another specification. In a particular specification, a location in space or time is defined relative to some suitable coordinate system.
 - 2 By extension, the location of an object is the union of the locations of the actions in which the object may take part.
- **8.11 Interaction point**: A location at which there exists a set of interfaces.

At any given location in time, an interaction point is associated with a location in space, within the specificity allowed by the specification language in use. Several interaction points may exist at the same location. An interaction point may be mobile.

9 Specification concepts

9.1 Composition

- a) (Of objects) A combination of two or more objects yielding a new object, at a different level of abstraction. The characteristics of the new object are determined by the objects being combined and by the way they are combined. The behaviour of a composite object is the corresponding composition of the behaviour of the component objects.
- b) (Of behaviours) A combination of two or more behaviours yielding a new behaviour. The characteristics of the resulting behaviour are determined by the behaviours being combined and the way they are combined.

NOTES

- 1 Examples of combination techniques are sequential composition, concurrent composition, interleaving, choice, and hiding or concealment of actions. These general definitions will always be used in a particular sense, identifying a particular means of combination.
- 2 In some cases, the composition of behaviours may yield a degenerate behaviour, e.g. deadlock, due to the constraints on the original behaviours.
- **9.2 Composite object**: An object expressed as a composition.

9.3 Decomposition

- a) (Of an object) The specification of a given object as a composition.
- b) (Of a behaviour) The specification of a given behaviour as a composition.

Composition and decomposition are dual terms and dual specification activities.

9.4 Behavioural compatibility: An object is behaviourally compatible with a second object with respect to a set of criteria (see Notes) if the first object can replace the second object without the environment being able to notice the difference in the objects' behaviour on the basis of the set of criteria.

Typically, the criteria impose constraints on the allowed behaviour of the environment. If the criteria are such that the environment behaves as a tester for the original object, i.e. the environment defines the smallest behaviour that does not constrain the behaviour of the original object, the resulting behavioural compatibility relation is called extension.

ISO/IEC 10746-2:1996 (E)

The criteria may allow the replacement object to be derived by modification of an otherwise incompatible object in order that it should be an acceptable replacement. An example of such a modification might be hiding of additional parameters on certain interactions. In this way, an interaction of the new object can be made to look like an interaction of the original object. In such cases behavioural compatibility is called **coerced behavioural compatibility**. If no modification is necessary, behavioural compatibility is called **natural behavioural compatibility**.

The concept of behavioural compatibility defined above on objects applies equally well to the behavioural compatibility of templates and of template types.

Behavioural compatibility is reflexive, but not necessarily symmetric or transitive (though it may be either or both).

NOTES

- 1 The set of criteria depends on the language in use and the testing theory applied.
- 2 Behavioural compatibility (with respect to a set of criteria) can be defined on template (see 9.11) and template types (see 9.19), thus:
 - a) if S and T are object templates, S is said to be behaviourally compatible with T if and only if any S-instantiation is behaviourally compatible with some T-instantiation (see 9.13);
 - b) if U and V are object template types, U and V are said to be behaviourally compatible if their corresponding templates are *behaviourally compatible*.
- **9.5 Refinement**: The process of transforming one specification into a more detailed specification. The new specification can be referred to as a refinement of the original one. Specifications and their refinements typically do not coexist in the same system description. Precisely what is meant by a more detailed specification will depend on the chosen specification language.

For each meaning of behavioural compatibility determined by some set of criteria (see 9.4), a specification technique will permit the definition of a refinement relationship. If template X refines a template Y, it will be possible to replace an object instantiated from Y by one instantiated from X in the set of environments determined by the selected definition of behavioural compatibility. Refinement relationships are not necessarily either symmetric or transitive.

9.6 Trace: A record of an object's interactions, from its initial state to some other state.

A trace of an object is thus a finite sequence of interactions. The behaviour uniquely determines the set of all possible traces, but not vice versa. A trace contains no record of an object's internal actions.

9.7 Type (of an <X>): A predicate characterizing a collection of <X>s. An <X> is of the type, or satisfies the type, if the predicate holds for that <X>. A specification defines which of the terms it uses have types, i.e. are <X>s. In RM-ODP, types are needed for, at least, objects, interfaces and actions.

The notion of type classifies the entities into categories, some of which may be of interest to the specifier (see the concept of class in 9.8).

9.8 Class (of <X>s): The set of all <X>s satisfying a type (see 9.7). The elements of the set are referred to as members of the class.

NOTES

- 1 A class may have no members.
- Whether the size of the set varies with time depends on the definition of the type.
- **9.9 Subtype/supertype**: A type A is a subtype of a type B, and B is a supertype of A, if every <X> which satisfies A also satisfies B.

The subtype and supertype relations are reflexive, transitive and anti-symmetric.

9.10 Subclass/superclass: One class A is a subclass of another class B, and B is a superclass of A, precisely when the type associated with A is a subtype of the type associated with B.

NOTE – A subclass is by definition a subset of any of its superclasses.

9.11 <X> **Template**: The specification of the common features of a collection of <**X**>s in sufficient detail that an <**X**> can be instantiated using it. <**X**> can be anything that has a type (see 9.7).

An <X> template is an abstraction of a collection of <X>s.

A template may specify parameters to be bound at instantiation time.

The definition given here is generic; the precise form of a template will depend on the specification technique used. The parameter types (where applicable) will also depend on the specification technique used.

Templates may be combined according to some calculus. The precise form of template combination will depend on the specification language used.

9.12 Interface signature: The set of action templates associated with the interactions of an interface.

An object may have many interfaces with the same signature.

9.13 Instantiation (of an <**X**> template): An <**X**> produced from a given <**X**> template and other necessary information. This <**X**> exhibits the features specified in the <**X**> template. <**X**> can be anything that has a type (see 9.7).

The definition given here is generic: how to instantiate an <X> template depends on the specification language used. Instantiating an <X> template may involve actualization of parameters, which may in turn involve instantiating other <X> templates or binding of existing interfaces (see 12.4).

NOTES

- 1 Instantiating an action template just results in an action occurring. The phrase "instantiation of an action template" is deprecated. "Occurrence of an action" is preferred.
- 2 If <X> is an object, it is instantiated in its initial state. An object can participate in interactions immediately after its instantiation.
- 3 Instantiations from different templates may satisfy the same type. Instantiations from the same template may satisfy different types.
- **9.14 Role**: Identifier for a behaviour, which may appear as a parameter in a template for a composite object, and which is associated with one of the component objects of the composite object.

Specification of a template as a composition of roles enables the instantiation process to be explained as the association of a specific component of the resultant composite object with each role. The association of a component object with a role may result from the actualization of a parameter.

9.15 Creation (of an <X>): Instantiating an <X>, when it is achieved by an action of objects in the model. <X> can be anything that can be instantiated, in particular objects and interfaces.

If <X> is an interface, it is either created as part of the creation of a given object, or as an additional interface to the creating object. As a result, any given interface must be part of an object.

9.16 Introduction (of an <X>): Instantiating an <X> when it is not achieved by an action of objects in the model.

NOTES

- 1 An <X> can be instantiated either by creation or introduction but not both.
- 2 Introduction does not apply to interfaces and actions since these are always supported by objects.
- **9.17 Deletion** (of an $\langle X \rangle$): The action of destroying an instantiated $\langle X \rangle$. $\langle X \rangle$ can be anything that can be instantiated, in particular objects and interfaces.

If <X> is an interface, it can only be deleted by the object to which it is associated.

NOTE – Deletion of an action is not meaningful: an action just happens.

- **9.18 Instance (of a type)**: An <*X*> that satisfies the type.
- **9.19** Template type (of an <X>): A predicate defined in a template that holds for all the instantiations of the template and that expresses the requirements the instantiations of the template are intended to fulfill.

The object template subtype/supertype relation does not necessarily coincide with behavioural compatibility. Instances of a template type need not be behaviourally compatible with instantiations of the associated template. They do coincide if:

- a) a transitive behavioural compatibility relation is considered; and
- b) template subtypes are behaviourally compatible with their template supertypes.

NOTES

- 1 This concept captures the notion of substitubility by design.
- 2 The form of the predicate that expresses the template type depends on the specification language used.
- 3 As a shorthand, "instances of a template T" are defined to be "instances of the template type associated with template T".
- 4 Figure 1 illustrates the relationships between some of the concepts: template type, template class, etc. The set of instances of \mathbf{t} contains both the set of instantiations of \mathbf{t} and the sets of all instantiations of subtypes of \mathbf{t} . The sets of instantiations of different templates are always disjoint.

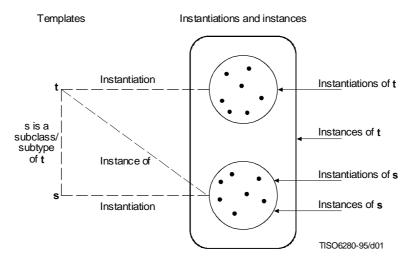


Figure 1 – Relationship between templates, instantiations and instances

9.20 Template class (of an <X>): The set of all <X>s satisfying an <X> template type, i.e. the set of <X>s which are instances of the <X> template. <X> can be anything that has a type (see 9.7).

Each template defines a single template class, so we may refer to instances of the template as instances of the template-class.

The notion of class is used to refer to a general classification of <X>s. Template class is a more restrictive notion where the members of a template class are limited to those instantiated from the template (or any of its subtypes), i.e. those <X>s which satisfy the <X> template type.

NOTE-Given a template type, we may shorten statements of the form "the template class associated with template A is a subclass of the template class associated with template B" to "template A is a subclass of template B" or "template A is a subtype of template B".

9.21 Derived class/base class: If a template A is an incremental modification of a template B, then the template class CA of instances of A is a derived class of the template class CB of instances of B, and the CB is a base class of CA.

The criteria for considering an arbitrary change to be an incremental modification would depend on metrics and conventions outside of this Recommendation | International Standard. If the criteria allow, a derived class may have several base classes.

The incremental modification relating templates must ensure that self-reference or recursion in the template of the base class becomes self-reference or recursion in the template of the derived class.

The incremental modification may, in general, involve adding to or altering the properties of the base template to obtain the derived template.

Classes can be arranged in an inheritance hierarchy according to derived class/base class relationships. This is the interpretation of inheritance in the ODP Reference Model. If classes can have several base classes, inheritance is said to be multiple. If the criteria prohibit suppression of properties from the base class, inheritance is said to be strict.

It is possible for one class to be a subclass of a second class without being a derived class, and to be a derived class without being a subclass. The inheritance hierarchy (where arcs denote the derived class relation) and the type hierarchy (where arcs denote the subtype or subclass relation) are therefore logically distinct, though they may coincide in whole or in part.

- **9.22 Invariant**: A predicate that a specification requires to be true for the entire life time of a set of objects.
- **9.23 Precondition**: A predicate that a specification requires to be true for an action to occur.
- **9.24 Postcondition**: A predicate that a specification requires to be true immediately after the occurrence of an action.

10 Organizational concepts

10.1 <X> Group: A set of objects with a particular characterizing relationship **<X>**. The relationship **<X>** characterizes either the structural relationship among objects or an expected common behaviour of the objects.

NOTE – Examples of specialized groups are:

- a) Addressed group: A set of objects that are addressed in the same way.
- b) Fault group: A set of objects that have a common fault dependency. For example, it may be assumed that if a computer fails, all objects executing on that computer also fail.
- c) Communicating group: A set of objects where all the objects participate in the same sequence of interactions with their environment.
- d) Fault tolerant replication group: A communicating group whose purpose is to provide a certain level of tolerance against some faults.
- **10.2 Configuration (of objects)**: A collection of objects able to interact at interfaces. A configuration determines the set of objects involved in each interaction.

The specification of a configuration may be static or may be in terms of the operation of dynamic mechanisms which change the configuration, such as binding and unbinding (see 13.4).

NOTE – A configuration can be expressed in terms of the concepts of concurrent composition. The process of composition generates an equivalent object for the configuration, at a different level of abstraction.

10.3 <X> Domain: A set of objects, each of which is related by a characterizing relationship **<X>** to a controlling object.

Every domain has a controlling object associated with it.

The controlling object can determine the identities of the collection of objects which comprises the associated domain. The controlling object may communicate with a controlled object dynamically or it may be considered to have communicated in an earlier epoch (see 10.5) of the controlling object. Generally, the controlling object is not a member of the associated domain.

NOTES

- 1 In enterprise terms, various policies can be administered by the controlling object over the domain.
- 2 Domains can be disjoint or overlapping.
- 3 By definition, a domain is a group, but not vice versa.
- 4 Examples of specialized domains are:

Domain	Member Class	Relationship	Controlling Class
Security domain	processing object	subject to policy set by	security authority object
Management domain	managed object	subject to policy set by	management domain object
Addressing domain	addressed object	address allocated by	addressing authority object
Naming domain	named object	name allocated by	name authority object

- **10.4 Subdomain**: A domain which is a subset of a given domain.
- **10.5 Epoch**: A period of time for which an object displays a particular behaviour. Any one object is in a single epoch at one time, but interacting objects may be in different epochs at the time of interaction.

A change of epoch may be associated with a change in the type of the object, so as to support type evolution. Alternatively, a change of epoch may be associated with a phase in the behaviour of an object of constant type.

For a distributed system to function correctly, the objects composing its configuration must be consistent. Thus, as the whole system evolves through a series of epochs, the individual objects which interact must never be in epochs in which their behaviours are sufficiently different that their concurrent composition leads to a failure. This concept will support the formalization of concepts of version and extensibility.

NOTE – A specification language may need to express:

- a) the way epochs are labelled;
- b) the sequence of epochs, and whether all objects need to pass through all members of the sequence;
- the rules for deriving the epoch of a composition from the epochs of its objects, particularly for configurations and complete systems;

ISO/IEC 10746-2: 1996 (E)

- d) whether identity of the epoch of an object is necessarily part of the state of that object;
- e) whether objects can negotiate on the basis of their current epoch identities;
- f) the relation of epoch to the concepts of local and global time.
- **10.6 Reference point**: An interaction point defined in an architecture for selection as a conformance point in a specification which is compliant with that architecture.

Significant classes of reference point are identified in ODP; details of these, and of the relationship of modelling to conformance, are given in clause 15.

10.7 Conformance point: A reference point at which behaviour may be observed for the purposes of conformance testing.

11 Properties of systems and objects

This clause describes the properties which may apply to an ODP system or part of an ODP system.

11.1 Transparencies

11.1.1 Distribution transparency: The property of hiding from a particular user the potential behaviour of some parts of a distributed system.

NOTE – Users may include for instance end-users, application developers and function implementors.

11.2 Policy concepts

11.2.1 Contract: An agreement governing part of the collective behaviour of a set of objects. A contract specifies obligations, permissions and prohibitions for the objects involved.

The specification of a contract may include:

- a) a specification of the different roles that objects involved in the contract may assume, and the interfaces associated with the roles;
- b) Quality of Service attributes (see 11.2.2);
- c) indications of duration or periods of validity;
- d) indications of behaviour which invalidates the contract;
- e) liveness and safety conditions.

NOTES

- 1 Objects in a contract need not be hierarchically related, but may be related on a peer-to-peer basis. The requirements in a contract are not necessarily applicable in the same way to all the objects concerned.
- 2 A contract can apply at a given reference point in a system. In that case, it specifies the behaviour which can be expected at the reference point.
- 3 An object template provides a simple example of a contract. An object template specifies the behaviour common to a collection of objects. As such, it specifies what the environment of any such objects may assume about their behaviour. Note that, for partial specifications, an object template leaves unspecified the behaviour of an object under certain environmental circumstances (e.g. particular interactions); the contract only extends to the specified behaviour.
- 11.2.2 Quality of Service: A set of quality requirements on the collective behaviour of one or more objects.

Quality of Service may be specified in a contract or measured and reported after the event.

The Quality of Service may be parameterized.

NOTE – Quality of Service is concerned with such characteristics as the rate of information transfer, the latency, the probability of a communication being disrupted, the probability of system failure, the probability of storage failure, etc.

11.2.3 Environment contract: A contract between an object and its environment, including Quality of Service constraints, usage and management constraints.

Quality of Service constraints include:

- temporal constraints (e.g. deadlines);
- volume constraints (e.g. throughput);
- dependability constraints covering aspects of availability, reliability, maintainability, security and safety (e.g. mean time between failures).

Usage and management constraints include:

- location constraints (i.e. selected locations in space and time);
- distribution transparency constraints (i.e. selected distribution transparencies).

Quality of Service constraints can imply usage and management constraints. For instance, some Quality of Service constraints (e.g. availability) are satisfied by provision of one or more distribution transparencies (e.g. replication).

Environment constraints can describe both:

- requirements placed on an object's environment for the correct behaviour of the object;
- constraints on the object behaviour in a correct environment.
- **11.2.4 Obligation**: A prescription that a particular behaviour is required. An obligation is fulfilled by the occurrence of the prescribed behaviour.
- **11.2.5 Permission**: A prescription that a particular behaviour is allowed to occur. A permission is equivalent to there being no obligation for the behaviour not to occur.
- **11.2.6 Prohibition**: A prescription that a particular behaviour must not occur. A prohibition is equivalent to there being an obligation for the behaviour not to occur.
- **11.2.7 Policy**: A set of rules related to a particular purpose. A rule can be expressed as an obligation, a permission or a prohibition.

NOTE – Not every policy is a constraint. Some policies represent an empowerment.

11.3 Temporal properties

- **11.3.1 Persistence**: The property that an object continues to exist across changes of contractual context (see 13.2.3) or of epoch.
- **11.3.2 Isochronicity**: A sequence of actions is isochronous if every adjacent pair of actions in the sequence occupy unique, equally-sized, adjacent intervals in time.

12 Naming concepts

- **12.1** Name: A term which, in a given naming context, refers to an entity.
- **12.2 Identifier**: An unambiguous name, in a given naming context.
- **12.3 Name space**: A set of terms usable as names.
- **12.4 Naming context**: A relation between a set of names and a set of entities. The set of names belongs to a single name space.
- **Naming action**: An action that associates a term from a name space with a given entity.

All naming actions are relative to a naming context.

Naming domain: A subset of a naming context such that all naming actions are performed by the controlling object of the domain (the name authority object).

NOTE – "Naming domain" is an instance of the <X> domain concept (see 10.3).

- **12.7 Naming graph**: A directed graph where each vertex denotes a naming context, and where each edge denotes an association between:
 - a name appearing in the source naming context; and
 - the target naming context.
- NOTE The existence of an edge between two naming contexts in a naming graph means that the target naming context can be reached (identified) from the source naming context.
- **12.8 Name resolution**: The process by which, given an initial name and an initial naming context, an association between a name and the entity designated by the initial name can be found.
- NOTE-The name resolution process does not necessarily provide sufficient information to interact with the designated entity.

13 Concepts for behaviour

13.1 Activity structure

- **13.1.1 Chain (of actions)**: A sequence of actions within an activity where, for each adjacent pair of actions, occurrence of the first action is necessary for the occurrence of the second action.
- **13.1.2** Thread: A chain of actions, where at least one object participates in all the actions of the chain.

An object may have associated with it one single thread or many threads simultaneously.

- **13.1.3 Joining action**: An action shared between two or more chains resulting in a single chain.
- **13.1.4 Dividing action**: An action which enables two or more chains.

There are two cases of a dividing action, depending on whether the enabled chains are required to join eventually.

- **13.1.5 Forking action**: A dividing action, where the enabled chains must (subject to failure) eventually join each other, i.e. the enabled chains cannot join other chains and they cannot terminate separately.
- **13.1.6 Spawn action**: A dividing action, where the enabled chains will not join. The enabled chains may interact and they may terminate separately.
- **13.1.7 Head action**: In a given activity, an action that has no predecessor.
- **13.1.8 Subactivity**: A subgraph of an activity which is itself an activity and which satisfies the following condition. For any pair of fork-join actions in the parent activity, if one of these actions is included in the subgraph, then both must be included in the subgraph.

13.2 Contractual behaviour

The concepts introduced here are illustrated in Figure 2.




Figure 2 – Liaison and related concepts

- **13.2.1 Establishing behaviour**: The behaviour by which a given contract is put in place between given objects. An establishing behaviour can be:
 - a) explicit, resulting from the interactions of objects that will take part in the contract; or
 - b) implicit, being performed by an external agency (e.g. a third party object, not taking part in the contract) or having been performed in a previous epoch.

NOTES

- 1 Negotiation is an example of a particular kind of establishing behaviour in which information is exchanged in the process of reaching a common view of permitted future behaviour.
- 2 Publication is an example of a particular kind of establishing behaviour in which information is distributed from one object to a number of others.
- 3 Explicit establishing behaviour must include an instantiation of the template associated with the contract. This may follow a possible negotiation/publication about which contract to set up and which template to instantiate, and with what parameters.
- **13.2.2 Enabled behaviour**: The behaviour characterizing a set of objects which becomes possible as a result of establishing behaviour.

The enabled behaviour will not necessarily be the same for all objects.

13.2.3 Contractual context: The knowledge that a particular contract is in place, and thus that a particular behaviour of a set of objects is required.

An object may be in a number of contractual contexts simultaneously; the behaviour is constrained to the intersection of the behaviours prescribed by each contractual context.

NOTE – In OSI, the concept of a presentation context is an example of a contractual context which can be established at connection establishment time or subsequently.

13.2.4 Liaison: The relationship between a set of objects which results from the performance of some establishing behaviour; the state of having a contractual context in common.

A liaison is characterized by the corresponding enabled behaviour.

NOTES

- 1 Examples of liaisons which result from different establishing behaviours are:
 - a) a dialogue (as in OSI-TP);
 - b) a binding (see 13.4.2);
 - c) a distributed transaction (as in OSI-TP);
 - d) an (N)-connection (as in OSI);
 - e) an association between (N)-entities enabling them to participate in (N)-connectionless communication (as in OSI);
 - f) a relationship between files and processes which access the files.
- 2 Certain behaviours may be contingent on the establishment of multiple related liaisons. For example, a distributed transaction may depend on both the liaison between the transaction users and the supporting association. The liaison between the transaction users (the distributed transaction) may continue to exist, but be inactive, when the association is broken.
- 3 A liaison may involve more than two objects. The objects involved in a liaison do not necessarily all have equivalent roles. Thus, there may be liaisons for the collection or distribution of information. The number of participants and the roles of the participants are determined by the contract expressed by the liaison.
- 4 There is a duality between contractual context and contractual obligation acceptance of specification and enabled behaviour. In practice, structures may be arbitrarily nested and an engagement liaison at one level can also agree a contract which permits an inner level liaison.
- **13.2.5 Terminating behaviour**: The behaviour which breaks down a liaison and repudiates the corresponding contractual context and the corresponding contract.

A terminating behaviour must be explicitly identified as such in the contract if the establishing behaviour was explicit.

13.3 Causality

Identification of causality allows the categorization of roles of interacting objects. This clause gives a basic set of roles.

Causality implies a constraint on each behaviour of the participating objects while they are interacting. Causality will be identified in the definition of classes (or subclasses) to which interacting objects belong, or in the refinement of templates for their classes (or subclasses).

13.3.1 Initiating object (with respect to a communication): An object causing a communication.

NOTE- The identification of an initiating object with respect to a communication involves an interpretation of the intent of the communication.

- **13.3.2 Responding object**: An object taking part in a communication, which is not the initiating object.
- **13.3.3 Producer object (with respect to communication)**: An object which is the source of the information conveyed.

The usage of this term does not imply any specific communication mechanism.

13.3.4 Consumer object (with respect to communication): An object which is a sink of the information conveyed.

The usage of this term does not imply any specific communication mechanism.

- **13.3.5** Client object: An object which requests that a function be performed by another object.
- **13.3.6 Server object**: An object which performs some function on behalf of a client object.

Client/server relationships of a different nature (or level of abstraction) may exist between an object and different compositions of the objects with which it communicates.

NOTE – Informally, a server provides a service requested by a client.

13.4 Establishing behaviours

13.4.1 Binding behaviour: An establishing behaviour between two or more interfaces (and hence between their supporting objects).

NOTE - "To bind" means "to execute a binding behaviour".

13.4.2 Binding: A contractual context, resulting from a given establishing behaviour.

Establishing behaviour, contractual context and enabled behaviour may involve just two object interfaces or more than two.

An object which initiates an establishing behaviour may or may not take part in the subsequent enabled behaviour.

Enabled behaviour (and, by analogy, contractual context) may be uniform (i.e. each participating object can do the same as every other) or non-uniform (i.e. one participating object has a different role from another, as in client and server).

There is no necessary correspondence between an object which initiates establishing behaviour and a particular role in non-uniform enabled behaviours (e.g. in a client-server contractual context, either object could validly have initiated the establishing behaviour).

13.4.3 Binding precondition: A set of conditions required for the successful execution of a binding behaviour.

The objects performing the binding behaviour must possess identifiers for all the interfaces involved in the binding. There may be additional preconditions.

- **13.4.4 Unbinding behaviour:** A behaviour that terminates a binding, i.e. a terminating behaviour for the binding.
- **13.4.5 Trading**: The interaction between objects in which information about new or potential contracts is exchanged via a third party object. It involves:
 - a) *Exporting:* The provision of an identifier to an interface which is claimed to meet some statement of requirements (i.e. offer a potential contract).
 - b) *Importing:* The provision of an identifier to an interface which matches a given statement of requirements, allowing a future binding behaviour to take place (i.e. the establishment of a contract).

13.5 Dependability

13.5.1 Failure: Violation of a contract.

NOTES

- 1 The behaviour specified in the contract is, by definition, the "correct behaviour". A failure is thus a deviation from compliance with the correct behaviour.
 - 2 The ways an object can fail are called its failure modes. Several types of failure modes can be distinguished:
 - arbitrary failures (non-compliance with the specification the most general failure mode);
 - omission failure (when expected interactions not take place);
 - crash failures (persistent omission failures);
 - timing failures (incorrectness due to untimely behaviour).
- 3 A failure can be perceived differently by different objects in the environment of the object that exhibits it. A failure may be: consistent if all the perceptions of the failure are the same; inconsistent if objects in the environment may have different perceptions of a given failure.
- **13.5.2 Error**: Part of an object state which is liable to lead to failures. A manifestation of a fault (see 13.5.3) in an object.

NOTES

- 1 Whether an error will actually lead to a failure depends on the object decomposition, its internal redundancy, and on the object behaviour. Corrective action may prevent an error from causing a failure.
 - 2 An error may be latent (i.e. not recognized as such) or detected. An error may disappear before being detected.
- **13.5.3 Fault**: A situation that may cause errors to occur in an object.

NOTES

- 1 Faults causing an error may appear from the time an object is specified through to the time it is destroyed. Faults in an early epoch (e.g. design faults) may not lead to failure until a later epoch (e.g. execution time).
- 2 A fault is either active or dormant. A fault is active when it produces errors. The presence of active faults is determined only by the detection of errors.

- 3 Faults can be:
 - accidental (that appear or are created fortuitously) or intentional (created deliberately);
 - physical (due to some physical phenomena) or human-made (resulting from human behaviour);
 - internal (part of an object state that may cause an error) or external (resulting from interference or interaction with the environment);
 - permanent or temporary.
- 4 The definitions of fault, error and failure imply, recursively, causal dependencies between faults, errors and failures:
 - a fault can lead to an error (it will lead to an error if it becomes active);
 - an error can lead to a system's failure (it will lead to a failure unless the system can deal with it);
 - a failure occurs when an error affects the correctness of the service delivered by a system (or system component).
- **13.5.4 Stability**: The property that an object has with respect to a given failure mode if it cannot exhibit that failure mode.

14 Management concepts

Management in ODP is concerned with overall systems management, including application management and communication management.

- **14.1 Application management**: The management of applications within an ODP system. Some aspects of applications management are common to all applications and are termed application independent management. Those aspects which are specific to a given application are termed application specific management.
- **14.2 Communication management**: Management of objects which support the communication betwen objects within an ODP system.
- **14.3 Management information**: Knowledge concerning objects which are of relevance to management.
- **14.4 Managed role**: The view of the management interface of an object which is being managed within an ODP system.

NOTE – Where the object provides OSI communication services, OSI Management refers to the management interface as a managed object.

- **14.5 Managing role**: The view of an object which is performing managing actions.
- **14.6 Notification**: An interaction initiated by an object operating in a managed role.

15 ODP approach to conformance

15.1 Conformance to ODP standards

Conformance relates an implementation to a standard. Any proposition that is true in the specification must be true in its implementation.

A conformance statement is a statement that identifies conformance points of a specification and the behaviour which must be satisfied at these points. Conformance statements will only occur in standards which are intended to constrain some feature of a real implementation, so that there exists, in principle, the possibility of testing.

The RM-ODP identifies certain reference points in the architecture as potentially declarable as conformance points in specifications. That is, as points at which conformance may be tested and which will, therefore, need to be accessible for test. However, the requirement that a particular reference point be considered a conformance point must be stated explicitly in the conformance statement of the specification concerned.

Requirements for the necessary consistency of one member of the family of ODP standards with another (such as the RM-ODP) are established during the standardization process. Adherence to these requirements is called **compliance**.

If a specification is compliant, directly or indirectly, with some other standards, then the propositions which are true in those standards are also true in a conformant implementation of the specification.

15.2 Testing and reference points

The truth of a statement in an implementation can only be determined by testing and is based on a mapping from terms in the specification to observable aspects of the implementation.

ISO/IEC 10746-2: 1996 (E)

At any specific level of abstraction, a test is a series of observable stimuli and events, performed at prescribed points known as reference points, and only at these points. These reference points are accessible interfaces. A system component for which conformance is claimed is seen as a black box, testable only at its external linkages. Thus, for example, conformance to OSI protocol specifications is not dependent on any internal structure of the system under test.

15.3 Classes of reference points

A conformance point is a reference point where a test can be made to see if a system meets a set of conformance criteria. A conformance statement must identify where the conformance points are, and what criteria are satisfied at these points. Four classes of reference points at which conformance tests can be applied are defined.

15.3.1 Programmatic reference point: A reference point at which a programmatic interface can be established to allow access to a function. A programmatic conformance requirement is stated in terms of a behavioural compatibility with the intent that one object be replaced by another. A programmatic interface is an interface which is realized through a programming language binding.

NOTE – For example, a programmatic reference point may be established in a database standard to support a language binding at some level of abstraction.

15.3.2 Perceptual reference point: A reference point at which there is some interaction between the system and the physical world.

NOTES

- 1 A perceptual reference point may be e.g. a human-computer interface or a robotic interface (specified in terms of the interactions of the robot with its physical environment).
- 2 A human-computer interface perceptual conformance requirement is stated in terms of the form of information presented to a human being and the interaction metaphor and dialogues the human may be engaged in.
 - 3 A perceptual reference point may, for example, be established in a graphics standard.
- **15.3.3 Interworking reference point**: A reference point at which an interface can be established to allow communication between two or more systems. An interworking conformance requirement is stated in terms of the exchange of information between two or more systems. Interworking conformance involves interconnection of reference points.

NOTE – For example, OSI standards are based on the interconnection of interworking reference points (the physical medium).

15.3.4 Interchange reference point: A reference point at which an external physical storage medium can be introduced into the system. An interchange conformance requirement is stated in terms of the behaviour (access methods and formats) of some physical medium so that information can be recorded on one system and then physically transferred, directly or indirectly, to be used on another system.

 $NOTE-For\ example,\ some\ information\ interchange\ standards\ are\ based\ on\ interchange\ reference\ points.$

15.4 Change of configuration

The testing of conformance may take place at a single reference point, or it may involve some degree of consistency over use in a series of configurations involving several reference points. This may involve the testing of conformance to:

- a) the requirement for a component to be able to operate after some preparatory process to adapt it to the local environment:
- b) the requirement for a component to operate according to its specification at a particular reference point from initialization onwards;
- c) the requirement for a component to continue to work when moved into a similar environment during operation.

The properties being tested above give rise to attributes of the objects or interfaces involved, as follows.

15.4.1 Portability: The property that the reference points of an object allow it to be adapted to a variety of configurations.

NOTE-If the reference point is a programmatic reference point, the result can be source-code or execution portability. If it is an interworking reference point, the result is equipment portability.

15.4.2 Migratability: The ability to change the configuration, substituting one reference point of an object for another while the object is being used.

15.5 The conformance testing process

Conformance is a concept which can be applied at any level of abstraction. For example, a very detailed perceptual conformance is expected to a standard defining character fonts, but a much more abstract perceptual conformance applies to screen layout rules.

The more abstract a specification is, the more difficult it is to test. An increasing amount of implementation-specific interpretation is needed to establish that the more abstract propositions about the implementation are in fact true. It is not clear that direct testing of very abstract specifications is possible at reasonable cost using currently available or foreseeable techniques.

The testing process makes reference to a specification. To be complete, the specification must contain:

- a) the behaviour of the object being standardized and the way this behaviour must be achieved;
- b) a list of the primitive terms used in the specification when making the statements of behaviour;
- c) a conformance statement indicating the conformance points, what implementations must do at them and what information implementors must supply (corresponding to the OSI notions of PICS and PIXIT).

There are two roles in the testing process: the implementor and the tester. The first role is that of the implementor, who constructs an implementation on the basis of the specification. The implementor must provide a statement of a mapping from all the terms used in the specification to things or happenings in the real world. Thus, the interfaces corresponding to the conformance points must be indicated and the representation of signals given. If the specification is abstract, the mapping of its basic terms to the real world may itself be complex. For example, in a computational viewpoint specification (see ITU-T Rec. X.903 | ISO/IEC 10746-3), the primitive terms might be a set of interactions between objects. The implementor wishing to conform to the computational viewpoint specification would have to indicate how the interactions were provided, either by reference to an engineering specification or by providing a detailed description of an unstandardized mechanism (although this course limits the field of application of the implementation to systems in which there is an agreement to use the unstandardized mechanism).

The second role is that of the tester, who observes the system under test. Testing involves some shared behaviour between the testing process and the system under test. If this behaviour is given a causal labelling, there is a spectrum of testing types from:

- a) passive testing, in which all behaviour is originated by the system under test and recorded by the tester;
- b) active testing, in which behaviour is originated and recorded by the tester.

Normally, the specification of the system under test is in the form of an interface, as is the specification of the tester and test procedures. When testing takes place, these interfaces are bound.

The tester must interpret its observations using the mapping provided by the implementor to yield propositions about the implementation which can then be checked to show that they are also true in the specification.

15.6 The result of testing

The testing process succeeds if all the checks against the specification succeed. However, it can fail because:

- a) the specification is logically inconsistent or incomplete, so that the propositions about the implementation cannot be checked (this should not occur);
- b) the mapping given by the implementor is logically incomplete, so that it is inconsistent or observations cannot be related to terms in the specification; testing is impossible;
- c) the observed behaviour cannot be interpreted according to the mapping given by the implementor. The behaviour of the system is not meaningful in terms of the specification, and so the test fails;
- d) the behaviour is interpreted to give terms expressed in the specification, but these occur in such a way that they yield propositions which are not true in the specification, and so the test fails.

15.7 Relation between reference points

The flow of information between modelled system components may pass through more than one reference point. For example, a distributed system may involve interactions of two components A and B, but communication between them may pass in turn through a programmatic interface, a point of interconnection and a further programmatic interface.

A refinement of the same system may show interconnected components that have more than one component on the communication path between them.

ISO/IEC 10746-2:1996 (E)

In either case, conformance testing may involve:

- a) testing the information flow at each of these reference points;
- b) testing the consistency between events at pairs of reference points.

In general, testing for correct behaviour of a configuration of objects will require testing that statements about communication interfaces are true, but it will also require observation of other interfaces of these objects, so that the statements about the composition can also be checked.

The general notion of conformance takes into account the relation between several conformance points. Since the specification related to a given conformance point may be expressed at various levels of abstraction, testing at a given conformance point will always involve interpretation at the appropriate level of abstraction. Thus, the testing of the global behaviour requires coordinated testing at all the conformance points involved and the use of the appropriate interpretation at each point.

In particular, conformance of a template to a given programmatic interface can only be asserted when considering the language binding for the language in which the template has been written, and compliance of the written template to the language binding specification, which must itself be conformant with the abstract interface specification.

Index

NOTE – Associated with each index entry is the clause or subclause where the index entry is defined.

Enabled behaviour, 13.2.2 <X> Domain, 10.3 Entity, 6.1 <X> Group, 10.1 Environment (of an object), 8.2 <X> Template, 9.11 Environment contract, 11.2.3 Abstraction, 6.3 Epoch, 10.5 Action, 8.3 Error, 13.5.2 Activity, 8.5 Establishing behaviour, 13.2.1 Application management, 14.1 Architecture (of a system), 6.6 Failure, 13.5.1 Atomicity, 6.4 Fault, 13.5.3 base class, 9.21 Forking action, 13.1.5 Behaviour (of an object), 8.6 Head action, 13.1.7 Behavioural compatibility, 9.4 Identifier, 12.2 Binding, 13.4.2 Information, 3.2.5 Binding behaviour, 13.4.1 Initiating object, 13.3.1 Binding precondition, 13.4.3 Instance (of a type), 9.18 Chain (of actions), 13.1.1 Instantiation (of an <X> template), 9.13 Class (of <X>s), 9.8 Interaction, 8.3 Client object, 13.3.5 Interaction point, 8.11 Coerced behavioural compatibility, 9.4 Interchange reference point, 15.3.4 Communication, 8.8 Interface, 8.4 Communication management, 14.2 Interface signature, 9.12 Compliance, 15.1 Internal action, 8.3 Composite object, 9.2 Interworking reference point, 15.3.3 Composition, 9.1 Introduction (of an $\langle X \rangle$), 9.16 Configuration (of objects), 10.2 Invariant, 9.22 Conformance point, 10.7 Isochronicity, 11.3.2 Consumer object, 13.3.4 Joining action, 13.1.3 Contract, 11.2.1 Liaison, 13.2.4 Contractual context, 13.2.3 Location in space, 8.9 Creation (of an $\langle X \rangle$), 9.15 Location in time, 8.10 Data, 3.2.6 Managed role, 14.4 Decomposition, 9.3 Management information, 14.3 Deletion (of an $\langle X \rangle$), 9.17 Managing role, 14.5 Derived class, 9.21

Migratability, 15.4.2

Name resolution, 12.8

Name, 12.1

Distributed processing, 3.2.1

Dividing action, 13.1.4

Distribution transparency, 11.1.2

ISO/IEC 10746-2: 1996 (E)

Name space, 12.3

Naming action, 12.5 Responding object, 13.3.2

Refinement, 9.5

Naming context, 12.4 Role, 9.14

Naming domain, 12.6 Sentence, 7.2

Naming graph, 12.7 Server object, 13.3.6

Natural behavioural compatibility, 9.4 Spawn action, 13.1.6

Notification, 14.6 Stability, 13.5.4

Object, 8.1 State (of an object), 8.7

Obligation, 11.2.3 Subactivity, 13.1.8

ODP standards, 3.2.2 Subclass, 9.10

ODP System, 3.2.4 Subdomain, 10.4

Open Distributed Processing, 3.2.3 Subtype, 9.9

Perceptual reference point, 15.3.2 Superclass, 9.10
Permission, 11.2.4 Supertype, 9.9
Persistence, 11.3.1 System, 6.5

Policy, 11.2.6 Template class (of an <X>), 9.20 Portability, 15.4.1 Template type (of an <X>), 9.19

Postcondition, 9.24 Term, 7.1

Precondition, 9.23 Terminating behaviour, 13.2.5

Producer object, 13.3.3 Thread, 13.1.2

Programmatic reference point, 15.3.1 Trace, 9.6

Published 11.2.5

Prohibition, 11.2.5 Trading, 13.4.5

Proposition, 6.2 Trading (of an eV)

Proposition, 6.2 Type (of an <X>), 9.7 Quality of Service, 11.2.2 Unbinding, 13.4.4

Reference point, 10.6 Viewpoint (on a system), 3.2.7