

# Recommendation **ITU-T Y.3126 (12/2023)**

SERIES Y: Global information infrastructure, Internet protocol aspects, next-generation networks, Internet of Things and smart cities

Future networks

---

**QoS requirements and framework of interworking capability for supporting deterministic communication services in local area networks for IMT-2020 and beyond**



ITU-T Y-SERIES RECOMMENDATIONS

**Global information infrastructure, Internet protocol aspects, next-generation networks, Internet of Things and smart cities**

<b>GLOBAL INFORMATION INFRASTRUCTURE</b>	Y.100-Y.999
General	Y.100-Y.199
Services, applications and middleware	Y.200-Y.299
Network aspects	Y.300-Y.399
Interfaces and protocols	Y.400-Y.499
Numbering, addressing and naming	Y.500-Y.599
Operation, administration and maintenance	Y.600-Y.699
Security	Y.700-Y.799
Performances	Y.800-Y.899
<b>INTERNET PROTOCOL ASPECTS</b>	Y.1000-Y.1999
General	Y.1000-Y.1099
Services and applications	Y.1100-Y.1199
Architecture, access, network capabilities and resource management	Y.1200-Y.1299
Transport	Y.1300-Y.1399
Interworking	Y.1400-Y.1499
Quality of service and network performance	Y.1500-Y.1599
Signalling	Y.1600-Y.1699
Operation, administration and maintenance	Y.1700-Y.1799
Charging	Y.1800-Y.1899
IPTV over NGN	Y.1900-Y.1999
<b>NEXT GENERATION NETWORKS</b>	Y.2000-Y.2999
Frameworks and functional architecture models	Y.2000-Y.2099
Quality of Service and performance	Y.2100-Y.2199
Service aspects: Service capabilities and service architecture	Y.2200-Y.2249
Service aspects: Interoperability of services and networks in NGN	Y.2250-Y.2299
Enhancements to NGN	Y.2300-Y.2399
Network management	Y.2400-Y.2499
Computing power networks	Y.2500-Y.2599
Packet-based Networks	Y.2600-Y.2699
Security	Y.2700-Y.2799
Generalized mobility	Y.2800-Y.2899
Carrier grade open environment	Y.2900-Y.2999
<b>FUTURE NETWORKS</b>	<b>Y.3000-Y.3499</b>
<b>CLOUD COMPUTING</b>	Y.3500-Y.3599
<b>BIG DATA</b>	Y.3600-Y.3799
<b>QUANTUM KEY DISTRIBUTION NETWORKS</b>	Y.3800-Y.3999
<b>INTERNET OF THINGS AND SMART CITIES AND COMMUNITIES</b>	Y.4000-Y.4999
General	Y.4000-Y.4049
Definitions and terminologies	Y.4050-Y.4099
Requirements and use cases	Y.4100-Y.4249
Infrastructure, connectivity and networks	Y.4250-Y.4399
Frameworks, architectures and protocols	Y.4400-Y.4549
Services, applications, computation and data processing	Y.4550-Y.4699
Management, control and performance	Y.4700-Y.4799
Identification and security	Y.4800-Y.4899
Evaluation and assessment	Y.4900-Y.4999

For further details, please refer to the list of ITU-T Recommendations.

# **Recommendation ITU-T Y.3126**

## **QoS requirements and framework of interworking capability for supporting deterministic communication services in local area networks for IMT-2020 and beyond**

### **Summary**

Interworking capability is an essential function to support quality of service (QoS)-guaranteed data transmission across heterogeneous networks. The data transmission of deterministic communication services in local networks usually involves multiple technology domains. In order to provide an efficient QoS guarantee for deterministic communication services in heterogeneous technology domains, this Recommendation defines three types of interworking capability and specifies QoS assurance requirements, framework instances and operational procedures of interworking capabilities, based on the models defined in Recommendation ITU-T Y.3121.

### **History\***

Edition	Recommendation	Approval	Study Group	Unique ID
1.0	ITU-T Y.3126	2023-12-14	13	11.1002/1000/15737

### **Keywords**

Deterministic communication service, framework instances, interworking capability, local area network, operational procedures, QoS assurance requirements.

---

\* To access the Recommendation, type the URL <https://handle.itu.int/> in the address field of your web browser, followed by the Recommendation's unique ID.

## FOREWORD

The International Telecommunication Union (ITU) is the United Nations specialized agency in the field of telecommunications, information and communication technologies (ICTs). The ITU Telecommunication Standardization Sector (ITU-T) is a permanent organ of ITU. ITU-T is responsible for studying technical, operating and tariff questions and issuing Recommendations on them with a view to standardizing telecommunications on a worldwide basis.

The World Telecommunication Standardization Assembly (WTSA), which meets every four years, establishes the topics for study by the ITU-T study groups which, in turn, produce Recommendations on these topics.

The approval of ITU-T Recommendations is covered by the procedure laid down in WTSA Resolution 1.

In some areas of information technology which fall within ITU-T's purview, the necessary standards are prepared on a collaborative basis with ISO and IEC.

## NOTE

In this Recommendation, the expression "Administration" is used for conciseness to indicate both a telecommunication administration and a recognized operating agency.

Compliance with this Recommendation is voluntary. However, the Recommendation may contain certain mandatory provisions (to ensure, e.g., interoperability or applicability) and compliance with the Recommendation is achieved when all of these mandatory provisions are met. The words "shall" or some other obligatory language such as "must" and the negative equivalents are used to express requirements. The use of such words does not suggest that compliance with the Recommendation is required of any party.

## INTELLECTUAL PROPERTY RIGHTS

ITU draws attention to the possibility that the practice or implementation of this Recommendation may involve the use of a claimed Intellectual Property Right. ITU takes no position concerning the evidence, validity or applicability of claimed Intellectual Property Rights, whether asserted by ITU members or others outside of the Recommendation development process.

As of the date of approval of this Recommendation, ITU had not received notice of intellectual property, protected by patents/software copyrights, which may be required to implement this Recommendation. However, implementers are cautioned that this may not represent the latest information and are therefore strongly urged to consult the appropriate ITU-T databases available via the ITU-T website at <http://www.itu.int/ITU-T/ipr/>.

© ITU 2024

All rights reserved. No part of this publication may be reproduced, by any means whatsoever, without the prior written permission of ITU.

## Table of Contents

	Page
1 Scope .....	1
2 References.....	1
3 Definitions .....	1
3.1 Terms defined elsewhere .....	1
3.2 Terms defined in this Recommendation.....	2
4 Abbreviations and acronyms .....	2
5 Conventions .....	3
6 Overview .....	3
7 Types of interworking capability.....	4
8 QoS assurance requirements of interworking capability .....	4
9 Instances of framework for interworking capabilities .....	5
9.1 Framework instance for A2A interworking capability.....	5
9.2 Framework instance for U2T interworking capability .....	6
9.3 Framework instance for T2T interworking capability.....	6
10 Operational procedures of interworking capability .....	8
10.1 QoS negotiation .....	8
10.2 QoS decomposition and mapping.....	9
10.3 Data processing and forwarding.....	9
Appendix I – An example of QoS assurance for data transmission across 5G and TSN .....	12
Bibliography.....	14



# Recommendation ITU-T Y.3126

## QoS requirements and framework of interworking capability for supporting deterministic communication services in local area networks for IMT-2020 and beyond

### 1 Scope

Based on the models defined in [ITU-T Y.3121], this Recommendation specifies the following aspects as a scope to support deterministic communication service across heterogeneous technology domains (TD) in a local area network.

- Types of interworking capability;
- Quality of service (QoS) assurance requirements;
- Instances of framework;
- Operational procedures.

Detailed QoS assurance protocols and schemes of each technology domain are out of the scope of this Recommendation.

### 2 References

The following ITU-T Recommendations and other references contain provisions which, through reference in this text, constitute provisions of this Recommendation. At the time of publication, the editions indicated were valid. All Recommendations and other references are subject to revision; users of this Recommendation are therefore encouraged to investigate the possibility of applying the most recent edition of the Recommendations and other references listed below. A list of the currently valid ITU-T Recommendations is regularly published. The reference to a document within this Recommendation does not give it, as a stand-alone document, the status of a Recommendation.

- [ITU-T Y.3121] Recommendation ITU-T Y.3121 (2023), *Quality of service requirements and framework for supporting deterministic communication services in local area network for IMT-2020*.

### 3 Definitions

#### 3.1 Terms defined elsewhere

This Recommendation uses the following terms defined elsewhere:

**3.1.1 technology domain** [ITU-T Y.3121]: A sub-network of a local area network adopting a single physical layer and data link layer scheme, with which the devices can send and receive information without interworking modules.

NOTE – The interworking module provides necessary functionalities, e.g., network interconnection, protocols' translation, and broadcasting support for the interworking of heterogeneous technology domains in the local area network.

**3.1.2 user device** [ITU-T Y.3121]: An equipment for the starting point and ending point of traffic, owned and operated by users.

**3.1.3 local area network** [b-ITU-T H.322]: A shared or switched medium, peer-to-peer communications network that broadcasts information for all stations to receive within a moderate-sized geographic area, such as a single office building or a campus. The network is generally owned, used, and operated by a single organization. In the context of this Recommendation, local area

network (LANs) also include internetworks composed of several LANs that are interconnected by bridges or routers.

**3.1.4 interworking** [b-ITU-T Y.1411]: The term "interworking" is used to express interactions between networks, between end systems, or between parts thereof, with the aim of providing a functional entity capable of supporting an end-to-end communication. The interactions required to provide a functional entity rely on functions and on the means to select these functions.

NOTE – The interworking capability in this Recommendation means a series of functions of "interworking" to support deterministic communication services transmission across multiple TDs.

### **3.2 Terms defined in this Recommendation**

None.

## **4 Abbreviations and acronyms**

This Recommendation uses the following abbreviations and acronyms:

5G	The 5th Generation Mobile Communication Technology
A2A	Application to Application
ACK	Acknowledgement
A-IWF	Application – Interworking Function
GCL	Gate Control List
IGW	Interworking Gateway function
IM	Interworking Module
INTF	Interface
LAN	Local Area Network
NACK	Negative Acknowledgement
NC	Network Controller
N-IWFC	Network – Interworking Function in Control Plane
N-IWFD	Network – Interworking Function in Data Plane
PHY	Physical Layer
QoS	Quality of Service
TD	Technology Domain
TSN	Time Sensitive Networking
T2T	TD to TD
U2T	User Device to TD
U-IWF	User Device – Interworking Function

## 5 Conventions

In this Recommendation:


The keywords "**is required to**" indicate a requirement which must be strictly followed and from which no deviation is permitted if conformance to this document is to be claimed.

The keywords "**is recommended**" indicate a requirement which is recommended but which is not absolutely required. Thus, this requirement need not be present to claim conformance.

The keywords "**can optionally**" and "**may**" indicate an optional requirement which is permissible, without implying any sense of being recommended. These terms are not intended to imply that the vendor's implementation must provide the option and the feature can be optionally enabled by the network operator/service provider. Rather, it means the vendor may optionally provide the feature and still claim conformance with the specification.

## 6 Overview


[ITU-T Y.3121] described the QoS requirements and framework for supporting deterministic communication services in local area networks (LAN) from end-to-end data transmission aspect, including a high-level model, three QoS groups and example operational procedures. As shown in Figure 1, the high-level model defined in [ITU-T Y.3121] mainly focuses on the interworking capability between different technology domains (TDs) with the interworking module (IM). In addition, this Recommendation specifies the interworking capability of application-to-application and user device to TD (U2T) to support end-to-end deterministic communication services (depicted with green arrows in Figure 1). The detailed functions and operational procedures for three types of interworking capability are also specified in this Recommendation.

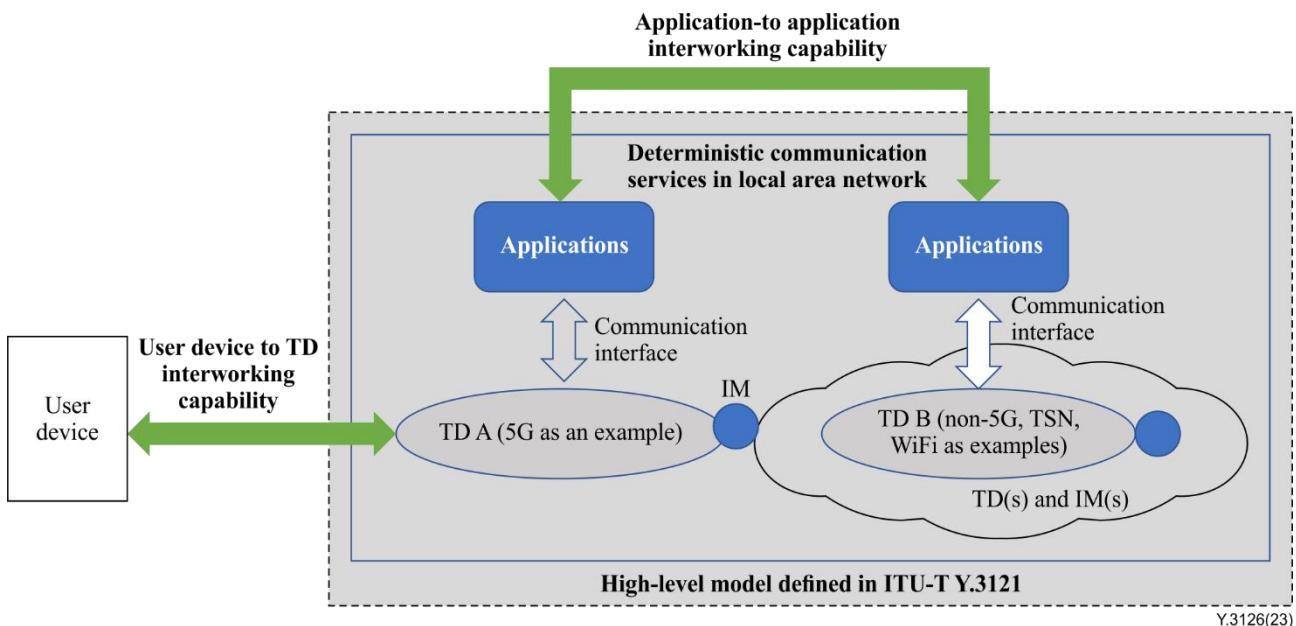

**Figure 1 – Relationship of interworking capabilities between this Recommendation and [ITU-T Y.3121]**

Typically, deterministic communication service crosses several different TDs in a local area network. Interworking capability is essential for QoS guarantee of end-to-end data transmission in this scenario. Lack of end-to-end interworking capability may lead to performance degradation, e.g., large end-to-end delay, bit error and packet loss, and even application disconnection. Therefore, this Recommendation specifies three types of interworking capability, QoS assurance requirements, instances of framework, and operational procedures for interworking capabilities.

## 7 Types of interworking capability

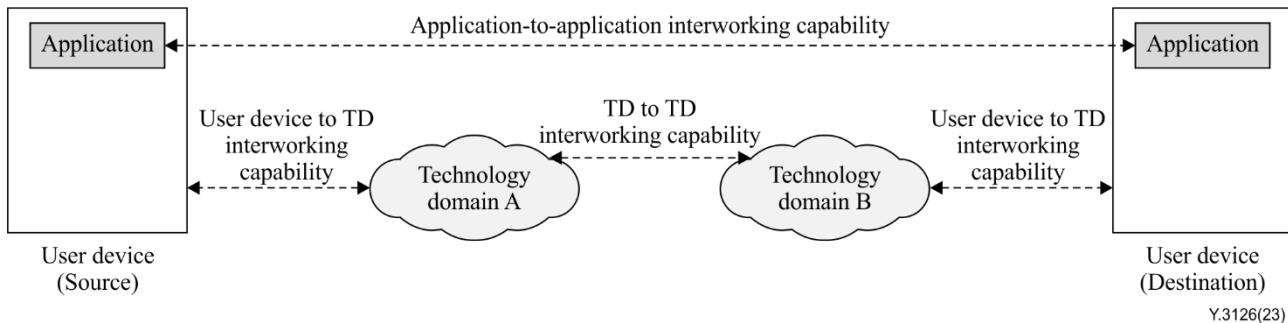

**Figure 2 – Three types of interworking capability**

To support deterministic communication services across heterogenous TDs in a local area network, three types of interworking capability are defined: application to application (A2A), user device to TD (U2T), and TD to TD (T2T) as indicated in Figure 2.

- 1) **Application-to-application interworking capability:** The QoS interworking between applications in the source and destination user devices. The following A2A QoS metrics are negotiated: packet loss rate, packet error rate, peak/average data rate, end-to-end latency, jitter, maximum frame size, etc.
- 2) **User device to TD interworking capability:** The QoS interworking between a user device to a network device in a TD. Multiple mechanisms such as admission control, bandwidth allocation, scheduling, etc. in each TD are used to support mapping from A2A QoS metrics into those of TD.
- 3) **TD to TD interworking capability:** The interworking between network elements of different TDs. The interworking capability provides horizontal QoS mapping and uniform QoS assurance across TDs. Meanwhile, conversions of protocols in the user and control planes should be performed between different TDs.

## 8 QoS assurance requirements of interworking capability

Interworking capabilities provide a logical interface (INTF) for QoS negotiation, mapping, and data exchange among entities in a TD or across multiple TDs. QoS assurance requirements for three types of interworking capability are specified below.

- Requirements for A2A interworking capability
  - It is recommended to negotiate at least one of the A2A QoS metrics for deterministic communication service in a local area network;
  - It is required to transmit A2A QoS metrics from a source user device to a destination user device;
  - It is required to advertise A2A QoS metrics to the related entities of each TD along the service transmission path.
- Requirements for U2T interworking capability
  - It is required that a TD requests A2A QoS metrics to the interworking user device and receives its response;
  - It is required that a user device and the interworking TD identify deterministic communication flows;
  - It is required that TD maps A2A QoS metrics into internal QoS metrics;


- It is required that a user device negotiates with network elements in the interworking TD to provide QoS assurance for deterministic communication service.
- Requirements for T2T interworking capability
  - It is required to establish a data-forwarding tunnel between TDs;
   
NOTE – Either a newly defined data protocol or data protocol conversion can be used in the data forwarding tunnel.
  - It is required to exchange QoS capabilities information (e.g., available resource, available power, channel state, buffer state and so on) between interworking TDs;
  - It is recommended to monitor the A2A QoS metrics of deterministic communication service;
  - It is required to support QoS negotiation among TDs to ensure a uniform QoS assurance level.

## 9 Instances of framework for interworking capabilities

Three instances of the framework (which is defined in [ITU-T Y.3121]) for three types of interworking capability are specified in clauses 9.1, 9.2 and 9.3, respectively.

### 9.1 Framework instance for A2A interworking capability

Figure 3 shows the framework instance for A2A interworking capability.

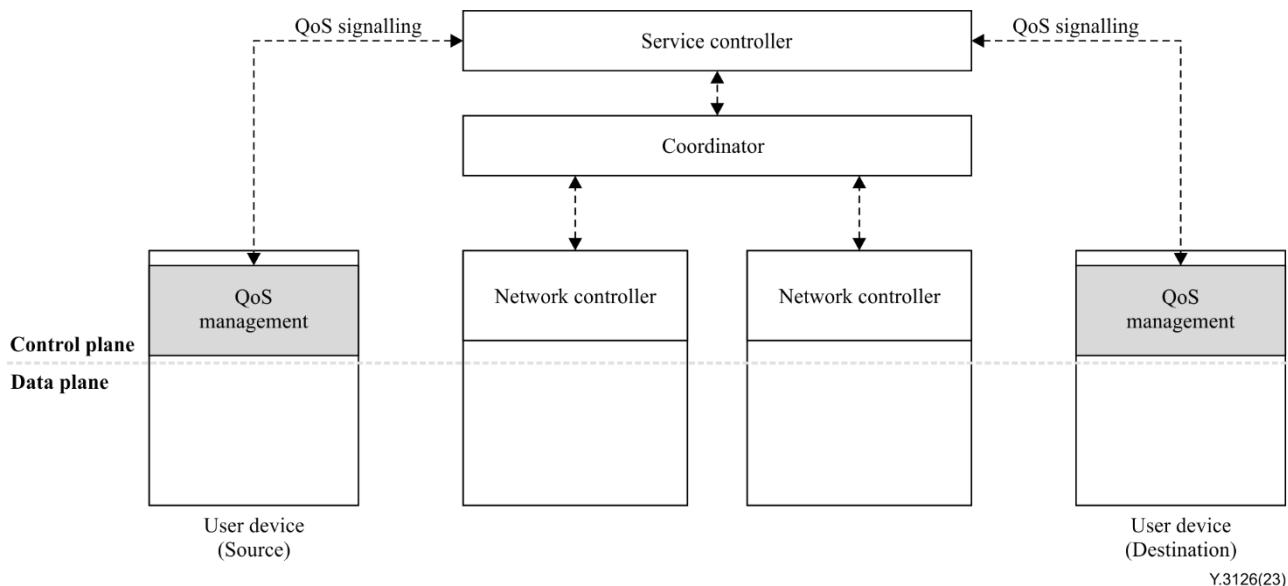

**Figure 3 – Framework instance for A2A interworking capability**

NOTE – The general functions of the service controller, coordinator and user device are defined in [ITU-T Y.3121].

The A2A interworking capability is only related to the control plane functions of the user device and the service controller.


Application – interworking function (A-IWF) is a logical interworking interface connecting the user device and the service controller. A-IWF is partly located in the control plane of the user device and partly located in the centralized service controller.

A-IWF supports QoS signalling enabling negotiation, transmission, and advertising QoS metrics between the user device and the service controller.

## 9.2 Framework instance for U2T interworking capability

Figure 4 shows the framework instance for U2T interworking capability.

User device – interworking function (U-IWF) is a logical QoS interworking interface between a user device and a network controller (NC) of the interworking TD. The function of U-IWF is partly located in the control plane of the user device, and partly located in the network controller.

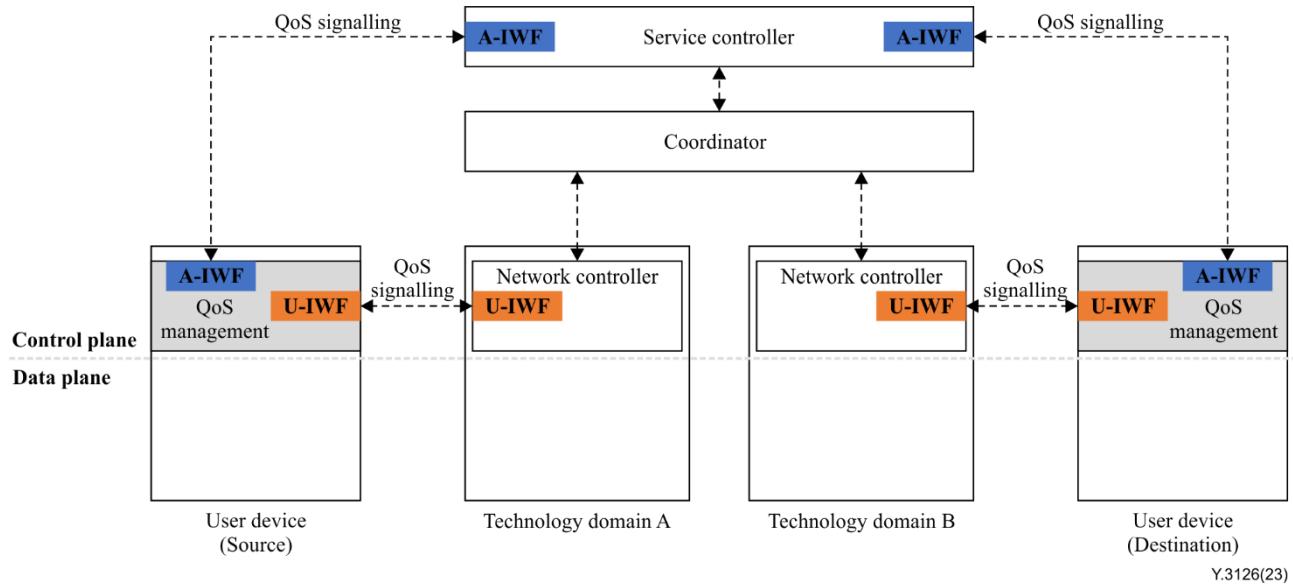

**Figure 4 – Framework instance for U2T interworking capability**


The U-IWF supports the discovery capability of the user device, QoS signalling enabling exchanges of QoS policies for call admission, resource allocation and scheduling, and QoS performance (e.g., data rate, packet error rate, jitter and so on) monitoring.

## 9.3 Framework instance for T2T interworking capability

T2T interworking capability involves QoS signalling in the control plane and protocol conversion in the data plane. The framework instance for T2T interworking capability consists of a centralized mode and a distributed mode.

### 9.3.1 Centralized mode

Figure 5 shows the framework instance for a centralized mode T2T interworking capability.

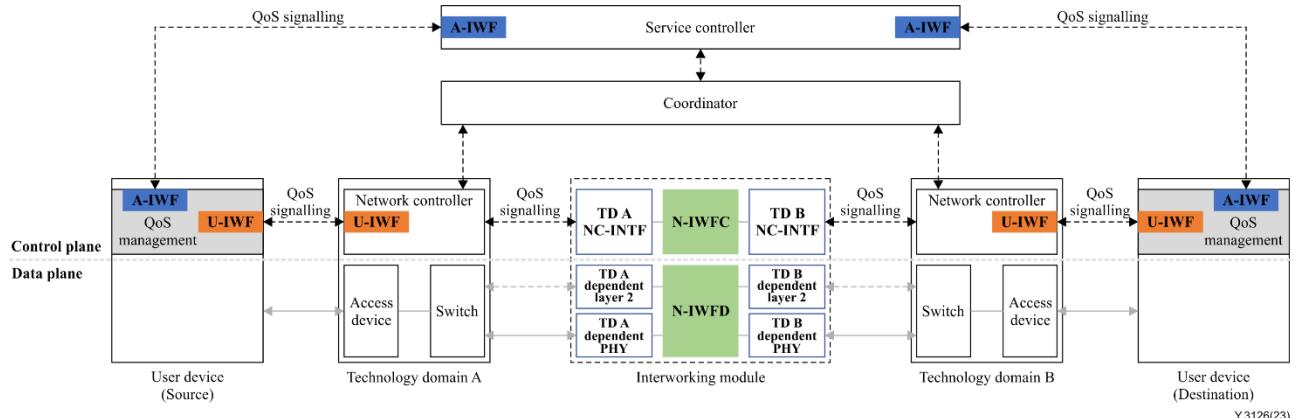

**Figure 5 – Framework instance for centralized mode T2T interworking capability**

NOTE – The general functions of the access device and switch are defined in [ITU-T Y.3121].


As shown in Figure 5, TD A and TD B are connected through an independent interworking module (IM). In the IM, two interworking functions are defined in the control plane and data plane respectively.

In the control plane, network – interworking function in control plane (N-IWFC) is a QoS interworking function between TDs. N-IWFC supports QoS signalling enabling the exchange of QoS information through the interworking TD's network controller-interface (TD NC-INTF). N-IWFC supports the functions such as horizontal QoS mapping and conversion between interworking TDs and QoS performance monitoring.

In the data plane, network – interworking function in data plane (N-IWFD) is a data management and transmission protocol conversion function. N-IWFD supports flow identification, packet filtering, packet encapsulation and de-encapsulation, data buffering and forwarding. The packet receiving from the previous TD (e.g., TD A) is buffered in N-IWFD, and is then re-encapsulated within the data format of the forwarding TD (e.g., TD B).

### 9.3.2 Distributed mode

Figure 6 shows the framework instance for distributed mode T2T interworking capability.

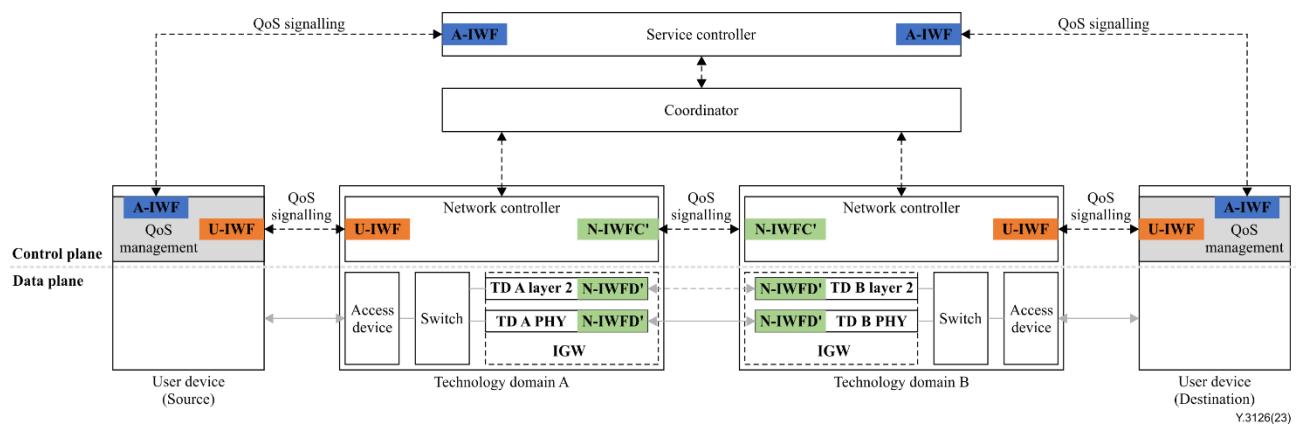

**Figure 6 – Framework instance for distributed mode T2T interworking capability**

As shown in Figure 6, TD A and TD B are connected directly through N-IWFC' in the control plane and N-IWFD' in the data plane, respectively. The interworking functions are distributed into two interworking TDs.

In the control plane, N-IWFC' is a QoS interworking logical interface, which is separately distributed in the network controllers of interworking TDs.

N-IWFC' supports control and management information exchange including information on QoS capabilities, control mechanisms and protocols, and QoS metrics. It also supports horizontal QoS mapping between interworking TDs.

In the data plane, the interworking gateway function (IGW) is located at the border of each TD. IGW connects to the intra-TD devices (e.g., switch or access devices) with internal data transmission protocols of connected TD. It interacts with peer IGW of the interworking TD through N-IWFD'.


N-IWFD' is a data interworking interface defined in both the data link layer and the physical layer (PHY). N-IWFD' supports frame buffering, flow identification, frame filtering, frame encapsulation, and de-encapsulation. Within N-IWFD', deterministic communication service can be transmitted across heterogeneous TDs.

## 10 Operational procedures of interworking capability

The three operational procedures of interworking capability are described in this clause: QoS negotiation, QoS decomposition and mapping, data processing and forwarding. QoS negotiation, QoS decomposition and mapping are procedures in the control plane, the data processing and forwarding is a procedure in the data plane.

### 10.1 QoS negotiation

QoS negotiation is the main procedure of A2A interworking capability, which determines the A2A QoS metrics. User devices, service controller and coordinator are involved in this procedure. Figure 7 describes the overall steps for QoS negotiation.

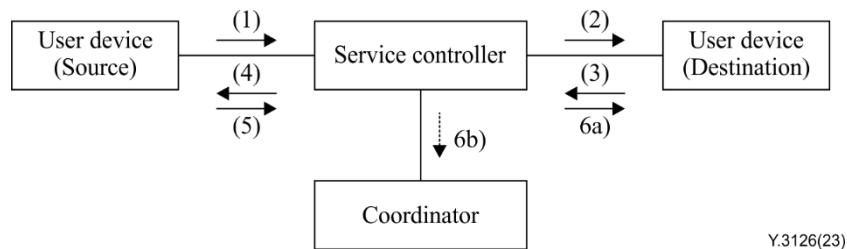


**Figure 7 – QoS negotiation procedure**

- 1) The source user device sends a service request to the service controller with application-specific metrics, such as flow ID, flow direction, packet size, latency requirements, accepted packet loss rate and so on.
- 2) The service controller identifies a destination user device from the received service request and forwards the service request to the corresponding destination user device.
- 3) The destination user device receives the service request, and then checks itself with the available buffer space, computing resources, port status and so on. The destination user device decides if it can meet the requested QoS metrics. If no, it denies the service request and replies a negative acknowledgement (NACK) to the service controller. Otherwise, the destination user device specifies the QoS level metrics (e.g., latency upper bound, maximum burst size, minimal transmission rate, etc.) it can provide. Acknowledgement (ACK) response message to the service request is then sent to the service controller.
- 4) The service controller forwards the service request response to the corresponding source user device.
- 5) If the response is negative, the QoS negotiation procedure is finished. Otherwise, the source user device checks if the received QoS metrics can meet the service requirements. If yes, the source user device responds with an ACK message with the negotiated QoS level parameters and then transmits it to the service controller. If no, the source user device responds with a NACK message to the service controller.
- 6) The service controller receives the response message from the source user device and checks the content of the message. There are two cases:
  - 6a) This is a default step. Regardless of ACK or NACK in the response message to the destination user device, the service controller should forward this message to the destination user device.
  - 6b) This is an optional step. If the response message is NACK, this step will not occur. If the response message is ACK, the service controller will forward the ACK message with the negotiated QoS level parameters to the coordinator.

## 10.2 QoS decomposition and mapping

Within QoS level determined by the QoS negotiation procedure, the QoS decomposition and mapping procedure aims to decompose the A2A QoS metrics and map to the TDs' QoS requirements. The service controller, coordinator and network controller in TDs are involved in this procedure. Figure 8 describes the overall steps for QoS decomposition and mapping.

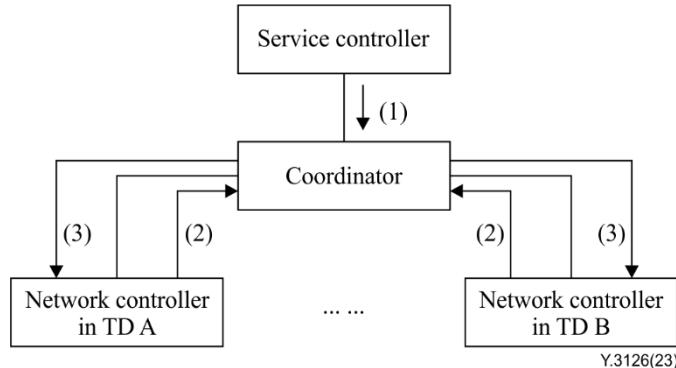

**Figure 8 – QoS decomposition and mapping procedure**


- 1) The coordinator receives the negotiated QoS level parameters of all flows and collects the information on corresponding flows of the source and destination user devices.
- 2) Based on the information of successful negotiated flows, the coordinator collects the network capability information of the corresponding TD such as the available network resources, link and queueing status, the port and the load status of network devices and so on.  
The coordinator plans the transmission path for each flow. Furthermore, according to the negotiated A2A QoS level parameters and network capability information, the coordinator decides the QoS requirements for each TD, and decomposes A2A QoS metrics into TD QoS metrics. Take end-to-end latency, for example, which is also explained in Appendix I. The negotiated end-to-end latency will be decomposed into several latency budgets for each TD across the transmission path.
- 3) The coordinator distributes the QoS metrics to the associated network controller in each TD.

## 10.3 Data processing and forwarding

After QoS decomposition and mapping, the network devices in TD will allocate resources for data transmission of the deterministic communication services to meet the QoS requirements. However, due to the two T2T interworking modes, the different data processing and forwarding steps are described in clauses 10.3.1 and 10.3.2 respectively.

### 10.3.1 Procedure with distributed T2T interworking mode

Figure 9 describes the data processing and forwarding procedure with distributed T2T interworking mode and entities in the data plane including source and destination user devices. Devices and gateway functions in TD are involved in this procedure.

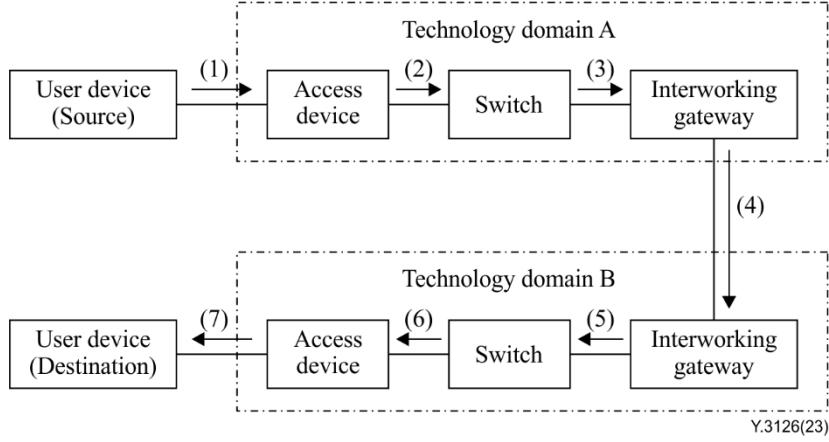

**Figure 9 – Data processing and forwarding procedure of distributed T2T interworking**

- 1) The source user device sends the application data to the access device in the interworking TD.
  - 2) The access device receives the application data. Then the access device forwards the application data to the switch over the transmission path provisioned by the coordinator.
  - 3) The switch receives the application data and forwards it to the interworking gateway of TD A.
- NOTE 1 – In step (2), the access device can forward the application data to the interworking gateway directly, the switch is optional.
- NOTE 2 – In step (3), maybe there are many switches during the transmission path of the flow in TD A, the switch may deliver the application data to another switch.
- 4) The IGW in TD A may take several sub-steps as follows for protocol conversion and data forwarding.
    - 4-1) It receives the application data encapsulated with the format of TD A from the network devices in TD A, meanwhile, it sets up the filtering and metering mechanism to check the application data.
    - 4-2) It de-encapsulates the received application data and re-encapsulates it with the new data format defined with the peer entity in the interworking TD.
    - 4-3) It checks the port status, such as time synchronization, queuing state and so on. Once the port status meets the predefined rules, it will deliver the application data with a new data format to the interworking gateway in interworking TD.
  - 5) The IGW in TD B decapsulates the received application data from the peer IGW in TD A, and encapsulates it with data format of TD B, then delivers application data to the switch in TD B.
  - 6) The switch receives the application data, and takes the filtering and metering mechanism, then forwards the application data to the access device of TD B.
  - 7) The access device delivers the received application data to the destination user device.


NOTE 3 – In step (5), the IGW in TD B may forward the data unit to the access device of TD B.

NOTE 4 – In step (6), maybe there are many switches during the transmission path of the flow in TD B, the switch may deliver the data unit to another switch.

NOTE 5 – The sum of latency in steps (5) to (7) should not exceed the assigned latency budget in TD B defined in the QoS decomposition and mapping procedure.

### 10.3.2 Procedure with centralized T2T interworking mode

Figure 10 describes the data processing and forwarding procedure with a centralized T2T interworking mode. Entities in the data plane including source and destination user devices, devices in each TD (access device and switches) and IM are involved in this procedure. In this scenario, the IM acts as an independent centralized entity to deal with protocol conversion across different TDs.

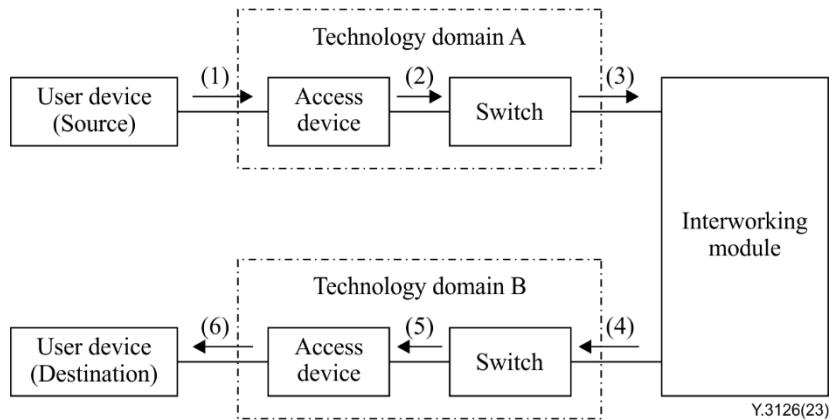

**Figure 10 – Data processing and forwarding procedure in centralized T2T interworking**

- 1) This step is the same as step (1) in clause 10.3.1.
- 2) This step is the same as step (2) in clause 10.3.1.
- 3) The switch receives the application data, and then forwards it to the IM.
- 4) IM takes several following sub-steps to make communication across different TDs.
  - 4-1) It receives the application data from the network devices in TD A, then sets up the filtering and metering mechanism to check the application data if it meets the maximum burst size, the minimal transmission rate and the latency requirement.
  - 4-2) It performs the protocol conversion and the application data is encapsulated with the format of TD B.
  - 4-3) It transmits the new encapsulated application data to the network device in TD B.
- 5) This step is the same as step (6) in clause 10.3.1.
- 6) This step is the same as step (7) in clause 10.3.1.

NOTE 1 – In step (2), the access device can forward the data unit to the interworking module directly, the switch is optional.

NOTE 2 – In steps (3) and (4), maybe there are many switches during the transmission path of the flow in TD A and TD B, the switch may deliver the data unit to another switch in the same TD.


NOTE 3 – The sum of latency in steps (1) to (3) should not exceed the assigned latency budget in TD A defined in the QoS decomposition and mapping procedure. Meanwhile, the sum of latency in steps (4) to (6) should not exceed the assigned latency budget in TD B defined in the QoS mapping procedure.

## Appendix I

### An example of QoS assurance for data transmission across 5G and TSN

(This appendix does not form an integral part of this Recommendation.)


To describe the detailed QoS assurance scheme for data processing and forwarding procedure clearly, this appendix gives the data transmission across the 5th generation mobile communication technology (5G) and time sensitive networking (TSN) as an example. Figure I.1 gives the overall system model for 5G and TSN technology domain, the network-side TSN translator and the device-side TSN translator acts as a centralized interworking module. It should be noted that although this example is given as a centralized T2T interworking mode, the principle and QoS assurance scheme is also effective for the distributed T2T interworking mode.

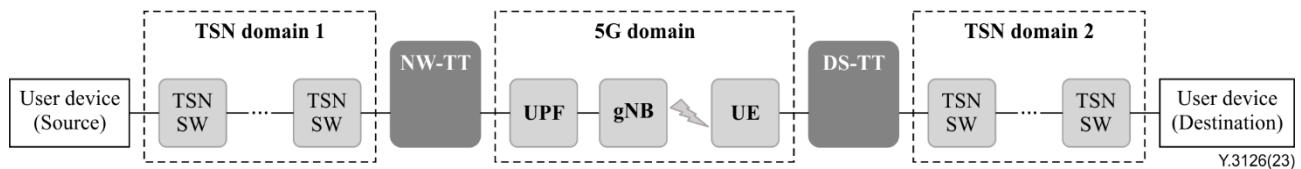

**Figure I.1 – Overall system model for 5G and TSN technology domain**

As for data transmission across 5G and TSN, it cares more about the end-to-end latency guarantee as a QoS requirement. As shown in Figure I.2, the end-to-end latency of time-critical service is divided into several independent latency budgets in each technology domain and interworking modules, which aims to decrease signalling interaction as well as to provide a solid guarantee for time critical service transmission across heterogeneous networks. In this example, the relationship between end-to-end latency requirements and latency budgets should follow the constraints described in the formula (I-1).

$$D_{TSN1} + D_{TSN2} + D_{5Gs} + D_{IM1} + D_{IM2} \leq D_{e2e} \quad (\text{I-1})$$

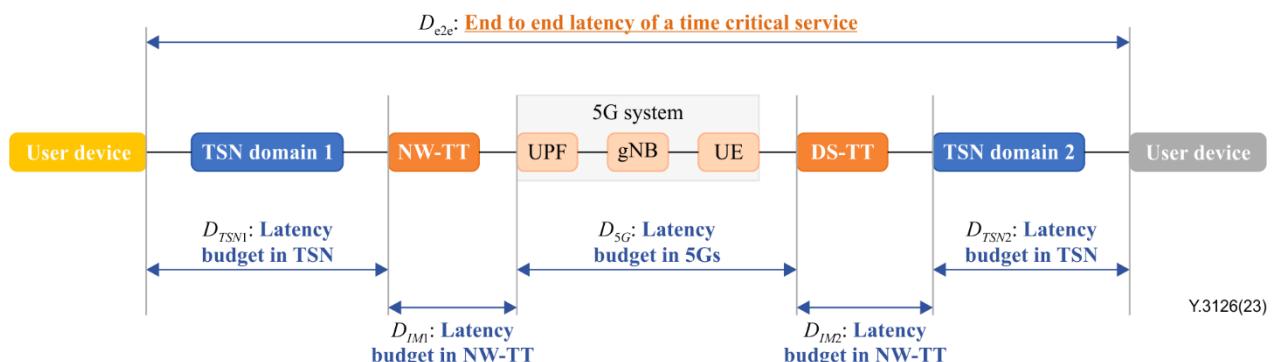

**Figure I.2 – Illustration for independent latency budget for each TD and Interworking module**

In TSN domains 1 and 2, it assumes that there are  $n$  and  $m$  TSN switches, respectively. The data transmission rate between each TSN switch are the same, but the queueing time in each switch is different, as a result, we can get the following formula.

$$D_{TSN1} - n \frac{L}{R} \geq \sum_{i=1}^n t_{TSN1}^{proc-i} \quad (\text{I-2})$$

$$D_{TSN2} - m \frac{L}{R} \geq \sum_{i=1}^m t_{TSN2}^{proc-i} \quad (I-3)$$

where,  $L$  means the data unit size, and  $R$  is the data transmission rate between two adjacent TSN switch. Therefore, the gate control list (GCL) setting, which has an essential effect on queueing time, should be well optimized to satisfy this constraint.

For time budget of two centralized interworking modules, it mainly includes the transmission delay and processing delay. As a result, the processing time should be well designed to satisfy the latency budget of the interworking modules.

For the latency budget in 5G system, it can be further divided into two parts, the data transmission latency in the core network and the radio network. The data transmission latency in the core network is stable, so the most uncertain part is the radio network. The 5G radio resource allocation and scheduling scheme should be optimized under the following constraints.

$$D_{5Gs} - D_{5Gs}^{core} \geq D_{5Gs}^{radio} \quad (I-4)$$

According to the proposed method, if all the latency has been satisfied in each single part, the final QoS requirement can be guaranteed.

For the detailed QoS assurance schemes in TSN and 5Gs, see [b-Sun-2021].

## Bibliography

- [b-ITU-T H.322] Recommendation ITU-T H.322 (1996), *Visual telephone systems and terminal equipment for local area networks which provide a guaranteed quality of service.*
- [b-ITU-T Y.1411] Recommendation ITU-T Y.1411 (2003), *ATM-MPLS network interworking – Cell mode user plane interworking.*
- [b-Sun-2021] Sun, L., Wang, J., Lin, S., Ma, Z., Li, W., Qilian, L., Huang, R. (2021), *Research on 5G-TSN joint scheduling mechanism based on radio channel information*, Journal on Communications, 42(12) pp 65-75.  
[<https://www.infocomm-journal.com/ttxb/EN/10.11959/i.issn.1000-436x.2021224>](https://www.infocomm-journal.com/ttxb/EN/10.11959/i.issn.1000-436x.2021224)



## SERIES OF ITU-T RECOMMENDATIONS

Series A	Organization of the work of ITU-T
Series D	Tariff and accounting principles and international telecommunication/ICT economic and policy issues
Series E	Overall network operation, telephone service, service operation and human factors
Series F	Non-telephone telecommunication services
Series G	Transmission systems and media, digital systems and networks
Series H	Audiovisual and multimedia systems
Series I	Integrated services digital network
Series J	Cable networks and transmission of television, sound programme and other multimedia signals
Series K	Protection against interference
Series L	Environment and ICTs, climate change, e-waste, energy efficiency; construction, installation and protection of cables and other elements of outside plant
Series M	Telecommunication management, including TMN and network maintenance
Series N	Maintenance: international sound programme and television transmission circuits
Series O	Specifications of measuring equipment
Series P	Telephone transmission quality, telephone installations, local line networks
Series Q	Switching and signalling, and associated measurements and tests
Series R	Telegraph transmission
Series S	Telegraph services terminal equipment
Series T	Terminals for telematic services
Series U	Telegraph switching
Series V	Data communication over the telephone network
Series X	Data networks, open system communications and security
<b>Series Y</b>	<b>Global information infrastructure, Internet protocol aspects, next-generation networks, Internet of Things and smart cities</b>
Series Z	Languages and general software aspects for telecommunication systems