

I n t e r n a t i o n a l T e l e c o m m u n i c a t i o n U n i o n

ITU-T

TELECOMMUNICATION
STANDARDIZATION SECTOR
OF ITU

H.248.17

(03/2013)

SERIES H: AUDIOVISUAL AND MULTIMEDIA SYSTEMS
Infrastructure of audiovisual services – Communication
procedures

Gateway control protocol: Line test packages

Recommendation ITU-T H.248.17



ITU-T H-SERIES RECOMMENDATIONS
AUDIOVISUAL AND MULTIMEDIA SYSTEMS

CHARACTERISTICS OF VISUAL TELEPHONE SYSTEMS	H.100–H.199
INFRASTRUCTURE OF AUDIOVISUAL SERVICES	
General	H.200–H.219
Transmission multiplexing and synchronization	H.220–H.229
Systems aspects	H.230–H.239
Communication procedures	H.240–H.259
Coding of moving video	H.260–H.279
Related systems aspects	H.280–H.299
Systems and terminal equipment for audiovisual services	H.300–H.349
Directory services architecture for audiovisual and multimedia services	H.350–H.359
Quality of service architecture for audiovisual and multimedia services	H.360–H.369
Supplementary services for multimedia	H.450–H.499
MOBILITY AND COLLABORATION PROCEDURES	
Overview of Mobility and Collaboration, definitions, protocols and procedures	H.500–H.509
Mobility for H-Series multimedia systems and services	H.510–H.519
Mobile multimedia collaboration applications and services	H.520–H.529
Security for mobile multimedia systems and services	H.530–H.539
Security for mobile multimedia collaboration applications and services	H.540–H.549
Mobility interworking procedures	H.550–H.559
Mobile multimedia collaboration inter-working procedures	H.560–H.569
BROADBAND, TRIPLE-PLAY AND ADVANCED MULTIMEDIA SERVICES	
Broadband multimedia services over VDSL	H.610–H.619
Advanced multimedia services and applications	H.620–H.629
Ubiquitous sensor network applications and Internet of Things	H.640–H.649
IPTV MULTIMEDIA SERVICES AND APPLICATIONS FOR IPTV	
General aspects	H.700–H.719
IPTV terminal devices	H.720–H.729
IPTV middleware	H.730–H.739
IPTV application event handling	H.740–H.749
IPTV metadata	H.750–H.759
IPTV multimedia application frameworks	H.760–H.769
IPTV service discovery up to consumption	H.770–H.779
Digital Signage	H.780–H.789

For further details, please refer to the list of ITU-T Recommendations.

Recommendation ITU-T H.248.17

Gateway control protocol: Line test packages

Summary

Recommendation ITU-T H.248.17 describes line test components and how they are used across an MGC/MG ITU-T H.248.1 interface to complete line tests.

This revision incorporates a correction to an incorrect signal identity in clause 8.3.1.2.

History

Edition	Recommendation	Approval	Study Group
1.0	ITU-T H.248.17	2002-11-29	16
1.1	ITU-T H.248.17 (2002) Cor. 1	2004-03-15	16
2.0	ITU-T H.248.17	2013-03-16	16

FOREWORD

The International Telecommunication Union (ITU) is the United Nations specialized agency in the field of telecommunications, information and communication technologies (ICTs). The ITU Telecommunication Standardization Sector (ITU-T) is a permanent organ of ITU. ITU-T is responsible for studying technical, operating and tariff questions and issuing Recommendations on them with a view to standardizing telecommunications on a worldwide basis.

The World Telecommunication Standardization Assembly (WTSA), which meets every four years, establishes the topics for study by the ITU-T study groups which, in turn, produce Recommendations on these topics.

The approval of ITU-T Recommendations is covered by the procedure laid down in WTSA Resolution 1.

In some areas of information technology which fall within ITU-T's purview, the necessary standards are prepared on a collaborative basis with ISO and IEC.

NOTE

In this Recommendation, the expression "Administration" is used for conciseness to indicate both a telecommunication administration and a recognized operating agency.

Compliance with this Recommendation is voluntary. However, the Recommendation may contain certain mandatory provisions (to ensure, e.g., interoperability or applicability) and compliance with the Recommendation is achieved when all of these mandatory provisions are met. The words "shall" or some other obligatory language such as "must" and the negative equivalents are used to express requirements. The use of such words does not suggest that compliance with the Recommendation is required of any party.

INTELLECTUAL PROPERTY RIGHTS

ITU draws attention to the possibility that the practice or implementation of this Recommendation may involve the use of a claimed Intellectual Property Right. ITU takes no position concerning the evidence, validity or applicability of claimed Intellectual Property Rights, whether asserted by ITU members or others outside of the Recommendation development process.

As of the date of approval of this Recommendation, ITU had not received notice of intellectual property, protected by patents, which may be required to implement this Recommendation. However, implementers are cautioned that this may not represent the latest information and are therefore strongly urged to consult the TSB patent database at <http://www.itu.int/ITU-T/ipr/>.

© ITU 2014

All rights reserved. No part of this publication may be reproduced, by any means whatsoever, without the prior written permission of ITU.

Table of Contents

	Page
1 Scope	1
2 References.....	1
3 Definitions	2
4 Abbreviations and acronyms	2
5 Test system architecture and flows.....	2
6 Line test components	4
6.1 Common line tests components for ANSI, ITU-T and TTC.....	4
6.2 ITU-T line tests components	6
6.3 ANSI line test components.....	13
6.4 TTC line test components.....	17
7 Line test procedures at the testing switching centre	18
7.1 ITU-T.....	18
7.2 ANSI.....	19
7.3 TTC line tests	20
8 Line test procedures at the testee switching centre.....	20
8.1 ITU-T.....	20
8.2 ANSI.....	21
8.3 TTC line tests	22

Recommendation ITU-T H.248.17

Gateway control protocol: Line test packages

1 Scope

This Recommendation describes line test components and how they are used to complete line tests. The definition of line test components, rather than of complete line tests, allows the media gateway controller (MGC) and media gateway (MG) to implement a minimal set of signals and packages to achieve a larger set of line tests. It is assumed that the media gateway controller is responsible for sequencing and timing of the line test components to complete the relevant line tests. The detailing of results that are reported (e.g., events and statistics), as well as the timing and mechanisms used for transmitting such records from the MG to the MGC, are outside the scope of this Recommendation.

2 References

The following ITU-T Recommendations and other references contain provisions which, through reference in this text, constitute provisions of this Recommendation. At the time of publication, the editions indicated were valid. All Recommendations and other references are subject to revision; users of this Recommendation are therefore encouraged to investigate the possibility of applying the most recent edition of the Recommendations and other references listed below. A list of the currently valid ITU-T Recommendations is regularly published. The reference to a document within this Recommendation does not give it, as a stand-alone document, the status of a Recommendation.

- | | |
|-----------------|---|
| [ITU-T G.711] | Recommendation ITU-T G.711 (1988), <i>Pulse code modulation (PCM) of voice frequencies.</i> |
| [ITU-T H.248.1] | Recommendation ITU-T H.248.1 (2013), <i>Gateway control protocol: Version 3.</i> |
| [ITU-T O.6] | Recommendation ITU-T O.6 (1988), <i>1020 Hz reference test frequency.</i> |
| [ITU-T O.11] | Recommendation ITU-T O.11 (1992), <i>Maintenance access lines.</i> |
| [ITU-T O.22] | Recommendation ITU-T O.22 (1992), <i>CCITT automatic transmission measuring and signalling testing equipment ATME No. 2.</i> |
| [ITU-T O.152] | Recommendation ITU-T O.152 (1992), <i>Error performance measuring equipment for bit rates of 64 kbit/s and $N \times 64$ kbit/s.</i> |
| [ITU-T Q.107] | Recommendation ITU-T Q.107 (1988), <i>Standard sending sequence of forward address information.</i> |
| [ITU-T Q.551] | Recommendation ITU-T Q.551 (2002), <i>Transmission characteristics of digital exchanges.</i> |
| [ITU-T Q.1950] | Recommendation ITU-T Q.1950 (2002), <i>Bearer independent call bearer control protocol.</i> |
| [ANSI T1.206]* | ANSI T1.206-1994, <i>Digital exchanges and PBXs – Digital circuit loopback test line with NxDS0 capability.</i> |

* T1 standards are maintained since November 2003 by ATIS.

[ANSI T1.207]*

ANSI T1.207-2000, *Operations, Administration, Maintenance and Provisioning (OAM&P) – Terminating Test Line Access and Capabilities.*

[TTC Standard JJ-90-10]

TTC Standard JJ-90-10 Ver7.1 (2006), *Inter-carrier Interface based on ISUP.*

[http://www.ttc.or.jp/jp/document_list/pdf/e/STD/JJ-90.10\(E\)v7.1.pdf](http://www.ttc.or.jp/jp/document_list/pdf/e/STD/JJ-90.10(E)v7.1.pdf)

3 Definitions

This Recommendation defines the following terms:

3.1 Add/Move/Modify (AMM): Commands as defined by [ITU-T. H.248.1].

3.2 Modify/Move (MM): Commands as defined by [ITU-T H.248.1].

4 Abbreviations and acronyms

This Recommendation uses the following abbreviations and acronyms:

ANSI	American National Standards Institute
ATME	Automatic Test and Measurement Equipment
CMS	Circuit Multiplication Systems
MG	Media Gateway
MGC	Media Gateway Controller
PCM	Pulse Code Modulation
TE	Test Equipment
TTC	Telecommunication Technology Committee

5 Test system architecture and flows

Figure 1 gives an example of a test system architecture in a split MGC/MG switching centre with the test equipment separate from the switching centre.

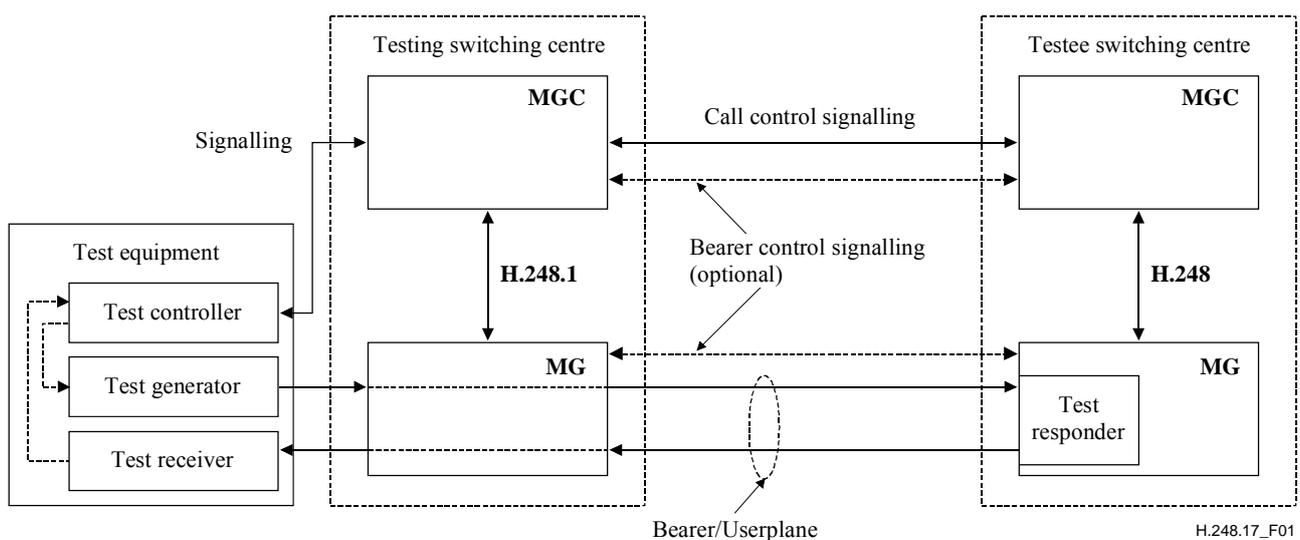


Figure 1 – Test system architecture (TE separate)

In Figure 1, the functionality of the test responder in the testee switching centre may be implemented through the procedures defined in clause 8. This Recommendation does not give guidance on implementing the testing switching centre, nor the test equipment for the example shown in Figure 1.

Figure 2 gives an illustration of a test system architecture in a split MGC/MG switching centre with the test equipment combined with the switching centre.

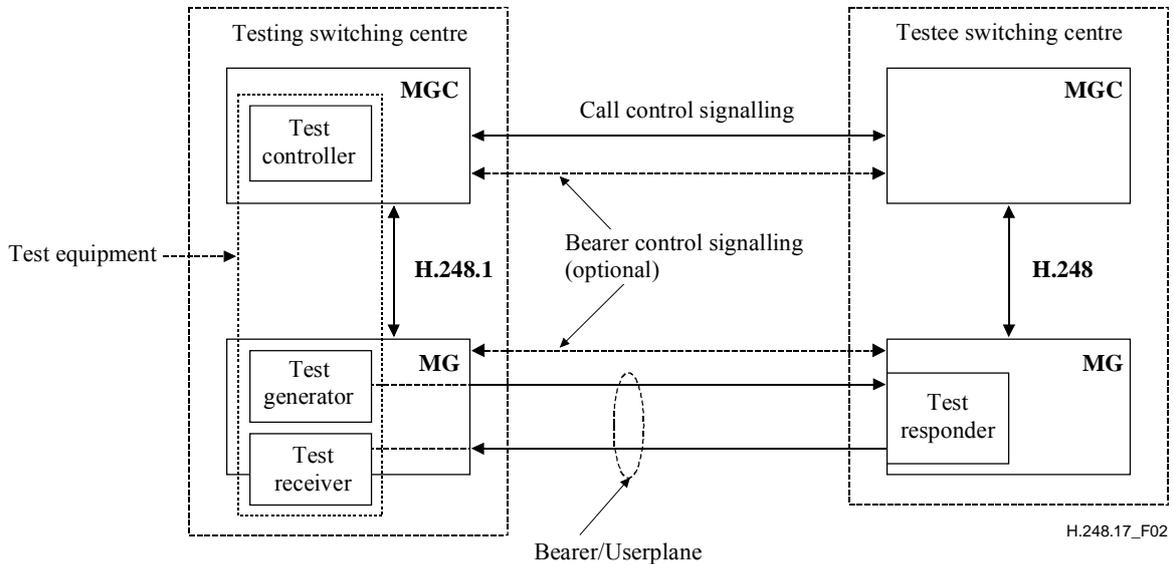


Figure 2 – Test system architecture (TE combined)

In Figure 2, the functionality of the test controller, test generator and test responder in the testee switching centre may be implemented through the procedures defined in clauses 7 and 8.

In certain scenarios, the role of the testing and testee switching centres may be combined into one switching centre, for example, to test the successful addition of new components (routes, MGs) to a switching centre. The examples in the above figures are not exhaustive and other test architectures may be implemented by using the test components and procedures from this Recommendation.

This Recommendation describes the use of various ITU-T H.248.1, packages, signals, parameters and procedures across the MGC/MG interface in the testee switching centre. The MGC/MG interface is common to both the TE combined and TE separated architectures depicted above. This Recommendation also describes the test procedures across the MGC/MG interface between the test controller and test generator in the testing switching centre in the architecture with TE combined.

This Recommendation does not provide any guidance on the procedures and ITU-T H.248.1 information elements used across the MGC/MG interfaces for normal ITU-T H.248.1 connection establishment procedures. The procedures and information elements used across the interface will be dictated by the call control used. This Recommendation does not provide guidance as to what point in a call control signalling the line test components should be sent. This information is provided in the relevant line test Recommendations e.g., [ITU-T O.11] and [ANSI T1.207].

At the switching centres, the MGC may use of a number of test components to complete a certain line test. Clause 6 provides details of these test components. Clause 7 provides the procedures to initiate the relevant line tests. Clause 8 provides the procedures to respond to the relevant line test. The test components and line tests procedures are documented according to the standard they are defined in.

Figure 3 is an example of the "Analogue Loopback Test Line" test described in clause 1.5.1 of [ITU-T O.11]. It shows how the line test components as assembled to form a response to a line test.

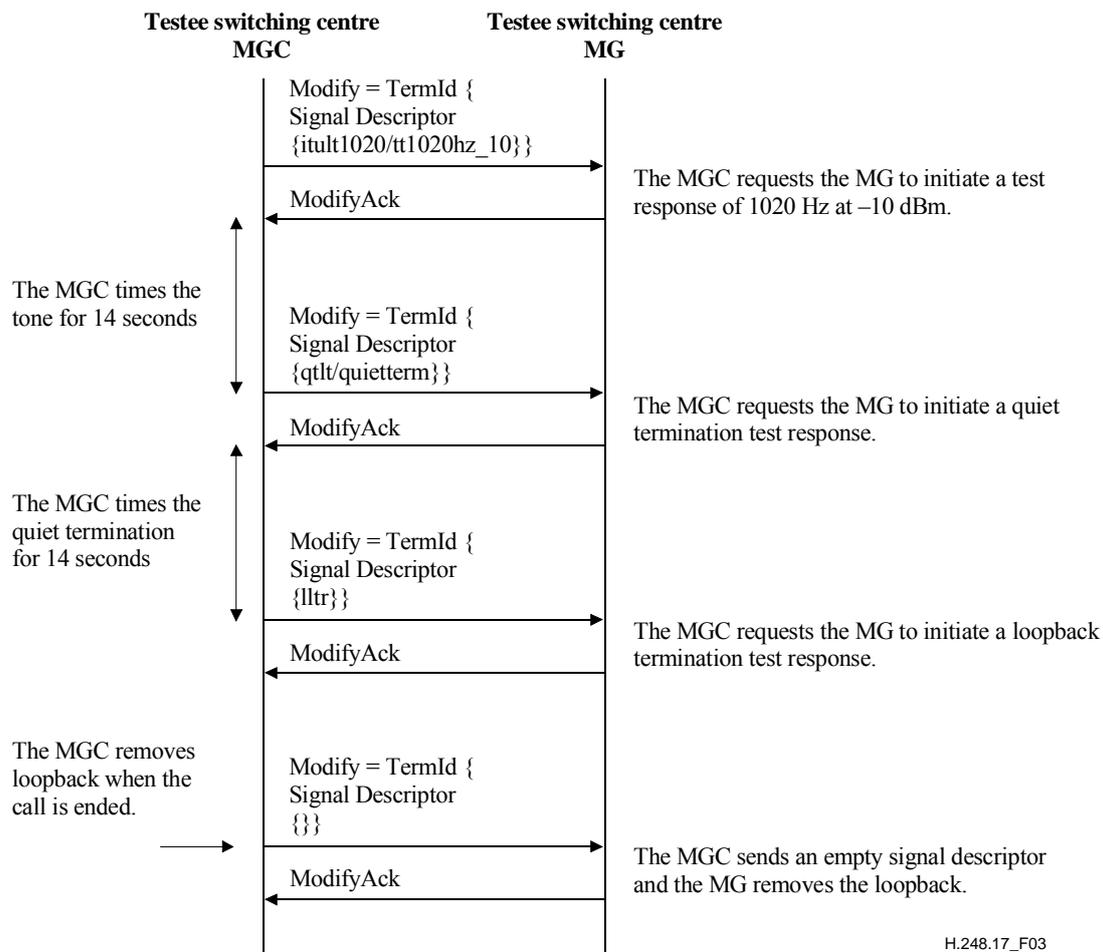


Figure 3 – Analogue loopback test call flow

6 Line test components

This clause defines the components that are used by the different line test variants to complete a full line testing procedure. The individual line test components are described in separate packages so that the support of one test component does not mandate the support of other test components.

6.1 Common line tests components for ANSI, ITU-T and TTC

This clause lists Test Tone Components used in several Line Tests. The following packages and signals are applicable for ANSI, ITU-T and TTC line tests.

6.1.1 Quiet termination line test component

Package name: Quiet Termination Line Test Component

Package ID: qtlt (0x0053)

Description: This package defines a generic line test component for Quiet Line Test functionality. For example, Quiet Termination as defined in clause 2.3.1 of [ITU-TQ.551] and in [ITU-T G.711].

Version: 1

Extends: None

6.1.1.1 Properties

None.

6.1.1.2 Events

None.

6.1.1.3 Signals

6.1.1.3.1 Quiet termination test component

Signal name:	Quiet termination test component
Signal ID:	quietterm (0x0001)
Description:	Quiet Termination (also called zero pattern) is applied to the termination that is a PCM signal corresponding to decoder output value 0 (μ -law) or output value 1 (A-law), with the sign bit in a fixed state that should be applied to the exchange test point. A-law has pattern 0x80 with decoder value 1 and μ -law has pattern 0xFF with decoder value 0.
Signal type:	On/Off
Duration:	N/A

6.1.1.3.1.1 Additional parameters

None.

6.1.1.4 Statistics

None.

6.1.1.5 Procedures

When the MGC wants MG to apply quiet termination, an AMM command is sent to the MG containing signal descriptor with the quietterm signal. Physical characteristics of the Quiet Termination are provisioned in the MG.

6.1.2 Loopback Line Test Response

Package name:	Loopback Line Test Response
Package ID:	lltr (0x0054)
Description:	This package defines a generic line test component for Loopback Line Test functionality.
Version:	1
Extends:	None

6.1.2.1 Properties

None.

6.1.2.2 Events

None.

6.1.2.3 Signals

6.1.2.3.1 Loopback line test component

Signal ID:	loopback (0x0001)
Description:	This signal initiates a loopback line test.
Signal type:	On/Off
Duration:	N/A

6.1.2.3.1.1 Additional parameters:

6.1.2.3.1.1.1 Attenuation Level

Parameter name:	Attenuation Level
Parameter ID:	attlevel (0x0001)
Description:	This parameter indicates the attenuation level associated with the loopback line test.
Type:	Enumeration
Optional:	Yes
Possible Values:	"0 dBm" (0x0001) "10 dBm" (0x0002) clause 5.1.7 of [ANSI T1.207]
Default:	"0 dBm"

6.1.2.4 Procedures

When the MGC wants the MG to connect loopback, the MGC sends a signal descriptor with the lltr (Loopback Line Test Response) signal. Upon reception of a command with the lltr signal, the MG applies a loopback, where any incoming information shall be treated according to clause 1.5 of [ITU-T O.11] or clause 5.2.1 of [ANSI T1.207], as appropriate.

Loopback can be stopped at any time by MGC sending an empty Signal Descriptor in a Modify command or by application of a new signal.

6.2 ITU-T line tests components

6.2.1 ITU-T 404 Hz line test package

Package name:	ITU-T 404 Hz Line Test package
Package ID:	itult404 (0x0055)
Description:	This package defines a generic line test component for an ITU-T 404 Hz Test Tone for ITU-T Line Test functionality.
Version:	1
Extends:	None

6.2.1.1 Properties

None.

6.2.1.2 Events

None.

6.2.1.3 Signals

6.2.1.3.1 Test tone 404 Hz –10 dBm0

Signal name:	Test tone 404 Hz –10 dBm0
Signal ID:	tt404hz_10 (0x0001)
Description:	Generate line test tone of 404 Hz at –10 dBm0 according to clause 9.1.1 of [ITU-T O.22].
Signal type:	On/Off
Duration:	N/A

6.2.1.3.1.1 Additional parameters

None

6.2.1.4 Statistics

None.

6.2.1.5 Procedures

The MGC shall send an AMM command with the above the signal to initiate a test tone component of the indicated frequency. Clauses 7.1 and 8.1 describe how the test tone components are used to complete a line test.

6.2.2 ITU-T 816 Hz line test package

Package name:	ITU-T 816 Hz Line Test package
Package ID:	itult816 (0x0056)
Description:	This package defines a generic line test component for an ITU-T 816 Hz test tone for ITU Line Test functionality.
Version:	1
Extends:	None

6.2.2.1 Properties

None.

6.2.2.2 Events

None.

6.2.2.3 Signals

6.2.2.3.1 Test tone 816 Hz –10 dBm0

Signal name:	Test tone 816 Hz –10 dBm0
Signal ID:	tt816hz_10 (0x0001)
Description:	Generate line test tone of 816 Hz at –10 dBm0 according to clause 3 of [ITU-T O.6].
Signal type:	On/Off
Duration:	N/A

6.2.2.3.1.1 Additional parameters

None.

6.2.2.4 Statistics

None.

6.2.2.5 Procedures

The MGC shall send an AMM command with the above the signal to initiate a test tone component of the indicated frequency. Clauses 7.1 and 8.1 describe how the test tone components are used to complete a line test.

6.2.3 ITU-T 1020 Hz line test package

Package name:	ITU-T 1020 Hz Line Test package
Package ID:	itult1020 (0x0057)
Description:	This package defines a generic line test component for an ITU-T 1020 Hz test tone for ITU-T Line Test functionality.
Version:	1
Extends:	None

6.2.3.1 Properties

None.

6.2.3.2 Events

None.

6.2.3.3 Signals

6.2.3.3.1 Test tone 1020 Hz

Signal name:	Test tone 1020 Hz
Signal ID:	tt1020hz (0x0001)
Description:	Generate line test tone of 1020 Hz at -10 dBm0 according to clause 3 of [ITU-T O.6].
Signal type:	On/Off
Duration:	N/A

6.2.3.3.1.1 Additional parameters

None

6.2.3.4 Statistics

None.

6.2.3.5 Procedures

The MGC shall send an AMM command with the above the signal to initiate a test tone component of the indicated frequency. Clauses 7.1 and 8.1 describe how the test tone components are used to complete a line test.

6.2.4 ITU-T 2100 Hz disable tone line test package

Package name:	ITU-T 2100 Hz Disable Tone Line Test package
Package ID:	itultdist (0x0058)
Description:	This package defines a generic line test component for an ITU-T 2100 Hz Disable Tone for ITU-T Line Test functionality.

Version: 1
Extends: None

6.2.4.1 Properties

None.

6.2.4.2 Events

None.

6.2.4.3 Signals

6.2.4.3.1 Test tone 2100 Hz disable tone

Signal name: Test tone 2100 Hz disable tone
Signal ID: tt2100hz_dis (0x0001)
Description: Generate line test tone of 2100 Hz at -12 dBm0 according to clause 9.4.1 b) of [ITU-T O.22].
Signal type: On/Off
Duration: N/A

6.2.4.3.1.1 Additional parameters

None.

6.2.4.4 Statistics

None.

6.2.4.5 Procedures

The MGC shall send an AMM command with the above the signal to initiate a test tone component of the indicated frequency. Clauses 7.1 and 8.1 describe how the test tone components are used to complete a line test.

6.2.5 ITU-T 2100 Hz disable echo canceller tone line test package

Package name: ITU-T 2100 Hz Disable Echo Canceller Tone Line Test package
Package ID: itultdisecd (0x0059)
Description: This package defines a generic line test component for an ITU-T 2100 Hz Disable Echo Canceller Tone for ITU-T Line Test functionality.
Version: 1
Extends: None

6.2.5.1 Properties

None.

6.2.5.2 Events

None.

6.2.5.3 Signals

6.2.5.3.1 Test tone 2100 Hz disable echo canceller tone

Signal name: Test tone 2100 Hz disable echo canceller tone

Signal ID:	tt2100hz_disecd (0x0001)
Description:	Generate line test tone of 2100 Hz at –12 dBm0 according to 9.4.1 c) of [ITU-T O.22].
Signal type:	On/Off
Duration:	N/A

6.2.5.3.1.1 Additional parameters

None.

6.2.5.4 Statistics

None.

6.2.5.5 Procedures

The MGC shall send an AMM command with the above the signal to initiate a test tone component of the indicated frequency. Clauses 7.1 and 8.1 describe how the test tone components are used to complete a line test.

6.2.6 ITU-T 2804 Hz tone line test package

Package name:	ITU-T 2804 Hz Tone Line Test package
Package ID:	itult2804 (0x005a)
Description:	This package defines a generic line test component for an ITU-T 2804 Hz Tone for ITU-T Line Test functionality.
Version:	1
Extends:	None

6.2.6.1 Properties

None.

6.2.6.2 Events

None.

6.2.6.3 Signals

6.2.6.3.1 Test tone 2804 Hz –10 dBm0

Signal name:	Test tone 2804 Hz –10 dBm0
Signal ID:	tt2804hz_10 (0x0001)
Description:	Generate line test tone of 2804 Hz at –10 dBm0 according to clauses 9.1.1 and 9.3 of [ITU-T O.22].
Signal type:	On/Off
Duration:	N/A

6.2.6.3.1.1 Additional parameters

None.

6.2.6.4 Statistics

None.

6.2.6.5 Procedures

The MGC shall send an AMM command with the above the signal to initiate a test tone component of the indicated frequency. Clauses 7.1 and 8.1 describe how the test tone components are used to complete a line test.

6.2.7 ITU-T noise test tone line test package

Package name:	ITU-T Noise Test Tone Line Test package
Package ID:	itulnttt (0x005b)
Description:	This package defines a generic line test component for an ITU-T Noise Test Tone for ITU-T Line Test functionality.
Version:	1
Extends:	None

6.2.7.1 Properties

None.

6.2.7.2 Events

None.

6.2.7.3 Signals

6.2.7.3.1 Noise test tone

Signal name:	Noise test tone
Signal ID:	ttnoise (0x0001)
Description:	Generate line test tone of noise at -12 dBm0 according to clause 9.4.1 e) of [ITU-T O.22].
Signal type:	On/Off
Duration:	N/A

6.2.7.3.1.1 Additional parameters

None.

6.2.7.4 Statistics

None.

6.2.7.5 Procedures

The MGC shall send an AMM command with the above the signal to initiate a test tone component of the indicated frequency. Clauses 7.1 and 8.1 describe how the test tone components are used to complete a line test.

6.2.8 ITU-T digital pseudo random test tone line test package

Package name:	ITU-T Digital Pseudo Random Test Tone Line Test package
Package ID:	itultdprt (0x005c)
Description:	This package defines a generic line test component for an ITU-T Digital Pseudo Random Test Tone for ITU-T Line Test functionality.
Version:	1
Extends:	None

6.2.8.1 Properties

None.

6.2.8.2 Events

None.

6.2.8.3 Signals

6.2.8.3.1 Test tone digital pseudo random

Signal name:	Test tone digital pseudo random
Signal ID:	ttrandom (0x0001)
Description:	Generate line test of a pseudo random digital signal according to clause 2 of [ITU-T O.152].
Signal type:	On/Off
Duration:	N/A

6.2.8.3.1.1 Additional parameters

None.

6.2.8.4 Statistics

None.

6.2.8.5 Procedures

The MGC shall send an AMM command with the above the signal to initiate a test tone component of the indicated frequency. Clauses 7.1 and 8.1 describe how the test tone components are used to complete a line test.

6.2.9 ITU-T ATME No. 2 test line response package

Package name:	ITU-T ATME No. 2 Test Line Response package
Package ID:	itultatme2 (0x005d)
Description:	This package defines a generic line test component for an ITU-T ATME No. 2 Test Line Response for ITU-T Line Test functionality.
Version:	1
Extends:	None

6.2.9.1 Properties

None.

6.2.9.2 Events

None.

6.2.9.3 Signals

6.2.9.3.1 ATME No. 2 test lines response

Signal name:	ATME No. 2 test lines response
Signal ID:	atme2res (0x0001)
Description:	Generate line test ATME No.2 response as defined in clause 1.7 of [ITU-T O.11].

Signal type: On/Off

Duration: N/A

6.2.9.3.1.1 Additional parameters

6.2.9.3.1.1.1 Response type

Parameter name: Response type

Parameter ID: resp (0x0001)

Description: This parameter indicates the response type.

Type: Enumeration

Optional: Yes

Possible values: "type_a" (0x0001) 1.7 a) of [ITU-T O.11].
"type_b" (0x0002) 1.7 b) of [ITU-T O.11].
NOTE – For ATME Type c, see clause 8.1.1.7.

Default: Provisioned

6.2.9.4 Statistics

None.

6.2.9.5 Procedures

The MGC shall send an AMM command with the above the signal to initiate a test tone component of the indicated frequency. Clauses 7.1 and 8.1 describe how the test tone components are used to complete a line test.

6.3 ANSI line test components

6.3.1 ANSI 1004 Hz test tone line test package

Package name: ANSI 1004 Hz Test Tone Line Test package

Package ID: ansilt1004 (0x005e)

Description: This package defines a generic line test component for an ANSI 1004 Hz Test Tone for ANSI Line Test functionality.

Version: 1

Extends: None

6.3.1.1 Properties

None.

6.3.1.2 Events

None.

6.3.1.3 Signals

6.3.1.3.1 Test tone 1004 Hz

Signal name: Test tone 1004 Hz

Signal ID: tt1004hz (0x0001)

Description: Generates a line test tone of 1004 Hz according as defined in clauses 5.1.1.2 and 5.1.3.1 of [ANSI T1.207]. Depending on the test

tone device a 1000, 1004 or 1013 Hz tone may be generated at 0, 2 or 3 dBm. The default is to provide a 1004 Hz 0 dBm tone.

Signal type: On/Off

Duration: N/A

6.3.1.3.1.1 Additional parameters

6.3.1.3.1.1.1 Level

Parameter name: Level

Parameter ID: level (0x0001)

Description: Indicates the level that the tone is generated at.

Type: Enumeration

Optional: Yes

Possible Values: "0dBm" (0x0001) clause 3.1.3.1 of [ANSI T1.207]
"2dBm" (0x0002) clause 3.1.3.1 of [ANSI T1.207]
"3dBm" (0x0003) clause 3.1.3.1 of [ANSI T1.207]
"-10dBm" (0x0004) clause 5.1.7 of [ANSI T1.207]

Default: "0dBm"

6.3.1.4 Statistics

None.

6.3.1.5 Procedures

The MGC shall send an AMM command with the above the signal to initiate a test tone component of the indicated frequency. Clauses 7.2 and 8.2 describe how the test tone components are used to complete a line test.

6.3.2 ANSI test responder line test package

Package name: ANSI Test Responder Line Test package

Package ID: ansilttres (0x005f)

Description: This package defines a generic line test component for an ANSI Test Responses for ANSI Line Test functionality.

Version: 1

Extends: None

6.3.2.1 Properties

None.

6.3.2.2 Events

None.

6.3.2.3 Signals

6.3.2.3.1 Test responders

Signal name: Test responders

SignalID: res (0x0001)

Description: Performs the 105-type responder role as defined in clause 5.1.5.1 of [ANSI T1.207].

Signal type: On/Off

Duration: N/A

6.3.2.3.1.1 Additional parameters

6.3.2.3.1.1.1 Responder type

Parameter name: Responder Type

ParameterID: rt (0x0001)

Description: This parameter indicates the responder type.

Type: Enumeration

Optional: No

Possible values:

"51B"	(0x0001)
"52"	(0x0002)
"56A"	(0x0003)
"RTTU"	(0x0004)
"RMS-D"	(0x0005)

Default: None

6.3.2.4 Statistics

None.

6.3.2.5 Procedures

The MGC shall send an AMM command with the above the signal to initiate a test tone component of the indicated frequency. Clauses 7.2 and 8.2 describe how the test tone components are used to complete a line test.

6.3.3 ANSI 2225 Hz test progress tone line test package

Package name: ANSI 2225 Hz Test Progress Tone Line Test package

Package ID: ansilt2225 (0x0060)

Description: This package defines a generic line test component for an ANSI 2225 Hz Test Progress Tone for ANSI Line Test functionality.

Version: 1

Extends: None

6.3.3.1 Properties

None.

6.3.3.2 Events

None.

6.3.3.3 Signals

6.3.3.3.1 Test progress tone 2225 Hz

Signal name: Test progress tone 2225 Hz

Signal ID: tt2225Hz (0x0001)

Description:	Generates a test progress tone of 2225 Hz at –10 dBm0 as defined in clause 5.1.5 of [ANSI T1.207].
Signal type:	On/Off
Duration:	N/A

6.3.3.3.1.1 Additional parameters

None.

6.3.3.4 Statistics

None.

6.3.3.5 Procedures

The MGC shall send an AMM command with the above the signal to initiate a test tone component of the indicated frequency. Clauses 7.2 and 8.2 describe how the test tone components are used to complete a line test.

6.3.4 ANSI digital test signal line test package

Package name:	ANSI Digital Test Signal Line Test package
Package ID:	ansiltdts (0x0061)
Description:	This package defines a generic line test component for an ANSI Digital Test Signal for ANSI Line Test functionality.
Version:	1
Extends:	None

6.3.4.1 Properties

None.

6.3.4.2 Events

None.

6.3.4.3 Signals

6.3.4.3.1 Digital test signal

Signal name:	Digital test signal
Signal ID:	digtestsig (0x0001)
Description:	Generates digital test signals as defined in clause 5.2.1 of [ANSI T1.207].
Signal type:	On/Off
Duration:	N/A

6.3.4.3.1.1 Additional parameters

None.

6.3.4.4 Statistics

None.

6.3.4.5 Procedures

The MGC shall send an AMM command with the above the signal to initiate a test tone component of the indicated frequency. Clauses 7.2 and 8.2 describe how the test tone components are used to complete a line test.

6.3.5 ANSI inverting loopback line test response

Package name:	ANSI Inverting Loopback Line Test Response
Package ID:	ansiinvlltr (0x0062)
Description:	This package defines a generic line test component for Inverting Loopback Line Test functionality.
Version:	1
Extends:	None

6.3.5.1 Properties

None.

6.3.5.2 Events

None.

6.3.5.3 Signals

6.3.5.3.1 Inverting loopback test response

Signal name:	Inverting loopback test response
Signal ID:	invloopback (0x0001)
Description:	Generates an Inverting Loopback Test Response according to clause 5.2.2 of [ANSI T1.207].
Signal type:	On/Off
Duration:	N/A

6.3.5.3.1.1 Additional parameters

None.

6.3.5.4 Procedures

When the MGC wants the MG to connect an inverting loopback as defined in clause 5.2.2 of [ANSI T1.207] the MGC sends a signal descriptor with the "ansiinvlltr/invloopback" (Inverting Loopback Line Test Response) signal. Upon reception of a command with the "ansiinvlltr/invloopback" signal, the MG applies an inverting loopback where any incoming information shall be treated according to clause 5.2.2 of [ANSI T1.207].

Inverting loopback can be stopped at any time by MGC sending an empty Signal Descriptor in a Modify command, or by application of a new signal.

6.4 TTC line test components

The TTC Line Tests use test components from the package, "Basic Call Progress Tones Generator with Directionality" described in clause A.8 of [ITU-T Q.1950], and generic test components defined in this Recommendation (see clause 8.3).

7 Line test procedures at the testing switching centre

This clause details test procedures that may be initiated by the testing switching centre. The MGC may determine the relevant line test to perform according to operator command.

The MGC is responsible for implementing the delays between the receipt of off hook and the generation of signals. The MGC is also responsible for implementing periodic interruptions to line tests.

7.1 ITU-T

7.1.1 Test line types according to Recommendation ITU-T O.11

[ITU-T O.11] describes test responder behaviour. For a description of this behaviour, see clause 8.

7.1.2 Automatic testing measuring equipment according to Recommendation ITU-T O.22

7.1.2.1 Absolute power level measurements clause 3.1 of [ITU-T O.22]

To provide the procedures of clause 3.1.1 of [ITU-T O.22] over an MCG/MG interface, the MGC at the access point at the input to the path to be measured shall request the MG via the signals, "itult404/tt404hz_10", "itult1020/tt1020hz", "itult2804/tt2804hz_10" to initiate tones of the indicated frequencies.

7.1.2.2 Noise measurements clause 3.2 of [ITU-T O.22]

To provide the procedures of clause 3.2.1 of [ITU-T O.22] over an MCG/MG interface, the MGC at the access point at the input to the path to be measured shall:

- request the MG via signal "qtl/quietterm" to initiate a quiet termination or;
- request the MG via signal "itult2804/tt2804hz_10" to initiate a tone.

7.1.2.3 Signal-to-total-distortion ratio measurements clause 3.3 of [ITU-T O.22]

To provide the procedures of clause 3.3.1 of [ITU-T O.22] over an MCG/MG interface, the MGC at the access point at the input to the path to be measured shall request the MG via the signal "itult1020/tt1020hz", to initiate tones for Signal-total-distortion ratio measurement.

7.1.2.4 Echo canceller testing system clause 3.4 of [ITU-T O.22]

These tests may be achieved through normal call establishment procedures between the MGC and MG. The use of echo cancellation equipment may be specified as per clause E.13.1 of [ITU-T H.248.1]. The clauses below specify the behaviour of individual tests.

7.1.2.4.1 Absolute power level measurements clause 3.4.1 of [ITU-T O.22]

To provide the procedures of clause 3.4.1 of [ITU-T O.22] over an MCG/MG interface, the MGC at the access point at the input to the path to be measured shall request the MG via the signals, "itult1020/tt1020hz", "itultdis/tt2100hz_dis", "itultdisecd/tt2100hz_disecd", "itult2804/tt2804hz_10", "itultntt/noise" to initiate tones of the indicated frequencies.

7.1.2.4.2 Noise measurements clause 3.4.2 of [ITU-T O.22]

As per clause 7.1.2.2.

7.1.2.4.3 Echo performance ratio measurements clause 3.4.3 of [ITU-T O.22]

To provide the procedures of clause 3.4.3 of [ITU-T O.22] over an MCG/MG interface, the MGC at the access point at the input to the path to be measured shall request the MG, via the signals "itultntt/ttnoise", to initiate noise test signal.

7.1.2.5 Digital test pattern tests to a digital loopback test line clause 3.5.1 of [ITU-T O.22]

To provide the procedures of clause 3.5.1 of [ITU-T O.22] over an MGC/MG interface, the MGC at the access point at the input to the path to be measured shall request the MG, via the signals "itultdprt/ttrandom", to initiate pseudo-random digital test signal. At the access point where the loopback is to be initiated, the procedures of clause 8.1.1.5 apply.

7.1.2.6 Transmission tests to a digital loopback test line clause 3.5.2 of [ITU-T O.22]

To provide the procedures of clause 3.5.2 of [ITU-T O.22] over an MGC/MG interface, the MGC at the access point at the input to the path to be measured shall request the MG, via the signals "itult404/tt404hz_10", "itult1020/tt1020hz", "itultdis/tt2100hz_dis", "itultdisecd/tt2100hz_disecd" or "itult2804/tt2804hz_10", to initiate tones of the indicated frequency. At the access point where the loopback is to be initiated, the procedures of clause 8.1.1.5 apply.

7.2 ANSI

7.2.1 100-type test lines – Quiet termination clause 5.1.1.1 of [ANSI T1.207]

This line test procedure is used in a responding role, see clause 8.2.1.

7.2.2 100-type test lines – 1000 Hz (milliwatt) Test tone clause 5.1.1.2 of [ANSI T1.207]

This line test procedure is used in a responding role, see clause 8.2.2.

7.2.3 101-type test line – Communications clause 5.1.2 of [ANSI T1.207]

These tests may be achieved through normal call establishment procedures between the MGC and MG. No line test components are used.

7.2.4 102-type test line – Milliwatt clause 5.1.3 of [ANSI T1.207]

This line test procedure is used in a responding role, see clause 8.2.4.

7.2.5 104-type test line clause 5.1.4 of [ANSI T1.207]

Not applicable to the MGC/MG interface as test pads are contained in a remote office.

7.2.6 105-type test line – Automatic transmission measuring clause 5.1.5 of [ANSI T1.207]

This line test procedure is used in a responding role, see clause 8.2.6.

7.2.7 107-type line test – Data transmission test line clause 5.1.6 of [ANSI T1.207]

These tests may be achieved through normal call establishment procedures between the MGC and MG. No line test components are used.

7.2.8 109-test line – Echo canceller testing clause 5.17 of [ANSI T1.207]

This line test procedure is used in a responding role, see clause 8.2.8.

7.2.9 108-type test line – Digital non inverting loop-back clause 5.2.1 of [ANSI T1.207]

To provide the procedures of clause 5.2.1 of [ANSI T1.207] over an MGC/MG interface at a testing switching centre, the MGC shall request the MG via the signal ansi/digtestsig in an AMM command, to initiate the digital test signals.

7.2.10 606-type test line – Digital inverting loop-back clause 5.2.2 of [ANSI T1.207]

No line test procedures are used as digital tests are performed by test set.

7.2.11 Operational line tests clause 5.3 of [ANSI T1.207]

These tests may be achieved through normal call establishment procedures between the MGC and MG. No line test components are used.

7.3 TTC line tests

See clause 8.3 for testee procedures.

8 Line test procedures at the testee switching centre

The MGC may determine the relevant line test to perform according to the forward addressing information provided by the appropriate signalling system.

The MGC is responsible for implementing the delays between the receipt of off hook and the generation of signals. The MGC is also responsible for implementing periodic interruptions to line tests.

8.1 ITU-T

8.1.1 Test line types according to Recommendation ITU-T O.11

8.1.1.1 Quiet termination test line clause 1.2/O.11]

To provide the procedures of clause 1.2 of [ITU-T O.11] over an MGC/MG interface, the MGC shall request the MG, via the signal "itult1020/tt1020hz" in an AMM command, to initiate a 1020 Hz tone. After 13-15 seconds, the MGC shall then request the MG, via the signal "qtl/quietterm", to initiate a quiet termination. When the calling party disconnects, the MGC shall remove any the "qtl/quietterm" signal.

8.1.1.2 Test and/or communications access line clause 1.3 of [ITU-T O.11]

These tests may be achieved through normal call establishment procedures between the MGC and MG. No line test components are used.

8.1.1.3 Echo suppressor test line clause 1.4 of [ITU-T O.11]

FFS.

8.1.1.4 Analogue loopback test line clause 1.5.1 of [ITU-T O.11]

To provide the procedures of clause 1.5.1 of [ITU-T O.11] over an MGC/MG interface, the MGC shall request the MG, via the signal "itult1020/tt1020hz" in an AMM command, to initiate a 1020 Hz tone. After 13-15 seconds, the MGC shall then request the MG, via the signal "qtl/quietterm" in a MM command, to initiate a quiet termination. After another 13-15 seconds, the MGC shall request the MG, via the signal "lltr/loopback", to loopback the local and remote ("GO" and "RETURN") sides of the termination. When the calling party releases, the MGC shall remove the loopback.

8.1.1.5 Digital loopback test line clause 1.5.2 of [ITU-T O.11]

To provide the procedures of clause 1.5.2 of [ITU-T O.11] over an MGC/MG interface, the MGC shall request the MG, via the signal "lltr/loopback", to loopback the local and remote ("GO" and "RETURN") sides of the termination.

8.1.1.6 Echo canceller test line clause 1.6 of [ITU-T O.11]

These tests may be achieved through normal call establishment procedures between the MGC and MG. The use of Echo Cancellation equipment may be specified as per clause E.13.1 of [ITU-T H.248.1]. No line test components are used.

8.1.1.7 ATME No. 2 test lines clause 1.7 of [ITU-T O.11]

To provide the procedures of clause 1.7 of [ITU-T O.11] over an MGC/MG interface, the MGC shall request the MG, via the signal "itultatme2/atme2res" with the appropriate response type, to initiate an ATME No. 2 response.

8.1.1.8 Busy flash signal test line clause 1.8 of [ITU-T O.11]

To provide the procedures of clause 1.8 of [ITU-T O.11] over an MGC/MG interface, the MGC shall request the MG, via the signal "Busy Tone" (clause E.7.3 of [ITU-T H.248.1]), to initiate a Busy Flash Test Line response.

8.1.2 Automatic testing measuring equipment according to Recommendation ITU-T O.22

For responses to ATME No. 2 line tests, see clauses 8.1.1.7 and 8.1.1.8.

8.2 ANSI

8.2.1 100-type test lines – Quiet termination clause 5.1.1.1 of [ANSI T1.207]

To provide the procedures of clause 5.1.1.3 of [ANSI T1.207] over an MGC/MG interface, the MGC shall request the MG, via the signal "qtlt/quietterm", to initiate a quiet termination. When the calling party disconnects, the MGC shall remove any the "qtlt/quietterm" signal.

8.2.2 100-type test lines – 1000 Hz (milliwatt) test tone clause 5.1.1.2 of [ANSI T1.207]

To provide the procedures of clause 5.1.1.3 of [ANSI T1.207] over an MGC/MG interface, the MGC shall request the MG, via the signal "ansilt1004/tt1004hz" in an AMM command, to initiate a 1004 Hz tone. After 5.5 seconds, the MGC shall then request the MG, via the signal "qtlt/quietterm", to initiate a quiet termination. When the calling party disconnects, the MGC shall remove any the "qtlt/quietterm" signal.

8.2.3 101-type test line – Communications clause 5.1.2 of [ANSI T1.207]

These tests may be achieved through normal call establishment procedures between the MGC and MG. No line test components are used.

8.2.4 102-type test line – Milliwatt clause 5.1.3 of [ANSI T1.207]

To provide the procedures of clause 5.1.3.2 of [ANSI T1.207] over an MGC/MG interface, the MGC shall request the MG, via the signal "ansilt1004/tt1004hz" in an AMM command, to initiate a 1004 Hz tone. After the reception of the acknowledgement of the generation of the signal, the MGC shall supervise any intervals or interruptions of the test by removing the "ansilt1004/tt1004hz" and reapplying it after the necessary delay.

8.2.5 104-type test line clause 5.1.4 of [ANSI T1.207]

Not applicable to the MGC/MG interface as test pads are contained in a remote office.

8.2.6 105-type test line – Automatic transmission measuring clause 5.1.5 of [ANSI T1.207]

To provide the procedures of clause 5.1.5 of [ANSI T1.207] over an MGC/MG interface at a far-end office, the MGC shall request the MG, via the signal "ansilt2225/tt2225Hz" in an AMM command, to initiate the test progress tone. When the responder becomes available, the MGC shall request the MG, via the signal "ansilttres/res", to insert the indicated test responder.

8.2.7 107-type test line – Data transmission test line clause 5.1.6 of [ANSI T1.207]

These tests may be achieved through normal call establishment procedures between the MGC and MG. No line test components are used.

8.2.8 109-test line – Echo canceller testing clause 5.1.7 of [ANSI T1.207]

To provide the procedures of clause 5.1.7 of [ANSI T1.207] over an MGC/MG interface, the MGC shall request the MG, via the signal "ansilt1004/tt1004hz" (at –10 dBm) in an AMM command, to initiate a 1004 Hz tone. After approximately 8 seconds, the MGC shall then request the MG, via the signal "qtlt/quietterm", to initiate a quiet termination. After approximately 16 seconds, the MGC shall then request the MG, via the signal "qtlt/loopback" (no attenuation), to initiate a loop of the

trunk. After approximately 16 seconds, the MGC shall then request the MG, via the signal "qtltr/loopback" (10 dB attenuation), to initiate a loop of the trunk with attenuation. This procedure is repeated until disconnect.

8.2.9 108-type test line – Digital non inverting loop-back clause 5.2.1 of [ANSI T1.207]

To provide the procedures of clause 5.2.1 of [ANSI T1.207] over an MGC/MG interface at a far-end office, the MGC shall request the MG, via the signal "lltr/loopback" in an AMM command, to initiate the loopback of the incoming and outgoing direction.

8.2.10 606-type test line – Digital inverting loop-back clause 5.2.2 of [ANSI T1.207]

To provide the procedures of clause 5.2.2 of [ANSI T1.207] over an MGC/MG interface at a far-end office, the MGC shall request the MG, via the signal "ansiinvlltr/invloopback" (indicating inverting loopback) in an AMM command, to initiate inverting loopback of the incoming and outgoing direction.

8.2.11 Operational line tests clause 5.3 of [ANSI T1.207]

These tests may be achieved through normal call establishment procedures between the MGC and MG. No line test components are used.

8.3 TTC line tests

8.3.1 TTC Standard JJ-90-10 Ver7.1, *Inter-Carrier Interface based on ISUP* (Appendix A)

The testee MGC can determine the test type to apply by examining the transmission medium requirement as described in clause A.2.2 of [TTC Standard JJ-90-10].

8.3.1.1 Loop trunk test line

To perform the line test described in clause A.4.2 of [TTC Standard JJ-90-10] over an MGC/MG interface, the MGC shall request the signal "lltr/loopback" to loopback the local and remote ("GO" and "RETURN") sides of the termination.

8.3.1.2 Auto Answering Trunk (AAT)

Auto Answering Trunk with forced disconnection

To perform the line test described in clause A.4.1 of [TTC Standard JJ-90-10] over an MGC/MG interface, the MGC shall request the MG, via the signal "bgc/brt" (clause A.8 of [ITU-T Q.1950], "Basic Call Progress Tones Generator with Directionality") in an AMM command, to initiate a ringing tone. After 6 seconds the MGC shall then request the MG, via the signal "bcg/bdt" (clause A.8 of [ITU-T Q.1950]), to initiate a dial tone. After reception of Modify acknowledgement, the MGC having timed the Dial Tone for a period of 10 seconds will request MG to stop Dial Tone by sending a MOD command.

Auto Answering Trunk without forced disconnection

To perform the line test described in clause A.4.1 of [TTC Standard JJ-90-10] over an MGC/MG interface, the MGC shall request the MG, via the signal "bgc/brt" (clause A.8 of [ITU-T Q.1950], "Basic Call Progress Tones Generator with Directionality") in an AMM command, to initiate a ringing tone. After reception of Modify acknowledgement, the MGC having timed the ringing tone for a period of 6 seconds shall then request the MG via the signal "bcg/bdt" (clause A.8 of [ITU-T Q.1950]) to initiate a dial tone.

SERIES OF ITU-T RECOMMENDATIONS

Series A	Organization of the work of ITU-T
Series D	General tariff principles
Series E	Overall network operation, telephone service, service operation and human factors
Series F	Non-telephone telecommunication services
Series G	Transmission systems and media, digital systems and networks
Series H	Audiovisual and multimedia systems
Series I	Integrated services digital network
Series J	Cable networks and transmission of television, sound programme and other multimedia signals
Series K	Protection against interference
Series L	Construction, installation and protection of cables and other elements of outside plant
Series M	Telecommunication management, including TMN and network maintenance
Series N	Maintenance: international sound programme and television transmission circuits
Series O	Specifications of measuring equipment
Series P	Terminals and subjective and objective assessment methods
Series Q	Switching and signalling
Series R	Telegraph transmission
Series S	Telegraph services terminal equipment
Series T	Terminals for telematic services
Series U	Telegraph switching
Series V	Data communication over the telephone network
Series X	Data networks, open system communications and security
Series Y	Global information infrastructure, Internet protocol aspects and next-generation networks
Series Z	Languages and general software aspects for telecommunication systems