ITU-T

H.248.22

TELECOMMUNICATION STANDARDIZATION SECTOR OF ITU (03/2013)

SERIES H: AUDIOVISUAL AND MULTIMEDIA SYSTEMS Infrastructure of audiovisual services – Communication procedures

Gateway control protocol: Shared Risk Group package

Recommendation ITU-T H.248.22



ITU-T H-SERIES RECOMMENDATIONS

AUDIOVISUAL AND MULTIMEDIA SYSTEMS

CHARACTERISTICS OF VISUAL TELEPHONE SYSTEMS	H.100-H.199
INFRASTRUCTURE OF AUDIOVISUAL SERVICES	
General	H.200-H.219
Transmission multiplexing and synchronization	H.220-H.229
Systems aspects	H.230-H.239
Communication procedures	H.240-H.259
Coding of moving video	H.260-H.279
Related systems aspects	H.280-H.299
Systems and terminal equipment for audiovisual services	H.300-H.349
Directory services architecture for audiovisual and multimedia services	H.350-H.359
Quality of service architecture for audiovisual and multimedia services	H.360-H.369
Supplementary services for multimedia	H.450-H.499
MOBILITY AND COLLABORATION PROCEDURES	
Overview of Mobility and Collaboration, definitions, protocols and procedures	H.500-H.509
Mobility for H-Series multimedia systems and services	H.510-H.519
Mobile multimedia collaboration applications and services	H.520-H.529
Security for mobile multimedia systems and services	H.530-H.539
Security for mobile multimedia collaboration applications and services	H.540-H.549
Mobility interworking procedures	H.550-H.559
Mobile multimedia collaboration inter-working procedures	H.560-H.569
BROADBAND, TRIPLE-PLAY AND ADVANCED MULTIMEDIA SERVICES	
Broadband multimedia services over VDSL	H.610–H.619
Advanced multimedia services and applications	H.620-H.629
Ubiquitous sensor network applications and Internet of Things	H.640-H.649
IPTV MULTIMEDIA SERVICES AND APPLICATIONS FOR IPTV	
General aspects	H.700-H.719
IPTV terminal devices	H.720-H.729
IPTV middleware	H.730-H.739
IPTV application event handling	H.740-H.749
IPTV metadata	H.750-H.759
IPTV multimedia application frameworks	H.760-H.769
IPTV service discovery up to consumption	H.770–H.779
Digital Signage	H.780-H.789

 $For {\it further details, please refer to the list of ITU-T Recommendations.}$

Recommendation ITU-T H.248.22

Gateway control protocol: Shared Risk Group package

Summary

Recommendation ITU-T H.248.22 describes a package to enable the media gateway controller (MGC) to indicate to the media gateway (MG) to use or not to use network resources associated with a shared risk group when setting up connections. When network connections are associated with ephemeral terminations in the MG, certain resources are used. A failure in the MG may result in the loss of certain groups of resources, whilst other groups of resources remain unaffected. The resources that share a risk of failure are called a shared risk group. A shared risk group is simply a grouping of the network resources (e.g., IP interfaces) sharing the same risk of failure. Each shared risk group could, for example, contain a number of IP interfaces located on the same piece of hardware. If a resource failure occurs, only terminations in the shared risk group corresponding to the failed resource are affected while other terminations are not.

This revision incorporates corrections to several values in the procedure associated with the usage of the "Include shared risk group" property.

History

Edition	Recommendation	Approval	Study Group
1.0	ITU-T H.248.22	2003-07-14	16
2.0	ITU-T H.248.22	2013-03-16	16

FOREWORD

The International Telecommunication Union (ITU) is the United Nations specialized agency in the field of telecommunications, information and communication technologies (ICTs). The ITU Telecommunication Standardization Sector (ITU-T) is a permanent organ of ITU. ITU-T is responsible for studying technical, operating and tariff questions and issuing Recommendations on them with a view to standardizing telecommunications on a worldwide basis.

The World Telecommunication Standardization Assembly (WTSA), which meets every four years, establishes the topics for study by the ITU-T study groups which, in turn, produce Recommendations on these topics.

The approval of ITU-T Recommendations is covered by the procedure laid down in WTSA Resolution 1.

In some areas of information technology which fall within ITU-T's purview, the necessary standards are prepared on a collaborative basis with ISO and IEC.

NOTE

In this Recommendation, the expression "Administration" is used for conciseness to indicate both a telecommunication administration and a recognized operating agency.

Compliance with this Recommendation is voluntary. However, the Recommendation may contain certain mandatory provisions (to ensure, e.g., interoperability or applicability) and compliance with the Recommendation is achieved when all of these mandatory provisions are met. The words "shall" or some other obligatory language such as "must" and the negative equivalents are used to express requirements. The use of such words does not suggest that compliance with the Recommendation is required of any party.

INTELLECTUAL PROPERTY RIGHTS

ITU draws attention to the possibility that the practice or implementation of this Recommendation may involve the use of a claimed Intellectual Property Right. ITU takes no position concerning the evidence, validity or applicability of claimed Intellectual Property Rights, whether asserted by ITU members or others outside of the Recommendation development process.

As of the date of approval of this Recommendation, ITU had not received notice of intellectual property, protected by patents, which may be required to implement this Recommendation. However, implementers are cautioned that this may not represent the latest information and are therefore strongly urged to consult the TSB patent database at http://www.itu.int/ITU-T/ipr/.

© ITU 2013

All rights reserved. No part of this publication may be reproduced, by any means whatsoever, without the prior written permission of ITU.

Table of Contents

			Page
1	Scope	e	1
2	Refer	rences	3
3	Defin	uitions	3
4	Abbre	eviations and acronyms	3
5	Share	ed risk group package	3
	5.1	Properties	3
	5.2	Events	4
	5.3	Signals	4
	5.4	Statistics	4
	5.5	Procedures	4

Recommendation ITU-T H.248.22

Gateway control protocol: Shared Risk Group package

1 Scope

When network connections are associated with ephemeral terminations in the MG, certain resources are used. A failure in the MG may result in the loss of certain groups of resources, whilst other groups of resources remain unaffected. The resources that share a risk of failure are called a shared risk group. A shared risk group is simply a grouping of the network resources (e.g., IP interfaces) sharing the same risk of failure. Each shared risk group could, for example, contain a number of IP interfaces located on the same piece of hardware. If a resource failure occurs, only terminations in the shared risk group corresponding to the failed resource are affected while other terminations are not.

The MGC may select different shared risk groups when the redundancy of network resources has to be controlled, or when the MGC wishes to specify which group of resources are to be used. With this functionality the MGC is given control of the resources used by ephemeral terminations in the MG. The MGC may order the MG to use resources from a selected Shared Risk Group, or not to use resources from a Shared Risk Group. This gives an advantage over using Termination ID schemes to link resource groups in that the MGC can specify certain resources to avoid in a CHOOSE (\$) Termination ID scenario.

The capability to order the MG to use diverse resources for different connections is particularly useful when a pair of connections is used for a primary and secondary link e.g., for signalling transport.

Figure 1 shows an example of a scenario where two shared risk groups have been defined and are used by ephemeral terminations. Context 3 represents a Primary Link and Context 5 is its secondary link.

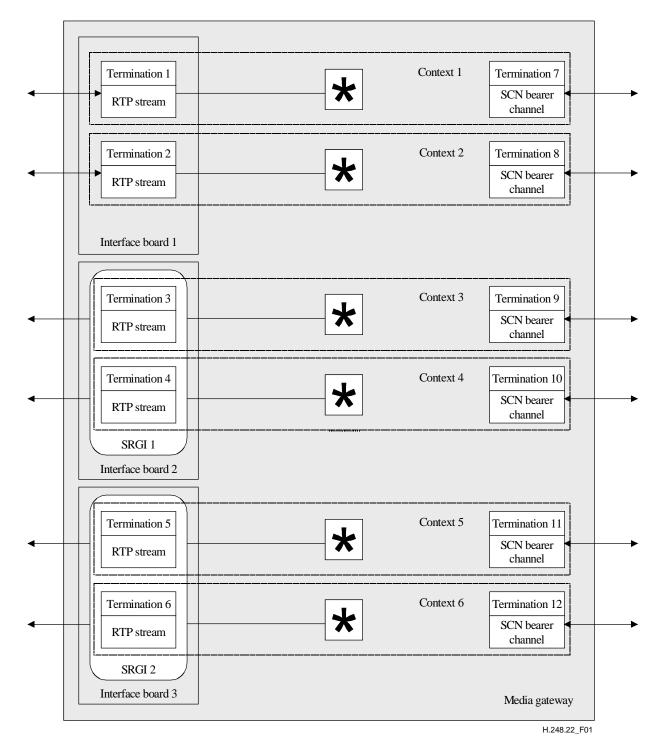


Figure 1 – Example of shared risk group usage

The Shared Risk Group Package may be used whenever the behaviour described in the procedures section of the package is required.

2 References

The following ITU-T Recommendations and other references contain provisions which, through reference in this text, constitute provisions of this Recommendation. At the time of publication, the editions indicated were valid. All Recommendations and other references are subject to revision; users of this Recommendation are therefore encouraged to investigate the possibility of applying the most recent edition of the Recommendations and other references listed below. A list of the currently valid ITU-T Recommendations is regularly published. The reference to a document within this Recommendation does not give it, as a stand-alone document, the status of a Recommendation.

[ITU-T H.248.1] Recommendation ITU-T H.248.1 (2013), *Gateway control protocol: Version 3*.

3 Definitions

This Recommendation defines the following term:

3.1 shared risk group: A Shared Risk Group consists of resources or groups of resources that share the same risk of failure. It is the relationship between resources in a MG that defines a shared risk group.

4 Abbreviations and acronyms

This Recommendation uses the following abbreviations and acronyms:

DSP Digital Signal Processor

MG Media Gateway

MGC Media Gateway Controller

RTP Real Time Protocol

SCN Switched Circuit Network

SRGI Shared Risk Group Identity

5 Shared risk group package

Package name: Shared Risk Group Package

No

Package ID: shrisk (0x006b)

Description: This package defines properties and procedures that are used to

distinguish between different shared risk groups in the MG.

Version:

Designed to be

extended only:

Extends: None

5.1 Properties

5.1.1 Include shared risk group

Property name: Include shared risk group

Property ID: incl (0x0001)

Description: The value of this property indicates if the shared risk group specified

is requested to be used or to not be used (see clause 5.5.1.1 for

further details).

Type: Sublist of type Boolean

Possible values: "on" (TRUE) Use resources from the specified SRGI only [Default]

"off" (FALSE) Use resources from any but the specified SRGI

Defined in: Termination State Descriptor

Characteristics: Write Only

5.1.2 Shared risk group identity request

Property name: Shared risk group identity request

Property ID: srgir (0x0002)

Description: The value of this property specifies the shared risk group identity

Type: Sublist of type Integer

Possible Values: The values specify the SRGI according to a scheme understood by

both MGC and MG (see clause 5.5.1.3 for further details).

Defined in: Termination State Descriptor

Characteristics: Write Only

5.1.3 Assigned shared risk group identity

Property name: Assigned shared risk group identity

Property ID: asrgi (0x0003)

Description: The value of this property specifies the Shared risk group identity

that has been allocated by the MG. This value cannot be directly

modified by the MGC.

Type: Integer

Possible Values: The values specify the SRGI according to a scheme understood by

both MGC and MG (see clause 5.5.1.2 for further details).

Defined in: Termination State Descriptor

Characteristics: ReadOnly

5.2 Events

N/A

5.3 Signals

N/A

5.4 Statistics

N/A

5.5 Procedures

5.5.1 Establishment/modification of terminations when using shared risk group

When an MGC determines that an ephemeral termination must use resources belonging to (or different to) a specific shared risk group, an Add/Modify/Move command will be sent to the MG specifying the "Include shared risk group" property and the "Shared risk group identity Request" property.

5.5.1.1 Usage of the "Include shared risk group" property

The "Include shared risk group" property shall be used to indicate to the MG if resources from the specified shared risk group identity (shrisk/srgir) must be used for the termination (shrisk/incl = on) or if resources from the specified risk group identity must not be used for the termination (shrisk/incl = off). If the MGC is not concerned with which shared risk groups are used then it should not include the shrisk/incl nor shrisk/srgir properties. The shrisk/incl and shrisk/srgir properties are valid only for the command that they are contained in. They cannot be read/audited after the execution of the command. Wildcarding values with CHOOSE (\$) or ALL (*) shall not be used with shrisk/incl and/or shrisk/srgir. For example: in the case of a semi-permanent connection and a protective secondary link, by specifying (shrisk/incl = on, shrisk/srgir = 1) for the primary link and (shrisk/incl = off, shrisk/srgir = 1) for the secondary, the MGC is assured that the primary and secondary links are not sharing the same groups of resources.

The MGC may provide a sublist of *shrisk/incl* and *shrisk/srgir* to the MG to enable the MGC to request that certain shared risk groups shall be used and other shared risk groups shall not be used. The first value of *shrisk/incl* in the sublist corresponds to the first value of *shrisk/srgir* sublist.

5.5.1.2 Usage of the "Assigned shared risk group identity" property

The "Assigned Shared Risk Group Identity (*shrisk/asrgi*)" contains the accumulated shared risk identities of the resources used by the termination. This value cannot be directly written by the MGC. However, it can indirectly be influenced by adding, modifying or subtracting resources from the termination. The MGC can audit this property to determine the shared risk groups used by a termination.

5.5.1.3 Usage of the "Shared risk group identity" property

How the "Shared risk group identity" is associated with MG resources is out of the scope of this Recommendation. The different resources used by a termination may have different "Shared Risk Group Identity" ranges. However, it is assumed that this will be operator configurable and provisioned on both the MGC and MG so that they have a mutual understanding of the Specified Risk Group identity schema. For example, a binary structure of the property can be used. That is, the *shrisk/srgi* decimal integer is treated as a four byte binary number within the MG and MGC. This way different bytes or groups of bits may be used to address different types of resources in the MG. For example: the first two bytes could be used to identify DSP resources while the last two bytes could identify interface boards on the MG. When sent over the GCP link, the binary number is, however, expressed as a decimal number integer.

SERIES OF ITU-T RECOMMENDATIONS

Series A	Organization of the work of ITU-T
Series D	General tariff principles
Series E	Overall network operation, telephone service, service operation and human factors
Series F	Non-telephone telecommunication services
Series G	Transmission systems and media, digital systems and networks
Series H	Audiovisual and multimedia systems
Series I	Integrated services digital network
Series J	Cable networks and transmission of television, sound programme and other multimedia signals
Series K	Protection against interference
Series L	Construction, installation and protection of cables and other elements of outside plant
Series M	Telecommunication management, including TMN and network maintenance
Series N	Maintenance: international sound programme and television transmission circuits
Series O	Specifications of measuring equipment
Series P	Terminals and subjective and objective assessment methods
Series Q	Switching and signalling
Series R	Telegraph transmission
Series S	Telegraph services terminal equipment
Series T	Terminals for telematic services
Series U	Telegraph switching
Series V	Data communication over the telephone network
Series X	Data networks, open system communications and security
Series Y	Global information infrastructure, Internet protocol aspects and next-generation networks
Series Z	Languages and general software aspects for telecommunication systems