



INTERNATIONAL TELECOMMUNICATION UNION

ITU-T

TELECOMMUNICATION
STANDARDIZATION SECTOR
OF ITU

I.525

(08/96)

SERIES I: INTEGRATED SERVICES DIGITAL
NETWORK

Internetwork interfaces

**Interworking between networks operating at bit
rates less than 64 kbit/s with 64 kbit/s-based
ISDN and B-ISDN**

ITU-T Recommendation I.525

(Previously CCITT Recommendation)

ITU-T I-SERIES RECOMMENDATIONS
INTEGRATED SERVICES DIGITAL NETWORK

GENERAL STRUCTURE	I.100–I.199
Terminology	I.110–I.119
Description of ISDNs	I.120–I.129
General modelling methods	I.130–I.139
Telecommunication network and service attributes	I.140–I.149
General description of asynchronous transfer mode	I.150–I.199
SERVICE CAPABILITIES	I.200–I.299
Scope	I.200–I.209
General aspects of services in ISDN	I.210–I.219
Common aspects of services in the ISDN	I.220–I.229
Bearer services supported by an ISDN	I.230–I.239
Teleservices supported by an ISDN	I.240–I.249
Supplementary services in ISDN	I.250–I.299
OVERALL NETWORK ASPECTS AND FUNCTIONS	I.300–I.399
Network functional principles	I.310–I.319
Reference models	I.320–I.329
Numbering, addressing and routing	I.330–I.339
Connection types	I.340–I.349
Performance objectives	I.350–I.359
Protocol layer requirements	I.360–I.369
General network requirements and functions	I.370–I.399
ISDN USER-NETWORK INTERFACES	I.400–I.499
Application of I-series Recommendations to ISDN user-network interfaces	I.420–I.429
Layer 1 Recommendations	I.430–I.439
Layer 2 Recommendations	I.440–I.449
Layer 3 Recommendations	I.450–I.459
Multiplexing, rate adaption and support of existing interfaces	I.460–I.469
Aspects of ISDN affecting terminal requirements	I.470–I.499
INTERNETWORK INTERFACES	I.500–I.599
MAINTENANCE PRINCIPLES	I.600–I.699
B-ISDN EQUIPMENT ASPECTS	I.700–I.799
ATM equipment	I.730–I.749
Management of ATM equipment	I.750–I.799

For further details, please refer to ITU-T List of Recommendations.

ITU-T RECOMMENDATION I.525

INTERWORKING BETWEEN NETWORKS OPERATING AT BIT RATES LESS THAN 64 kbit/s WITH 64 kbit/s-BASED ISDN AND B-ISDN

Source

ITU-T Recommendation I.525 was revised by ITU-T Study Group 13 (1993-1996) and was approved under the WTSC Resolution No. 1 procedure on the 27th of August 1996.

FOREWORD

ITU (International Telecommunication Union) is the United Nations Specialized Agency in the field of telecommunications. The ITU Telecommunication Standardization Sector (ITU-T) is a permanent organ of the ITU. The ITU-T is responsible for studying technical, operating and tariff questions and issuing Recommendations on them with a view to standardizing telecommunications on a worldwide basis.

The World Telecommunication Standardization Conference (WTSC), which meets every four years, establishes the topics for study by the ITU-T Study Groups which, in their turn, produce Recommendations on these topics.

The approval of Recommendations by the Members of the ITU-T is covered by the procedure laid down in WTSC Resolution No. 1.

In some areas of information technology which fall within ITU-T's purview, the necessary standards are prepared on a collaborative basis with ISO and IEC.

NOTE

In this Recommendation, the expression "Administration" is used for conciseness to indicate both a telecommunication administration and a recognized operating agency.

INTELLECTUAL PROPERTY RIGHTS

The ITU draws attention to the possibility that the practice or implementation of this Recommendation may involve the use of a claimed Intellectual Property Right. The ITU takes no position concerning the evidence, validity or applicability of claimed Intellectual Property Rights, whether asserted by ITU members or others outside of the Recommendation development process.

As of the date of approval of this Recommendation, the ITU had/had not received notice of intellectual property, protected by patents, which may be required to implement this Recommendation. However, implementors are cautioned that this may not represent the latest information and are therefore strongly urged to consult the TSB patent database.

© ITU 1997

All rights reserved. No part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the ITU.

CONTENTS

	Page
1 General.....	1
2 Scope.....	1
3 Principles	1
4 Interworking configurations.....	1
4.1 General interworking configuration.....	1
4.2 Interworking configurations between ISDN and access networks operating at bit rates of less than 64 kbit/s.....	2
5 Examples of applications	3
6 Interworking between B-ISDN and networks operating at bit rates of less than 64 kbit/s.....	3
6.1 Interworking principles.....	3
6.2 Interworking configurations.....	3
6.2.1 Indirect interworking scenario.....	3
6.2.2 Direct interworking scenario	4
Annex A – Network interworking between an ISDN and an integrated digital network at a basic rate of 32 kbit/s (IDN-32).....	4
A.1 General.....	4
A.2 Scope.....	4
A.3 Interworking configuration and network characteristics.....	4
A.3.1 Interworking configuration.....	4
A.3.2 Key IDN-32 and ISDN characteristics and related interworking functions ..	5
A.3.3 Services suitable for IDN-32-ISDN interworking.....	5
A.3.4 Connection types suitable for IDN-32-ISDN interworking.....	6
A.3.5 Functional requirements for IDN-32-ISDN interworking.....	7
A.3.6 Handling of non-voice calls between IDN-32 and ISDN subscribers.....	8
Appendix A.1 – Integrated digital network at a basic rate of 32 kbit/s (IDN-32).....	8
A.I.1 General.....	8
A.I.2 Scope	8
A.I.3 Principles	8
A.I.4 Access configuration	9
Annex B – Network interworking between an ISDN and a Digital Public Land Mobile Network (D-PLMN).....	9
B.1 General.....	9
B.2 Scope.....	9

	Page
B.3 Interworking configuration and network characteristics.....	9
B.3.1 Interworking configuration.....	9
B.3.2 Key D-PLMN and ISDN characteristics and related interworking functions.....	9
B.3.3 Services suitable for D-PLMN-ISDN interworking.....	10
B.3.4 Functional requirements for D-PLMN-ISDN interworking.....	10
Appendix B.I – D-PLMN.....	12
B.I.1 General.....	12
B.I.2 Scope	12
B.I.3 Principles	12

Recommendation I.525

INTERWORKING BETWEEN NETWORKS OPERATING AT BIT RATES LESS THAN 64 kbit/s WITH 64 kbit/s-BASED ISDN AND B-ISDN

(revised in 1996)

1 General

Along with the adoption of ISDN, there is an increasing number of public digital networks being established which rely on bit rates of less than 64 kbit/s. Though some of these may be national options or specialized applications, in many cases these networks will require to interwork with public ISDNs.

In the text of this Recommendation, "ISDN" is used to identify 64 kbit/s-based ISDN and "B-ISDN" to describe broadband ISDNs.

2 Scope

The purpose of this Recommendation is to describe the interworking arrangements between ISDN and networks operating at bit rates less than 64 kbit/s. Examples of such digital networks include:

- local public networks provided as a national option, for example, a digital network based on a rate of 32 kbit/s (IDN-32);
- mobile networks, including cellular networks;
- Personal Communication Networks (PCNs);
- private networks.

3 Principles

Networks operating at less than 64 kbit/s and interworking with ISDN shall follow internationally-agreed 64 kbit/s-based ISDN interface standards for interconnecting with ISDN. In particular, they shall ensure time slot sequence integrity of the information conveyed in a 64 kbit/s channel at the interworking point. Any adaption and interworking functions to standard ISDN interfaces will be provided within the specialized network (i.e. networks with rates less than 64 kbit/s).

Principles and objectives for end-to-end service quality, compatibility, and essential service support are for further study.

If both ends of a call terminate on similar networks which operate at less than 64 kbit/s, it would be desirable if interworking functions such as speech transcoders were disabled. In such cases, the ISDN could, for example, provide a 64 kbit/s transparent path to interconnect the two sub-rate networks. The mechanism to achieve this is for further study.

4 Interworking configurations

4.1 General interworking configuration

Figure 1 shows the general reference configuration for interworking.




Figure 1/I.525 – General configuration for interworking between ISDN and networks which operate at bit rates of less than 64 kbit/s

4.2 Interworking configurations between ISDN and access networks operating at bit rates of less than 64 kbit/s

Interworking between Access Networks (ANs) operating at bit rates of less than 64 kbit/s and ISDN based on the primary rate of 2048 kbit/s should be provided using V5 interface (V5.1 or V5.2).

The interworking function at the point of the network interface includes speech signal transcoding, bit rates adaptation for non-speech information and signalling protocol conversion. It is provided in the LTE (Line Terminating Equipment).

Figure 2 shows an AN operating at a bit rate of less than 64 kbit/s connected to an ISDN exchange using V5.1 interface.

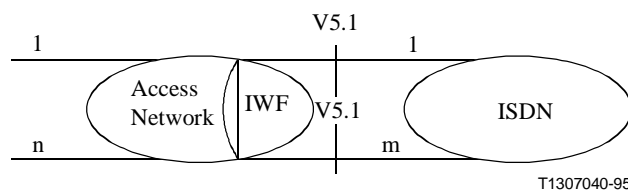


Figure 2/I.525 – General V5.1 interface configuration for ANs operating at bit rates of less than 64 kbit/s

In this case AN-ISDN connection is provided using m V5.1 links each transferring the information of $n = \frac{64}{k} \times 30 = m \times 30$ users, where k is a bit rate of the subscriber line ($k < 64$ kbit/s).

The V5.2 interface making use of the traffic concentration permits to serve $r > n$ subscriber lines by m AN-ISDN links or to serve n subscriber lines by $s < m$ links.

Figure 3 shows this interworking scenario.

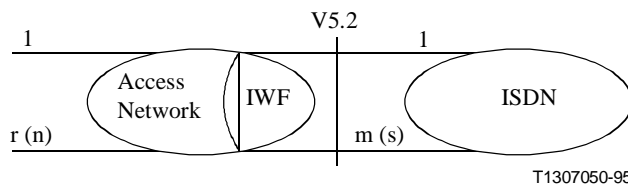


Figure 3/I.525 – General V5.2 interface configuration for ANs operating at bit rates of less than 64 kbit/s

5 Examples of applications

5.1 Annex A describes an example of interworking of IDN-32 with ISDN.

5.2 Annex B describes an example of interworking of a Digital Public Land Mobile Network (D-PLMN) with ISDN.

5.3 Interworking arrangements of other networks operating at less than 64 kbit/s with ISDNs are for further study.

6 Interworking between B-ISDN and networks operating at bit rates of less than 64 kbit/s

6.1 Interworking principles

Arrangements for interworking between networks operating at bit rates of less than 64 kbit/s and B-ISDN are classified into two types as depicted in Figure 4. The first one is an indirect interworking scenario with B-ISDN via 64 kbit/s-based ISDN and the second one is a direct interworking scenario with B-ISDN.

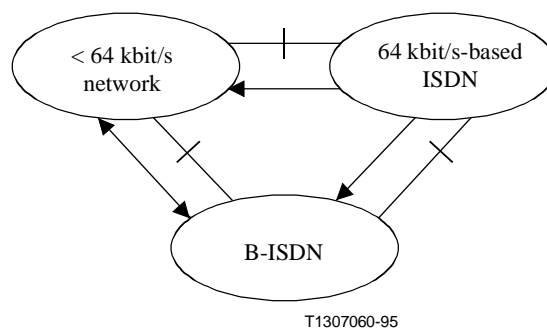


Figure 4/I.525 – General interworking configuration between B-ISDN and networks operating at bit rates of less than 64 kbit/s

Any adaption and interworking functions to standard B-ISDN interfaces or to 64 kbit/s-based ISDN are provided within the specialized sub-rate network.

Principles and objectives for end-to-end service quality, compatibility and essential service support are for further study.

6.2 Interworking configurations

6.2.1 Indirect interworking scenario

In this arrangement, interworking between networks operating at bit rates of less than 64 kbit/s and B-ISDN occurs indirectly, i.e. through 64 kbit/s-based ISDN as depicted in Figure 5. In this case functions and other requirements for interworking between 64 kbit/s ISDN and B-ISDN should be in line with the Recommendation I.580.

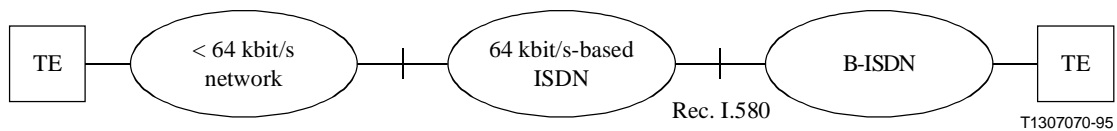


Figure 5/I.525 – Indirect interworking configuration between B-ISDN and networks operating at bit rates of less than 64 kbit/s

6.2.2 Direct interworking scenario

In this scenario, interworking between networks operating at bit rates of less than 64 kbit/s and B-ISDN takes place directly, i.e. without intervention of 64 kbit/s-based ISDN as illustrated in Figure 6.




Figure 6/I.525 – Direct interworking configuration between B-ISDN and networks operating at bit rates of less than 64 kbit/s

The adaption mechanism and interworking functions needed for this arrangement are for further study.

ANNEX A

Network interworking between an ISDN and an integrated digital network at a basic rate of 32 kbit/s (IDN-32)

A.1 General

In the Integrated Digital Network at a basic rate of 32 kbit/s, users are provided with a digital user network access at 32 kbit/s (see Appendix I to Annex A). Furthermore, some users of the IDN-32 can be provided with a digital user network access at 64 kbit/s as well as ISDN basic and primary rate accesses. Furthermore, all users of IDN-32 can communicate with telephone users of any other network.

A.2 Scope

The purpose of this Annex is to describe the general arrangements for interworking between an IDN-32 and the ISDN.

A.3 Interworking configuration and network characteristics

A.3.1 Interworking configuration

See Figure A.1.




Figure A.1/I.525 – General configuration for interworking between ISDN and IDN-32

A.3.2 Key IDN-32 and ISDN characteristics and related interworking functions

Table A.1 identifies the key characteristics of an IDN-32 and an ISDN, indicating possible interworking functions to accommodate dissimilar characteristics.

Table A.1/I.525 – Key IDN-32 and ISDN characteristics (Note)

	IDN-32	ISDN	Interworking functions included in IDN-32
Subscriber Interface	Digital	Digital	a)
User network signalling	In-band	Out-band	b)
User terminal equipment supported	Digital TE (DTS, DTE, etc.)	TE1 or TE2 + TA	c)
Inter-exchange signalling	SS No. 7 ISUP	SS No. 7 ISUP	
Transmission facilities	Digital	Digital	a)
Information transfer mode	Circuit	Circuit/packet	d)
Information transfer capability	Voice/voiceband data, unrestricted 32 kbit/s digital	Speech, 3.1 kHz audio, unrestricted 64 kbit/s digital video, etc.	d)

NOTE – A brief description of IDN-32 is provided in Appendix I to Annex A.

Interworking functions:

- a) 32 to 64 kbit/s and 64 to 32 kbit/s digital conversion of transmitted signals.
- b) Mapping between IDN-32 signals in the subscriber access and I.451 messages.
- c) Support of communication between DTEs (without modem).
- d) Further study required.

A.3.2.1 Location of interworking functions

Interworking functions are to be located within IDN-32. The location of interworking functions is dependent on the configuration of the national telephone network.

The optimum location of each interworking function may be specific per interworking function and depend on the usage of the service, network topology, etc.

A.3.3 Services suitable for IDN-32-ISDN interworking

This subclause considers the subject of services suitable for IDN-32-ISDN interworking. The discussions dealing with IDN-32 to/from ISDN direction are addressed in individual subclauses.

A.3.3.1 Services suitable for IDN-32-ISDN interworking (circuit mode)

Currently, there are two identified services that could be subject to IDN-32–ISDN interworking. These are:

- i) circuit mode 32 kbit/s, 8 kHz structured service, usable for voice or voiceband data;
- ii) circuit mode 32 kbit/s, 8 kHz structured service, usable for unrestricted 32 kbit/s.

NOTE – IDN-32-ISDN interworking means interworking both ways between IDN-32 and ISDN, while IDN-32 to ISDN refers to a call initiated in the IDN-32 and terminated in the ISDN, and ISDN to IDN-32 refers to a call initiated in the ISDN and terminated in the IDN-32.

A.3.3.2 ISDN bearer services suitable for ISDN to IDN-32 interworking (circuit mode)

Currently there are two identified bearer services that could be used within ISDN to IDN-32 interworking. These are:

- i) circuit mode 64 kbit/s, 8 kHz structured bearer service, usable for speech information transfer;
- ii) circuit mode 64 kbit/s, 8 kHz structured bearer service, usable for 3.1 kHz audio information transfer.

Bearer services similar to those used within the IDN-32 to ISDN interworking can be used within the ISDN to IDN-32 interworking:

- i) circuit mode 64 kbit/s, 8 kHz structured bearer service, usable for speech information transfer;
- ii) circuit mode 64 kbit/s, 8 kHz structured bearer service, usable for 3.1 kHz audio information transfer (Note 1);
- iii) circuit mode 64 kbit/s unrestricted, 8 kHz structured bearer service (Note 2).

NOTE 1 – Transmission of 9600 bit/s voiceband data is for further study.

NOTE 2 – For further study.

Since one of these services – the 64 kbit/s unrestricted bearer services – can only be provided for individual IDN-32 users, during the setting up of a call, the ISDN call progress indicator will only recognize those users who can be provided with this bearer service.

A.3.3.3 ISDN bearer services suitable for IDN-32-ISDN interworking (packet mode)

For further study.

A.3.3.4 ISDN bearer services suitable for ISDN to IDN-32 interworking (packet mode)

Currently, there are two identified bearer services that could be used within ISDN for ISDN (packet mode call) to IDN-32 interworking:

- i) B-channel: packet mode, unrestricted digital information, service data unit integrity, X.25 link level, X.25 packet level bearer service;
- ii) D-channel: packet mode, unrestricted digital information, service data unit integrity, I.441 link level, X.25 packet level bearer service.

The bearer services described in this subclause are provided within ISDN. Detailed mechanisms are for further study.

A.3.4 Connection types suitable for IDN-32-ISDN interworking

This subclause identifies the mapping of ISDN bearer services and possible connection types for IDN-32-ISDN interworking. Depending on the specific ISDN bearer service being considered, more

than one ISDN connection type may be applicable. However, in some cases the connection type may not be fully compatible with requested bearer service, thereby leading to downgrading of services.

The ISDN bearer services and possible connection types for four IDN-32-ISDN interworking cases are given in Table A.2.

Refer to Recommendation I.335 for more details regarding the mapping between ISDN bearer services and ISDN connection types.

Table A.2/I.525 – ISDN bearer services and connection types suitable for IDN-32-ISDN interworking

Interworking	ISDN bearer services categories	ISDN connection types			
		64 kbit/s unrestricted	Speech	3.1 kHz audio	Packet
IDN-32 to ISDN (circuit)	64 kbit/s unrestricted 3.1 kHz audio	Y	N	N	N
		R	FFS	Y	N
ISDN to IDN-32 (circuit)	64 kbit/s unrestricted Speech 3.1 kHz audio	Y	N	N	N
		R	Y	Y	N
		R	FFS	Y	N
IDN-32 to ISDN (packet)	Virtual call and permanent virtual circuit	For further study			
IDN-32 to ISDN (packet)	Virtual call and permanent virtual circuit	For further study			

Y Yes – Can be used (some interworking scenarios may require further study).
N No – Cannot be used.
FFS For further study.
R Can be used except when A/m-law conversion and echo-control may be required.

NOTE 1 – It is recognized that IDN-32 services interworking with ISDN must use currently defined ISDN bearer services.

NOTE 2 – It is possible that the service obtained on each of the bearer services for IDN-32 to ISDN interworking may not be the same as that obtained for ISDN to ISDN configurations.

NOTE 3 – Refer to Recommendation I.231 for the service definition for 64 kbit/s interworking. Various mechanisms for ISDN – other networks interworking supporting Y-Series terminals connected to the ISDN using the 64 kbit/s unrestricted bearer service are contained in Recommendation I.515. Procedures require further study.

NOTE 4 – Other ISDN bearer services and connection types that may be applicable for IDN-32-ISDN interworking are for further study.

A.3.5 Functional requirements for IDN-32-ISDN interworking

A.3.5.1 Interworking between signalling systems

Since IDN-32 uses SS No. 7 ISUP, no new interworking requirements are identified.

A.3.5.2 Provision of interworking indications

An interworking indication is required for the ISDN local exchange to know that interworking has occurred. ISUP Q.761-Q.764 and I.451/Q.931 protocols have the ability to identify this interworking situation to the ISDN local exchange and the ISDN terminal (call progress indicator).

The ISDN terminal would be informed in every case that interworking has occurred. Procedures are for further study.

A.3.5.3 Failure indication

Failure indication, when carried by the I.451 and ISUP signalling messages, should be meaningful and give a clear indication of the reason.

A.3.6 Handling of non-voice calls between IDN-32 and ISDN subscribers

For some cases of IDN-32-ISDN interworking the capability to interconnect DTEs used as terminal equipments should be provided. The need for the transfer of data signals via a 32/64 kbit/s converter should be taken into consideration.

APPENDIX A.1

(to Annex A of Recommendation I.525)

Integrated digital network at a basic rate of 32 kbit/s (IDN-32)

A.I.1 General

The Integrated Digital Network at a basic bit rate of 32 kbit/s (IDN-32) is based on the following principles:

- the digitalization of the user network access for each user, which allows establishment of an all-digital network and permits integration of a number of services within this network;
- the use of 32 kbit/s as a basic rate for transmission and switching facilities;
- the provision of digital four-wire connections between terminals of this network.

A.I.2 Scope

The purpose of this Appendix is to describe the main features of IDN-32, which are needed for the interworking functions specification.

A.I.3 Principles

IDN-32 consists of digital subscriber network and digital switching exchanges. This allows to establish the digital connections from user-to-user.

IDN-32 is created using the following equipments:

- digital subscriber network using remote subscriber multiplexers;
- digital switching equipments (subscriber switching modules, remote subscriber switching modules and transit switching modules);
- digital transmission systems;
- interworking units (Note);
- operation and maintenance module.

NOTE – Interworking units provide the interfaces with ISDN, PSTN, etc.

Users can be provided with a 64 kbit/s channel obtained by combining two 32 kbit/s channels. A primary rate access can be obtained by using the whole digital transmission capacity.

A.I.4 Access configuration

The digital terminals are connected to remote subscriber multiplexers.

The remote subscriber multiplexers are connected to subscriber switching modules by digital transmission systems.

All subscriber switching modules are connected to transit switching modules.

Operating and maintenance modules support all the facilities mentioned above.

ANNEX B

Network interworking between an ISDN and a Digital Public Land Mobile Network (D-PLMN)

B.1 General

In a D-PLMN users are typically provided with digital user network access capabilities at significantly less than 64 kbit/s for efficient radio frequency use, which may be different for speech and data, and a separate low bit rate signalling access. Different D-PLMNs can operate at different bit rates.

B.2 Scope

The purpose of this Annex is to describe the general arrangements for interworking between a D-PLMN and the ISDN.

B.3 Interworking configuration and network characteristics

B.3.1 Interworking configuration

See Figure 1.

B.3.2 Key D-PLMN and ISDN characteristics and related interworking functions

Table B.1 identifies the key characteristics of a D-PLMN and an ISDN, indicating possible interworking functions to accommodate dissimilar characteristics.

Table B.1/I.525 – Key D-PLMN and ISDN characteristics and possible interworking functions required

	D-PLMN	IWF	ISDN
Subscriber Interface	Digital	–	Digital
User-network signalling	Out-band	Signal mapping	Out-band
Inter-exchange signalling	SS No. 7 ISUP	Signal mapping	SS No. 7 ISUP
	MAP		(MAP)
Information transfer mode	Circuit	Circuit connection based on 64 kbit/s	Circuit
	Packet	For further study	Packet
Information transfer capability	Low rate speech	Transcoding Echo control	Speech based on 64 kbit/s PCM
	3.1 kHz Audio	Modem Pool	3.1 kHz Audio
	Low bit-rate data	Rate Adapting	64 kbit/s UDI
Additional Services	ISDN Services	–	ISDN Services
	Mobile Specific Services	For further study	–
	(Note)		
NOTE – This may be a "Short Message" – to be confirmed.			

B.3.3 Services suitable for D-PLMN-ISDN interworking

B.3.3.1 Services suitable for calls initiated in a D-PLMN and terminated in ISDN

- i) circuit mode service usable for speech information transfer;
- ii) circuit mode service, usable for data;
- iii) packet mode service, usable for data.

B.3.3.2 ISDN bearer services suitable for calls initiated in ISDN and terminated in a D-PLMN

- i) circuit mode 64 kbit/s, 8 kHz structured bearer service, usable for speech information transfer;
- ii) circuit mode 64 kbit/s, 8 kHz structured bearer service, usable for 3.1 kHz audio information transfer;
- iii) packet mode up to the capacity of the interface.

B.3.4 Functional requirements for D-PLMN-ISDN interworking

B.3.4.1 Interworking between signalling systems

When the D-PLMN uses ISUP, no extra interworking functions are required.

B.3.4.2 Interworking for speech

The IWF in a D-PLMN has a transcoder to convert between the low bit-rate speech coding in D-PLMN and the standard 64 kbit/s coding in ISDN (see Figure B.1). The low bit-rate speech coding

in D-PLMN may have a processing delay sufficiently long to require an echo canceller to cancel the echo from the ISDN side.

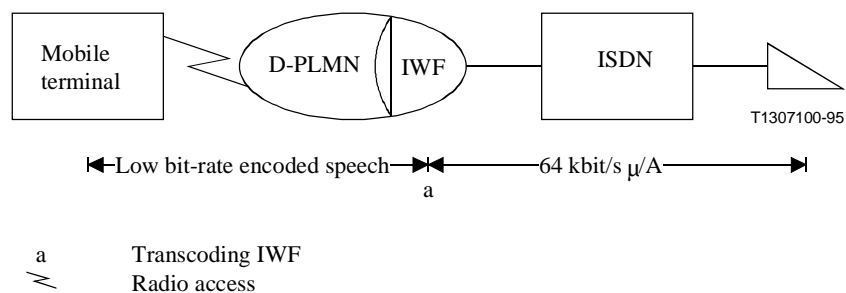


Figure B.1/I.525 – General configuration for interworking between ISDN and D-PLMN showing transcoding IWF

In the case where there is D-PLMN access at both ends of a connection, and both D-PLMNs are of the same type, it would be desirable if the speech transcoders were disabled (see clause 3), for optimum performance. This case is illustrated in Figure B.2.

(It is possible that this scenario could include an ISDN connection long enough to require its own echo control, resulting in cascaded echo cancellers. In this case, it would be desirable for signalling information to be conveyed from the D-PLMNs such that the ISDN echo cancellers were disabled.)

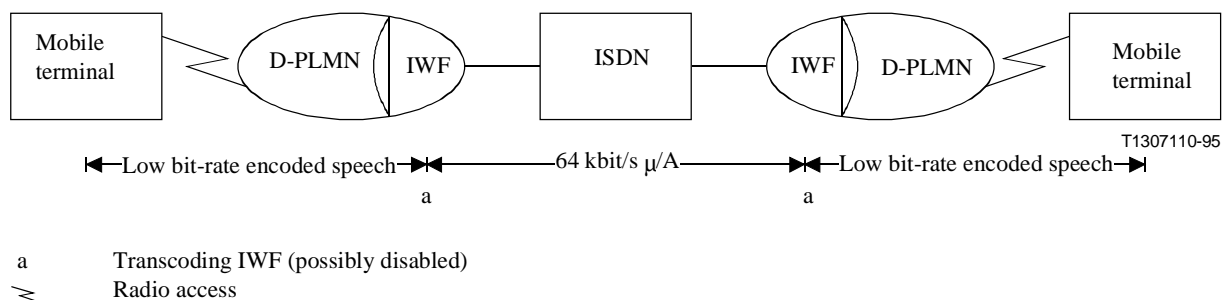


Figure B.2/I.525 – General configuration for interworking between ISDN and D-PLMNs at both ends of the connection

B.3.4.3 Interworking for data

Since the complex voice coding of D-PLMNs cannot pass voiceband data, when data transmission is required, the voice codec must be bypassed. One mechanism for transmission across the ISDN would be for the low bit rate of the D-PLMN (e.g. 8 kbit/s) to be rate-adapted to 64 kbit/s by the IWF. This is illustrated in Figure B.3.

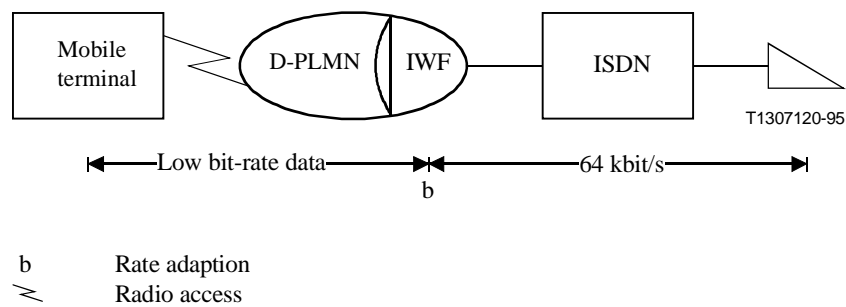


Figure B.3/I.525 – General configuration for interworking between ISDN and D-PLMN for data

B.3.4.4 Supplementary service interworking

A D-PLMN may be provided with similar or identical supplementary services to those in the ISDN, but with some differences resulting from:

- moving from one mobile switching exchange area to another;
- roaming to another country offering the same D-PLMN capability;
- a connection to the D-PLMN only on an on-demand basis.

Frequently, the supplementary services will be required to operate across networks, and interworking between a D-PLMN and the ISDN requires interworking of signalling, notification and indications. Additionally, procedure compatibility may sometimes need to be assured before interworking of a supplementary service can be allowed.

APPENDIX B.I

(to Annex B of Recommendation I.525)

D-PLMN

B.I.1 General

A D-PLMN is based on the following principles:

- the digitalization of the user network access for each user, allowing the establishment of an all-digital network;
- the provision of a single low bit-rate communication channel and a single low bit-rate signalling channel to and from terminals of this network.

B.I.2 Scope

The purpose of this Appendix is to describe the main features of a D-PLMN which are needed for, and affect, the interworking functions specification.

B.I.3 Principles

A D-PLMN consists of a digital switching network connected to and serving digital radio transceiver stations which can be connected by radio links on an on-demand basis to mobile terminals within their radio-coverage areas.

Because of the nature of the radio links, only relatively low bit rates may be available for the transport of speech or data, and for speech, complex encoding is required. Additionally, error correction coding and other techniques are needed to overcome excessive bit error rates during fades

and close to the edge of the radio-coverage area. These result in transmission delays sufficient to require echo control within the D-PLMN for speech. Speech encoding used by D-PLMN is not suitable for conveying voiceband data. For data, echo control is removed.

A D-PLMN is constructed using the following equipment:

- digital radio transceiver stations, incorporating digital multiplexers;
- digital transcoders (for radio path to standard PCM transcoding);
- digital switching equipment (mobile subscriber switching modules and transit switching modules);
- echo controllers;
- digital transmission systems;
- interworking units (Note);
- operation and maintenance modules.

NOTE – Interworking units provide the interfaces to ISDN, PSTN, etc.

ITU-T RECOMMENDATIONS SERIES

Series A	Organization of the work of the ITU-T
Series B	Means of expression: definitions, symbols, classification
Series C	General telecommunication statistics
Series D	General tariff principles
Series E	Overall network operation, telephone service, service operation and human factors
Series F	Non-telephone telecommunication services
Series G	Transmission systems and media, digital systems and networks
Series H	Audiovisual and multimedia systems
Series I	Integrated services digital network
Series J	Transmission of television, sound programme and other multimedia signals
Series K	Protection against interference
Series L	Construction, installation and protection of cables and other elements of outside plant
Series M	Maintenance: international transmission systems, telephone circuits, telegraphy, facsimile and leased circuits
Series N	Maintenance: international sound programme and television transmission circuits
Series O	Specifications of measuring equipment
Series P	Telephone transmission quality, telephone installations, local line networks
Series Q	Switching and signalling
Series R	Telegraph transmission
Series S	Telegraph services terminal equipment
Series T	Terminals for telematic services
Series U	Telegraph switching
Series V	Data communication over the telephone network
Series X	Data networks and open system communication
Series Z	Programming languages