



INTERNATIONAL TELECOMMUNICATION UNION

ITU-T

TELECOMMUNICATION
STANDARDIZATION SECTOR
OF ITU

Q.634

INTERWORKING OF SIGNALLING SYSTEMS

LOGIC PROCEDURES FOR INTERWORKING OF SIGNALLING SYSTEM No. 4 TO R2

ITU-T Recommendation Q.634

(Extract from the *Blue Book*)


NOTES

1 ITU-T Recommendation Q.634 was published in Fascicle VI.6 of the *Blue Book*. This file is an extract from the *Blue Book*. While the presentation and layout of the text might be slightly different from the *Blue Book* version, the contents of the file are identical to the *Blue Book* version and copyright conditions remain unchanged (see below).

2 In this Recommendation, the expression “Administration” is used for conciseness to indicate both a telecommunication administration and a recognized operating agency.

Recommendation Q.634

LOGIC PROCEDURES FOR INTERWORKING OF SIGNALLING SYSTEM No. 4 TO R2

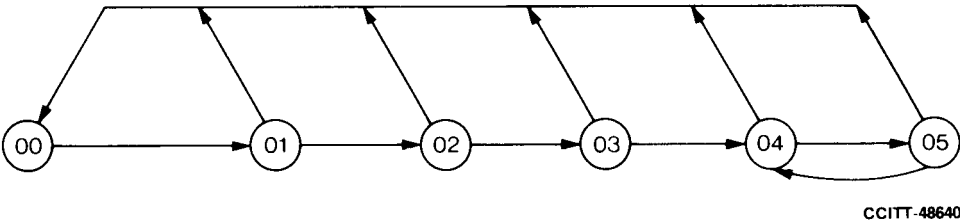

| State number | State description | Sheet reference |
|--------------|---------------------------|-----------------|
| 00 | Idle | 1 |
| 01 | Wait for CPCI-FITE | 1 |
| 02 | Wait for address-complete | 1 |
| 03 | Wait for answer | 2 |
| 04 | Answered | 2 |
| 05 | Clear-back | 2 |


FIGURE 1/Q.634
State overview diagram for interworking of Signalling System No. 4 to R2

Procedures not shown

The following procedures, not directly relevant to interworking, are not shown in the logic procedures:

- Repeat attempt.

FIGURE 2/Q.634
Notes to interworking of Signalling System No. 4 to R2

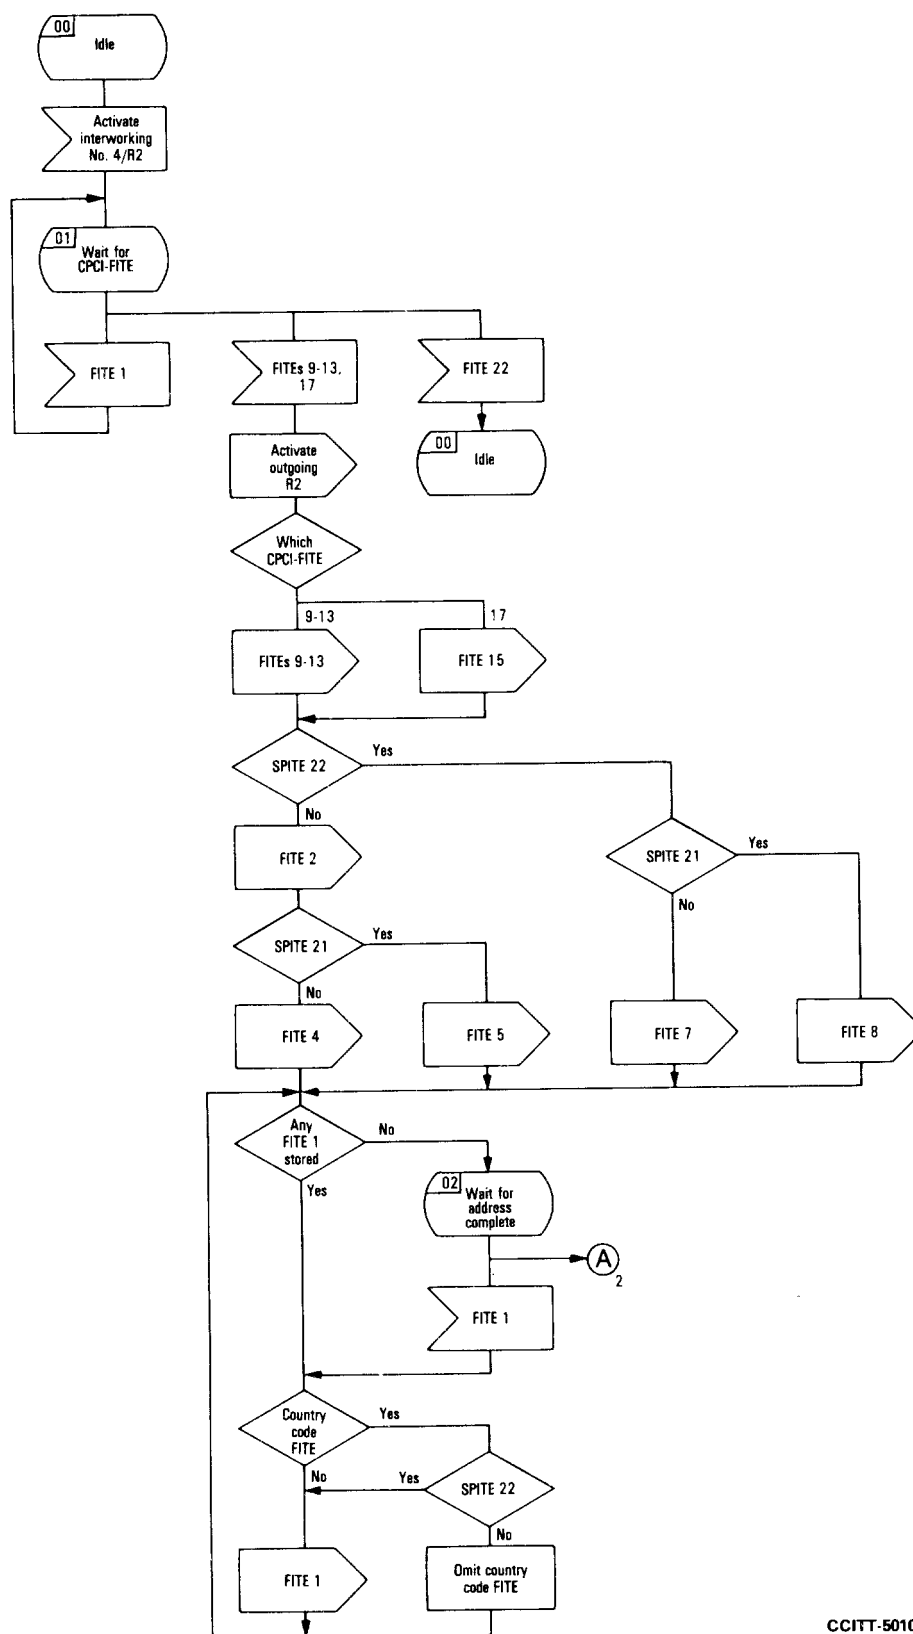

CCITT-50100

FIGURE 3/Q.634 (Sheet 1 of 2)
Interworking of Signalling System No. 4 to R2

