



INTERNATIONAL TELECOMMUNICATION UNION

ITU-T

TELECOMMUNICATION
STANDARDIZATION SECTOR
OF ITU

Q.663

INTERWORKING OF SIGNALLING SYSTEMS

**LOGIC PROCEDURES FOR
INTERWORKING OF SIGNALLING
SYSTEM No. 7 (TUP) TO No. 6**

ITU-T Recommendation Q.663

(Extract from the *Blue Book*)


NOTES

1 ITU-T Recommendation Q.663 was published in Fascicle VI.6 of the *Blue Book*. This file is an extract from the *Blue Book*. While the presentation and layout of the text might be slightly different from the *Blue Book* version, the contents of the file are identical to the *Blue Book* version and copyright conditions remain unchanged (see below).

2 In this Recommendation, the expression “Administration” is used for conciseness to indicate both a telecommunication administration and a recognized operating agency.

Recommendation Q.663

LOGIC PROCEDURES FOR INTERWORKING OF SIGNALLING SYSTEM No. 7 (TUP) TO No. 6

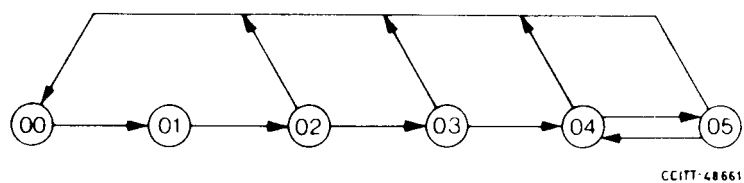

<i>State number</i>	<i>State description</i>	<i>Sheet reference</i>
00	Idle	1, 2
01	Wait for CPCI-FITE	1
02	Wait for address-complete	1
03	Wait for answer	1
04	Answered	2
05	Clear-back	2

FIGURE 1/Q.663

State overview diagram for interworking of Signalling System No. 7 (TUP) to No. 6


Procedures not shown

The following procedure, not directly relevant to interworking, is not shown in the logic:

P₁ - Procedure for repeat attempt.


FIGURE 2/Q.663

Notes to interworking of Signalling System No. 7 (TUP) to No. 6

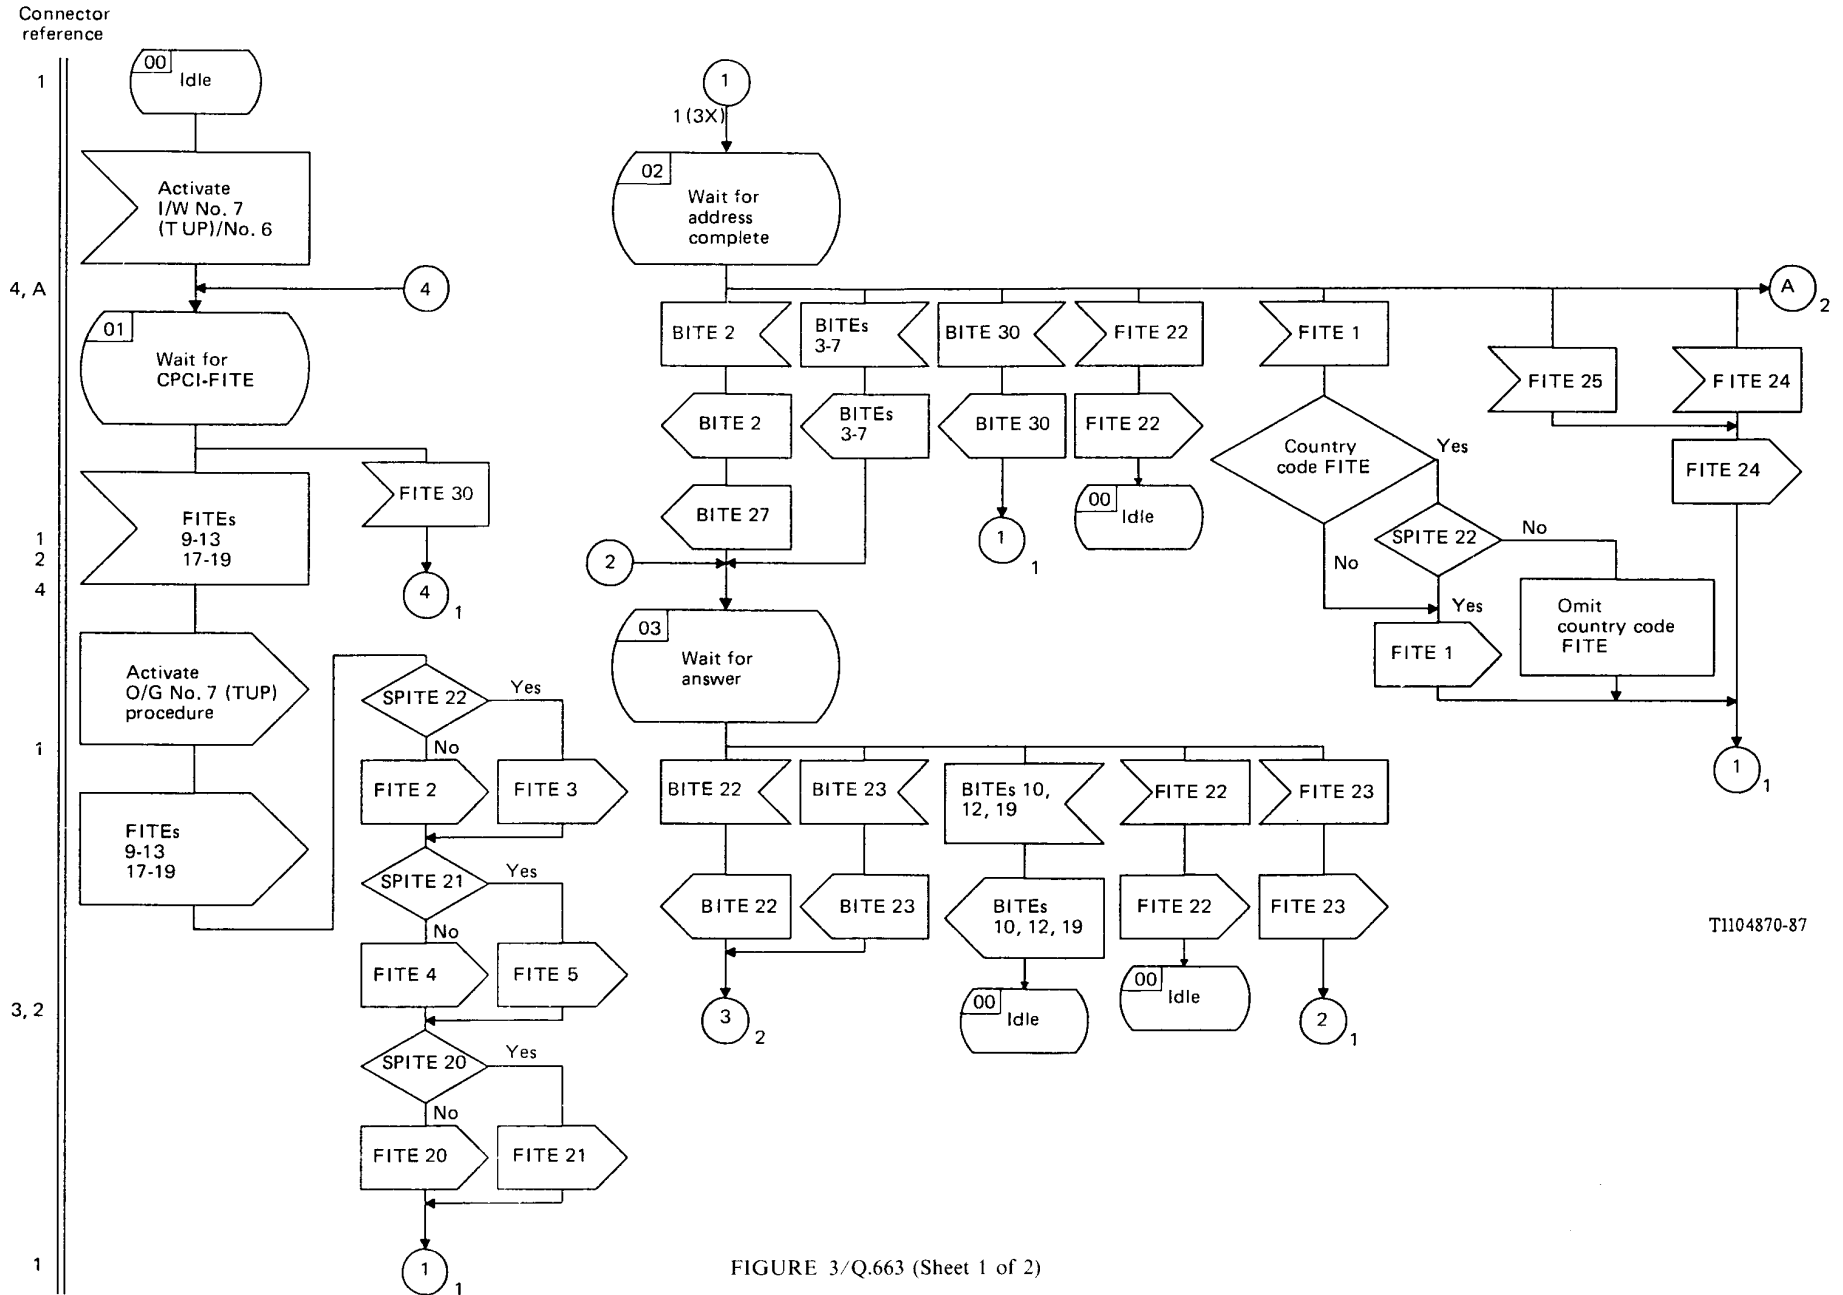

T1104870-87

FIGURE 3/Q.663 (Sheet 1 of 2)
Interworking of Signalling System No. 7 (TUP) to No. 6

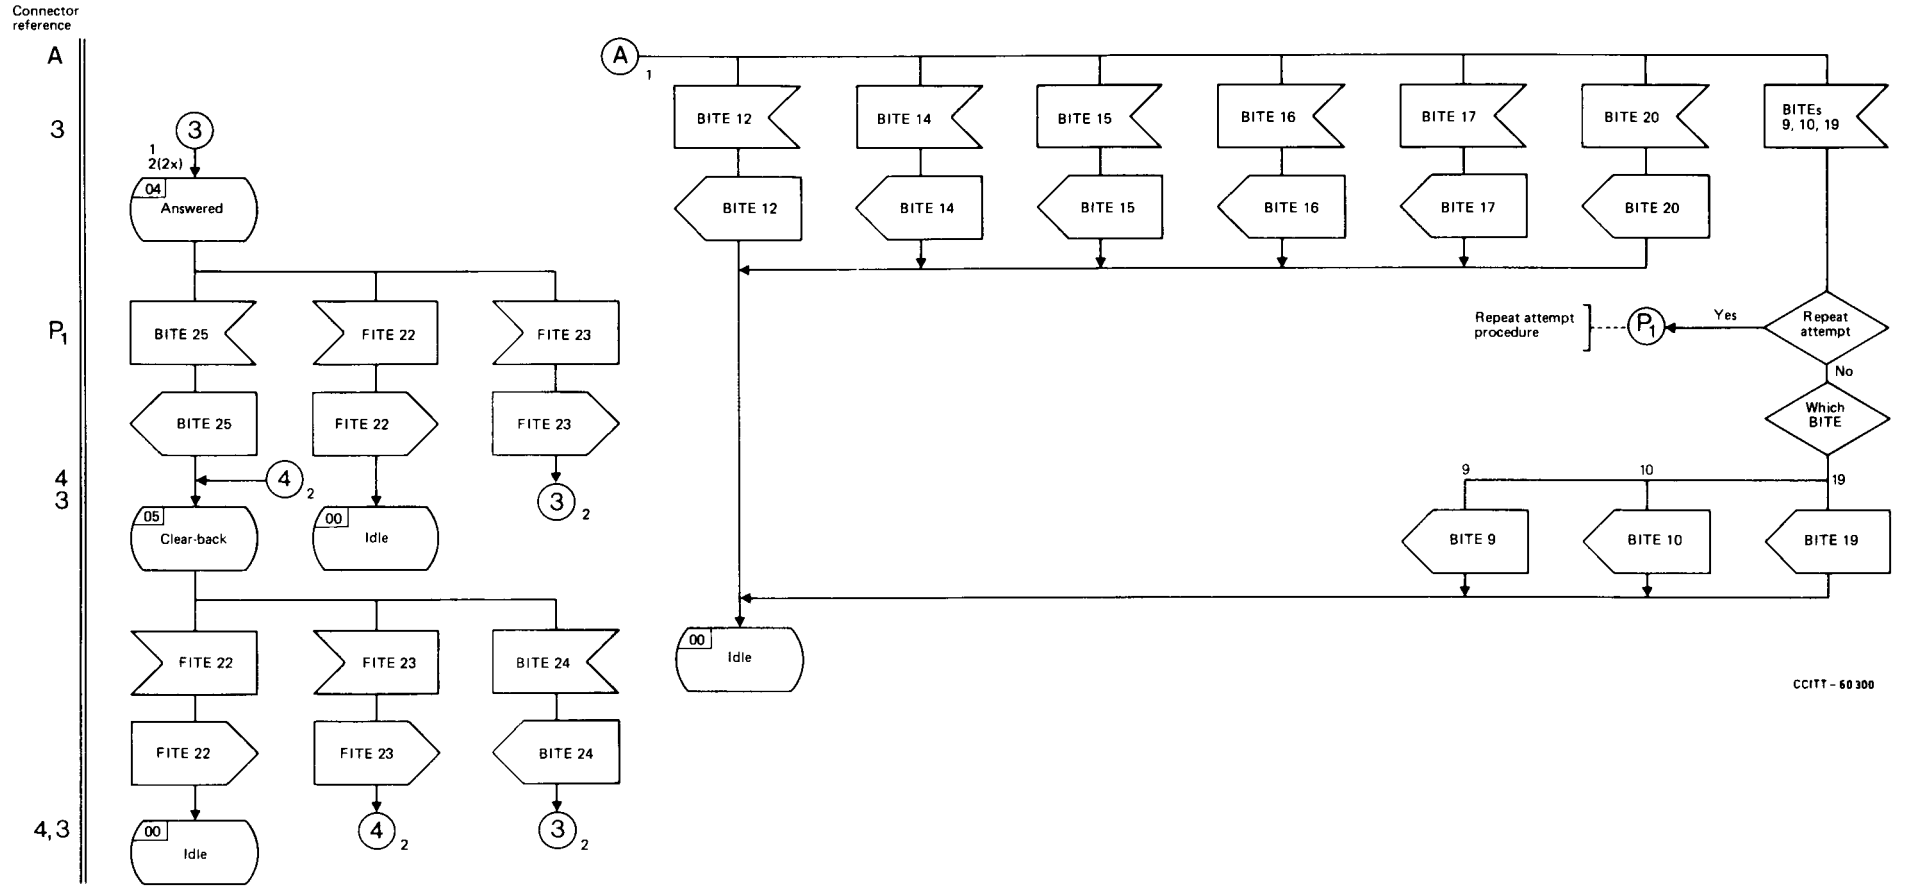

CCITT - 60 300

FIGURE 3/Q.663 (Sheet 2 of 2)
 Interworking of Signalling System No. 7 (TUP) to No. 6