



INTERNATIONAL TELECOMMUNICATION UNION

**ITU-T**

TELECOMMUNICATION  
STANDARDIZATION SECTOR  
OF ITU

**Q.681**

## **INTERWORKING OF SIGNALLING SYSTEMS**

---

### **LOGIC PROCEDURES FOR INTERWORKING OF SIGNALLING SYSTEM R2 TO No. 4**

**ITU-T Recommendation Q.681**

(Extract from the *Blue Book*)

---


## NOTES

1       ITU-T Recommendation Q.681 was published in Fascicle VI.6 of the *Blue Book*. This file is an extract from the *Blue Book*. While the presentation and layout of the text might be slightly different from the *Blue Book* version, the contents of the file are identical to the *Blue Book* version and copyright conditions remain unchanged (see below).

2       In this Recommendation, the expression “Administration” is used for conciseness to indicate both a telecommunication administration and a recognized operating agency.

## Recommendation Q.681

### LOGIC PROCEDURES FOR INTERWORKING OF SIGNALLING SYSTEM R2 TO No. 4

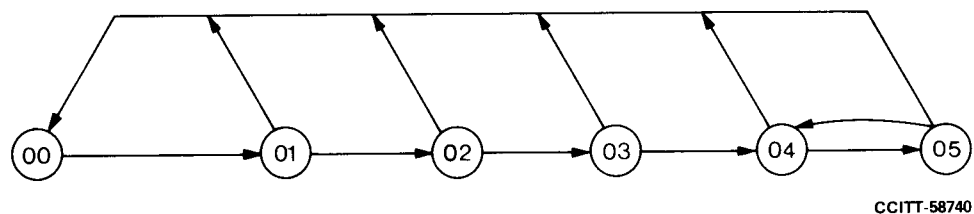


<i>State number</i>	<i>State description</i>
00	Idle
01	Wait for CPCI-FITE
02	Wait for address-complete
03	Wait for answer
04	Answered
05	Clear-back

FIGURE 1/Q.681  
State overview diagram for interworking of Signalling System R2 to No. 4

FIGURE 2/Q.681  
(Reserved for future notes)

Connector  
reference

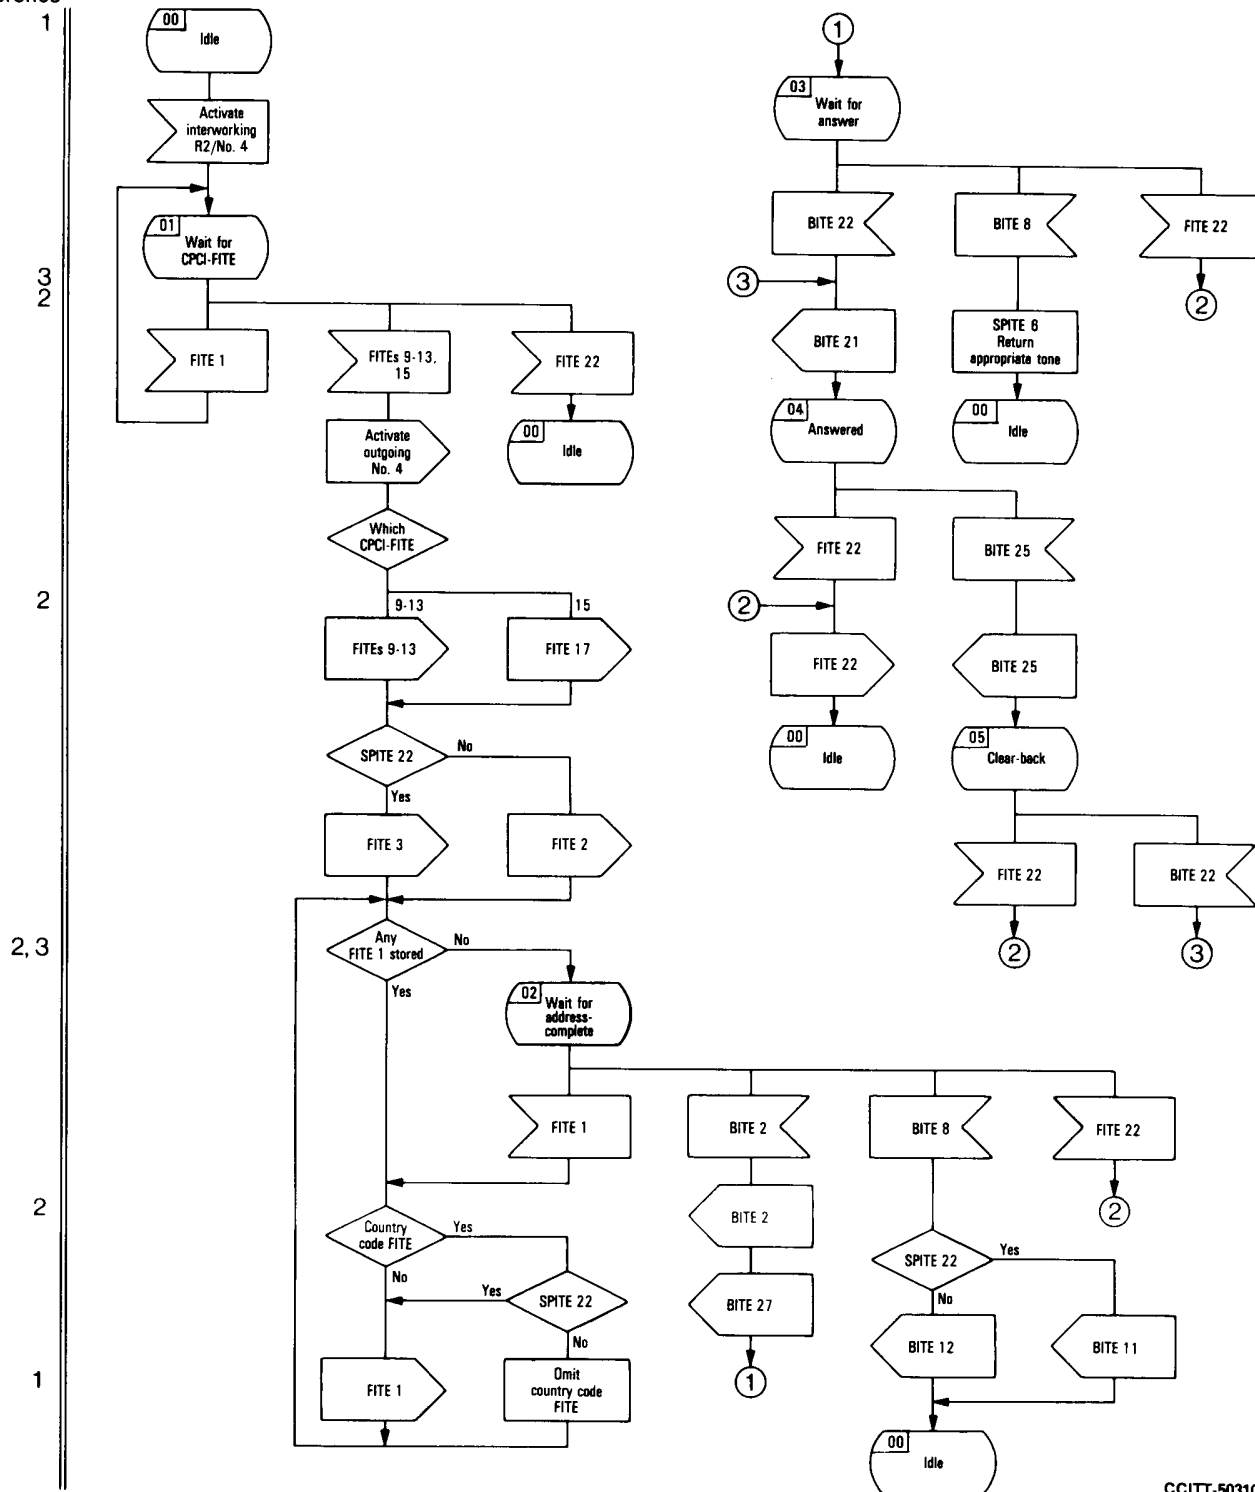

CCITT-50310

FIGURE 3/Q.681  
Interworking of Signalling System R2 to No. 4