



# COVERING NOTE

GENERAL SECRETARIAT OF THE INTERNATIONAL TELECOMMUNICATION UNION

Geneva, 6 October 2009

ITU – TELECOMMUNICATION STANDARDIZATION SECTOR


**Subject: Erratum 1 (10/2009) to**

Recommendation ITU-T G.8262/Y.1362 (08/2007), *Timing characteristics of synchronous Ethernet equipment slave clock (EEC)*

*Within clause 9.1.1, replace Table 8 and Figure 7 with the following representations:*

**Table 8 – Lower limit of maximum tolerable sinusoidal input wander for Option 1**

Peak-to-peak wander amplitude		Wander frequency				
$A_1$ [ $\mu\text{s}$ ]	$A_2$ [ $\mu\text{s}$ ]	$f_4$ [mHz]	$f_3$ [mHz]	$f_2$ [mHz]	$f_1$ [Hz]	$f_0$ [Hz]
0.25	2	0.32	0.8	16	0.13	10

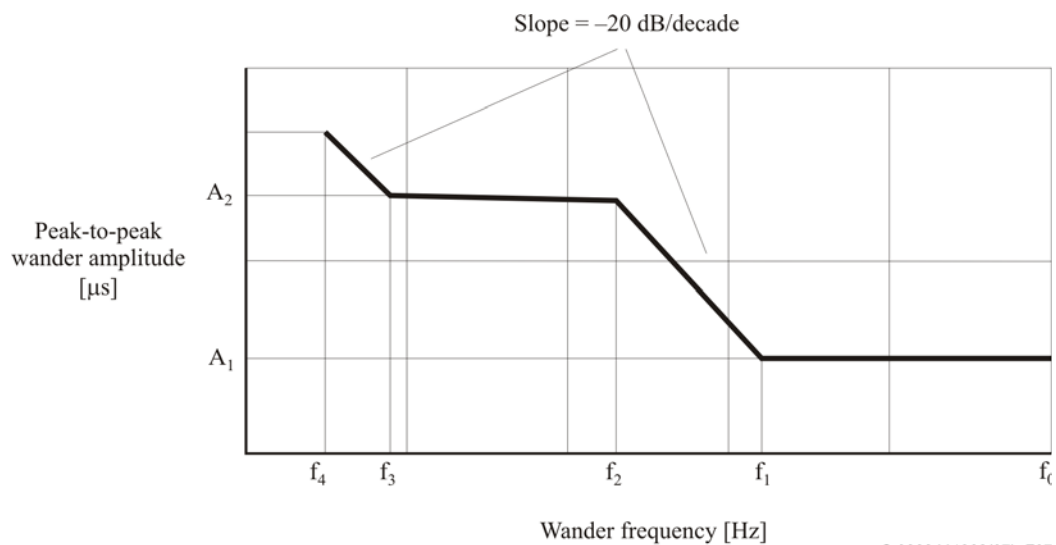

G.8262-Y.1362(07)\_F07

**Figure 7 – Lower limit of max tolerable sinusoidal input wander for EEC-Option 1**