

International Telecommunication Union

**ITU-T**

TELECOMMUNICATION  
STANDARDIZATION SECTOR  
OF ITU

**Y.2111**

(11/2008)

SERIES Y: GLOBAL INFORMATION  
INFRASTRUCTURE, INTERNET PROTOCOL ASPECTS  
AND NEXT-GENERATION NETWORKS

Next Generation Networks – Quality of Service and  
performance

---

**Resource and admission control functions in  
next generation networks**

Recommendation ITU-T Y.2111



ITU-T Y-SERIES RECOMMENDATIONS  
**GLOBAL INFORMATION INFRASTRUCTURE, INTERNET PROTOCOL ASPECTS AND NEXT-  
GENERATION NETWORKS**

<b>GLOBAL INFORMATION INFRASTRUCTURE</b>	
General	Y.100–Y.199
Services, applications and middleware	Y.200–Y.299
Network aspects	Y.300–Y.399
Interfaces and protocols	Y.400–Y.499
Numbering, addressing and naming	Y.500–Y.599
Operation, administration and maintenance	Y.600–Y.699
Security	Y.700–Y.799
Performances	Y.800–Y.899
<b>INTERNET PROTOCOL ASPECTS</b>	
General	Y.1000–Y.1099
Services and applications	Y.1100–Y.1199
Architecture, access, network capabilities and resource management	Y.1200–Y.1299
Transport	Y.1300–Y.1399
Interworking	Y.1400–Y.1499
Quality of service and network performance	Y.1500–Y.1599
Signalling	Y.1600–Y.1699
Operation, administration and maintenance	Y.1700–Y.1799
Charging	Y.1800–Y.1899
<b>NEXT GENERATION NETWORKS</b>	
Frameworks and functional architecture models	Y.2000–Y.2099
<b>Quality of Service and performance</b>	<b>Y.2100–Y.2199</b>
Service aspects: Service capabilities and service architecture	Y.2200–Y.2249
Service aspects: Interoperability of services and networks in NGN	Y.2250–Y.2299
Numbering, naming and addressing	Y.2300–Y.2399
Network management	Y.2400–Y.2499
Network control architectures and protocols	Y.2500–Y.2599
Security	Y.2700–Y.2799
Generalized mobility	Y.2800–Y.2899

*For further details, please refer to the list of ITU-T Recommendations.*

## **Recommendation ITU-T Y.2111**

### **Resource and admission control functions in next generation networks**

#### **Summary**

Recommendation ITU-T Y.2111 specifies the functional architecture and requirements for the resource and admission control functions in next generation networks, which may involve a variety of access and core transport technologies and multiple domains. The RACF provides real-time application-driven and policy-based transport resource management in support of end-to-end quality of service (QoS), gate control, network address translation, and traversal of remote network address translators. The RACF is not service-specific. Services can make use of RACF whether the IP multimedia subsystem is involved or not.

In particular, this edition includes extensions to Recommendation ITU-T Y.2111 (2006) to address issues related to multicast in support of IPTV services, nomadicity, and interactions between CPE/CPN and RACF.

#### **Source**

Recommendation ITU-T Y.2111 was approved on 13 November 2008 by ITU-T Study Group 13 (2009-2012) under Recommendation ITU-T A.8 procedure.

## FOREWORD

The International Telecommunication Union (ITU) is the United Nations specialized agency in the field of telecommunications, information and communication technologies (ICTs). The ITU Telecommunication Standardization Sector (ITU-T) is a permanent organ of ITU. ITU-T is responsible for studying technical, operating and tariff questions and issuing Recommendations on them with a view to standardizing telecommunications on a worldwide basis.

The World Telecommunication Standardization Assembly (WTSA), which meets every four years, establishes the topics for study by the ITU-T study groups which, in turn, produce Recommendations on these topics.

The approval of ITU-T Recommendations is covered by the procedure laid down in WTSA Resolution 1.

In some areas of information technology which fall within ITU-T's purview, the necessary standards are prepared on a collaborative basis with ISO and IEC.

## NOTE

In this Recommendation, the expression "Administration" is used for conciseness to indicate both a telecommunication administration and a recognized operating agency.

Compliance with this Recommendation is voluntary. However, the Recommendation may contain certain mandatory provisions (to ensure e.g., interoperability or applicability) and compliance with the Recommendation is achieved when all of these mandatory provisions are met. The words "shall" or some other obligatory language such as "must" and the negative equivalents are used to express requirements. The use of such words does not suggest that compliance with the Recommendation is required of any party.

## INTELLECTUAL PROPERTY RIGHTS

ITU draws attention to the possibility that the practice or implementation of this Recommendation may involve the use of a claimed Intellectual Property Right. ITU takes no position concerning the evidence, validity or applicability of claimed Intellectual Property Rights, whether asserted by ITU members or others outside of the Recommendation development process.

As of the date of approval of this Recommendation, ITU had received notice of intellectual property, protected by patents, which may be required to implement this Recommendation. However, implementers are cautioned that this may not represent the latest information and are therefore strongly urged to consult the TSB patent database at <http://www.itu.int/ITU-T/ipr/>.

© ITU 2009

All rights reserved. No part of this publication may be reproduced, by any means whatsoever, without the prior written permission of ITU.

## CONTENTS

	<b>Page</b>
1	Scope ..... 1
2	References..... 1
3	Definitions ..... 2
4	Abbreviations and acronyms ..... 3
5	Overview and requirements..... 5
5.1	Overview ..... 5
5.2	High-level requirements ..... 6
6	RACF mechanisms and scenarios ..... 7
6.1	QoS resource control mechanisms and scenarios..... 7
6.2	NAPT control and NAT traversal mechanisms and scenarios ..... 12
6.3	Resource control for unicast and multicast ..... 14
6.4	Resource control scenarios for nomadicity ..... 16
7	Functional architecture ..... 17
7.1	Overview ..... 18
7.2	Functional entity descriptions..... 19
7.3	Mechanisms..... 27
8	Reference points ..... 28
8.1	Reference point Rs ..... 28
8.2	Reference point Rw ..... 39
8.4	Reference point Ru ..... 56
8.5	Reference point Rt..... 61
8.6	Reference point Rp ..... 74
8.7	Reference Point Ri..... 85
8.8	Reference point Rd ..... 96
8.9	Reference point Rn ..... 108
8.10	Reference point Rh ..... 108
8.11	Summary..... 118
9	Procedures ..... 119
9.1	Procedures for QoS control ..... 119
9.2	Procedures for NAPT control and NAT traversal ..... 133
10	Inter-operator communications..... 136
10.1	End-to-end QoS control..... 136
10.2	Nomadicity ..... 137
11	Security considerations and requirements ..... 138
11.1	Overview of threats and potential attacks ..... 138
11.2	Security requirements..... 139

	<b>Page</b>
Appendix I – Examples of the implementation of the RACF architecture.....	141
Appendix II – TRC-FE over different transport technologies .....	143
II.1    TRC-FE over IP network.....	143
II.2    TRC-FE over MPLS network.....	143
II.3    TRC-FE over Ethernet network.....	143
II.4    TRC-FE over broadband wireless network .....	144
Appendix III – Example of methods for detecting and determining resource availability in TRC-FE .....	145
Appendix IV – Examples of admission control procedures for unicast and multicast.....	147
IV.1    Examples of admission control procedures for unicast and multicast .....	147
IV.2    Example of multicast resource control scenario.....	153
Appendix V – The consideration of the CPN gateway control mode.....	155
Appendix VI – Resource control deployment scenarios for multicast .....	159
Appendix VII – Inter-operator RACF communication scenarios for end-to-end QoS control involving nomadicity.....	161
Appendix VIII – Comparison between reference point $R_w$ and $R_h$ .....	164
VIII.1  NAT traversal and dynamic firewall working mode.....	164
VIII.2  Related information components used in pull mode .....	164
VIII.3  Information components specific to core network .....	165
VIII.4  Information components related to charging.....	165
Bibliography.....	166

# Recommendation ITU-T Y.2111

## Resource and admission control functions in next generation networks

### 1 Scope

This Recommendation specifies the resource and admission control functions (RACF) in support of end-to-end quality of service (QoS) and network border control (at access-core and inter-domain boundaries) in next generation networks (NGNs). The RACF is aimed at providing real-time application-driven and policy-based transport resource management for a wide range of services and for a variety of transport technologies (fixed, mobile, etc.). Services can make use of RACF whether the IP multimedia subsystem is involved or not. This Recommendation defines the related requirements and functional architecture covering aspects such as resource reservation, admission control and gate control, network address port translation (NAPT) and firewall control, and network address translator (NAT) traversal.

It also defines the reference points between different functional entities and the pertinent stage 2 requirements and describes the procedures for QoS-related transport resource control, NAPT control and NAT traversal.

The pertinent protocol specifications are described in separate Recommendations. End-to-end information flows for representative applications, such as VoIP, bulk data transfer and video on demand, are for further study.

Note that network management functionality is outside the scope of this Recommendation.

Administrations may require operators and service providers to take into account national regulatory and national policy requirements in implementing this Recommendation.

### 2 References

The following ITU-T Recommendations and other references contain provisions which, through reference in this text, constitute provisions of this Recommendation. At the time of publication, the editions indicated were valid. All Recommendations and other references are subject to revision; users of this Recommendation are therefore encouraged to investigate the possibility of applying the most recent edition of the Recommendations and other references listed below. A list of the currently valid ITU-T Recommendations is regularly published. The reference to a document within this Recommendation does not give it, as a stand-alone document, the status of a Recommendation.

- [ITU-T Y.1291] Recommendation ITU-T Y.1291 (2004), *An architectural framework for support of Quality of Service in packet networks*.
- [ITU-T Y.2001] Recommendation ITU-T Y.2001 (2004), *General overview of NGN*.
- [ITU-T Y.2011] Recommendation ITU-T Y.2011 (2004), *General principles and general reference model for Next Generation Networks*.
- [ITU-T Y.2012] Recommendation ITU-T Y.2012 (2006), *Functional requirements and architecture of the NGN release 1*.

### 3 Definitions

This Recommendation defines the following terms:

**3.1 absolute QoS:** Traffic delivery with numerical bounds on some or all QoS parameters. These bounds may be physical limits, or enforced limits such as those encountered through mechanisms like rate policing. The bounds may result from designating a class of network performance objectives for packet transfer.

**3.2 application session:** An end-to-end user process that is established through the SCF (using SIP or other protocol) and may trigger a resource control session.

**3.3 firewall working mode selection:** The operation of selecting the packet inspection mode (e.g., IP, TCP/UDP header, or higher layer) of a packet-filtering-based firewall for accepting or rejecting the packets of a media flow based on related service and security requirements.

**3.4 gate:** A construct used to enable or disable the forwarding of IP packets based on the policy decision. A gate is identified by the classifier (e.g., IPv4 5-tuple) and direction of a media flow or a group of media flows that are in conformance to the same set of policy decisions.

**3.5 gate control:** The operation of opening or closing a gate. When a gate is open, the packets in the media flows are allowed to pass through; when a gate is closed, the packets in the media flows are not allowed to pass through.

**3.6 hard state:** A state that is persistent until explicitly removed.

**3.7 media flow:** A unidirectional media stream, which is specified by two endpoint identifiers and bandwidth, as well as class of service if needed.

**3.8 multicast:** A process of transmitting packet data units from one source to many destinations. The actual mechanism (e.g., IP multicast) for this process may be different for different network technologies.

**3.9 network address translation:** The operation by which IP addresses are translated (mapped) from one address domain to another address domain.

**3.10 network address port translation (NAPT):** The operation by which IP addresses and transport or port identifiers such as TCP and UDP port numbers are translated (mapped) from one address domain to another address domain.

**3.11 network address translator (NAT):** An entity that implements network address translation or NAPT functions. It consists of two types of NATs: near-end NAT that can be controlled by the operators directly, and far-end (remote) NAT that cannot be controlled by the operators directly.

**3.12 nomadicity:** Ability of the user to change the network access point after moving; when changing the network access point, the user's service session is completely stopped and then started again, i.e., no handover is involved. It is assumed that the normal usage pattern is that users shut down their service session before moving to another access point or changing terminal.

**3.13 NAPT control:** The operation of providing network address mapping information and NAPT policy rules to a near-end NAT in the media flow.

**3.14 NAT traversal:** The operation of adapting the IP addresses so that the packets in the media flow can pass through a far-end (remote) NAT.

**3.15 path-coupled QoS signalling:** A mode of signalling where the signalling messages follow a path that is tied to the data packets. Signalling messages are routed only through nodes that are in the data path.

**3.16 relative QoS:** Traffic delivery where bounds on QoS parameters such as delay, etc., are not expressed in absolute terms. It describes the circumstances where certain classes of traffic are handled differently from other classes of traffic, and the classes achieve different levels of QoS.

- 3.17 resource control session:** A process for a set of media flows associated with an application session for a period of time in order to control resources required for the application session.
- 3.18 soft state:** A state that has a lifetime and requires renewal to keep alive.
- 3.19 technology dependent resource control functions:** The functions that require specific knowledge of the link-layer technology in use in order to perform resource control.
- 3.20 technology independent resource control functions:** The functions that do not require specific knowledge of the link-layer technology in use in order to perform resource control.
- 3.21 unicast:** A process of transmitting packet data units from one source to one destination. The actual mechanism (e.g., IP unicast) for this process may be different for different network technologies.

#### 4 Abbreviations and acronyms

This Recommendation uses the following abbreviations:

AAA	Authentication, Authorization, and Accounting
ACS	Auto-Configuration Server
ATM	Asynchronous Transfer Mode
BTV	Broadcast TV
CDMA	Code Division Multiple Access
CGPE-FE	CPN Gateway Policy Enforcement Functional Entity
CMTS	Cable Modem Termination System
CNPS	Core Network Path Selection
CPE	Customer Premises Equipment
CPN	Customer Premises Network
DiffServ	Differentiated Services
DoS	Denial of Service
DSCP	Differentiated Services Code Point
DSL	Digital Subscriber Line
DSLAM	Digital Subscriber Line Access Multiplexer
ERC	Element Resource Control
ETS	Emergency Telecommunications Service
FDP	Final Decision Point
FWMS	Firewall Working Mode Selection
GC	Gate Control
GGSN	Gateway GPRS Support Node
GTP	GPRS Tunnelling Protocol
HTTP	HyperText Transfer Protocol
ID	Identifier
IGMP	Internet Group Management Protocol


IMS	IP Multimedia Subsystem
IP	Internet Protocol
IPMC	IP Packet Marking Control
LAN	Local Area Network
LSP	Label Switched Path
LTN	Logical Transport Network
MLD	Multicast Listener Discovery
MPLS	MultiProtocol Label Switching
MRF	Multicast Replication Function
MSCF	Messaging Service Control Function
MTCF	Multicast Transport Control Function
NACF	Network Attachment Control Function
NAPT	Network Address Port Translation
NAPTC	NAPT Control
NAT	Network Address Translator
NGN	Next Generation Network
NRM	Network Resource Maintenance
NS	Network Selection
NTM	Network Topology Maintenance
NTRD	Network Topology and Resource Database
P-CSCF	Proxy-Call Session Control Function
PD-FE	Policy Decision Functional Entity
PE-FE	Policy Enforcement Functional Entity
PNNI	Private Network-to-Network Interface
PPP	Point-to-Point Protocol
QMTD	QoS Mapping – Technology Dependent
QMTI	QoS and Priority Mapping – Technology Independent
QoS	Quality of Service
RACF	Resource and Admission Control Function
RDR	Resource Decision Request
RIP	Resource Initiation Response
RIR	Resource Initiation Request
RLC	Rate Limiting Control
RMR	Resource Modification Request
RRR	Resource Release Request
RSVP	Resource ReSerVation Protocol
RTCP	RTP Control protocol

RTP	Real-Time Transport
SCF	Service Control Function
SCPF	Service Control Proxy Function
SLA	Service Level Agreement
TCP	Transmission Control Protocol
TDDP	Technology Dependent Decision Point
TDR	Telecommunications for Disaster Relief
TLS	Transport Layer Security
TRC-FE	Transport Resource Control Functional Entity
TRE-FE	Transport Resource Enforcement Functional Entity
UDP	User Datagram Protocol
UE	User Equipment
UMTS	Universal Mobile Telecommunications System
VCI	Virtual Channel Identifier
VPI	Virtual Path Identifier
VPN	Virtual Private Network

## 5 Overview and requirements

### 5.1 Overview

Within the NGN architecture [ITU-T Y.2001] and [ITU-T Y.2011], the resource and admission control functions (RACF) act as the arbitrator between service control functions (SCF) and transport functions for QoS [ITU-T Y.1291] related transport resource control within access and core networks. The policy decisions made by the RACF are based on transport subscription information, service level agreements (SLAs), network policy rules, service priority (e.g., defined by [b-ITU-T Y.2171]), and transport resource status and utilization information. Figure 1 depicts a schematic view of the RACF in the overall NGN architecture.

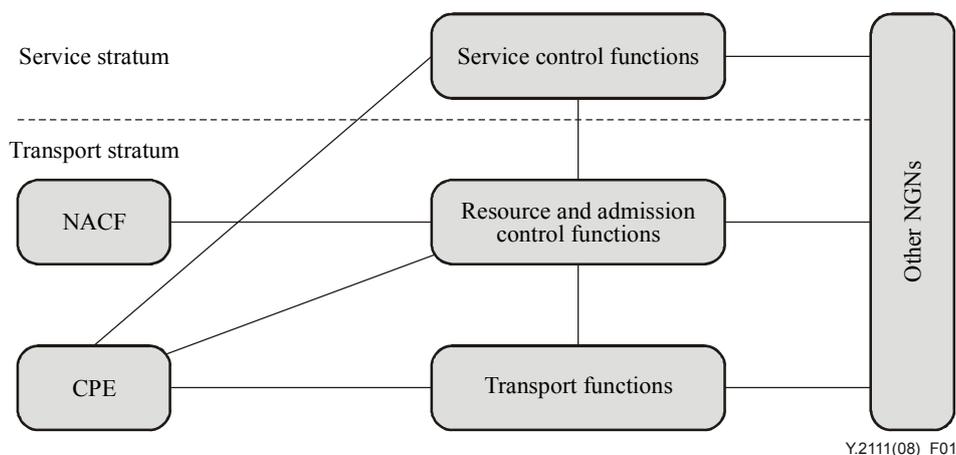

**Figure 1 – RACF within the NGN architecture**

The RACF provides an abstract view of transport network infrastructure to the SCF and decouples the provision of services from the details of transport facilities such as network topology, connectivity, resource utilization and QoS mechanisms/technology, etc. The RACF interacts with the SCF and transport functions for a variety of applications (e.g., SIP-based call [b-IETF RFC 3261], video streaming, etc.) that require the control of NGN transport resource, including QoS control, NAT/firewall control and NAT traversal.

The RACF executes policy-based transport resource control upon the request of the SCF, determines transport resource availability, makes admission decisions, and applies controls to transport functions for enforcing the policy decisions. The RACF interacts with transport functions for the purpose of controlling one or more of the following functions in the transport stratum: bandwidth reservation and allocation, packet filtering; traffic classification, marking, policing, and priority handling; network address and port translation; firewall.

The RACF takes into account the capabilities of transport networks and associated transport subscription information for subscribers in support of the transport resource control. The RACF interacts with network attachment control functions (NACF), including network access registration, authentication and authorization, parameter configuration, etc., for checking transport subscription information.

For delivery of those services across multiple providers or operators, SCF, RACF and transport functions may interact with the corresponding functions in other NGNs.

## **5.2 High-level requirements**

### **5.2.1 Requirements**

The resource and admission control functional architecture meets the following mandatory requirements:

- 1) Control the QoS-related transport resources within packet networks and at the network boundaries in accordance with their capabilities.
- 2) Support different access and core transport technologies (e.g., xDSL, UMTS, CDMA2000, cable, LAN, WLAN, Ethernet, MPLS, IP, ATM), while hiding network technological and administrative details (e.g., network topology, connectivity, control mechanisms) from the SCF.
- 3) Support CPE's differing intelligence and capability. For example, some CPE may support transport QoS signalling (e.g., GPRS session management signalling [b-ETSI TS 123 207], RSVP [b-IETF RFC 2205]), while others may not.
- 4) Support resource and admission control within a single administrative domain and between administrative domains.
- 5) Act as the arbitrator for QoS-related transport resource negotiation between SCF and transport functions in the access and core networks.
- 6) Support both relative QoS control and absolute QoS control.
- 7) Verify transport resource availability on an end-to-end basis. The verification may be loose or strict, depending on whether the request is for relative or absolute QoS. The RACF may act to reserve the resource.
- 8) Support QoS differentiation over various categories of packet traffic including packet-type flows (i.e., different packet-type flows may receive different QoS treatments) and user designations (i.e., different user traffic may receive different QoS treatments depending on the user's classifications).

- 9) Support QoS signalling [b-ITU-T Q-Sup.51]. This may include the ability to perform admission control based on estimated performance achieved along the path, compliant with QoS objectives.
- 10) Authorize requests for QoS and operate only on the authorized requests for QoS, for example, using information derived from transport subscription information, service priority, and network policy rules.
- 11) Support dynamic near-end NAPT control and firewall working mode selection.
- 12) Support far-end (remote) NAT traversal.
- 13) Support distributed and centralized transport resource control architectures.

The resource and admission control functional architecture meets the following optional requirements:

- a) Export information to support charging based on resource usage and/or QoS treatments.
- b) Support methods for resource-based admission control.
- c) Have access to and make use of information provided by network management on performance monitoring to assist in making resource-based admission decisions.
- d) Have access to and make use of the network status information provided by the underlying network infrastructure in support of end-to-end QoS when transport functions detect and report a failure.
- e) Make use of the service priority information for priority handling (e.g., admission control based on service priority information). This includes passing of service priority information between entities where applicable.
- f) Support path selection between ingress and egress points within a single domain to satisfy QoS resource requirements.

### **5.2.2 Additional requirements in Revision 1**

The resource and admission control functional architecture meets the following mandatory requirements in Revision 1:

- 1) Resource and admission control for multicast in support of, e.g., IPTV.
- 2) Resource and admission control in support of nomadicity.

The resource and admission control functional architecture meets the following optional requirement in Revision 1:

- 1) Support the interaction between the CPE/CPN and RACF.

## **6 RACF mechanisms and scenarios**

### **6.1 QoS resource control mechanisms and scenarios**

#### **6.1.1 QoS resource control mechanisms**

##### **QoS capability of CPE**

According to the capability of QoS negotiation, the CPE can be categorized as follows:

- Type 1 – CPE without QoS negotiation capability (e.g., vanilla soft phone, gaming consoles):

The CPE does not have any QoS negotiation capability at either the transport or the service stratum. It can communicate with the SCF for service initiation and negotiation, but cannot request QoS resources directly.

- Type 2 – CPE with QoS negotiation capability at the service stratum (e.g., SIP phone with SDP [b-IETF RFC 4566]/SIP QoS extensions [b-IETF RFC 3312]):  
The CPE can perform service QoS negotiation (such as bandwidth) through service signalling, but is unaware of QoS attributes specific to the transport. The service QoS concerns characteristics pertinent to the application.
- Type 3 – CPE with QoS negotiation capability at the transport stratum (e.g., UMTS UE):  
The CPE supports RSVP-like or other transport signalling (e.g., GPRS session management signalling, ATM PNNI/Q.931). It is able to directly perform transport QoS negotiation throughout the transport facilities (e.g., DSLAM, CMTS, SGSN/GGSN).

Note that the SCF is required to be able to invoke the resource control process for all types of CPE.

### **Resource control modes**

In order to handle different types of CPE and transport QoS capabilities, the RACF is required to support the following QoS resource control modes as part of its handling of a resource request from the SCF:

- Push mode: The RACF makes the authorization and resource control decision based on policy rules and autonomously instructs the transport functions to enforce the policy decision.
- Pull mode: The RACF makes the authorization decision based on policy rules and, upon the request of the transport functions, re-authorizes the resource request and responds with the final policy decision for enforcement.

The push mode is suitable for the first two types of CPE. For type 1 CPE, the SCF determines the QoS requirements of the requested service on behalf of the CPE; for type 2 CPE, the SCF extracts the QoS requirements from service signalling. The pull mode is suitable for type 3 CPE, which can explicitly request QoS resource reservation through transport QoS signalling.

### **Resource control states**

Regardless of the QoS negotiation capability of a particular CPE and the use of a particular resource control mode, the QoS resource control process consists of three logical states:

- Authorization (Authorized): The QoS resource is authorized based on policy rules. The authorized QoS bounds the maximum amount of resource for the resource reservation.
- Reservation (Reserved): The QoS resource is reserved based on the authorized resource and resource availability. The reserved resource can be used by best effort media flows when the resource has not been committed in the transport functions.
- Commitment (Committed): The QoS resource is committed for the requested media flows when the gate is opened and other admission decisions (e.g., bandwidth allocation) are enforced in the transport functions.

The general resource control criteria are required to be:

- The amount of committed resources is not greater than the amount of reserved resources.
- The amount of reserved resources is not greater than the amount of authorized resources.

Note that the amount of committed resources typically equals the amount of reserved resources.

### **Resource control schemes**

Given the variety of application characteristics and performance requirements, the RACF supports three resource control schemes:

- Single-phase scheme: Authorization, reservation and commitment are performed in a single step. The requested resource is immediately committed upon successful authorization and

reservation. The single-phase scheme is suitable for client-server-like applications to minimize the delay between the service request and the ensuing reception of content.

- Two-phase scheme: Authorization and reservation are performed in one step, followed by commitment in another step. Alternatively authorization is performed in one step, followed by reservation and commitment in another step. The two-phase scheme is suitable for interactive applications, which have stringent performance requirements and need to have sufficient transport resources available.
- Three-phase scheme: Authorization, reservation and commitment are performed in three steps sequentially. The three-phase scheme is suitable for network-hosted services in an environment where transport resources are scarce.

These resource control schemes involve the PD-FE, TRC-FE, PE-FE and certain reference points. The specific reference points involved depend on the implementation scenarios. Distributed transaction processing, which requires interactions among the involved functional entities, is supported in these three schemes.

### **Information for resource control**

The RACF is required to perform resource control based on the following information:

- Service information: A set of data provided by the SCF for a resource control request, derived from service subscription information, service QoS requirement and service policy rules.
- Transport network information: A set of data collected from the transport networks, which may consist of transport resource admission decisions and network policy rules.
- Transport subscription information: A set of data for the transport subscription profile such as the maximum transport capacity per subscriber.

### **Policy rules for the enforcement of resource control results**

The RACF may assist the installation of two types of policy rules related to the enforcement of resource control results:

- Policy decision: A set of policy conditions and actions for the enforcement of resource control results on a per flow basis, which is produced dynamically upon the individual resource request from the SCF. The RACF is required to make policy decisions based on the information for resource control described in the above paragraph, and install the policy decisions to the transport functions autonomously or upon the request of the transport functions. The policy decision can be modified and updated within the lifetime of a resource control session.
- Policy configuration: A set of static policy rules for default network resource configuration. The policy configuration is predefined by network operators and the policy rules will not be influenced by individual service requests. The policy configuration can be pre-provisioned statically in transport functions, e.g., mapping rules of the IP layer QoS to link layer QoS. In some cases, the RACF may help install the initial policy configuration for resource control, such as default resource control configuration (e.g., default gate setting). The related details are for further study.

Note that the RACF may use the soft-state (state that has a lifetime and requires renewal to keep alive) or hard-state (state that is persistent until explicitly removed) approach in support of transport resource control.

## Levels of resources

The RACF may control the resource at different levels. At least, two levels have been identified:

- Aggregate level: The resources controlled at this level correspond to bulk of traffic independent of the start and stop of an application session and may carry more than one application session at the same time.
- Media flow level: The resources controlled in this level correspond to individual user traffic flow.

For example, the aggregate level may concern:

- A bulk of traffic belonging to the same class of service, disregarding the kind of data and application session; a bulk of bandwidth between two nodes or an LSP, a VPN or a VLAN, disregarding the type of applications or data belonging to this application session.

### 6.1.2 QoS resource control scenarios

On account of different QoS capabilities of CPE and transport networks, two QoS resource control scenarios are described as examples.

Note that the intent of these examples is to illustrate the relationship between RACF and relevant entities. For the following example scenarios, only the originating CPE is shown for simplicity.

#### **Scenario 1:** Push mode QoS resource control scenario

The QoS resource control scenario using the push mode is required to be applied to all types of CPE.


The CPE type 1 does not have any QoS negotiation capability. It cannot initiate an explicit QoS request. The SCF (including IMS [b-ETSI TS 123 228] and non-IMS) is responsible for deriving the QoS needs of the requested service and sending a request to the RACF for QoS resource authorization and reservation.

The CPE type 2 supports QoS negotiation at the service stratum. It can initiate an explicit service QoS request through the service signalling with QoS extensions (e.g., SDP/SIP extensions for application QoS requirements) or through dedicated application layer QoS signalling used for application signalling protocols that lack QoS extensions or are difficult to extend. The SCF (e.g., P-CSCF in IMS) is responsible for extracting the service QoS requirements and sending a request to the RACF for QoS resource authorization and reservation.

The CPE type 3 supports path-coupled QoS signalling in the transport stratum and can operate in push mode. In this case, the QoS resource authorization and reservation is conducted in the same way as the common push mode, where authorized and/or reserved QoS resource information is required to be pushed to the transport functions in advance. Path-coupled QoS signalling can be used to invoke resource commitment at the transport functions that, in turn, interact with the RACF or can indicate the result of resource commitment to the CPE.

In this scenario, the single-phase or two-phase resource control scheme can be used.

Figure 2 depicts the high-level QoS resource control procedure for scenario 1. The detailed information flows can be found in clause 9.1.1.

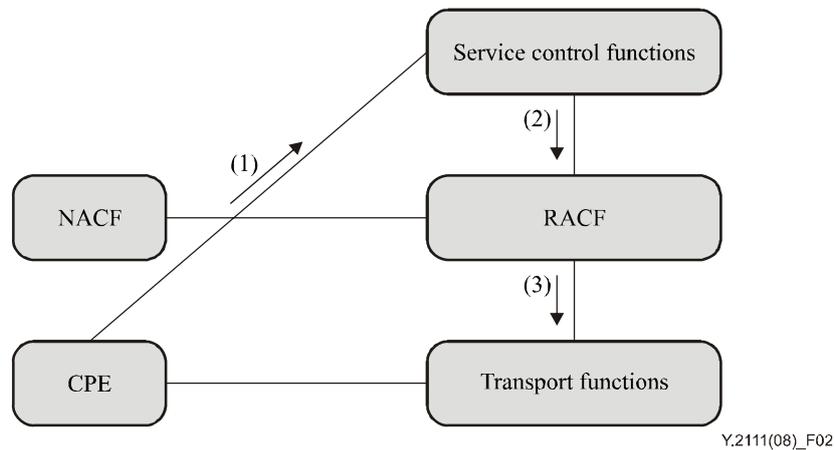

**Figure 2 – Flow diagram for scenario 1**

- 1) The CPE requests an application-specific service by sending a service request (e.g., SIP Invite, HTTP Get) to the SCF and may also send a dedicated application layer QoS signalling request. The service request may or may not contain any explicit service QoS requirement parameters.
- 2) The SCF extracts or derive the service QoS requirement parameters (e.g., bandwidth) of the requested service, and then requests QoS resource authorization and reservation from the RACF by sending a request for resource reservation which contains the explicit QoS requirement parameters.
- 3) The RACF performs authorization and admission control based on policy rules, resource admission decision and transport subscription profile stored in the NACF. If the request is granted, the RACF pushes the gate control, packet marking and bandwidth allocation decisions to the transport functions.

**Scenario 2: Pull mode QoS resource control scenario**


The QoS resource control scenario using the pull mode is applied to CPE and transport networks that support path-coupled transport signalling, which includes QoS signalling (e.g., RSVP) and other transport signalling.

The CPE type 3 supports dedicated path-coupled transport QoS signalling (e.g., GPRS session management signalling, RSVP) that passes only through the nodes on the data path. It can initiate an explicit QoS request (actually a resource reservation request) directly to the transport functions or just initiate a resource request without QoS information.

Figure 3 depicts the high-level QoS resource control steps for the scenario. The detailed information flows can be found in clause 9.1.2. The QoS resource reservation may or may not need the involvement of the SCF.

In the scenario with the involvement of the SCF, the two-phase or three-phase resource control scheme can be used for coordination between the service signalling and the dedicated path-coupled transport signalling. In this scenario, all steps are required to perform the resource reservation.

In the scenario without the involvement of the SCF, the CPE initiates a QoS request using the transport signalling to the transport function. After receiving the request, the transport function sends a request to RACF for admission control and resource reservation. The RACF will send back the decision to the transport function. In this scenario, only steps 4, 5 and 6 are required.

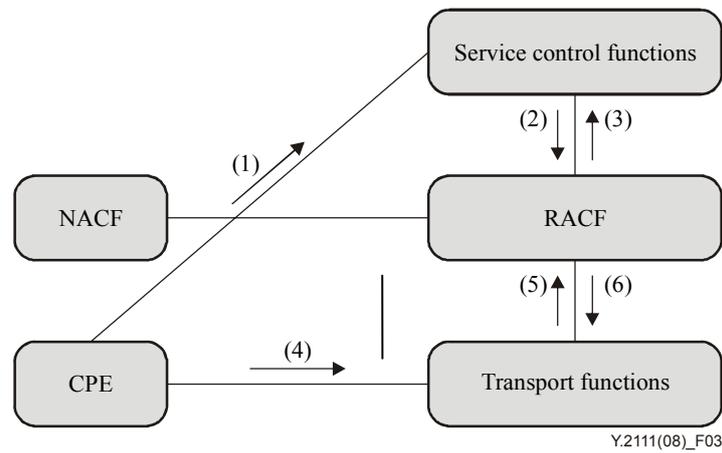

**Figure 3 – Flow diagram for scenario 2**

- 1) The CPE requests an application-specific service by sending a service request (e.g., SIP Invite, HTTP Get) to the SCF. The service request may or may not contain any explicit (application) service QoS requirements.
- 2) The SCF extracts or derives service QoS requirements (e.g., bandwidth) for the requested service, and sends an authorization request to the RACF that contains explicit QoS requirements.
- 3) The RACF checks authorization based on network policy rules. If the resources are authorized, an authorization token [b-IETF RFC 3520] is assigned to this service and informed to the CPE. The use of authorization token is optional. It is possible to perform authorization without the use of a token.
- 4) The CPE may initiate a request with QoS information for resource reservation directly to the transport functions through a dedicated path-coupled transport QoS signalling. This QoS request contains the explicit transport QoS requirement parameters for an application-specific service. It may also contain an authorization token assigned at the first phase. Alternatively, the CPE may initiate a request without explicit QoS information.
- 5) On receipt of the QoS request, the transport functions at the network edge send a request to the RACF for resource reservation and admission control that may contain the authorization token as an option. When the CPE sends a request without explicit QoS information, the transport functions send the QoS request to RACF on behalf of the CPE.
- 6) The RACF makes a reservation and admission control decision based on transport subscription profile held in the NACF, service information, network policy rules and resource availability. If the request is granted, the RACF provides the gate control, packet marking and bandwidth allocation decisions to the transport functions.

## 6.2 NAPT control and NAT traversal mechanisms and scenarios

### 6.2.1 NAPT control and NAT traversal scenarios

The RACF is required to provide the control function in support of the following NAPT scenarios.

#### Near-end NAPT control

In order to hide transport network addresses between different sub-networks and/or domains as a security measure, or to use private addresses due to the shortage of public addresses, near-end NAT devices controlled by operators are required to perform the NAPT at the border of access-to-core and/or the border of core-to-core. All NAPT techniques in support of network address hiding ultimately involve the installation of address bindings in NAPT devices, and the modification of the application signalling messages to reflect the bindings created by the NAPT.

## Far-end (remote) NAT traversal

Far-end (remote) NAT devices are widely deployed in enterprise and residential networks to protect the customer premises networks. Both signalling and media of the application have to go through such NAT devices, if they exist. By default, the applications assume the CPE's local network address is unique and reachable globally; the application signalling uses this local address to set up the end-to-end connection. However, the far-end NAT has broken those properties because the network address of media packets will be changed by the far-end NAT. The application cannot work through the far-end NAT, and NAT traversal mechanisms are required. All NAT traversal techniques ultimately involve the modification of the application protocol messages to reflect the address mapping necessitated by the far-end NAT.

### 6.2.2 NAPT control and NAT traversal mechanisms

The RACF is required to interact with the SCF and transport functions to perform the NAPT control and NAT traversal functions. Both NAPT control and NAT traversal can be supported by the same set of functional entities. The pertinent functions are distributed in the SCF, RACF and transport functions as shown in Figure 4:

- NAPT proxy function: is a service stratum function, which modifies the address and/or port in the message body of application signalling to reflect the address binding information created by NAPT enforcement function defined below.
- NAPT control function: obtains the address binding information, performs the NAPT policy control along with gate control (i.e., instruct the opening/closing of a gate).
- NAPT enforcement function: is a transport stratum function, which enforces the NAPT and media relay (address latching) to change the address and port number of the media packets.

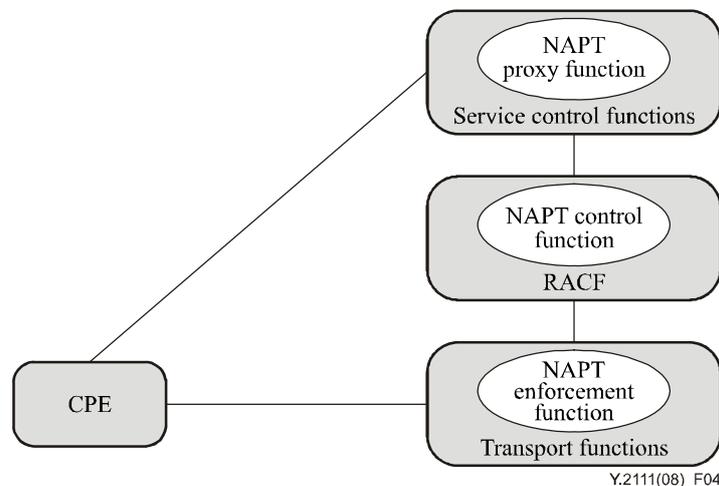


Figure 4 – NAPT and NAT traversal control mechanisms

The NAPT control function in RACF is required to provide the NAPT and NAT traversal control functions for address/port binding and NAPT policy control along with gate control; interact with NAPT proxy function in the SCF for modifying the message body of application signalling; and interact with NAPT enforcement function in the transport functions for requesting network address/port translation information.

## **6.3 Resource control for unicast and multicast**

### **6.3.1 Introduction**

In order to provide an attractive IPTV service, many providers offer bundles of TV channels to customers with a very large number of channels, even if some of the TV channels remain frequently unwatched. IPTV traffic is carried over the network along with VoD traffic and Internet traffic. Often, the number of TV channels offered to customers is greater than the number of channels that can be simultaneously carried over the access and aggregation network, and at least some channels will be watched by more than one user on a given access node. Therefore, multicast is likely to be used.

In this configuration, the risk of congestion is high and will result in degradation of QoS being provided, as well as in the impossibility to attend new service requests. It is therefore of utmost importance to monitor, prevent, if possible, and control this situation. The RACF aims to address the related issues.

### **6.3.2 Multicast resource control descriptions**

#### **6.3.2.1 Elementary functions for multicast processing**

Two new elementary functions are defined to process multicast services:

**Multicast replication function (MRF):** The operation of replicating packets of a multicast group based on the membership tracked by the MTCF. A multicast group is identified by the combination of a unicast source address and a multicast destination address, or only by a multicast destination address.

**Multicast transport control function (MTCF):** The operation of processing the requests (e.g., IGMP, MLD) for joining or leaving a multicast group and tracking the group membership. It may interact with RACF for admission control of the requests based on the subscriber information (i.e., multicast access control list and subscribed multicast bandwidth) as well as the QoS-related transport resource information.

#### **6.3.3 Resource control schemes for multicast services**

The MTCF may interact with the RACF for the following purposes:

- Request the RACF to perform resource and admission control based on the initial processing of multicast requests (e.g., when the transport node is not already part of requested multicast group).
- Request the RACF to release related-resources when all end users leave an existing multicast group.
- Notify the RACF of abnormal events (e.g., link failure).

Two implementation scenarios are possible in the context of RACF to perform resource control for multicast services:

- **Standalone RACF:** multicast resource and admission control is performed in a separate node from MTCF.
- **Co-located RACF:** multicast resource and admission control is performed in the same node as MTCF.

The use of these two schemes is dependent on the multicast service control mechanism. For instance, when transport-layer signalling (e.g., IGMP, MLD) is used for multicast request, a co-located scheme is commonly employed to accommodate the performance requirement of channel zapping.

#### **6.3.4 Resource control scenarios for multicast**

Dependent on the multicast capability and mechanisms supported by the CPE and networks, the resource control scenarios for multicast are illustrated as follows:

##### **Scenario 1: MTCF requested QoS resource authorization and reservation**

In this scenario, the multicast resource authorization and reservation are triggered by the MTCF when the MTCF receives a multicast group joining message (e.g., IGMP, MLD) from the CPE.

- 1) The CPE requests a multicast service (i.e., the request for an individual TV channel) by sending a transport signalling (e.g., IGMP, MLD) to the transport functions.
- 2) Upon receiving the service request from the CPE, the MTCF performs the multicast control, and, if needed, requests the QoS resource authorization and reservation by sending a resource reservation request to the RACF.
- 3) The RACF performs authorization and admission control based on relevant information, e.g., policy rules, resource admission decision and transport subscription profile. If the request is granted, the RACF will send the policy decisions to the transport functions (i.e., MTCF) for enforcing the policy decisions.

##### **Scenario 2: SCF requested QoS resource authorization and reservation**

In this scenario, the resource authorization and reservation are triggered by the SCF. Joining the multicast group is requested by the CPE through sending transport signalling (e.g., IGMP, MLD) or by RACF without sending transport signalling.

- 1) The CPE requests a multicast service (e.g., the request for an individual TV channel or for a set of channels) by sending a service request to the SCF.
- 2) Upon receiving the service request, the SCF performs the service control and requests the QoS resource authorization and reservation by sending a request for resource reservation to the RACF.
- 3) The RACF performs authorization and admission control based on the relevant information, e.g., policy rules, resource admission decision and transport subscription profile. If the request is granted, the RACF will push the policy decisions to the transport functions.

#### **6.3.5 Resource control approaches for multicast and unicast**

When the RACF is used to provide resource control for both multicast and unicast services, three approaches are supported:

- 1) Exclusive resource allocation approach: Dedicated resources are allocated to multicast services and unicast services respectively through other manners (e.g., network management system). The unicast and multicast services do not share any network resources. In this case, two RACF instances operate independently to support the resource admission control for multicast and unicast services respectively without any interaction.
- 2) Adjustable resource allocation approach: Similar to the above approach, dedicated resources are allocated to multicast services and unicast services respectively through other manners (e.g., network management system). However, the RACF may adjust the ratio of the dedicated resources (i.e., maximum number of channels or bandwidth) between multicast and unicast services.

The RACF instances may interact with each other to negotiate the resource adjustment at the aggregate level. The relationship between the RACF instances may be either master-slave or client-server.

- 3) Dynamic resource allocation approach: Multicast and unicast services share common resources. Each instance of the RACF is responsible for the resource and admission control for both multicast and unicast services in a particular network segment e.g., access, aggregation and/or core networks. Different RACF instances may interact with each other to make the final resource and admission control decision. The interactions may be either at the aggregate level or at the per media flow level.

#### **6.4 Resource control scenarios for nomadicity**

This clause describes the nomadicity scenario involving two operators playing the roles of the NGN home provider and NGN visited provider. The NGN home provider owns the subscriber and the transport resources of the subscriber's home network, and the NGN visited provider owns the transport resources of the access network visited by the subscriber.

The NGN home provider performs initial policy decisions based on the user transport subscription profile, its own network policy rules, and service information. The NGN visited provider performs final policy decisions based on available resources, its own network policy rules, and the SLA with the NGN home provider.

There are two resource control scenarios for nomadicity.

**Scenario 1:** The SCF-requested QoS resource reservation procedure (Push mode)

- 1) The home SCF sends a resource initiation request to the home RACF.
- 2) The home RACF authorizes the request including checking if the required QoS resources are consistent with the transport subscription information held in the home NACF, and finds that the required resources belong to the visited network. Then the home RACF sends the request to the visited RACF over the Ri reference point.
- 3) The visited RACF checks if the required QoS resources are consistent with its own network policy rules, and also checks the resource availability.
- 4) The visited RACF makes the final admission decisions, and then responds to the home RACF over the Ri reference point.

**Scenario 2:** The CPE-requested QoS control procedure (Pull mode)


This scenario usually contains two phases: the SCF-requested QoS initial authorization phase and CPE-requested QoS resource reservation phase.

- 1) The home SCF sends an initial resource authorization request to the home RACF as triggered by a service establishment signalling message from the CPE.
- 2) The home RACF makes a QoS resource authorization decision based on the subscription profile from the home NACF and the operator policies. If the required resources belong to the visited network, the home RACF asks the visited RACF for authorization over the Ri reference point.
- 3) The CPE requests QoS resource reservation in the visited network through path-coupled transport signalling.
- 4) (Optional) If the home RACF previously requested the initial authorization, the visited RACF sends a message to the home PD-FE over the Ri reference point for retrieving the related service information.

- 5) Based on the 'QoS request' from the CPE, the visited RACF checks if the required QoS resources and the service information are consistent with network policy rules and the initial authorization information, and also checks the resource availability. Then the visited RACF makes the final admission decisions.

The home NACF provides user profile information for authorizing and authenticating the requests for user access to the visited network and network resource.

## 7 Functional architecture

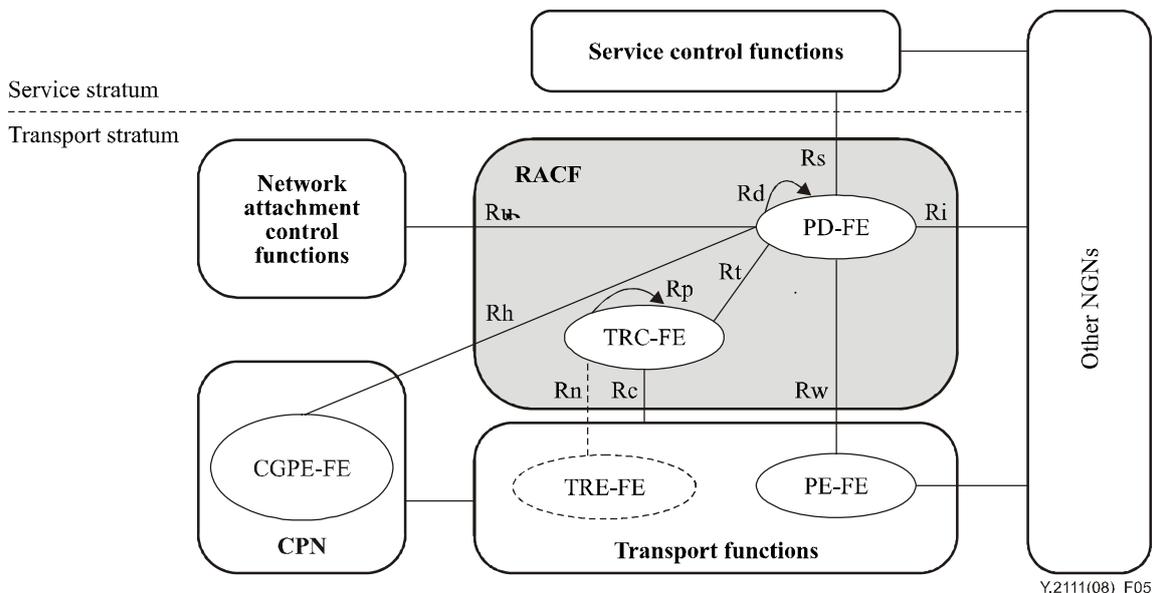

**Figure 5 – Generic resource and admission control functional architecture in NGN**

Figure 5 describes the functional architecture with functional entities and the relevant reference points. This architecture includes:

- SCF (service control functions),
- PD-FE (policy decision functional entity),
- TRC-FE (transport resource control functional entity),
- TRE-FE (transport resource enforcement functional entity),
- PE-FE (policy enforcement functional entity),
- CGPE-FE (CPN gateway policy enforcement functional entity)
- NACF (network attachment control functions).

The CPE/CPN may be connected to the PE-FE in access network domains and the PE-FE can reside at the network boundary to interconnect with other NGNs.

NOTE – It is foreseen that for efficient support of IPTV services, the CPN would include the CPN gateway policy decision functional entity (CGPD-FE) and require direct interactions and a new reference point between the CGPD-FE and PD-FE. Such interactions and reference point, are for further study.

Other NGNs may include access networks only or core networks only or both of them. The transport functions could also apply to access networks and core networks. NGN is recommended to allow both IPv4 and IPv6, so the impacts of NATs on the architecture and reference points (e.g., Rs and Rw) are required to be considered as a whole. The NACF is required to be connected to PD-FE in access network domains. The dashed line for TRE-FE and reference point Rn is for further study. Note that the Rc reference point may be connected to any instances of the transport

functions as needed, including PE-FE, TRE-FE and other transport processing functional entities in the transport stratum defined in [ITU-T Y.2012], to obtain the pertinent information.

Administrative domains are not represented in Figure 5. At least one PD-FE is required to be deployed in each network administrative domain (e.g., access network domain and/or core network domain) with associated PE-FEs and TRC-FEs. Depending on the business model and implementation choices, the RACF may be present in an access network domain or core network domain, or may be present in both access and core network domains. The implementation and physical configuration of the PD-FE and TRC-FE are flexible; they can be distributed or centralized, and may be a stand-alone device or part of an integrated device. Appendix I depicts some implementation examples.

## 7.1 Overview

The RACF consists of two types of resource and admission control functional entities: the PD-FE (policy decision functional entity) and the TRC-FE (transport resource control functional entity). This decomposition of PD-FE and TRC-FE enables the RACF to support a variety of access and core networks (e.g., fixed and mobile access networks) within a general resource control framework.

- The PD-FE provides a single contact point to the SCF and hides the details of transport network from the SCF. The PD-FE makes the final decision regarding network resource and admission control based on network policy rules, SLAs, service information provided by the SCF, transport subscription information provided by the NACF in access networks, and resource-based admission decision results provided by TRC-FE. The PD-FE controls the gates in the PE-FEs at a per flow level. The PD-FE consists of transport technology-independent resource control functions and is independent of the SCF as well. The policy rules used by PD-FE are service-based and are assumed to be provided by the network operators.
  - One PD-FE instance may serve multiple service providers.
  - One PD-FE instance may control all or a sub-set of PE-FE instances belonging to the same domain.
  - Multiple PD-FE instances within the same network operator's domain can be interconnected through the Rd reference point.
- The TRC-FE deals with the diversity of underlying transport technologies and provides the resource-based admission control decision results to the PD-FE. The TRC-FE is service-independent and consists of transport technology-dependent resource control functions. The PD-FE requests the TRC-FE instances in the involved transport networks through the Rt reference point to detect and determine the requested QoS resource along the media flow path. The TRC-FE may collect and maintain the transport network topology and the transport resource status information and authorize resource admission control of a transport network based on network information such as topology and/or connectivity, network and element resource availability, as well as the transport subscription information in access networks.
  - Multiple TRC-FE instances may coexist in a transport network, for the control of different sub-domains or areas without overlapping.
  - Multiple TRC-FE instances in the same core transport network can be interconnected through the Rp reference point.
  - TRC-FE instances in different operators' domains interact indirectly through PD-FE instances.

- The PD-FE may contact only one designated TRC-FE instance, and then TRC-FE instances communicate with each other through the Rp reference point to detect and determine the requested QoS resource from edge to edge in the involved network.
- The PD-FE may contact multiple TRC-FE instances and determine the requested QoS resource from edge to edge in the involved network.
- Within a single domain, a given TRC-FE instance may interact with multiple PD-FE instances; a given PD-FE instance may interact with multiple TRC-FE instances.

The SCF represents an abstract notion of the functional entities in the service stratum of NGN [ITU-T Y.2012] that request the QoS resource and admission control for media flows of a given service via the Rs reference point.

The NACF includes a collection of functional entities that provide a variety of functions for user access network management and configuration based on the user profiles.

A transport infrastructure is shared among multiple SCF instances and even possibly shared among multiple service providers. Transport resource separation mechanisms (i.e., L1/L2/L3 VPN) may be used among SCF instances for security and network performance.

The PE-FE (policy enforcement functional entity) in the transport stratum is a packet-to-packet gateway at the boundary of different packet networks and/or between the CPN and access network. It is the key injection node to enforce dynamic QoS and resource control, NAPT control and NAT traversal.

The CGPE-FE (CPN gateway policy enforcement functional entity) in the CPN enforces the transport policy rules for upstream traffic instructed by the PD-FE.

The TRE-FE (transport resource enforcement functional entity) in the transport stratum enforces the transport resource policy rules instructed by the TRC-FE at the technology-dependent aggregate level. Note that the detailed requirements for TRE-FE are different for different transport technologies. These requirements are specified in other related Recommendations (e.g., the MPLS-related specifics are specified in [b-ITU-T Y.2174]).

## **7.2 Functional entity descriptions**

### **7.2.1 Service control functions**

The SCF in different domains can interact with PD-FE via the Rs reference point. The SCF makes requests for transport resources and may receive notifications when resources are reserved and released.

- The SCF is required to provide information to the PD-FE to identify media flows and their required QoS characteristics (e.g., service class, bandwidth).
- The SCF may provide service priority information to the PD-FE to facilitate appropriate priority handling (e.g., priority processing of the resource request, resource pre-emption if needed).
- The SCF may request resource usage information through the PD-FE for charging or other usage metering.
- The SCF may provide service information to the PD-FE to facilitate appropriate dynamic firewall working mode selection.
- The SCF is required to indicate when the resource is to be committed (i.e., opening gate and allocating bandwidth). A resource may either be committed immediately or just reserved for a later commitment.

- When a NAPT function is required, the SCF is required to request address binding (mapping) information and perform required modifications in signalling messages. This includes any address information modifications that may be required for binding.
- When the pull mode along with a path-coupled resource reservation mechanism is used, the SCF is required to indicate to the PD-FE whether it is notified when resources are reserved, modified and released.
- When an authorization token mechanism is used, the PD-FE may provide the SCF one or multiple authorization tokens, which are required to be included in a signalling message to CPE.

## **7.2.2 Network attachment control functions**

Network attachment control functions (NACF) provide the following:

- Dynamic provision of IP address and other user equipment configuration parameters.
- Authentication of user access network, prior or during the IP address allocation procedure.
- Authorization of user access network, based on user profiles (e.g., access transport subscription).
- Access network configuration, based on user profiles.
- Location management.

The PD-FE in the access network interacts with the NACF via the Ru reference point to obtain the transport subscription information and the binding information of the logical/physical port address to an assigned IP address.

## **7.2.3 Resource and admission control functions**

### **7.2.3.1 Overview**

Tables 1 and 2 summarize the elementary resource and admission control functions, respectively for PD-FE and TRC-FE. In the following descriptions, technology dependent functions are functions that require specific knowledge of the link-layer technology in use. Technology independent functions are functions that do not require specific knowledge of the link-layer technology in use.

**Table 1 – PD-FE elementary functions**

<b>Acronym</b>	<b>Function</b>	<b>Description</b>
FDP	Final decision point	Makes the final admission decisions (including priority considerations) in terms of network resources and admission control, based on request from the SCF.
QMTI	QoS and priority mapping – Technology independent	Maps the service QoS requirements and priority received from the SCF to network QoS parameters (e.g., Y.1541 class [b-ITU-T Y.1541]) and priority.
GC	Gate control	Controls the opening and closing of a gate.
IPMC	IP packet marking control	Decides on the packet marking and remarking of IP flows.
NAPTC	NAPT control and NAT traversal	Controls network address translation for both near-end NA(P)T and far-end NA(P)T.
RLC	Rate limiting control	Decides on the bandwidth limit of flows (e.g., for policing).
FWMS	Firewall working mode selection	Selects the working mode of the firewall based on the related service information.
CNPS	Core network path selection	Chooses the core network ingress and/or egress path at the network boundary based on the service information and technology-independent policy rules.
NS	Network selection	Locates core networks and the PE-FE that are involved to enforce the final admission decisions.

**Table 2 – TRC-FE elementary functions**

<b>Acronym</b>	<b>Function</b>	<b>Description</b>
QMTD	QoS mapping – Technology dependent	Maps the network QoS parameters to transport (technology-dependent) QoS parameters.
TDDP	Technology dependent decision point	Makes technology-dependent and resource-based admission decisions for both unicast and multicast.
NTM	Network topology maintenance	Collects and maintains the transport network topology information for both unicast and multicast.
NRM	Network resource maintenance	Collects and maintains the transport resource status information for both unicast and multicast.
ERC	Element resource control	Controls the QoS-related resources in the transport elements at the aggregate level (e.g., VLAN, VPN, LSP).
NOTE – The ERC is for further study.		

### 7.2.3.2 Policy decision functional entity (PD-FE)

The PD-FE handles the QoS resource requests received from the SCF via the Rs reference point or from PE-FE via the Rw reference point. The PD-FE contains the following functions:

- Final decision point (FDP): This function first checks the QoS resource request based on service information, network policy rules and transport subscription information, and then interacts with the TRC-FE via the Rt reference point to detect and determine the requested QoS resource within the involved access and/or core transport networks.
  - The FDP makes the final admission decision for media flows of a given service based on network policy rules, service information, transport subscription information, and decision on resource availability.
  - The FDP indicates the loss of connectivity: It informs the SCF that the connectivity of the transport resource previously granted is lost. The SCF may request PD-FE to relinquish all resources associated with the resource control session.
- QoS mapping – technology independent (QMTI): This function maps the service QoS parameters and priority received from the SCF via the Rs reference point to network QoS parameters (e.g., Y.1541 class) and priority based on the network policy rules.
- Gate control (GC): This function controls PE-FE to install and enforce the final admission decisions via the Rw reference point (e.g., opening or closing the gate). The action to pass or drop IP packets is based on a set of IP gates (packet classifiers, e.g., IPv4 5-tuple) and transport interface identification information (e.g., VLAN/VPN ID) as needed.
- IP packet marking control (IPMC): This function takes decisions on packet marking and remarking of flows. The marking may consider the priority of the flow and traffic engineering parameters.
- NAPT control and NAT traversal (NAPTC): This function interacts with PE-FE and SCF to provide the address binding information for NAPT control and NAT traversal as needed.
- Rate limiting control (RLC): This function makes decisions on the bandwidth limits of flows (e.g., for policing).
- Firewall working mode selection (FWMS): This function selects the working mode of the firewall based on the service information. Four packet inspection modes could be identified (static packet filtering, dynamic packet filtering, stateful inspection, deep packet inspection, see also clause 7.2.4.1).
- Core network path selection (CNPS): This function chooses the core network ingress and/or egress path for a media flow based on the service information and technology independent policy rules at the involved PD-FE.
- Network selection (NS): This function locates core networks that are involved to offer the requested QoS resource. It locates the PE-FE instances that are involved to enforce the final admission decisions.

The PD-FE is required to make the final policy decisions based on the service information (e.g., service type, flow description, bandwidth, priority), transport network information (e.g., resource admission result, network policy rules) and transport subscription information (e.g., maximum upstream/downstream capacity). The policy decision is required to provide sufficient information to make the PE-FE perform the resource control operation (e.g., gate opening/closing, bandwidth allocation/rate limiting, packet marking, traffic policing/shaping, NAPT and address latching). The policy decisions may be composed of flow ID, IP addresses, bandwidth, gate status, time/volume limit, traffic descriptor, etc.

The PD-FE can be stateful or stateless depending on the complexity of the specific network environment, application characteristics and deployment architecture.

- The stateless PD-FE only maintains the transaction state information, e.g., state held for the duration of a request-response operation. In order to be stateless, the PD-FE is required to generate the resource control session information for each resource control request from the SCF, which can be stored in the SCF, TRC-FE or PE-FE and used to retrieve the state information together with pertinent information flows.
- The stateful PD-FE may maintain a variety of resource control session information within PD-FE, such as the session duration, the resource control session information (e.g., the association between SCF and PD-FE, PD-FE and TRC-FE, PD-FE and PE-FE), the resource reservation limit (e.g., time limit/volume limit), resource reservation status (i.e., authorized, reserved, or committed) and physical/logical connection ID.

### 7.2.3.3 Transport resource control functional entity (TRC-FE)

TRC-FE is responsible for transport technology dependent resource control as follows:

- Resource status monitoring and network information collection  
The TRC-FE collects and maintains the network information and resource status information. The resource status information may be specific to the resource based admission control scheme being used by TRC-FE, i.e., whether it is accounting, out-of-band measurements, in-band measurements, or reservation-based.
- Resource based admission control  
On receipt of the resource request from PD-FE, the TRC-FE is required to perform resource based admission control based on the QoS and priority requirements received from the PD-FE (e.g., bandwidth and Y.1541 class), in conjunction with the resource utilization information and transport dependent policy rules, and is required to update the resource status and return the result to PD-FE.
- Transport dependent policy control  
Transport dependent policy rules are a set of rules specific to a transport sub-network and technology. The TRC-FE ensures that a request from the PD-FE matches the transport specific policy rules (e.g., access link policy rules, core transport network policy rules), as multiple PD-FEs can request resources from the same TRC-FE. The TRC-FE is required to coordinate the resource requests from PD-FEs and take into account transport dependent policy rules to decide if the resource requests can be supported (e.g., usage/constraints of particular transport QoS class and total capacity).

The TRC-FE provides the following basic functions:

- QoS mapping – technology dependent (QMTD): This function maps the network QoS parameters and classes received from the PD-FE via the Rt reference point to transport (technology dependent) QoS parameters and classes based on specific transport policy rules, and accommodating the diversity of transport technologies.
  - When mapping network QoS parameters to transport (technology dependent) QoS parameters, TRC-FE considers the underlying transport technology. A set of network QoS parameters may be mapped to different sets of transport (technology dependent) QoS parameters based on transport technologies. The TRC-FE has knowledge of the QoS related features of the underlying transport network and map the network QoS parameters to the best matching transport (technology dependent) QoS parameters for given transport technology. The mapping policy rules need to be provided by network operators.

- Technology dependent decision point (TDDP): This function receives and responds to the QoS resource request from PD-FE via the Rt reference point and/or from another TRC-FE via Rp reference point for both unicast and multicast. This function detects and determines the availability of requested QoS resource based on the network topology and resource status information, as well the transport subscription information in access networks. It may make path selection between ingress and egress points within its purview of a sub-domain to satisfy the QoS resource requirements. If the requested resource is available, this function updates the resource status to include the new application request and responds to PD-FE and/or another TRC-FE with a positive answer (e.g., resource available); otherwise, it responds to PD-FE and/or another TRC-FE with a negative answer (e.g., resource unavailable).
- Network topology maintenance (NTM): This function collects and maintains the transport network topology information (including unicast and multicast) from transport functions via the Rc reference point. It is possible that the topology information is configured and tracked locally in the TRC-FE. In this case, the Rc reference point is not needed. Note that the reference point that allows the TRC-FE to collect the topology information from the NMS is for further study.
- Network resource maintenance (NRM): This function collects and maintains the transport resource status information (including unicast and multicast) from transport functions via the Rc reference point. It is possible that the resource information is configured and tracked locally in the TRC-FE. In this case, the Rc reference point is not needed. Note that the reference point that allows the TRC-FE to collect the resource information from the NMS is for further study.
- Element resource control (ERC): This function controls the QoS-related resources in the intermediate transport elements at the aggregate level (e.g., VLAN, VPN, LSP). Note that the ERC is for further study.

The implementation of the TRC-FE in various access networks may be different according to access transport technologies and corresponding QoS mechanisms in the data plane. The implementation of the TRC-FE may be different in various core networks according to core transport technologies and corresponding QoS mechanisms in the data plane.

Multiple TRC-FE instances can be interconnected in the same core transport network, and one or more of those instances may be co-located with transport functions (for example, MTCF and MRF), in support of different types of admission control (for example, multicast admission control). The TRC-FE instance that is directly connected to PD-FE is called top-tier TRC-FE. The TRC-FE instance that is connected to top-tier TRC-FE and co-located with transport functions is called co-located TRC-FE. The following operation modes are supported by the TRC-FE and the Rp reference point:

- Outsourcing mode  
The co-located TRC-FE makes the resource admission decision for both unicast and multicast services; the top-tier TRC-FE queries the co-located TRC-FE for resource admission in the relevant network segment. The outsourcing mode can be performed at either media flow level or aggregate level. The outsourcing mode is suitable for the dynamic resource approach, i.e., the resources are fully shared by unicast and multicast.

- **Designating mode**  
The co-located TRC-FE performs resource admission control for unicast and/or multicast services respectively within the pre-provisioned threshold of aggregate resources; the top-tier TRC-FE is entitled to adjust the threshold of aggregate resources based on the resource utilization or upon the request of co-located TRC-FE. The designating mode can only be performed at the aggregate level. The designating mode is suitable for adjustable resource approach, i.e., the dedicated resources are provisioned to unicast and multicast services.
- **Reporting mode**  
The co-located TRC-FE makes the resource admission decision for multicast services and the top-tier TRC-FE makes the resource admission decision for unicast services. Based on the predefined provider's policy, the co-located TRC-FE reports the resource status information to the top-tier TRC-FE. The co-located TRC-FE and top-tier TRC-FE interact with each other to maintain the consistency of the resource status information. The granularity of interaction between top-tier TRC-FE and co-located TRC-FE can be either at per session level. Note that this mode is required to follow a restricted procedure such as shown in Appendix IV. The reporting mode is suitable for dynamic resource approach, i.e., the resources are fully shared by unicast and multicast.

Further detailed mechanisms are described in Appendix IV.

Appendix II elaborates on the TRC-FE over different transport technologies.

Examples of methods for detecting and determining resource availability in TRC-FE: refer to Appendix III.

#### **7.2.4 Transport functions**

Note that the transport functions described in the following subclauses pertain only to the entities interacting with RACF.

##### **7.2.4.1 Policy enforcement functional entity (PE-FE)**

The PE-FE enforces the network policy rules instructed by the PD-FE on a per-subscriber and per-IP flow basis. It is recommended that the PD-FE be able to perform the following functions based on flow information such as classifier (e.g., IPv4 5-tuple) and flow direction, as well as transport interface identification information (e.g., VLAN/VPN ID, LSP label) as needed. The functions of the PE-FE include:

- **Opening and closing gate:** enabling or disabling packet filtering for an IP media flow.  
A gate is unidirectional, associated with a media flow in either the upstream or downstream direction. When a gate is open, all of the packets associated with the flow are allowed to pass through; when a gate is closed, all of the packets associated with the flow are blocked and dropped.
- **Rate limiting and bandwidth allocation**
- **Traffic classification and marking**
- **Traffic policing and shaping**
- **Mapping of IP-layer QoS information onto link layer QoS information based on predefined static policy rules (e.g., setting 802.1p priority values)**
- **Network address and port translation**
- **Media relay (i.e., address latching) for NAT traversal**
- **Collecting and reporting resource usage information (e.g., start-time, end-time, and octets of sent data)**

- Packet-filtering-based firewall: inspecting and dropping packets based on predefined static security policy rules and gates installed by PD-FE.

There are four packet inspection modes for packet-filtering-based firewall:

- Static packet filtering: inspecting packet header information and dropping packets based on static security policy rules. This is the default packet inspection mode applied for all flows.
- Dynamic packet filtering: inspecting packet header information and dropping packets based on static security policy rules and dynamic gate status.
- Stateful inspection: inspecting packet header information as well as TCP/UDP connection state information and dropping packets based on static security policy rules and dynamic gate status.
- Deep packet inspection: inspecting packet header information, TCP/UDP connection state information and the content of payload together, and dropping packets based on static security policy rules and dynamic gate status.

#### **7.2.4.2 CPN gateway policy enforcement functional entity**

The CGPE-FE enforces the network policy rules instructed by the PD-FE for upstream traffic on a per-subscriber and per-flow basis. It performs the following functions based on flow information such as classifier (e.g., IPv4 5-tuple) and flow direction, as well as transport interface identification information (e.g., VLAN, ATM VPC/VPI) as needed. The functions of the CGPE-FE include:

- Opening and closing gate: enabling or disabling packet filtering for an media flow.  
A gate is unidirectional, associated with a media flow in either the upstream or downstream direction. When a gate is open, all of the packets associated with the flow are allowed to pass through; when a gate is closed, all of the packets associated with the flow are blocked and dropped.
- Rate limiting and bandwidth allocation
- Traffic classification and marking
- Traffic policing and shaping
- Mapping of IP-layer QoS information onto link layer QoS information based on predefined static policy rules (e.g., setting 802.1p priority values)
- Collecting and reporting resource usage information (e.g., start-time, end-time, and octets of sent data)

#### **7.2.4.3 Transport resource enforcement functional entity (TRE-FE)**

The TRE-FE enforces the transport resource policy rules instructed by the TRC-FE at the technology-dependent aggregate level (e.g., VLAN, VPN and MPLS). It is recommended that the TRE-FE be able to perform the functions based only on transport link information (e.g., VLAN/VPN ID, and LSP label). For example, a TRE-FE may be used to modify the bandwidth associated with an LSP, or to set ATM traffic management parameters such as cell rate or burst size.

Note that the detailed requirements for TRE-FE are different for different transport technologies. These requirements are specified in other related Recommendations (e.g., the MPLS-related specifics are specified in [b-ITU-T Y.2174]).

## **7.3 Mechanisms**

### **7.3.1 Selection mechanisms**

In order to transfer the resource control requests between relevant functional entities (such as between SCF and PD-FE, PD-FE and TRC-FE, PD-FE and PE-FE, TRC-FE and TRC-FE, or PD-FE and PD-FE), two operations are performed: discovery and selection.

#### **Discovery mechanism**

A functional entity discovers the communicating parties by the following mechanisms:

- **Static mechanism:** A functional entity may obtain the topology and connectivity information of all relevant communicating parties from statically configured location information, which includes either the IP address or the fully qualified domain name (FQDN). This information would be retrieved through, for example, the DNS.
- **Dynamic mechanism:** A functional entity may formulate the topology and connectivity information of all relevant communicating parties and update the information automatically.

In this Recommendation, the static mechanism is mandatory and the dynamic mechanism is optional.

#### **Selection mechanism**

A functional entity selects a specific instance from the list of communicating parties that are discovered. The information such as the type of service and a set of service attributes, globally unique IP addresses or the end user's identifier can be used to identify the specific communicating party.

The PD-FE identifier, resource control session identifier, and globally unique IP address information (or transport subscriber identifier) are required by pertinent reference points (such as Rs, Rw, Rt, Ri, Rd and Rp) in support of a selection mechanism.

### **7.3.2 Binding mechanisms**

The RACF is required to use one of the following mechanisms for binding the media flow QoS request with the policy decision information in support of policy enforcement in the PE-FE when transport signalling is applied to pull the policy decision information from the PD-FE:

- 1) **Authorization token:** The PD-FE generates an authorization token upon resource request from the SCF. The authorization token contains the fully qualified domain name of the PD-FE and a resource control session ID in the PD-FE, which allows the PD-FE to uniquely identify the resource request.
- 2) **Source address of media flow (e.g., globally unique IP address):** When neither near-end NAPT nor far-end NAPT is deployed between the CPE and the SCF, the end user globally unique IP address is used for the binding. Otherwise, the source address of the media flow received by the access gateway is required to be used for the binding. The fully qualified domain name of the PD-FE and the resource control session ID can be derived based on the source address of the media flow.

- 3) Source address of media flow and other filters (e.g., media flow classifier): When multiple simultaneous media flows are provisioned in a session, the source address may not be adequate to identify a unique binding; other filters such as the port number of source address, destination address and port number, and protocol number may be used with the source address for the binding. The fully qualified domain name of the PD-FE and the session ID are derived based on the source address of media flow and other applied filter information.
- 4) Transport subscriber identifier: When the transport subscription information is needed by the RACF for policy decision and resource control, the transport subscriber identifier may be used for accessing the subscription profile in the NACF directly.

## 8 Reference points

NOTE – By default, all information components in an information flow defined in this clause are to be considered 'mandatory' unless they are explicitly identified as being "optional".

### 8.1 Reference point Rs

The Rs reference point allows QoS resource request information needed for QoS resource authorization and reservation to be exchanged between the PD-FE and the SCF. Either the push or pull mode may be used. The Rs reference point is required to be able to support resource control for both fixed and mobile networks, and is recommended to support NAPT/firewall control and NAT traversal at the PE-FE as needed.

The Rs reference point may operate as an intra-domain or an inter-domain reference point.

#### 8.1.1 Functional requirements

##### 8.1.1.1 Resource control functional requirements

The Rs reference point provides the ability for the SCF to make requests:

- for resource authorization and reservation for a media flow;
- for QoS handling;
- for priority handling;
- for gate control of a media flow;
- to insert NAPT function and request address mapping information;
- for dynamic firewall working mode selection;
- for resource usage information.

In addition, the SCF can request notification of events.

##### 8.1.1.2 Resource control session processing functional requirements

To assure the reliability and performance of resource control session operations across the Rs reference point, the following capabilities are required:

**Overload control:** The Rs reference point is required to provide the capability to support overload control for preventing the overflow of information messages exchanged between SCF and PD-FE.

**Synchronization and audit:** The Rs reference point is required to provide the capability to support synchronization and audit of the resource control session status in support of recovery and operational information statistics and auditing.

**Session state maintenance:** When a stateful PD-FE is used, it is required to be able to maintain the session state using either soft-state or hard-state approaches. The reservation holding time specifies the time limitation in support of abnormal recovery. When a stateless PD-FE is used, the resource control session information passed by the SCF or PE-FE can be used to derive the session state and relevant information.

### 8.1.2 Information exchange requirements

This clause provides a brief description of the information exchange requirements for the Rs reference point.

**Request-response transactions:** The reference point is required to allow the SCF to request a transaction to be performed by the PD-FE and get a response (that can be correlated with the request) in return.

**Notifications:** The reference point is required to support the notification of asynchronous events (from the PD-FE to the SCF).

**Reliable delivery:** The reference point is required to provide reliable delivery of messages.

**Capabilities:** The SCF is required to be able to determine the capabilities of appropriate PD-FE instance when requesting resources and other transport plane functions.

**Security:** The Rs is required to support the authentication between the SCF and PD-FE such that requests to the PD-FE from unauthenticated sources will not be performed and such that the SCF can verify the source of notifications sent from the PD-FE. Refer to clause 11 for other security requirements.

**One-to-many/many-to-one:** Two modes are required to be supported: 1) One-to-many mode: a SCF is required to be able to communicate with multiple PD-FEs; 2) Many-to-one mode, multiple SCF instances are required to be able to make requests to a given PD-FE. Only a single SCF will make a request to a given PD-FE for a particular session.

**Granularity of resource control:** The Rs reference point is required to support resource control operations (including resource authorization, reservation, commitment, modification and termination) at different levels of granularity. A single resource control request may combine one or several media flows from a single application session, or from a single SCF, or from a provider domain.

For example:

- The change of any individual media flow within an existing resource control session invokes the operation of resource modification to that media flow.
- The failure of any individual elements (e.g., transport link failure) invokes the operation of resource termination to all affected media flows.

**Level of resource control:** The Rs reference point is required to support the resources control for the media flow level.

NOTE – Rs resource control for aggregate level is outside the scope of Revision 1.

### 8.1.3 Information components

The information components exchanged across the Rs reference point are categorized as follows.

#### 8.1.3.1 Resource control processing information components

The information components for resource control request processing (e.g., discovery, binding, overload control and state maintenance) are described in Table 3.

**Table 3 – Resource control processing information components (Rs)**

<b>Information component</b>	<b>Description</b>
SCF identifier	A unique identifier for different instances of the SCF within the same administrative domain of a single requestor.
Resource control session identifier	An identifier for the session, which may be composed of multiple media flows for which the resource reservation requests are sent to the RACF. The identifier has to be unique within the same SCF instance.
Globally unique IP address information (Optional, Note 1)	A set of IP address information used for locating the access network in which the CPE is requesting the transport resource.
– Unique IP address	The IP address for identifying the CPE.
– Address realm	The addressing domain of the IP address (e.g., Subnet prefix or VPN ID).
Transport subscriber identifier (Optional, Note 1)	A globally unique identifier for the CPE requesting the transport resource. This identifier can be used for locating the transport subscription information for the CPE.
Resource requestor identifier	An identifier for the requestor (i.e., the owner of SCF (e.g., a Service Provider)) of resource control service. It is unique over the requestors sending requests for the resource control to the same RACF domain.
Resource request priority (Optional)	The indication of the importance of a resource control request. It can be used for processing simultaneous requests by PD-FE based on the priority level.
Reservation holding time (Optional)	The value of time interval for which the resource is reserved, which can be initiated by SCF based on the service requirement and/or granted by PD-FE based on the network policy decision. The PD-FE is required to release the session when the holding time is expired.
Resource control session information (Optional)	The record of the resource control session information. This is used for deriving the session state and other information (e.g., association of SCF and PD-FE) and only has a local significance between the PD-FE and the SCF. This component is only applicable when a stateless PD-FE is deployed.
<p>NOTE 1 – One of globally unique IP address or transport subscriber identifier is recommended to be present.</p> <p>NOTE 2 – Only the optional component is explicitly indicated. The use of each information component (i.e., mandatory or optional) also refers to the specific information messages in clause 8.1.4.</p> <p>NOTE 3 – How the SCF obtains the information of transport subscriber ID is an issue for service stratum functionality.</p>	

### **8.1.3.2 QoS resource information components**

The QoS resource information sub-components for media session and media flows are described in Table 4.

**Table 4 – QoS resource information sub-components (Rs)**

<b>Information component</b>	<b>Description</b>
Media profile	A set of information sub-components for a media session, which may be composed of data flows and control flows (e.g., RTP and RTCP flows for a VoIP call). The sub-components in a media profile can be represented by a wildcard as needed.
– Media number	An identifier for a media session (e.g., ordinal number of the position of the "m=" line in the SDP).
– Type of service	Indication of service type for the media data flow (e.g., voice, video telephony, or streaming video).
– Application class of service (Optional)	The application service class for the media (e.g., first class) is of local significance between the resource request client (i.e., the owner of SCF) and the owner of PD-FE, and is to be converted by PD-FE to Network Class of Service (e.g., Y.1541 class for performance requirement) based on SLA and network policy rules.
– Media priority (Optional)	Information for priority handling (e.g., TDR/ETS).
– Media flow description	A set of sub-components of individual or a group of media flows within a media session.

The information sub-components of the media flow description are described in Table 5.

**Table 5 – Media flow description sub-components (Rs)**

<b>Information component</b>	<b>Description</b>
Media flow description	A set of sub-components of individual media flows or a group of media flows within a media session. The sub-components of a Media Flow Description can be represented by a wildcard as needed.
– Flow direction (in→out, out→in, bidirectional)	Direction of the media flow, where "in" refers to inside the core network so that "out→in" refers to the direction towards the core network.
– Flow number	An identifier for the individual media flow within a media session.
– Flow status	Instruction and indication of enabled or disabled status for a media flow.
– Protocol version	The version of source and destination unicast network address protocol (e.g., IPv4 or IPv6).
– IP addresses	The source and destination network addresses.
– Ports	The source and destination port numbers. Port ranges are required to be supported (e.g., two consecutive ports for RTP, RTCP).
– Protocol number	The protocol ID (e.g., UDP, TCP).
– Bandwidth	The requested maximum bandwidth. The upstream and downstream BW is recommended to be provided separately.

### 8.1.3.3 Authorization token information components

The information component used for the binding purpose in the pull mode is described in Table 6.

**Table 6 – Authorization token information component (Rs)**

Information component	Description
Authorization token (Optional)	A unique identifier used in policy pull mode. The token is requested by the SCF and provided in a response by the PD-FE.

### 8.1.3.4 Charging correlation information component

This information component provides the resource usage information, see Table 7.

**Table 7 – Charging correlation information component (Rs)**

Information component	Description
Charging correlation information (Optional)	Charging correlation information, such as charging ID of the SCF and networks, and resource usage information.

### 8.1.3.5 Resource control action information components

A variety of indicators are used to request a specific resource control action per network event/condition, see Table 8.

**Table 8 – Resource control action information components (Rs)**

Information component	Description
Resource reservation mode	Indication of resource reservation mode (e.g., non-reservation, reservation only or reservation + commitment). In the pull mode of the QoS control scenario, the "non-reservation" option is used. In the push mode, either the "reservation only" or the "reservation + commit" option is used.
Dynamic firewall working mode (Optional)	Service information for dynamic firewall working mode selection (e.g., security level).
Resource request result	Indication of the result for a resource request (initiation, modification, release).
Timestamp	The time when the resources were lost.
Reason	Information describing the cause for an event (e.g., Abort event).
Event notification indication (Optional)	A set of information sub-components indicating the query and notification of a transport event. Note that the listed sub-components may not include all event notifications. Extra events can be added.
– Resource information indicator	Indication of a request for resource information. It is used by the SCF to ask the PD-FE to include the modified service information (such as available bandwidth) in the response message, or is used by PD-FE to retrieve the original service information when an event occurs (e.g., node failure).
– Transport loss indicator	The SCF's subscription for the notification of the transport loss events, or notification of a transport loss event to the SCF.

**Table 8 – Resource control action information components (Rs)**

<b>Information component</b>	<b>Description</b>
– Transport recovery indicator	The SCF's subscription for the transport recovery events, or notification of a transport recovery event.
– Transport release indicator	The SCF's subscription for the transport release events, or notification of a transport release event to the SCF
NAPT control and NAT traversal indication (Conditional)	A set of information subcomponents indicating the existence of near-end and/or far-end NAPT's. The events of NAPT control and NAT traversal are not mutually exclusive. They can be used in the same information flow.
– Address translation command	Indication to the SCF for signalling message modification for near-end NAPT. The PD-FE may perform the NAPT control, obtain the address binding information, and request the SCF to modify signalling messages accordingly based on network address hiding policy decision.
– Address binding information request	Indication of the presence of far-end NAT traversal issued by the SCF. The SCF may ask the RACF for the network address and port translation information (e.g., address latching) in support of far-end NAT traversal.
– Address binding information response	Indication to the SCF for the response of address latching for far-end NAT traversal. The PD-FE is required to obtain the NAPT information, generate the address binding information and send it to relevant SCF instance. The SCF is required to modify the message body of application signalling accordingly.

#### **8.1.4 Information flows exchanged over Rs**

This clause describes the information flows (namely requests and responses) exchanged over Rs.

##### **8.1.4.1 Resource initiation request**

The resource initiation request information flow is sent by the SCF to PD-FE to initiate a resource control session. Depending on the resource reservation mode desired, a single resource initiation request may be used for authorization only or reservation only or commitment only or some combination of the above. It contains the following information components:

- SCF identifier
- Resource control session identifier
- Globally unique IP address information (Optional, see Note)
  - Unique IP address
  - Address realm
- Transport subscriber identifier (Optional, see Note)
- Resource requestor identifier
- Resource request priority (Optional)
- Reservation holding time (Optional)
- Resource control session information (Optional)

- Dynamic firewall working mode (Optional)
- Authorization token (Optional)
- Charging correlation information (Optional)
- Media profile
  - Media number
  - Type of service
  - Application class of service (Optional)
  - Media priority (Optional)
  - Media flow description
    - Flow direction
    - Flow number
    - Flow status
    - Protocol version
    - IP addresses
    - Ports
    - Protocol number
    - Bandwidth
- Resource reservation mode
- Event notification indication (Optional)
  - Resource information indicator
  - Transport loss indicator
  - Transport recovery indicator
  - Transport release indicator
- NAPT control and NAT traversal (Conditional)
  - Address binding information request

NOTE – At least of one of the above information components is required to be present.

#### **8.1.4.2 Resource initiation response**

The resource initiation response information flow is sent by PD-FE to the SCF to confirm the resource initiation request of the SCF. It contains the following information components:

- SCF identifier
- Resource control session identifier
- Reservation holding time (Optional)
- Resource control session information (Optional)
- Resource request result
- Authorization token (Optional)
- Media profile (Optional)
  - Media number
  - Type of service
  - Application class of service (Optional)
  - Media priority (Optional)

- Media flow description
  - Flow direction
  - Flow number
  - Flow status
  - Protocol version
  - IP addresses
  - Ports
  - Protocol number
  - Bandwidth
- NAPT control and NAT traversal (Conditional)
  - Address translation command
  - Address binding information response

#### **8.1.4.3 Resource modification request**

The resource modification request information flow is sent by the SCF to PD-FE to request the modification of the resources assigned to an established session. The session state can be retrieved with the resource control session information provided by the SCF if a stateless PD-FE is used. It contains the following information components:

- SCF identifier
- Resource control session identifier
- Resource requestor identifier
- Resource request priority (Optional)
- Reservation holding time (Optional)
- Resource control session information (Optional)
- Dynamic firewall working mode (Optional)
- Charging correlation information (Optional)
- Media profile
  - Media number
  - Type of service
  - Application class of service (Optional)
  - Media priority (Optional)
  - Media flow description
    - Flow direction
    - Flow number
    - Flow status
    - Protocol version
    - IP addresses
    - Ports
    - Protocol number
    - Bandwidth

- Resource reservation mode
- Event notification indication (Optional)
  - Resource information indicator
  - Transport loss indicator
  - Transport recovery indicator
  - Transport release indicator
- NAPT control and NAT traversal (Conditional)
  - Address binding information request

#### **8.1.4.4 Resource modification response**

The resource modification response information flow is sent by PD-FE to the SCF to confirm that the resource modification request made by the SCF has been received and to indicate the result. The information within this flow is the same as that in the resource initiation response information flow.

#### **8.1.4.5 Resource action request**

The resource action request information flow is sent by PD-FE to the SCF as needed to request a specific resource control action (e.g., retrieving the resource information) for an established session. It contains the following information components:

- SCF identifier
- Resource control session identifier
- Resource control session information (Optional)
- Dynamic firewall working mode (Optional)
- Charging correlation information (Optional)
- Media profile
  - Media number
  - Type of service
  - Application class of service (Optional)
  - Media priority (Optional)
  - Media flow description
    - Flow direction
    - Flow number
    - Flow status
    - Protocol version
    - IP addresses
    - Ports
    - Protocol number
    - Bandwidth
- Event notification indication (Optional)
  - Resource information indicator
  - Transport loss indicator
  - Transport recovery indicator
  - Transport release indicator

- NAPT control and NAT traversal (Conditional)
  - Address translation command
  - Address binding information response

#### **8.1.4.6 Resource action response**

The resource action response information flow is sent by the SCF to PD-FE to confirm that the request for the specific action has been received and to provide the requested service information. It contains the following information components:

- SCF identifier
- Resource control session identifier
- Resource requestor identifier
- Resource request priority (Optional)
- Resource control session information (Optional)
- Dynamic firewall working mode (Optional)
- Charging correlation information (Optional)
- Media profile (Optional)
  - Media number
  - Type of service
  - Application class of service (Optional)
  - Media priority (Optional)
  - Media flow description
    - Flow direction
    - Flow number
    - Flow status
    - Protocol version
    - IP addresses
    - Ports
    - Protocol number
    - Bandwidth
- Event notification indication (Optional)
  - Resource information indicator
  - Transport loss indicator
  - Transport recovery indicator
  - Transport release indicator
- NAPT control and NAT traversal (Conditional)
  - Address binding information request

#### **8.1.4.7 Resource notification**

The resource notification information flow is sent by PD-FE to notify the SCF of transport resource events. It contains the following information components:

- SCF identifier
- Resource control session identifier
- Resource control session information (Optional)

- Dynamic firewall working mode (Optional)
- Charging correlation information (Optional)
- Media profile
  - Media number
  - Type of service
  - Application class of service (Optional)
  - Media priority (Optional)
  - Media flow description
    - Flow direction
    - Flow number
    - Flow status
    - Protocol version
    - IP addresses
    - Ports
    - Protocol number
    - Bandwidth
- Event notification indication
  - Resource information indicator
  - Transport loss indicator
  - Transport recovery indicator
  - Transport release indicator

NOTE – The use of this information flow for the notification of resource usage information is for further study.

#### **8.1.4.8 Resource release request**

The resource release request information flow is sent by the SCF to PD-FE to request the release of resources assigned to an established session or individual media flow. The resource release can be resource control session based, flow-based, and a wildcard is used to indicate the release of all of sessions related to this client. When a request is received, all of the relevant resources are released including the transport event notification settings. It contains the following information components:

- SCF identifier
- Resource control session identifier
- Resource requestor identifier
- Resource request priority (Optional)
- Resource control session information (Optional)
- Dynamic firewall working mode (Optional)
- Charging correlation information (Optional)
- Media profile
  - Media number
  - Type of service
  - Application class of service (Optional)
  - Media priority (Optional)

- Media flow description
  - Flow direction
  - Flow number
  - Flow status
  - Protocol version
  - IP addresses
  - Ports
  - Protocol number
  - Bandwidth

#### **8.1.4.9 Resource release response**

The resource release response information flow is sent by PD-FE to the SCF to confirm that the resource release request has been received and to indicate the results. It contains the following information components:

- SCF identifier
- Resource control session identifier
- Resource request priority (Optional)
- Resource control session information (Optional)
- Resource request result

#### **8.1.4.10 Abort resource request**

The abort resource request information flow is sent by PD-FE to the SCF to indicate the loss of all resources for the established session to the SCF. It contains the following information components:

- SCF identifier
- Resource control session identifier
- Resource requestor identifier
- Resource control session information (Optional)
- Timestamp
- Reason

#### **8.1.4.11 Abort resource response**

The abort resource response is sent by the SCF to PD-FE to confirm a resource abort request. It contains the following information components:

- SCF identifier
- Resource control session identifier
- Resource control session information (Optional)

## **8.2 Reference point Rw**

The Rw reference point allows the final admission decisions to be installed (either pushed or pulled) to the PE-FE from the PD-FE. This reference point is required to be able to support resource control for both fixed and mobile access networks and is recommended to support NAPT/firewall control and NAT traversal at the PE-FE as needed.

The Rw reference point is an intra-domain reference point.

## 8.2.1 Functional requirements

### 8.2.1.1 Resource control functional requirements

The Rw reference point allows the PD-FE to push the admission decisions to the PE-FE, and also allows the PE-FE to request the admission decisions when path-coupled resource reservation mechanisms are in use. The PD-FE may specify:

- Resources to be reserved and/or committed for media flows,
- QoS handling such as packet marking and policing to use,
- Gate control (opening/closing) for a media flow,
- The insertion of a NAPT function, requesting the necessary address mapping information,
- Resource usage information request and report for a media flow,
- Dynamic firewall working mode selection for a media flow,
- Technology independent core network ingress/egress path information for a media flow.

In addition, the PD-FE can request notification of events and may receive a request from the PE-FE to verify the resource reservation that it receives from the CPE.

Note that the NAPT function may be contained within the same or a different information flow from the function providing bandwidth reservation. The Rw reference point is recommended to allow for this flexibility.

### 8.2.1.2 Resource control session processing functional requirements

To assure the reliability and performance of resource control session operations across the Rw reference point, the following capabilities are required:

**Overload control:** The Rw reference point is required to provide the capability to support overload control for preventing the overflow of information messages exchanged between the PD-FE and the PE-FE.

**Synchronization and audit:** The Rw reference point is required to provide the capability to support synchronization and audit of the resource control session status in support of recovery and operational information statistics and auditing.

**Session state maintenance:** When a stateful PD-FE is used, it is required to be able to maintain the session state using either soft-state or hard-state approaches. The reservation holding time specifies the time limitation in support of abnormal recovery. When a stateless PD-FE is used, the resource control session information passed by the SCF or PE-FE can be used to derive the session state and relevant information.

## 8.2.2 Information exchange requirements

This clause provides a brief description of the information exchange requirements for the Rw reference point.

**Request-response transactions:** The reference point is required to allow the PD-FE to request a transaction to be performed by the PE-FE and get a response (that can be correlated with the request) in return.

**Notifications:** The reference point is required to allow the notification of asynchronous events (from the PE-FE to the PD-FE).

**Reliable delivery:** The reference point is recommended to provide reliable delivery of messages.

**Capabilities:** The PD-FE is required to be able to determine capabilities when requesting resources and other transport plane functions from the PE-FE.

**Security:** The Rw is recommended to support the authentication between the PD-FE and PE-FE such that requests to the PE-FE from unauthenticated sources will not be performed and such that the PD-FE can verify the source of notifications sent from the PE-FE. Refer to clause 11 for other security requirements.

**One-to-many/many-to-one:** Two modes are required to be supported: 1) One-to-many mode, a PD-FE is required to be able to communicate with multiple PE-FEs; 2) Many-to-one mode, multiple PD-FEs are required to be able to make requests to a given PE-FE.

For either mode, only a single PD-FE is required to make a request to a given PE-FE for a particular session.

**Granularity of resource control:** The Rw reference point is required to support resource control requests at different levels of granularity.

**Level of resource control:** The Rw reference point is required to support the resources control for the media flow level.

### **8.2.3 Information components**

The majority of the information components at the Rw reference point are similar to those at Rs. However, the value and meaning may be changed in the PD-FE due to the operator's policy decision and QoS mapping. In addition, some components are not applicable and some new parameters are needed at Rw.

#### **8.2.3.1 Resource control processing information components**

The resource control processing information components at Rw are described in Table 9.

**Table 9 – Resource control processing information components (Rw)**

<b>Information component</b>	<b>Description</b>
PD-FE identifier	A unique identifier for different instances of PD-FE within the same administrative domain of a single network operator.
Resource control session identifier	An identifier for the session, which may be composed of multiple media flows for which the resource reservation requests are sent to the PE-FE. The identifier has to be unique within the same PD-FE instance.
Resource requestor identifier (Optional, Note 2)	An identifier for the requestor (i.e., the owner of SCF (e.g., a service provider)) of resource control service. It is unique over the requestors sending requests for the resource control to the same RACF domain.
Resource request priority (Optional)	The indication of the importance of a resource control request. It can be used for processing simultaneous requests by PE-FE based on the priority level.
Reservation holding time (Optional, Note 3)	The value of time interval for which the resource is reserved, which can be initiated by SCF based on the service requirement and/or granted by PD-FE based on the network policy decision. The PD-FE is required to release the session when the holding time is expired.
Resource control session information (Optional, Note 4)	The record of the resource control session information. This is used for deriving the session state and other information (e.g., association of PD-FE and PE-FE) and only has a local significance between the PD-FE and pertinent parties. This component is only applicable when a stateless PD-FE is deployed.
<p>NOTE 1 – Only the optional component is explicitly indicated. The use of each information component (i.e., mandatory or optional) also refers to the specific information messages in clause 8.2.4.</p> <p>NOTE 2 – The resource requestor identifier may be used to assist PD-FE in identifying the unique relationship between the resource control session and requestor of the SCF.</p> <p>NOTE 3 – Reservation holding time may be used by PE-FE to assist PD-FE in monitoring the resource control session timeout and/or state.</p> <p>NOTE 4 – When a stateless PD-FE is in use, the PD-FE identifier is required to be inserted in the resource control session information component and sent to pertinent entities (e.g., PE-FE or TRC-FE).</p>	

### **8.2.3.2 QoS resource information components**

The QoS resource information sub-components for media session and media flows are described in Table 10.

**Table 10 – QoS resource information sub-components (Rw)**

Information component	Description
Media profile	A set of information sub-components for a media session, which may be composed of data flows and control flows (e.g., RTP and RTCP flows for a VoIP call).
– Media number	An identifier for a media session (e.g., ordinal number of the position of the "m=" line in the SDP).
– Network class of service (Optional)	Represents the network service class subscribed by a CPE (e.g., premium, gold, silver, and regular). It may include the QoS performance class (e.g., Y.1541 class).  This parameter is only of local significance for a single operator owning the transport resource, which can be mapped from application CoS issued by the SCF based on network policy rules and SLA and can be used for the transport resource control and authorization of transport subscription.
– Media priority (Optional)	Information for priority handling (e.g., TDR/ETS).
– Path selection information (Optional)	The technology independent core network ingress/egress path information at the PE-FE for a media flow (e.g., VPN ID).
– Media flow description	A set of sub-components of individual or a group of media flows within a media session.
Physical connection identifier (Optional)	A local identifier for physical connection of the access transport network that the CPE is attached to (e.g., IP address of PE-FE device, and MAC address or link ID and physical port ID). It is the same as defined at the Ru reference point.
Logical connection identifier (Optional)	A local identifier for logical connection of the access transport network to which the CPE is connected (e.g., ATM VPI/VCI, PPP, MPLS label, GTP tunnel or logical port). It can be used by PE-FE to identify the layer 2 connection in pertinent network devices for a particular CPE requesting the access transport resource. It is the same as defined at the Ru reference point.
NOTE – The application class of service and the type of service are mapped into the network class of service and relevant media flow description sub-components (e.g., IP QoS handling class and traffic descriptor).	

The information sub-components of the media flow description are described in Table 11.

**Table 11 – Media flow description sub-components (Rw)**

<b>Information component</b>	<b>Description</b>
Media flow description	A set of parameters for the individual media flow within a media session.
– Flow direction (in→out, out→in, bidirectional)	Direction of the media flow, where "in" refers to inside the core network so that "out→in" refers to the direction towards the core network.
– Flow number	An identifier for the individual media flow within a media session.
– Gate status	Instruction and indication of open or closed status of the gate for a media flow or a group of media flows. The PD-FE is required to perform the gate control based on the flow status received from the SCF.
– Protocol version	The version of source and destination unicast network address protocol (e.g., IPv4 or IPv6).
– IP addresses	The source and destination network addresses.
– Ports	The source and destination port numbers. Port ranges are required to be supported (e.g., two consecutive ports for RTP, RTCP).
– Protocol number	The protocol ID (e.g., UDP, TCP).
– Bandwidth	The requested maximum bandwidth. The upstream and downstream BW is recommended to be provided separately.
– IP QoS handling class (Optional)	A QoS parameter for IP packet marking and handling in PE-FE (e.g., IPv4 DSCP and IPv6 traffic class). It can be derived from the service information, network CoS and network policy rules.
– Traffic descriptor (Optional)	The description of the flow characteristics (e.g., peak data rate, sustainable data rate, and maximum burst size as specified in [b-ITU-T Y.1221]).

### 8.2.3.3 Authorization token information component

**Table 12 – Authorization token information component (Rw)**

<b>Information component</b>	<b>Description</b>
Authorization token (Optional)	A unique identifier used in policy pull mode. The token is produced by the PD-FE and may be sent back by the PE-FE to the PD-FE for the re-authorization of the resource request in the pull mode.
NOTE – Only applicable to policy pull mode as an optional binding method.	

### 8.2.3.4 Charging correlation information component

**Table 13 – Charging correlation information component (Rw)**

<b>Information component</b>	<b>Description</b>
Charging correlation information (Optional)	Charging correlation information, such as charging ID of the SCF and networks, and resource usage information.

### 8.2.3.5 Resource control action information components

**Table 14 – Resource control action information components (Rw)**

<b>Information component</b>	<b>Description</b>
Resource reservation mode	Indication of resource reservation mode (e.g., non-reservation, reservation only or reservation + commitment). In the pull mode of the QoS control scenario, the "non-reservation" option is used. In the push mode, either the "reservation only" or the "reservation + commit" option is used.
Dynamic firewall working mode (Optional)	Service information for dynamic firewall working mode selection (e.g., security level).
Resource request result	Indication of the result for a resource request (initiation, modification, release).
Timestamp	The time when the resources were lost.
Reason	Information describing the cause for an event (e.g., Abort event).
Event notification indication (Optional)	A set of information sub-components indicating the query and notification of a transport event. Note that listed sub-components may not include all event notifications. Extra events can be added.
– Resource information indicator	Indication of a request for resource information. It is used by the PD-FE to ask the PE-FE to include the modified resource information (such as available bandwidth) in the response message, or is used by the PE-FE to retrieve the policy decision information when an event occurs (e.g., node failure).
– Transport loss indicator	The PD-FE's subscription for the notification of the transport loss events, or notification of a transport loss event to the PD-FE.
– Transport recovery indicator	The PD-FE's subscription for the transport recovery events, or notification of a transport recovery event to the PD-FE.
– Transport release indicator	The PD-FE's subscription for the transport release events, or notification of a transport release event to the PD-FE.
NAPT control and NAT traversal Indication (Conditional)	A set of information sub-components indicating the existence of near-end and/or far-end NAPT's. The events of NAPT control and NAT traversal are not mutually exclusive. They can be used in the same information flow.
– Address translation command	Indication to the PD-FE for signalling message modification for near-end NAPT. The PE-FE may perform the NAPT enforcement, and ask the PD-FE to request the SCF to modify signalling messages accordingly based on network address hiding policy decision.

**Table 14 – Resource control action information components (Rw)**

Information component	Description
– Address binding information request	Indication of the presence of far-end NAT traversal issued by the PD-FE. The PD-FE may ask the PE-FE for the network address and port translation information (e.g., address latching) in support of far-end NAT traversal.
– Address binding information response	Indication to the PD-FE for the response of address latching for far-end NAT traversal.  The PE-FE is required to obtain the NAPT information, generate the address binding information and send it to relevant PD-FE instance. The PD-FE is required to ask the relevant SCF instance to modify the message body of application signalling accordingly.

### 8.2.4 Messages exchanged over Rw

This clause describes the information flows (namely requests and responses) exchanged over Rw.

#### 8.2.4.1 Resource initiation request

The resource initiation request information flow is sent by PD-FE to PE-FE to initiate a resource control session. Depending on the resource reservation mode desired, a single resource initiation request may be used for reservation only or reservation and commitment. The session state can be derived through resource control session information provided by PD-FE if a stateless PE-FE is used. It contains the following information components:

- PD-FE identifier
- Resource control session identifier
- Resource requestor identifier (Optional)
- Resource request priority (Optional)
- Reservation holding time (Optional)
- Resource control session information (Optional)
- Dynamic firewall working mode (Optional)
- Charging correlation information (Optional)
- Media profile
  - Media number
  - Network class of service (Optional)
  - Media priority (Optional)
  - Path selection information (Optional)
  - Media flow description
    - Flow direction
    - Flow number
    - Gate status
    - Protocol version
    - IP addresses
    - Ports
    - Protocol number

- Bandwidth
- IP QoS handling class (Optional)
- Traffic descriptor (Optional)
- Physical connection identifier (Optional)
- Logical connection identifier (Optional)
- Resource reservation mode (Optional)
- Event notification indication (Optional)
  - Resource information indicator
  - Transport loss indicator
  - Transport recovery indicator
  - Transport release indicator
- NAPT control and NAT traversal (Conditional)
  - Address binding information request

#### **8.2.4.2 Resource initiation response**

The resource initiation response information flow is sent by PE-FE to PD-FE to confirm the resource initiation request. It contains the following information components:

- PD-FE identifier
- Resource control session identifier
- Resource requestor identifier (Optional)
- Reservation holding time (Optional)
- Resource control session information (Optional)
- Resource request result
- Media profile (Optional)
  - Media number
  - Network class of service (Optional)
  - Media priority (Optional)
  - Media flow description
    - Flow direction
    - Flow number
    - Gate status
    - Protocol version
    - IP addresses
    - Ports
    - Protocol number
    - Bandwidth
    - IP QoS handling class (Optional)
    - Traffic descriptor (Optional)
- NAPT control and NAT traversal (Conditional)
  - Address translation command
  - Address binding information response

### 8.2.4.3 Resource modification request

The resource modification request information flow is sent by PD-FE to PE-FE to request the resource modification of an established session. It contains the following information components:

- PD-FE identifier
- Resource control session identifier
- Resource requestor identifier (Optional)
- Resource request priority (Optional)
- Reservation holding time (Optional)
- Dynamic firewall working mode (Optional)
- Charging correlation information (Optional)
- Media profile
  - Media number
  - Network class of service (Optional)
  - Media priority (Optional)
  - Path selection information (Optional)
  - Media flow description
    - Flow direction
    - Flow number
    - Gate status
    - Protocol version
    - IP addresses
    - Ports
    - Protocol number
    - Bandwidth
    - IP QoS handling class (Optional)
    - Traffic descriptor (Optional)
- Physical connection identifier (Optional)
- Logical connection identifier (Optional)
- Resource reservation mode
- Event notification indication (Optional)
  - Resource information indicator
  - Transport loss indicator
  - Transport recovery indicator
  - Transport release indicator
- NAPT control and NAT traversal (Optional)
  - Address binding information request

### 8.2.4.4 Resource modification response

The resource modification response information flow is sent by PE-FE to PD-FE to confirm the resource modification request. The information components are the same as those in the resource initiation response.

#### 8.2.4.5 Resource action request

The resource action request information flow is sent by PE-FE to PD-FE to request a specific resource control action (e.g., retrieving the resource information). It contains the following information components:

- PD-FE identifier
- Resource control session identifier
- Resource requestor identifier (Optional)
- Resource control session information (Optional)
- Authorization token (Optional)
- Dynamic firewall working mode (Optional)
- Media profile (Optional)
  - Media number
  - Network class of service (Optional)
  - Media priority (Optional)
  - Path selection information (Optional)
  - Media flow description
    - Flow direction
    - Flow number
    - Gate status
    - Protocol version
    - IP addresses
    - Ports
    - Protocol number
    - Bandwidth
    - IP QoS handling class (Optional)
    - Traffic descriptor (Optional)
- Physical connection identifier (Optional)
- Logical connection identifier (Optional)
- Resource reservation mode
- Event notification indication (Optional)
  - Resource information indicator
  - Transport loss indicator
  - Transport recovery indicator
  - Transport release indicator
- NAPT control and NAT traversal (Conditional)
  - Address translation command
  - Address binding information response

#### 8.2.4.6 Resource action response

The resource action response information flow is sent by PD-FE to PE-FE as needed to confirm the request of the specific action and provide the service information. It contains the following information components:

- PD-FE identifier
- Resource control session identifier
- Resource requestor identifier (Optional)
- Resource request priority (Optional)
- Resource control session information (Optional)
- Authorization token (Optional)
- Dynamic firewall working mode (Optional)
- Charging correlation information (Optional)
- Media profile (Optional)
  - Media number
  - Network class of service (Optional)
  - Media priority (Optional)
  - Path selection information (Optional)
  - Media flow description
    - Flow direction
    - Flow number
    - Gate status
    - Protocol version
    - IP addresses
    - Ports
    - Protocol number
    - Bandwidth
    - IP QoS handling class (Optional)
    - Traffic descriptor (Optional)
- Physical connection identifier (Optional)
- Logical connection identifier (Optional)
- Resource reservation mode
- Event notification indication (Optional)
  - Resource information indicator
  - Transport loss indicator
  - Transport recovery indicator
  - Transport release indicator
- NAPT control and NAT traversal (Conditional)
  - Address binding information request

#### 8.2.4.7 Resource notification

The resource notification information flow is sent by PE-FE to notify PD-FE of the transport resource events. It contains the following information components:

- PD-FE identifier
- Resource control session identifier
- Resource requestor identifier (Optional)
- Resource control session information (Optional)
- Dynamic firewall working mode (Optional)
- Charging correlation information (Optional)
- Media profile
  - Media number
  - Network class of service (Optional)
  - Media priority (Optional)
  - Media flow description
    - Flow direction
    - Flow number
    - Gate status
    - Protocol version
    - IP addresses
    - Ports
    - Protocol number
    - Bandwidth
    - IP QoS handling class (Optional)
    - Traffic descriptor (Optional)
- Event Notification Indication
  - Resource information indicator
  - Transport loss indicator
  - Transport recovery indicator
  - Transport release indicator

#### 8.2.4.8 Resource decision request

The resource decision request information flow is sent by PE-FE to PD-FE to request the authorization and relevant policy decision information in the policy pull mode in the initial and modification phases. It contains the following information components:

- PD-FE identifier
- Resource control session identifier
- Resource requestor identifier (Optional)
- Resource request priority (Optional)
- Authorization token (Optional)
- Dynamic firewall working mode (Optional)

- Media profile
  - Media number
  - Network class of service (Optional)
  - Media priority (Optional)
  - Path selection information (Optional)
  - Media flow description
    - Flow direction
    - Flow number
    - Gate status
    - Protocol version
    - IP addresses
    - Ports
    - Protocol number
    - Bandwidth
    - IP QoS handling class (Optional)
    - Traffic descriptor (Optional)
- Physical connection identifier (Optional)
- Logical connection identifier (Optional)
- Resource reservation mode
- NAPT control and NAT traversal (Conditional)
  - Address translation command
  - Address binding information response

#### **8.2.4.9 Resource decision response**

The resource decision response information flow is sent by PD-FE to authorize the request and provide the information to PE-FE in the policy pull mode in the initial and modification phases. It contains the following information components:

- PD-FE identifier
- Resource control session identifier
- Resource requestor identifier (Optional)
- Resource request priority (Optional)
- Resource control session information (Optional)
- Authorization token (Optional)
- Dynamic firewall working mode (Optional)
- Charging correlation information (Optional)
- Media profile
  - Media number
  - Network class of service (Optional)
  - Media priority (Optional)
  - Path selection information (Optional)

- Media flow description
  - Flow direction
  - Flow number
  - Gate status
  - Protocol version
  - IP addresses
  - Ports
  - Protocol number
  - Bandwidth
  - IP QoS handling class (Optional)
  - Traffic descriptor (Optional)
- Physical connection identifier (Optional)
- Logical connection identifier (Optional)
- Resource reservation mode
- Event notification indication (Optional)
  - Resource information indicator
  - Transport loss indicator
  - Transport recovery indicator
  - Transport release indicator
- NAPT control and NAT traversal (Conditional)
  - Address binding information request

#### **8.2.4.10 Resource release request**

The resource release request information flow is sent by PD-FE to PE-FE to request the resource release for an established session or individual media flow. It contains the following information components

- PD-FE identifier
- Resource control session identifier
- Resource requestor identifier (Optional)
- Resource control session information (Optional)
- Media profile (Optional)
  - Media number
  - Network class of service (Optional)
  - Media priority (Optional)
  - Dynamic firewall working mode (Optional)
  - Media flow description
    - Flow direction
    - Flow number
    - Gate status
    - Protocol version
    - IP addresses
    - Ports

- Protocol number
- Bandwidth
- IP QoS handling class (Optional)
- Traffic descriptor (Optional)
- Physical connection identifier (Optional)
- Logical connection identifier (Optional)
- Event notification indication (Optional)
  - Resource information indicator
  - Transport loss indicator
  - Transport recovery indicator
  - Transport release indicator
- NAPT control and NAT traversal (Conditional)
  - Address binding information request

#### **8.2.4.11 Resource release response**

The resource release response information flow is sent by PE-FE to PD-FE to confirm the resource release request. It contains the following information components:

- PD-FE identifier
- Resource control session identifier
- Resource requestor identifier (Optional)
- Resource control session information (Optional)
- Resource request result

#### **8.2.4.12 Abort resource request**

The abort resource request information flow is sent by PE-FE to PD-FE to indicate the loss of all resources for the established session. It contains the following information components:

- PD-FE identifier
- Resource control session identifier
- Resource requestor identifier (Optional)
- Resource control session information (Optional)
- Authorization token (Optional)
- Timestamp
- Reason

#### **8.2.4.13 Abort resource response**

The abort resource response information flow is sent by PD-FE to confirm the resource abort request. It contains the following information components:

- PD-FE identifier
- Resource control session identifier
- Resource requestor identifier (Optional)
- Resource control session information (Optional)

### 8.3 Reference point Rc

NOTE – The details of Rc reference point are for further study.

The Rc reference point allows TRC-FE to collect the network topology and resource status information of an access or a core network. It is relevant to a transport functional entity at the network boundary or inside the network. Note that the Rc reference point may be connected to any instances of transport functions as needed, including PE-FE, TRE-FE and other functional entities in the transport stratum defined in [ITU-T Y.2012], to obtain the relevant information.

The Rc reference point is an intra-domain reference point.

#### 8.3.1 Functional requirements

The Rc reference point provides the ability for TRC-FE to request all transport elements within its purview to:

- Collect the network topology information;
- Collect the resource status information.

In addition, the TRC-FE can request notification of events (e.g., link or port failure) from a transport element to update the resource status information.

#### 8.3.2 Information exchange requirements

This clause provides a brief description of the information exchange requirements for the Rc reference point.

**Request-response transactions:** The reference point is required to allow the TRC-FE to request a transaction to be performed by a transport element and get a response (that can be correlated with the request) in return.

**Notifications:** The reference point is required to allow the notification of asynchronous events (from a transport element to the TRC-FE).

**Reliable delivery:** The reference point is recommended to provide reliable delivery of messages.

**Capabilities:** The TRC-FE is required to be able to determine capabilities when requesting resources and other transport plane functions from a transport element.

**Security:** All messages between TRC-FE and transport elements are recommended to be authenticated such that requests to the transport elements from unauthenticated sources will not be performed and such that notifications sent from the transport elements to TRC-FE can be ensured to come from an authenticated source.

#### 8.3.3 Information exchanged

The resource status information is recommended to include pre-provisioned resources for applications and amount of actual traffic using the resources.

The resource status information is specific to the L2/L3 transport technologies of a network.

This information may be specific to each traffic class in the transport functions if different traffic classes are supported.

The resource status information may be specific to the resource-related admission control scheme being used by TRC-FE, i.e., whether it is accounting, out-of-band measurements, in-band measurements, or reservation-based. Note that the TRC-FE can employ more than one resource-related admission control method simultaneously and use the relevant information based on the applicable method.

### 8.3.4 Information components

This clause describes the information components exchanged across the Rc reference point.

Note that some requirements for Rc are specific to transport technologies. These requirements are specified in other related Recommendations (e.g., [b-ITU-T Y.2174]).

#### 8.3.4.1 Resource status information components

The resource status information components at Rc are described in Table 15.

NOTE – Performance attributes other than bandwidth (e.g., one-way delay, delay variation, and packet loss ratio) are for further study. In general, performance information can be provided by the management of performance measurement as defined in [b-ITU-T Y.2173] to the RACF. The related details are also for further study.

**Table 15 – Resource status information components (Rc)**

Information component	Description
Transport FE identifier	A unique identifier for different instances of transport functional entities within the same administrative domain of a single network operator.
Transport resource identifier	A local identifier for a transport resource such as port, link or connection. Examples of a connection include ATM VP/VC, MPLS LSP, and VLAN. The physical connection identifier and logical connection identifier may be used to derive this transport identifier in certain scenarios, e.g., access network.
Transport class of service (Optional)	It represents the transport service class of the connection. Multiple transport service classes may be included in a connection.
Bandwidth	Available bandwidth of a relevant link or connection. The upstream and downstream BW is recommended to be provided separately. It is optional to specify bandwidth for each class of service.

### 8.4 Reference point Ru

The Ru reference point allows PD-FE to interact with the NACF for checking on CPE transport subscription information and the binding information of the logical/physical port address to an assigned IP address.

The Ru reference point is an intra-domain reference point.

#### 8.4.1 Functional requirements

##### 8.4.1.1 Resource control functional requirements

The Ru reference point provides the ability for RACF to access the user profile for:

- Retrieving the configuration information in order to locate the access transport network for a transport subscriber;
- Retrieving access transport network subscription information in order to perform resource based admission control.

#### 8.4.1.2 Resource control session processing functional requirements

To assure the reliability and performance of resource control session operations across the Ru reference point, the following capabilities are required:

**Overload control:** The Ru reference point is required to provide the capability to support overload control for preventing the overflow of information messages exchanged between the PD-FE and NACF.

**Synchronization and audit:** The Ru reference point is required to provide the capability to support synchronization and audit of the resource control session status in support of recovery and operational information statistics and auditing.

**Session state maintenance:** When a stateful PD-FE is used, it is required to be able to maintain the session state using either soft-state or hard-state approaches. The reservation holding time specifies the time limitation in support of abnormal recovery. When a stateless PD-FE is used, the resource control session information passed by the SCF or PE-FE can be used to derive the session state and relevant information.

#### 8.4.2 Information exchange requirements

This clause provides a brief description of the information exchange requirements for the Ru reference point.

**Request-response transactions:** The reference point is required to allow the PD-FE to request a transaction to be performed by the NACF and get a response (that can be correlated with the request) in return.

**Notifications:** The reference point is required to support the notification of asynchronous events (from the NACF to the PD-FE).

**Reliable delivery:** The reference point is required to provide reliable delivery of messages.

**Capabilities:** The PD-FE is required to be able to determine capabilities when requesting resources and other transport plane functions via the PD-FE.

**Security:** The Ru is recommended to support the authentication between the PD-FE and NACF such that requests to the NACF from unauthenticated sources will not be performed and such that the PD-FE can verify the source of notifications sent from the NACF. Refer to clause 11 for other security requirements.

**Many-to-one:** Many-to-one mode, multiple PD-FE instances is required to be able to make requests to a given NACF. Only a single PD-FE will make a request to a given NACF for a particular session.

#### 8.4.3 Information components

The information components consist of those in Tables 16 to 18.

**Table 16 – Access transport resource subscriber information components (Ru)**

<b>Information component</b>	<b>Description</b>
Globally unique IP address information	A set of IP address information used for locating the access network in which the CPE is requesting the transport resource.
– Unique IP address	The IP address for identifying the CPE.
– Address realm	The addressing domain of the IP address (e.g., Subnet prefix or VPN ID).
Transport subscriber identifier	A globally unique identifier for the CPE requesting the transport resource. This identifier can be used for locating the transport subscription information for the CPE.
Physical connection identifier (Optional)	A local identifier for physical connection of access transport network that the CPE is attached to (e.g., IP address of PE-FE device, and MAC address or Link ID and physical port).
Logical connection identifier	A local identifier for logical connection of access transport network to which the CPE is connected (e.g., ATM VPI/VCI, PPP, MPLS Label, GTP Tunnel and logical port). It can be used to locate the layer 2 connection and pertinent network devices for a particular CPE requesting the access transport resource.
Type of access transport network (Optional)	The type of access network to which the CPE is attached.

**Table 17 – Default access transport resource configuration information sub-components (Ru)**

<b>Information component</b>	<b>Description</b>
Default configuration (Optional)	
– Default access control list	The list of destination IP addresses, ports, prefixes and port ranges allowed to cut through by default.
– Default upstream bandwidth	The maximum bandwidth that can be used for the upstream connections by default.
– Default downstream bandwidth	The maximum bandwidth that can be used for the downstream connections by default.

**Table 18 – Access transport resource subscription information sub-components (Ru)**

Information component	Description
Transport resource subscription (Optional)	
– Network class of service	Represents the network service class subscribed by a CPE (e.g., Premium, Gold, Silver, Regular). It may include the QoS performance class (e.g., Y.1541 class).  This parameter is only of local significance for a single operator owning the transport resource, which can be mapped from application CoS issued by the SCF based on network policy rules and SLA and can be used for the transport resource control and authorization of transport subscription.
– Subscribed upstream bandwidth	The maximum bandwidth subscribed by a CPE for the upstream connections.
– Subscribed downstream bandwidth	The maximum amount of bandwidth subscribed by a CPE for the downstream connections.
– Level of priority	The maximum level of priority permitted for any reservation request.

#### 8.4.4 Information exchanged over Ru

The Ru reference point is recommended to allow information exchange as follows:

- The profile information is pushed by the NACF to PD-FE.
- The profile information is pulled by PD-FE from the NACF.

The PD-FE and NACF are recommended to use one of two selection mechanisms, either local static configuration or dynamic discovery, based on globally unique IP address and/or transport subscriber identifier to locate the respective communicating entities (i.e., PD-FE → NACF, or NACF → PD-FE).

The following information is recommended to be exchanged through the Ru reference point:

##### 8.4.4.1 Transport resource information request

The transport resource information request information flow is sent by PD-FE to NACF to request the access transport network profile information. Globally unique IP address information and/or transport subscriber identifier is recommended to be used to discover the NACF and identify the user profile using the static configuration or dynamic discovery approaches. It contains the following information components:

- Globally unique IP address information (Optional, see Note)
  - Unique IP address
  - Address Realm
- Transport subscriber identifier (Optional, see Note)

NOTE – One of them is required to be present.

#### 8.4.4.2 Transport resource information response

The transport resource information response information flow is sent by the NACF to PD-FE to provide the access transport network profile information during either a new resource initiation request from the SCF or the network failure recovery procedure. It contains the following information components:

- Globally unique IP address information (Optional, see Note)
  - Unique IP address
  - Address Realm
- Transport subscriber identifier (Optional, see Note)
- Physical connection identifier (Optional)
- Logical connection identifier
- Type of access transport network (Optional)
- Transport resource subscription (Optional)
  - Network class of service
  - Subscribed upstream bandwidth
  - Subscribed downstream bandwidth
  - Level of priority

NOTE – One of them is required to be present.

#### 8.4.4.3 Transport resource information indication

The transport resource information indication information flow is sent by the NACF to PD-FE to push the access transport network profile information when an IP address assigned to a subscriber or the relevant profile is changed after the profile information has been sent to the PD-FE. It contains the following information components:

- Globally unique IP address information (Optional, see Note)
  - Unique IP address
  - Address realm
- Transport subscriber identifier (Optional, see Note)
- Physical connection identifier (Optional)
- Logical connection identifier
- Type of access transport network (Optional)
- Transport resource subscription (Optional)
  - Network class of service
  - Subscribed upstream bandwidth
  - Subscribed downstream bandwidth
  - Level of priority
- Default configuration (Optional)
  - Default access control list
  - Default upstream bandwidth
  - Default downstream bandwidth

NOTE – One of them is required to be present.

#### 8.4.4.4 Transport resource release notification

The transport resource release notification information flow is sent by NACF to notify the PD-FE to remove the resource profile information from local repository when the assigned IP address is released (e.g., DHCP leased timer expiry or a release of the access transport resources). It contains the following information components:

- Globally unique IP address information (Optional, see Note)
  - Unique IP address
  - Address realm
- Transport subscriber identifier (Optional, see Note)

NOTE – One of them is required to be present.

### 8.5 Reference point Rt

The Rt reference point allows PD-FE to interact with TRC-FE to detect and determine the requested QoS resource in the involved access network and core network for media flows along the media flow path. In addition, it can relay the access network information from NACF to TRC-FE through PD-FE.

The Rt reference point is an intra-domain reference point.

#### 8.5.1 Functional requirements

##### 8.5.1.1 Resource control functional requirements

The Rt reference point provides the ability for PD-FE to request the TRC-FE entities in the involved networks to detect and determine the requested QoS resource for a given media flow. PD-FE may also request TRC-FE to provide the path selection information for a given flow in the core network.

##### 8.5.1.2 Resource control session processing functional requirements

To assure the reliability and performance of resource control session operations across the Rt reference point, the following capabilities are required:

**Overload control:** The Rt reference point is required to provide the capability to support overload control for preventing the overflow of information messages exchanged between the PD-FE and the TRC-FE.

**Synchronization and audit:** The Rt reference point is required to provide the capability to support synchronization and audit of the resource control session status in support of recovery and operational information statistics and auditing.

**Session state maintenance:** When a stateful PD-FE is used, it is required to be able to maintain the session state using either soft-state or hard-state approaches. The reservation holding time specifies the time limitation in support of abnormal recovery. When a stateless PD-FE is used, the resource control session information passed by the SCF or PE-FE can be used to derive the session state and relevant information.

#### 8.5.2 Information exchange requirements

This clause provides a brief description of the information exchange requirements for the Rt reference point.

**Request-response transactions:** The reference point is required to allow the PD-FE to request a transaction to be performed by the TRC-FE and get a response (that can be correlated with the request) in return.

**Notifications:** The reference point is required to allow the notification of asynchronous events (from the TRC-FE to the PD-FE).

**Reliable delivery:** The reference point is recommended to provide reliable delivery of messages.

**Capabilities:** The PD-FE is required to be able to determine capabilities when requesting resources and other transport plane functions from the TRC-FE.

**Security:** The Rt is recommended to support the authentication between the PD-FE and TRC-FE such that requests to the TRC-FE from unauthenticated sources will not be performed and such that the PD-FE can verify the source of notifications sent from the TRC-FE. Refer to clause 11 for other security requirements.

**One-to-many/many-to-one:** Two modes are required to be supported: 1) One-to-many mode, a PD-FE is required to be able to communicate with multiple TRC-FEs; 2) Many-to-one mode, multiple PD-FEs are required to be able to make requests to a given TRC-FE.

**Granularity of resource control:** The Rt reference point is required to support resource control requests at different levels of granularity.

**Level of resource control:** The Rt reference point is required to support the resources control for the media flow level.

NOTE – Rt resource control at the aggregate level is for further study.

### 8.5.3 Information components

The majority of the information components at the Rt reference point are similar to those at Rs. However, the value and meaning may be changed in the PD-FE due to the network policy rules and QoS mapping. In addition, some components are not applicable and some new information components are needed at Rt.

#### 8.5.3.1 Resource control processing information components

The resource control processing information components at Rt are as described in Table 19.

**Table 19 – Resource control processing information components (Rt)**

Information component	Description
PD-FE identifier	A unique identifier for different instances of PD-FE within the same administrative domain of a single network operator.
Resource control session identifier	An identifier for the session, which may be composed of multiple media flows for which the resource reservation requests are sent to the TRC-FE. The identifier has to be unique within the same PD-FE instance.
Globally unique IP address information (Optional, Note 1)	A set of IP address information used for locating the access network in which the CPE is requesting the transport resource.
– Unique IP address	The IP address for identifying the CPE.
– Address realm	The addressing domain of the IP address (e.g., Subnet prefix or VPN ID).
Transport subscriber identifier (Optional)	A globally unique identifier for the CPE requesting the transport resource. This identifier can be used for locating the transport subscription information for the CPE.
Resource requestor identifier (Optional, Note 2)	An identifier for the requestor (i.e., the owner of SCF (e.g., a Service Provider)) of resource control service. It is unique over the requestors sending requests for the resource control to the same RACF domain.
Resource request priority (Optional)	The indication of the importance of a resource control request. It can be used for processing simultaneous requests by TRC-FE based on the priority level.

**Table 19 – Resource control processing information components (Rt)**

<b>Information component</b>	<b>Description</b>
Reservation holding time (Optional, Note 3)	The value of time interval for which the resource is reserved, which can be initiated by SCF based on the service requirement and/or granted by PD-FE based on the network policy decision. The PD-FE is required to release the session when the holding time is expired.
Resource control session information (Optional, Note 4)	The record of the resource control session information. This is used for deriving the session state and other information (e.g., association of PD-FE and TRC-FE) and only has a local significance between the PD-FE and pertinent parties. This component is only applicable when a stateless PD-FE is deployed.
<p>NOTE 1 – Only the optional component is explicitly indicated. The use of each information component (i.e., mandatory or optional) also refers to the specific information messages in clause 8.5.4.</p> <p>NOTE 2 – The resource requestor identifier may be used to assist PD-FE in identifying the unique relationship between the resource control session and requestor of the SCF.</p> <p>NOTE 3 – Reservation holding time may be used by PE-FE to assist PD-FE in monitoring the resource control session timeout and/or state.</p> <p>NOTE 4 – When a stateless PD-FE is in use, the PD-FE identifier is required to be inserted in the resource control session information component and sent to pertinent entities (e.g., PE-FE or TRC-FE).</p>	

### 8.5.3.2 QoS resource information components

The QoS resource information sub-components for media session and media flows are described in Table 20.

**Table 20 – QoS resource information sub-components (Rt)**

<b>Information component</b>	<b>Description</b>
Media profile	A set of information sub-components for a media session, which may be composed of data flows and control flows (e.g., RTP and RTCP flows for a VoIP call).
– Media number	An identifier for a media session (e.g., ordinal number of the position of the "m=" line in the SDP).
– Type of service	Indication of service type for the media data flow (e.g., voice, video telephony, or streaming video).
– Network class of service (Optional)	Represents the network service class subscribed by a CPE (e.g., Premium, Gold, Silver, and Regular). It may include the QoS performance class (e.g., Y.1541 class).  This parameter is only of local significance for a single operator owning the transport resource, which can be mapped from application CoS issued by the SCF based on network policy rules and SLA and can be used for the transport resource control and authorization of transport subscription.
– Media priority (Optional)	Information for priority handling (e.g., TDR/ETS).
– Ingress identifier (Optional)	The IP address of the ingress PE-FE where the involved flow enters a sub-domain.

**Table 20 – QoS resource information sub-components (Rt)**

Information component	Description
– Egress identifier (Optional)	The IP address of the egress PE-FE where the involved flow leaves a sub-domain.
– Performance state (Optional)	Estimated performance level of the local domain, to be compared with desired network performance requirement (e.g., Y.1541 class).
– Path selection information (Optional)	For requests, the technology independent core network ingress/egress path information at the PE-FE for a media flow (e.g., VPN ID). For responses, may be also the path selection information for the media flow within the core network.
– Media flow description	A set of sub-components of individual or a group of media flows within a media session.
Physical connection identifier (Optional)	A local identifier for physical connection of the access transport network that the CPE is attached to (e.g., IP address of PE-FE device, and MAC address or Link ID and physical port ID). It is the same as defined at the Ru reference point.
Logical connection identifier (Optional)	A local identifier for logical connection of the access transport network to which the CPE is connected (e.g., ATM VPI/VCI, PPP, MPLS Label, GTP Tunnel or logical port). It can be used by PE-FE to identify the layer 2 connection in pertinent network devices for a particular CPE requesting the access transport resource. It is the same as defined at the Ru reference point.
Type of access transport network (Optional)	The type of access network to which the CPE is attached.
Transport resource subscription (Optional)	
– Network class of service	Represents the network service class subscribed by a CPE (e.g., Premium, Gold, Silver, Regular). It may include the QoS performance class (e.g., Y.1541 class). This parameter is only of local significance for a single operator owning the transport resource, which can be mapped from application CoS issued by the SCF based on network policy rules and SLA and can be used for the transport resource control and authorization of transport subscription.
– Subscribed upstream bandwidth	The maximum bandwidth subscribed by a CPE for the upstream connections.
– Subscribed downstream bandwidth	The maximum amount of bandwidth subscribed by a CPE for the downstream connections.
– Level of priority	The maximum level of priority permitted for any reservation request.
NOTE – The application class of service and the type of service are mapped into the network class of service and relevant media flow description sub-components (e.g., IP QoS handling class and traffic descriptor).	

The information sub-components of the media flow description are described in Table 21.

**Table 21 – Media flow description sub-components (Rt)**

<b>Information component</b>	<b>Description</b>
Media flow description	A set of parameters for the individual media flow within a media session.
– Flow direction (in→out, out→in, bidirectional)	Direction of the media flow, where "in" refers to inside the core network so that "out→in" refers to the direction towards the core network.
– Flow number	An identifier for the individual media flow within a media session.
– Flow status	Instruction and indication of enabled or disabled status for a media flow.
– Protocol version	The version of source and destination unicast network address protocol (e.g., IPv4 or IPv6).
– IP addresses	The source and destination network addresses.
– Ports	The source and destination port numbers. Port ranges are required to be supported (e.g., two consecutive ports for RTP, RTCP).
– Protocol number	The protocol ID (e.g., UDP, TCP).
– Bandwidth	The requested maximum bandwidth. The upstream and downstream BW is recommended to be provided separately.
– IP QoS handling class (Optional)	A QoS parameter for IP packet marking and handling in PE-FE (e.g., IPv4 DSCP and IPv6 traffic class). It can be derived from the service information, network CoS and network policy rules.
– Traffic descriptor (Optional)	The description of the flow characteristics (e.g., peak data rate, sustainable data rate, and maximum burst size as specified in [b-ITU-T Y.1221]).

### **8.5.3.3 Authorization token information component**

This component is not applicable.

### **8.5.3.4 Charging correlation information component**

This component is not applicable.

### 8.5.3.5 Resource control action information components

**Table 22 – Resource control action information components (Rt)**

Information component	Description
Resource reservation mode	Indication of resource reservation mode (e.g., non-reservation, reservation only or reservation + commitment). In the pull mode of the QoS control scenario, the "non-reservation" option is used. In the push mode, either the "reservation only" or the "reservation + commit" option is used.
Resource request result	Indication of the result for a resource request (initiation, modification, release).
Timestamp	The time when the resources were lost.
Reason	Information describing the cause for an event (e.g., Abort event).
Event notification indication (Optional)	A set of information sub-components indicating the query and notification of a transport event. Note that the listed sub-components may not include all event notifications. Extra events can be added.
– Resource information indicator	Indication of a request for resource information. It is used by the PD-FE to ask the TRC-FE to include the resource information (such as available bandwidth) in the response message, or is used by TRC-FE to retrieve the processed service information when an event occurs (e.g., node failure).
– Transport loss indicator	The PD-FE's subscription for the notification of the transport loss events, or notification of a transport loss event to the PD-FE.
– Transport recovery indicator	The PD-FE's subscription for the transport recovery events, or notification of a transport recovery event to the PD-FE.
– Transport release indicator	The PD-FE's subscription for the transport release events, or notification of a transport release event to the PD-FE.

### 8.5.4 Information exchanged over Rt

This clause describes the information (namely requests and responses) exchanged over Rt.

#### 8.5.4.1 Resource initiation request

The resource initiation request information flow is sent by PD-FE to TRC-FE to request the transport resource control (e.g., resource admission and decision). It contains the following information components:

- PD-FE identifier
- Resource control session identifier
- Globally unique IP address information (Optional, see Note)
  - Unique IP address
  - Address realm
- Transport subscriber identifier (Optional, see Note)
- Resource requestor identifier (Optional)
- Resource request priority (Optional)
- Reservation holding time (Optional)

- Resource control session information (Optional)
- Media profile
  - Media number
  - Type of service (Optional)
  - Network class of service (Optional)
  - Media priority (Optional)
  - Ingress identifier (Optional)
  - Egress identifier (Optional)
  - Path selection information (Optional)
  - Media flow description
    - Flow direction
    - Flow number
    - Flow status
    - Protocol version
    - IP addresses
    - Ports
    - Protocol number
    - Bandwidth
    - IP QoS handling class (Optional)
    - Traffic descriptor (Optional)
- Physical connection identifier (Optional)
- Logical connection identifier (Optional)
- Type of access transport network (Optional)
- Transport resource subscription (Optional)
  - Network class of service
  - Subscribed upstream bandwidth
  - Subscribed downstream bandwidth
  - Level of priority
- Event notification indication (Optional)
  - Resource information indicator
  - Transport loss indicator
  - Transport recovery indicator
  - Transport release indicator

NOTE – One of them is required to be present.

#### **8.5.4.2 Resource initiation response**

The resource initiation response information flow is sent by TRC-FE to PD-FE to confirm the resource initiation request. It contains the following information components:

- PD-FE identifier
- Resource control session identifier
- Resource requestor identifier (Optional)
- Reservation holding time (Optional)

- Resource control session information (Optional)
- Resource request result
- Media profile (Optional)
  - Media number
  - Type of service (Optional)
  - Network class of service (Optional)
  - Media priority (Optional)
  - Ingress identifier (Optional)
  - Egress identifier (Optional)
  - Path selection information (Optional)
  - Performance state (Optional)
  - Media flow description
    - Flow direction
    - Flow number
    - Flow status
    - Protocol version
    - IP addresses
    - Ports
    - Protocol number
    - Bandwidth
    - IP QoS handling class (Optional)
    - Traffic descriptor (Optional)

#### **8.5.4.3 Resource modification request**

The resource modification request information flow is sent by PD-FE to TRC-FE to request the resource modification of an established session. The session state can be provided via resource control session information if a stateless TRC-FE is used. It contains the following information components:

- PD-FE identifier
- Resource control session identifier
- Resource requestor identifier (Optional)
- Resource request priority (Optional)
- Reservation holding time (Optional)
- Resource control session information (Optional)
- Media profile
  - Media number
  - Type of service (Optional)
  - Network class of service (Optional)
  - Media priority (Optional)
  - Ingress identifier (Optional)
  - Egress identifier (Optional)
  - Path selection information (Optional)

- Media flow description
  - Flow direction
  - Flow number
  - Flow status
  - Protocol version
  - IP addresses
  - Ports
  - Protocol number
  - Bandwidth
  - IP QoS handling class (Optional)
  - Traffic descriptor (Optional)
- Physical connection identifier (Optional)
- Logical connection identifier (Optional)
- Type of access transport network (Optional)
- Transport resource subscription (Optional)
  - Network class of service
  - Subscribed upstream bandwidth
  - Subscribed downstream bandwidth
  - Level of priority
- Event notification indication (Optional)
  - Resource information indicator
  - Transport loss indicator
  - Transport recovery indicator
  - Transport release indicator

#### **8.5.4.4 Resource modification response**

The resource modification response information flow is sent by TRC-FE to PD-FE to confirm the resource modification request. The information components are the same as those in the resource initiation response.

#### **8.5.4.5 Resource action request**

The resource action request information flow is sent by TRC-FE to PD-FE as needed to request a specific resource control action (e.g., retrieving the information). It contains the following information components:

- PD-FE identifier
- Resource control session identifier
- Resource requestor identifier (Optional)
- Resource control session information (Optional)
- Media profile
  - Media number
  - Type of service (Optional)
  - Network class of service (Optional)
  - Media priority (Optional)

- Ingress identifier (Optional)
- Egress identifier (Optional)
- Path selection information (Optional)
- Media flow description
  - Flow direction
  - Flow number
  - Flow status
  - Protocol version
  - IP addresses
  - Ports
  - Protocol number
  - Bandwidth
  - IP QoS handling class (Optional)
  - Traffic descriptor (Optional)
- Physical connection identifier (Optional)
- Logical connection identifier (Optional)
- Type of access transport network (Optional)
- Transport resource subscription (Optional)
  - Network class of service
  - Subscribed upstream bandwidth
  - Subscribed downstream bandwidth
  - Level of priority
- Event notification indication (Optional)
  - Resource information indicator
  - Transport loss indicator
  - Transport recovery indicator
  - Transport release indicator

#### **8.5.4.6 Resource action response**

The resource action response information flow is sent by PD-FE to TRC-FE as needed to confirm the request of the specific action and provide the service information. It contains the following information components:

- PD-FE identifier
- Resource control session identifier
- Resource requestor identifier (Optional)
- Resource control session information (Optional)
- Media profile
  - Media number
  - Type of service (Optional)
  - Network class of service (Optional)
  - Media priority (Optional)
  - Ingress identifier (Optional)

- Egress identifier (Optional)
- Path selection information (Optional)
- Performance state (Optional)
- Media flow description
  - Flow direction
  - Flow number
  - Flow status
  - Protocol version
  - IP addresses
  - Ports
  - Protocol number
  - Bandwidth
  - IP QoS handling class (Optional)
  - Traffic descriptor (Optional)
- Physical connection identifier (Optional)
- Logical connection identifier (Optional)
- Type of access transport network (Optional)
- Transport resource subscription (Optional)
  - Network class of service
  - Subscribed upstream bandwidth
  - Subscribed downstream bandwidth
  - Level of priority
- Event notification indication (Optional)
  - Resource information indicator
  - Transport loss indicator
  - Transport recovery indicator
  - Transport release indicator

#### **8.5.4.7 Resource notification**

The resource notification information flow is sent by TRC-FE to notify PD-FE of the transport resource events. It contains the following information components:

- PD-FE identifier
- Resource control session identifier
- Resource requestor identifier (Optional)
- Resource control session information (Optional)
- Dynamic firewall working mode (Optional)
- Media profile
  - Media number
  - Type of service (Optional)
  - Network class of service (Optional)
  - Media priority (Optional)
  - Ingress identifier (Optional)

- Egress identifier (Optional)
- Path selection information (Optional)
- Media flow description
  - Flow direction
  - Flow number
  - Flow status
  - Protocol version
  - IP addresses
  - Ports
  - Protocol number
  - Bandwidth
  - IP QoS handling class (Optional)
  - Traffic descriptor (Optional)
- Event notification indication (Optional)
  - Resource information indicator
  - Transport loss indicator
  - Transport recovery indicator
  - Transport release indicator

#### **8.5.4.8 Resource release request**

The resource release request information flow is sent by PD-FE to TRC-FE to request the resource release for an established session or individual media flow. The session state can be provided via resource control session information if a stateless TRC-FE is used. It contains the following information components:

- PD-FE identifier
- Resource control session identifier
- Resource requestor identifier (Optional)
- Resource control session information (Optional)
- Media profile (Optional)
  - Media number
  - Type of service (Optional)
  - Network class of service (Optional)
  - Media priority (Optional)
  - Ingress identifier (Optional)
  - Egress identifier (Optional)
  - Path selection information (Optional)
  - Media flow description
    - Flow direction
    - Flow number
    - Flow status
    - Protocol version
    - IP addresses

- Ports
- Protocol number
- Bandwidth
- IP QoS handling class (Optional)
- Traffic descriptor (Optional)
- Physical connection identifier (Optional)
- Logical connection identifier (Optional)
- Type of access transport network (Optional)
- Transport resource subscription (Optional)
  - Network class of service
  - Subscribed upstream bandwidth
  - Subscribed downstream bandwidth
  - Level of priority
- Event notification indication (Optional)
  - Resource information indicator
  - Transport loss indicator
  - Transport recovery indicator
  - Transport release indicator

#### **8.5.4.9 Resource release response**

The resource release response information flow is sent by TRC-FE to PD-FE to confirm the resource release request. It contains the following information components:

- PD-FE identifier
- Resource control session identifier
- Resource requestor identifier (Optional)
- Resource control session information (Optional)
- Resource request result

#### **8.5.4.10 Abort resource request**

The abort resource request information flow is sent by TRC-FE to PD-FE to indicate the loss of all resources for the established session. It contains the following information components:

- PD-FE identifier
- Resource control session identifier
- Resource requestor identifier (Optional)
- Resource control session information (Optional)
- Timestamp
- Reason

#### **8.5.4.11 Abort resource response**

The abort resource response message is sent by PD-FE to TRC-FE to confirm a resource abort request. It contains the following information components:

- PD-FE identifier
- Resource control session identifier

- Resource requestor identifier (Optional)
- Resource control session information (Optional)

## 8.6 Reference point Rp

The Rp reference point allows the interaction between TRC-FE instances within the same administrative domain for resource admission control of unicast, multicast or both.

The Rp reference point is an intra-domain reference point.

### 8.6.1 Functional requirements

#### 8.6.1.1 Resource control functional requirements

When an operator's core network consists of multiple sub-domains, it is an option to deploy multiple TRC-FE instances in each sub-domain. In this case, the TRC-FE instances communicate with each other through Rp.

In addition, the Rp reference point can be used between top-tier TRC-FE instance and co-located TRC-FE instance using one of operation modes defined in clause 7.2.3.3: outsourcing mode and designating mode.

#### 8.6.1.2 Resource control session processing functional requirements

To assure the reliability and performance of resource control session operations across the Rp reference point, the following capabilities are required:

**Overload control:** The Rp reference point is required to provide the capability to support overload control for preventing the overflow of information messages exchanged between TRC-FE instances.

**Synchronization and audit:** The Rp reference point is required to provide the capability to support synchronization and audit of the resource control session status in support of recovery and operational information statistics and auditing.

**Session state maintenance:** When a stateful PD-FE is used, it is required to be able to maintain the session state using either soft-state or hard-state approaches. The reservation holding time specifies the time limitation in support of abnormal recovery. When a stateless PD-FE is used, the resource control session information passed by the SCF or PE-FE can be used to derive the session state and relevant information.

### 8.6.2 Information exchange requirements

This clause provides a brief description of the information exchange requirements for the Rp reference point.

**Request-response transactions:** The reference point is required to allow a TRC-FE to request a transaction to be performed by another TRC-FE and get a response (that can be correlated with the request) in return.

**Notifications:** The reference point is required to allow the notification of asynchronous events (from a TRC-FE to another TRC-FE).

**Reliable delivery:** The reference point is recommended to provide reliable delivery of messages.

**Capabilities:** A TRC-FE is required to be able to determine capabilities when requesting resources and other transport plane functions from another TRC-FE.

**Security:** The Rp is recommended to support the authentication between the instances of TRC-FEs such that requests to the TRC-FE from unauthenticated sources will not be performed and such that the TRC-FE can verify the source of notifications sent from another TRC-FE. Refer to clause 11 for other security requirements.

**Granularity of resource control:** The Rp reference point is required to support resource control requests at different levels of granularity.

**Level of resource control:** The Rp reference point is required to support the resources control at media flow level and/or aggregate level according to the deployed resource control mode as described in clause 6.1.1.

### 8.6.3 Information components

#### 8.6.3.1 Resource control processing information components

The information components for request processing, described in Table 23 below, provide the information used for discovery, binding, flow control (overload control), state maintenance, etc.

**Table 23 – Resource control processing information components (Rp)**

Information component	Description
TRC-FE identifier	A unique identifier for different instances of TRC-FE within the same administrative domain of a single network operator.
Resource control session identifier	An identifier for the session, which may be composed of multiple media flows for which the resource reservation requests are sent to the TRC-FE. The identifier has to be unique within the same PD-FE instance.
Reservation holding time (Optional)	The value of time interval for which the resource is reserved, which can be initiated by SCF based on the service requirement and/or granted by PD-FE based on the network policy decision. The PD-FE is required to release the session when the holding time is expired.
Resource control session information (Optional)	The record of the resource control session information. This is used for deriving the session state and other information (e.g., association of TRC-FE instances) and only has a local significance between the pertinent TRC-FE instances. This component is only applicable when a stateless PD-FE is deployed.

#### 8.6.3.2 QoS resource information components

The QoS resource information sub-components for media session, media flows and aggregate resource are described in Table 24.

**Table 24 – QoS resource information sub-components (Rp)**

Information component	Description
Media profile (Conditional)	A set of information sub-components for a media session, which may be composed of data flows and control flows (e.g., RTP and RTCP flows for a VoIP call).
– Media number	An identifier for a media session (e.g., ordinal number of the position of the "m=" line in the SDP).
– Type of service	Indication of service type for the media data flow (e.g., voice, video telephony, or streaming video).
– Network class of service (Optional)	Represents the network service class subscribed by a CPE (e.g., Premium, Gold, Silver, Regular). It may include the QoS performance class (e.g., Y.1541 class).  This parameter is only of local significance for a single operator owning the transport resource, which can be mapped from application CoS issued by the SCF based on network policy rules and SLA and can be used for the transport resource control and authorization of transport subscription.
– Media priority (Optional)	Information for priority handling (e.g., TDR/ETS).
– Ingress identifier (Optional)	The IP address of the ingress PE-FE where the involved flow enters a sub-domain.
– Egress identifier (Optional)	The IP address of the egress PE-FE where the involved flow leaves a sub-domain.
– Path selection information (Optional)	For requests, the technology independent core network ingress/egress path information at the PE-FE for a media flow (e.g., VPN ID). For responses, may be also the path selection information for the media flow within the core network.
– Media flow description	A set of sub-components of individual or a group of media flows within a media session.
Physical access ID (Optional)	The identifier of the physical access to which the user equipment is connected.
Logical access ID (Optional)	The identifier of the logical access used by the attached user equipment. In the xDSL case, the Logical Access ID may explicitly contain the identifier of VP and/or VC carrying the traffic.
Aggregate resource profile (Conditional)	The aggregate resource description.

The information sub-components of the media flow description are described in Table 25.

**Table 25 – Media flow description sub-components (Rp)**

<b>Information component</b>	<b>Description</b>
Media flow description	A set of parameters for the individual media flow within a media session.
– Flow direction (in→out, out→in, bidirectional)	Direction of the media flow, where "in" refers to inside the core network so that "out→in" refers to the direction towards the core network.
– Flow number	An identifier for the individual media flow within a media session.
– Flow status	Instruction and indication of enabled or disabled status for a media flow.
– Protocol version	The version of source and destination unicast network address protocol (e.g., IPv4 or IPv6).
– IP addresses	The source and destination network addresses.
– Ports	The source and destination port numbers. Port ranges are required to be supported (e.g., two consecutive ports for RTP, RTCP).
– Protocol number	The protocol ID (e.g., UDP, TCP).
– Bandwidth	The requested maximum bandwidth. The upstream and downstream BW is recommended to be provided separately.
– IP QoS handling class (Optional)	A QoS parameter for IP packet marking and handling in PE-FE (e.g., IPv4 DSCP and IPv6 traffic class). It can be derived from the service information, network CoS and network policy rules.
– Traffic descriptor (Optional)	The description of the flow characteristics (e.g., peak data rate, sustainable data rate, and maximum burst size as specified in [b-ITU-T Y.1221]).

The information sub-components of the aggregate resource profile are described in Table 26.

**Table 26 – Aggregate resource profile sub-components (Rp)**

<b>Information component</b>	<b>Description</b>
Aggregate resource profile (Conditional)	The description of an aggregate resource.
– Direction (Optional)	Direction of the requested bulk resources.
– Physical access ID (Optional, Note)	The identifier of the physical access to which the user equipment is connected.
– Logical access ID (Optional, Note)	The identifier of the logical access used by the attached user equipment. For example, in the xDSL case, the Logical Access ID corresponds to the identifier of VP and/or VC carrying the traffic.
– Physical aggregation ID (Optional, Note)	The identifier of the physical resource in the aggregation network.
– Logical aggregation ID (Optional, Note)	The identifier of the logical resource in the aggregation network.
– Bandwidth	The maximum requested data rate.
– QoS class (Optional)	A QoS class parameter for requested resources (e.g., 802.1p).
– Traffic descriptor (Optional)	The description of the resource characteristics (e.g., peak data rate, sustainable data rate, and maximum burst size (e.g., as specified in [b-ITU-T Y.1221])).
NOTE – Either physical/logical access IDs or physical/logical aggregation connection IDs may be present in the Aggregate Resource Profile.	

### **8.6.3.3 Authorization token information components**

This component is not applicable.

### **8.6.3.4 Charging correlation information components**

This component is not applicable.

### 8.6.3.5 Resource control action information components

**Table 27 – Resource control action information components (Rp)**

Information component	Description
Resource reservation mode	Indication of resource reservation mode (e.g., non-reservation, reservation only or reservation + commitment). In the pull mode of the QoS control scenario, the "non-reservation" option is used. In the push mode, either the "reservation only" or the "reservation + commit" option is used.
Resource request result	Indication of the result for a resource request (initiation, modification, release).
Timestamp	The time when the resources were lost.
Reason	Information describing the cause for an event (e.g., Abort event).
Event notification indication (Optional)	A set of information sub-components indicating the query and notification of a transport event. Note that listed sub-components may not include all event notifications. Extra events can be added.
– Resource information indicator	Indication of a request for resource information. It is used by the TRC-FE instance to ask the pertinent TRC-FE instances to include the resource information (such as available bandwidth) in the response message, or is used by TRC-FE to retrieve the processed service information when an event occurs (e.g., node failure).
– Transport loss indicator	The TRC-FE's subscription for the notification of the transport loss events, or notification of a transport loss event to TRC-FE.
– Transport recovery indicator	The TRC-FE's subscription for the transport recovery events, or notification of a transport recovery event to TRC-FE.
– Transport release indicator	The TRC-FE's subscription for the transport release events, or notification of a transport release event to TRC-FE.

### 8.6.4 Information exchanged over Rp

This clause describes the information exchanged over Rp.

#### 8.6.4.1 Resource initiation request

One TRC-FE instance may request another TRC-FE instance in the downstream sub-network to check the availability of the requested QoS resource and update the resource status information for outsourcing mode. The request, i.e., information flow, communicates the following information:

- TRC-FE identifier
- Resource control session identifier
- Resource requestor identifier (Optional)
- Reservation holding time (Optional)
- Resource control session information (Optional)
- Physical access ID (Optional)
- Logical access ID (Optional)
- Media profile (Conditional, see Note 1)
  - Media number
  - Type of service (Optional)

- Network class of service (Optional)
- Media priority (Optional)
- Ingress identifier (Optional)
- Egress identifier (Optional)
- Path selection information (Optional)
- Media flow description
  - Flow direction
  - Flow number
  - Flow status
  - Protocol version
  - IP addresses
  - Ports
  - Protocol number
  - Bandwidth
  - IP QoS handling class (Optional)
  - Traffic descriptor (Optional)
- Aggregate resource profile (Conditional, see Note 1)
  - Direction (Optional)
  - Physical access ID (Optional, see Note 2)
  - Logical access ID (Optional, see Note 2)
  - Physical aggregation ID (Optional, see Note 2)
  - Logical aggregation ID (Optional, see Note 2)
  - Bandwidth
  - QoS class (Optional)
  - Traffic descriptor (Optional)
- Event notification indication (Optional)
  - Resource information indicator
  - Transport loss indicator
  - Transport recovery indicator
  - Transport release indicator

NOTE 1 – Depending on the level of requested resources, either media description or aggregate resource profile may be present.

NOTE 2 – Either physical/logical access IDs or physical/logical aggregation connection IDs may be present in the aggregate resource profile.

#### **8.6.4.2 Resource initiation response**

One TRC-FE instance may respond to another TRC-FE instance in the upstream sub-network to confirm the resource initiation request. The response, i.e., information flow, communicates the following information:

- TRC-FE identifier
- Resource control session identifier
- Resource requestor identifier (Optional)

- Reservation holding time (Optional)
- Resource control session information (Optional)
- Resource request result
- Physical access ID (Optional)
- Logical access ID (Optional)
- Media profile (Optional)
  - Media number
  - Type of service (Optional)
  - Network class of service (Optional)
  - Media priority (Optional)
  - Ingress identifier (Optional)
  - Egress identifier (Optional)
  - Path selection information (Optional)
  - Media flow description
    - Flow direction
    - Flow number
    - Flow status
    - Protocol version
    - IP addresses
    - Ports
    - Protocol number
    - Bandwidth
    - IP QoS handling class (Optional)
    - Traffic descriptor (Optional)
- Aggregate resource profile (Optional)
  - Direction (Optional)
  - Physical access ID (Optional)
  - Logical access ID (Optional)
  - Physical aggregation ID (Optional)
  - Logical aggregation ID (Optional)
  - Bandwidth
  - QoS class (Optional)
  - Traffic descriptor (Optional)

#### **8.6.4.3 Resource modification request**

One TRC-FE may request another TRC-FE in the downstream sub-network to check the availability of the modified requested QoS resource and update the resource status information for outsourcing mode. The request, i.e., information flow, communicates the following information:

- TRC-FE identifier
- Resource control session identifier
- Resource requestor identifier (Optional)
- Reservation holding time (Optional)

- Resource control session information (Optional)
- Physical access ID (Optional)
- Logical access ID (Optional)
- Media profile (Conditional, see Note 1 in clause 8.6.4.1)
  - Media number
  - Type of service (Optional)
  - Network class of service (Optional)
  - Media priority (Optional)
  - Ingress identifier (Optional)
  - Egress identifier (Optional)
  - Path selection information (Optional)
  - Media flow description
    - Flow direction
    - Flow number
    - Flow status
    - Protocol version
    - IP addresses
    - Ports
    - Protocol number
    - Bandwidth
    - IP QoS handling class (Optional)
    - Traffic descriptor (Optional)
- Aggregate resource profile (Conditional, see Note 1 in clause 8.6.4.1)
  - Direction (Optional)
  - Physical access ID (Optional, see Note 2 in clause 8.6.4.1)
  - Logical access ID (Optional, see Note 2 in clause 8.6.4.1)
  - Physical aggregation ID (Optional, see Note 2 in clause 8.6.4.1)
  - Logical aggregation ID (Optional, see Note 2 in clause 8.6.4.1)
  - Bandwidth
  - QoS class (Optional)
  - Traffic descriptor (Optional)
- Event notification indication (Optional)
  - Resource information indicator
  - Transport loss indicator
  - Transport recovery indicator
  - Transport release indicator

#### **8.6.4.4 Resource modification response**

One TRC-FE instance may respond to another TRC-FE instance in the upstream sub-network to confirm the resource modification request. The information components in the response, i.e., information flow, are the same as those in the resource initiation response.

#### **8.6.4.5 Resource request rejection**

A TRC-FE may respond to another TRC-FE in the upstream sub-network that the requested QoS resource is unavailable. The response, i.e., information flow, communicates the following information:

- TRC-FE identifier
- Resource control session identifier
- Resource requestor identifier (Optional)
- Resource control session information (Optional)
- Reason

#### **8.6.4.6 Resource unavailable indication**

A TRC-FE may notify another TRC-FE in the upstream sub-network that the requested QoS resource is no longer available. The response, i.e., information flow, communicates the following information:

- TRC-FE identifier
- Resource control session identifier
- Resource requestor identifier (Optional)
- Resource control session information (Optional)
- Reason

#### **8.6.4.7 Resource release request**

One TRC-FE instance may request another TRC-FE instance in the downstream sub-network to release the requested QoS resource. The request, i.e., information flow, communicates the following information:

- TRC-FE identifier
- Resource control session identifier
- Resource requestor identifier (Optional)
- Resource control session information (Optional)
- Reason

#### **8.6.4.8 Resource release response**

One TRC-FE instance may respond to another TRC-FE instance in the upstream sub-network to report the action taken in response to a resource release request. The response, i.e., information flow, communicates the following information:

- TRC-FE identifier
- Resource control session identifier
- Resource requestor identifier (Optional)
- Resource control session information (Optional)
- Reason

#### 8.6.4.9 Aggregate resource allocation request

The aggregate resource allocation request message is used to increase or decrease current aggregate resource allocation that is sent from one TRC-FE to another TRC-FE for designating model. The aggregate resource allocation request message contains the following components:

- TRC-FE identifier
- Resource control session identifier
- Resource requestor identifier (Optional)
- Reservation holding time (Optional)
- Resource control session information (Optional)
- Aggregate resource profile
  - Direction (Optional)
  - Physical access ID (Optional, see Note 2 in clause 8.6.4.1)
  - Logical access ID (Optional, see Note 2 in clause 8.6.4.1)
  - Physical aggregation ID (Optional, see Note 2 in clause 8.6.4.1)
  - Logical aggregation ID (Optional, see Note 2 in clause 8.6.4.1)
  - Bandwidth
  - QoS class (Optional)
  - Traffic descriptor (Optional)
- Event notification indication (Optional)
  - Resource information indicator
  - Transport loss indicator
  - Transport recovery indicator
  - Transport release indicator

#### 8.6.4.10 Aggregate resource allocation response

The aggregate resource allocation response message is used to confirm aggregate resource allocation for designating model. The aggregate resource allocation response message contains the following components:

- TRC-FE identifier
- Resource control session identifier
- Resource requestor identifier (Optional)
- Reservation holding time (Optional)
- Resource control session information (Optional)
- Resource request result
- Aggregate resource profile (Optional)
  - Direction (Optional)
  - Physical access ID (Optional, see Note 2 in clause 8.6.4.1)
  - Logical access ID (Optional, see Note 2 in clause 8.6.4.1)
  - Physical aggregation ID (Optional, see Note 2 in clause 8.6.4.1)
  - Logical aggregation ID (Optional, see Note 2 in clause 8.6.4.1)

- Bandwidth
- QoS class (Optional)
- Traffic descriptor (Optional)

## 8.7 Reference Point Ri

The Ri reference point is an inter-domain reference point. The Ri reference point conveys the information on QoS handling, priority handling and resource usage between domains.

The Ri reference point is used to support inter-operator domain PD-FE communication when the SCF is not capable of interacting with the PD-FE in each domain crossed by the media flow or when no SCF is available. For example, when there are separate access network and core network operators and the SCF only interacts with the core network PD-FE, Ri can be used to request resource and admission control over the access domain.

NOTE – It is recommended to limit the Ri reference point to the nomadicity scenario in Revision 1.

### 8.7.1 Functional requirements

The functional requirements on Ri are similar to the requirements on Rs, except for the gate control, NATP and firewall aspects which are not part of the inter-domain exchanges.

In peering relations between operators, the PD-FE instance of each operator may interact with PD-FE instances of other operators.

#### 8.7.1.1 Resource control functional requirements

The Ri reference point provides the ability for the PD-FE to make requests:

- for resource authorization and reservation for a media flow;
- for QoS handling;
- for priority handling;
- for resource usage information.

In addition, the PD-FE can request notification of events.

#### 8.7.1.2 Resource control session processing functional requirements

To assure the reliability and performance of resource control session operations across the Ri reference point, the following capabilities are required:

**Overload control:** The Ri reference point is required to provide the capability to support overload control for preventing the overflow of information messages exchanged between PD-FE coming from a different domain.

**Synchronization and audit:** The Ri reference point is required to provide the capability to support synchronization and audit of the resource control session status in support of recovery and operational information statistics and auditing.

**Session state maintenance:** When a stateful PD-FE is used, it is required to be able to maintain the session state using either soft-state or hard-state approaches. The reservation holding time specifies the time limitation in support of abnormal recovery. When a stateless PD-FE is used, the resource control session information passed by the other PD-FE or PE-FE can be used to derive the session state and relevant information.

### 8.7.2 Information exchange requirements

This clause provides the description of the information exchange requirements for the Ri reference point.

**Request-response transactions:** The reference point is required to allow the originating PD-FE in one administrative domain to request a transaction to be performed by the peer PD-FE in another administrative domain and get a response (that can be correlated with the request) in return.

**Notifications:** The reference point is required to support the notification of asynchronous events (from the peer PD-FE to the originating PD-FE).

**Reliable delivery:** The reference point is required to provide reliable delivery of messages.

**Capabilities:** The originating PD-FE is required to be able to determine the capabilities of the peer PD-FE when requesting resources and other transport functions.

**Security:** The Ri is required to support authentication between the corresponding PD-FEs such that requests to the peer PD-FE from unauthenticated sources will not be performed and such that an originating PD-FE can verify the source of notifications sent from a peer PD-FE. Refer to clause 11 for other security requirements

**One-to-many/many-to-one communications:** Two modes are required to be supported: 1) One-to-many mode: one originating PD-FE in a given domain is required to be able to send requests to peer PD-FEs in multiple domains; 2) Many-to-one mode, one peer PD-FE in a given domain is required to be able to accept requests from originating PD-FEs in multiple domains. Only one originating PD-FE instance in a single domain will make a request to peer PD-FE in the other domain on behalf of a particular session.

**Granularity of resource control:** The Ri reference point is required to support resource control requests from one administrative domain to another domain at different levels of granularity, e.g., at the media flow level, application session level, service control function level and the operator level between administrative domains.

**Level of resource control:** The Ri reference point is required to support resource control from one administrative domain to another domain for the media flow level.

NOTE – Ri resource control at the aggregate level is for further study.

### **8.7.3 Information components**

The information components exchanged across the Ri reference point are categorized as follows:

#### **8.7.3.1 Resource control processing information components**

The information components for resource control request processing (e.g., discovery, binding, overload control and state maintenance) are described in Table 28.

**Table 28 – Resource control processing information components (Ri)**

<b>Information component</b>	<b>Description</b>
PD-FE identifier	A unique identifier for different instances of the originating PD-FE within the same administrative domain of a single requestor.
Resource control session identifier	An identifier for the session, which may be composed of multiple media flows for which the resource reservation requests are sent to the peer PD-FE. The identifier has to be unique within the PD-FE instance.
Globally unique IP address information (Optional, Note 1)	A set of IP address information used for locating the network in which the CPE is requesting the transport resource.
– Unique IP address	The IP address for identifying the CPE.
– Address realm	The addressing domain of the IP address (e.g., Subnet prefix or VPN ID).
Transport subscriber identifier (Optional, Note 1)	A globally unique identifier for the CPE requesting the transport resource. This identifier can be used for locating the transport subscription information for the CPE.
Resource requestor identifier	An identifier for the requestor (i.e., the owner of originating PD-FE (e.g., a Service Network Provider)) of resource control service. It is unique over the requestors sending requests for the resource control to the same peer RACF domain.
Resource request priority (Optional)	The indication of the importance of a resource control request. It can be used for processing simultaneous requests by peer PD-FE based on the priority level.
Reservation holding time (Optional)	The value of time interval for which the resource is reserved, which can be initiated by originating PD-FE based on the service requirement in the request message; or granted by peer PD-FE based on the network policy decision in the response message. The session is released when the holding time is expired.
Resource control session information (Optional)	The record of the resource control session information. This is used for deriving the session state and other information (e.g., association of peer PD-FE and originating PD-FE) and only has a local significance between the originating PD-FE and the peer PD-FE. This component is only applicable when a stateless PD-FE is deployed.
NOTE 1 – One of globally unique IP address or transport subscriber identifier is required to be present.	
NOTE 2 – Only the optional component is explicitly indicated. The use of each information component (i.e., mandatory or optional) also refers to the specific information messages in clause 8.7.4.	
NOTE 3 – How the peer PD-FE obtains the information of transport subscriber ID is an issue for service stratum functionality.	

### 8.7.3.2 QoS resource information components

The QoS resource information sub-components for media session and media flows are described in Table 29.

**Table 29 – QoS resource information sub-components (Ri)**

<b>Information component</b>	<b>Description</b>
Media profile	A set of information sub-components for a media session, which may be composed of data flows and control flows (e.g., RTP and RTCP flows for a VoIP call). The sub-components in a media profile can be represented by a wildcard as needed.
– Media number	An identifier for a media session (e.g., ordinal number of the position of the "m=" line in the SDP).
– Type of service	Indication of service type for the media data flow (e.g., voice, video telephony, or streaming video).
– Application class of service (Optional)	The application service class for the media (e.g., first class) is of local significance between the resource request client (i.e., the owner of originating PD-FE) and the owner of peer PD-FE, and is to be converted by peer PD-FE to Network Class of Service (e.g., Y.1541 class for performance requirement) based on SLA and network policy rules.
– Media priority (Optional)	Information for priority handling (e.g., TDR/ETS).
– Media flow description	A set of sub-components of individual or a group of media flows within a media session.

The information sub-components of the media flow description are described in Table 30.

**Table 30 – Media flow description sub-components (Ri)**

<b>Information component</b>	<b>Description</b>
Media flow description	A set of sub-components of individual media flows or a group of media flows within a media session. The sub-components of a media flow description can be represented by a wildcard as needed.
– Flow direction (in→out, out→in, bidirectional)	Direction of the media flow, where "in" refers to inside the originating domain, so that "in→out" refers to the direction from the originating domain, "out→in" refers to the direction towards the originating domain.
– Flow number	An identifier for the individual media flow within a media session.
– Flow status	Instruction and indication of enabled or disabled status for a media flow.
– Protocol version	The version of source and destination unicast network address protocol (e.g., IPv4 or IPv6).
– IP addresses	The source and destination network addresses.
– Ports	The source and destination port numbers. Port ranges are required to be supported (e.g., two consecutive ports for RTP, RTCP).
– Protocol number	The protocol ID (e.g., UDP, TCP).
– Bandwidth	The requested maximum bandwidth. The upstream and downstream BW is recommended to be provided separately.

### 8.7.3.3 Authorization token information components

The information component used for binding purpose in the pull mode is described in Table 31.

**Table 31 – Authorization information component (Ri)**

Information component	Description
Authorization token (Optional)	A unique identifier used in policy pull mode. The token is requested by the original PD-FE and provided in a response by the peer PD-FE.

### 8.7.3.4 Charging correlation information component

This information component provides the resource usage information, see Table 32.

**Table 32 – Charging correlation information component (Ri)**

Information component	Description
Charging correlation information (Optional)	Charging correlation information, such as charging ID of the originating PD-FE and networks, and resource usage information.

### 8.7.3.5 Resource control action information components

A variety of indicators are used to request a specific resource control action per network event/condition, see Table 33.

**Table 33 – Resource control action information components (Ri)**

Information Component	Description
Resource reservation mode	Indication of resource reservation mode (e.g., non-reservation, reservation only or reservation + commitment). In the pull mode of the QoS control scenario, the "non-reservation" option is used. In the push mode, either the "reservation only" or the "reservation + commit" option is used.
Resource request result	Indication of the result for a resource request (initiation, modification, release).
Timestamp	The time when the resources were lost.
Reason	Information describing the cause for an event (e.g., Abort event).
Event notification indication (Optional)	A set of information sub-components indicating the query and notification of a transport event. Note that the listed sub-components may not include all event notifications. Extra events can be added.
– Resource information indicator	Indication of a request for resource information. It is used by the originating PD-FE to ask the peer PD-FE to include the modified service information (such as available bandwidth) in the response message, or is used by peer PD-FE to retrieve the original service information when an event occurs (e.g., node failure).
– Transport loss indicator	The originating PD-FE's subscription for the notification of the transport loss events, or notification of a transport loss event by the peer PD-FE.
– Transport recovery indicator	The originating PD-FE's subscription for the transport recovery events, or notification of a transport recovery event by the peer PD-FE.

**Table 33 – Resource control action information components (Ri)**

<b>Information Component</b>	<b>Description</b>
– Transport release indicator	The originating PD-FE's subscription for the transport release events, or notification of a transport release event by the peer PD-FE.
NAPT control and NAT traversal indication (Conditional)	A set of information sub-components indicating the existence of near-end and/or far-end NAPT's. The events of NAPT control and NAT traversal are not mutually exclusive. They can be used in the same information flow.
– Address translation command	Indication to the SCF for signalling message modification for near-end NAPT. The peer PD-FE may perform the NAPT control, obtain the address binding information, and request the SCF to modify signalling messages accordingly based on network address hiding policy decision.
– Address binding information request	Indication of the presence of far-end NAT traversal issued by the SCF. The SCF may ask the RACF for the network address and port translation information (e.g., address latching) in support of far-end NAT traversal.

#### **8.7.4 Information flows exchanged over Ri**

This clause describes the information flows (namely requests and responses) exchanged over Ri.

##### **8.7.4.1 Resource initiation request**

The resource initiation request information flow is sent by the originating PD-FE to the peer PD-FE to initiate a resource control session. Depending on the desired resource reservation mode, a single resource initiation request may be used for authorization only or reservation only or commitment only or some combination of the above. It contains the following information components:

- PD-FE identifier
- Resource control session identifier
- Globally unique IP address information (Optional, see Note)
  - Unique IP address
  - Address realm
- Transport subscriber identifier (Optional, see Note)
- Resource requestor identifier
- Resource request priority (Optional)
- Reservation holding time (Optional)
- Resource control session information (Optional)
- Authorization token (Optional)
- Charging correlation information (Optional)
- Media profile
  - Media number
  - Type of service
  - Application class of service (Optional)
  - Media priority (Optional)

- Media flow description
  - Flow direction
  - Flow number
  - Flow status
  - Protocol version
  - IP addresses
  - Ports
  - Protocol number
  - Bandwidth
- Resource reservation mode
- Event notification indication (Optional)
  - Resource information indicator
  - Transport loss indicator
  - Transport recovery indicator
  - Transport release indicator
- NAPT control and NAT traversal (Conditional)
  - Address binding information request

NOTE – One of these is required to be present.

#### **8.7.4.2 Resource initiation response**

The resource initiation response information flow is sent by the peer PD-FE to the originating PD-FE to confirm the resource initiation request of the originating PD-FE. It contains the following information components:

- PD-FE identifier
- Resource control session identifier
- Reservation holding time (Optional)
- Resource control session information (Optional)
- Resource request result
- Authorization token (Optional)
- Media profile (Optional)
  - Media number
  - Type of service
  - Application class of service (Optional)
  - Media priority (Optional)
  - Media flow description
    - Flow direction
    - Flow number
    - Flow status
    - Protocol version
    - IP addresses
    - Ports

- Protocol number
- Bandwidth
- NAPT control and NAT traversal (Conditional)
  - Address translation command
  - Address binding information response

#### **8.7.4.3 Resource modification request**

The resource modification request information flow is sent by the originating PD-FE to the peer PD-FE to request the modification of the resources assigned to an established session. The session state can be retrieved with the resource control session information provided by the originating PD-FE if a stateless PD-FE is used. It contains the following information components:

- PD-FE identifier
- Resource control session identifier
- Resource requestor identifier
- Resource request priority (Optional)
- Reservation holding time (Optional)
- Resource control session information (Optional)
- Charging correlation information (Optional)
- Media profile
  - Media number
  - Type of service
  - Application class of service (Optional)
  - Media priority (Optional)
  - Media flow description
    - Flow direction
    - Flow number
    - Flow status
    - Protocol version
    - IP addresses
    - Ports
    - Protocol number
    - Bandwidth
- Resource reservation mode
- Event notification indication (Optional)
  - Resource information indicator
  - Transport loss indicator
  - Transport recovery indicator
  - Transport release indicator
- NAPT control and NAT traversal (Conditional)
  - Address binding information request

#### 8.7.4.4 Resource modification response

The resource modification response information flow is sent by the peer PD-FE to the originating PD-FE to confirm that the resource modification request made by the originating PD-FE has been received and indicate the result. The information within this flow is the same as that in the resource initiation response information flow.

#### 8.7.4.5 Resource action request

The resource action request information flow is sent by the peer PD-FE to the originating PD-FE as needed to request a specific resource control action (e.g., retrieving the resource information) for an established session. It contains the following information components:

- PD-FE identifier
- Resource control session identifier
- Resource control session information (Optional)
- Charging correlation information (Optional)
- Media profile
  - Media number
  - Type of service
  - Application class of service (Optional)
  - Media priority (Optional)
  - Media flow description
    - Flow direction
    - Flow number
    - Flow status
    - Protocol version
    - IP addresses
    - Ports
    - Protocol number
    - Bandwidth
- Event notification indication (Optional)
  - Resource information indicator
  - Transport loss indicator
  - Transport recovery indicator
  - Transport release indicator
  - Address binding information response
- NAPT control and NAT traversal (Conditional)
  - Address translation command
  - Address binding information response

#### 8.7.4.6 Resource action response

The resource action response information flow is sent by the originating PD-FE to the peer PD-FE to confirm that the request for the specific action has been received and to provide the requested service information. It contains the following information components:

- PD-FE identifier

- Resource control session identifier
- Resource requestor identifier
- Resource request priority (Optional)
- Resource control session information (Optional)
- Charging correlation information (Optional)
- Media profile (Optional)
  - Media number
  - Type of service
  - Application class of service (Optional)
  - Media priority (Optional)
  - Media flow description
    - Flow direction
    - Flow number
    - Flow status
    - Protocol version
    - IP addresses
    - Ports
    - Protocol number
    - Bandwidth
- Event notification indication (Optional)
  - Resource information indicator
  - Transport loss indicator
  - Transport recovery indicator
  - Transport release indicator
- NAPT control and NAT traversal (Conditional)
  - Address binding information request

#### **8.7.4.7 Resource notification**

The resource notification information flow is sent by the peer PD-FE to notify the originating PD-FE of transport resource events. It contains the following information components:

- PD-FE identifier
- Resource control session identifier
- Resource control session information (Optional)
- Charging correlation information (Optional)
- Media profile
  - Media number
  - Type of service
  - Application class of service (Optional)
  - Media priority (Optional)
  - Media flow description
    - Flow direction
    - Flow number

- Protocol version
- IP addresses
- Ports
- Protocol number
- Bandwidth
- Event notification indication
  - Resource information indicator
  - Transport loss indicator
  - Transport recovery indicator
  - Transport release indicator

NOTE – The use of this information flow for the notification of resource usage information is for further study.

#### **8.7.4.8 Resource release request**

The resource release request information flow is sent by the originating PD-FE to the peer PD-FE to request the release of resources assigned to an established session or individual media flow. The resource release can be resource control session based, flow-based, and a wildcard is used to indicate the release of all of the sessions related to this client. When a request is received, all of the relevant resources are released including the transport event notification settings. It contains the following information components:

- PD-FE identifier
- Resource control session identifier
- Resource requestor identifier
- Resource request priority (Optional)
- Resource control session information (Optional)
- Charging correlation information (Optional)
- Media profile
  - Media number
  - Type of service
  - Application class of service (Optional)
  - Media priority (Optional)
  - Media flow description
    - Flow direction
    - Flow number
    - Flow status
    - Protocol version
    - IP addresses
    - Ports
    - Protocol number
  - Bandwidth

#### **8.7.4.9 Resource release response**

The resource release response information flow is sent by the peer PD-FE to the originating PD-FE to confirm the resource release request has been received and indicate the results. It contains the following information components:

- PD-FE identifier
- Resource control session identifier
- Resource request priority (Optional)
- Resource control session information (Optional)
- Resource request result

#### **8.7.4.10 Abort resource request**

The abort resource request information flow is sent by the peer PD-FE to the originating PD-FE to indicate the loss of all resources for the established session to the peer PD-FE. It contains the following information components:

- PD-FE identifier
- Resource control session identifier
- Resource requestor identifier
- Resource control session information (Optional)
- Timestamp
- Reason

#### **8.7.4.11 Abort resource response**

The abort resource response is sent by the originating PD-FE to the peer PD-FE to confirm a resource abort request. It contains the following information components:

- PD-FE identifier
- Resource control session identifier
- Resource control session information (Optional)

### **8.8 Reference point Rd**

The PD-FE is required to provide a single point of contact to the SCF over Rs. For scalability in larger domains, multiple instances of PD-FE may be deployed, each one handling a subset of the PE-FEs. As a result, the PD-FE instance that receives a request over the Rs reference point may not be able to directly reach the PE-FE concerned. Hence the instances of PD-FE need to inter-communicate over Rd. Note that multiple instances of PD-FE may be deployed without using the Rd reference point, e.g., where all PE-FE instances are directly reachable from a given PD-FE instance, or where the SCF directly sends the request to the PD-FE instance handling the PE-FE concerned.

The Rd reference point is an intra-domain reference point.

#### **8.8.1 Functional requirements**

The functional requirements on Rd are similar to the requirements on Rs except for the security requirements that are not applicable to intra-domain operations. Rd needs to support conveying only partial information related to specific functions of PD-FE.

The functional requirements on Rd are similar to the requirements on Rs and Ri except for:

- The gate control, NAPT and firewall aspects which are optional.
- The security requirements that are not applicable to intra-domain operation.

Rd needs to support conveying only partial information related to specific functions of PD-FE.

#### 8.8.1.1 Resource control functional requirements

The Rd reference point provides the ability for the PD-FE to make requests:

- for resource authorization and reservation for a media flow;
- for QoS handling;
- for priority handling;

and optionally:

- for gate control of a media flow;
- to insert NAPT function and request address mapping information;
- for dynamic firewall working mode selection;
- for resource usage information.

In addition, the PD-FE can request notification of events.

#### 8.8.1.2 Resource control session processing functional requirements

To assure the reliability and performance of resource control session operations across the Rd reference point, the following capabilities are required:

**Overload control:** The Rd reference point is required to provide the capability to support overload control for preventing the overflow of information messages exchanged between PD-FEs belonging to the same domain.

**Synchronization and audit:** The Rd reference point is required to provide the capability to support synchronization and audit of the resource control session status in support of recovery and operational information statistics and auditing.

**Session state maintenance:** When a stateful PD-FE is used, it is required to be able to maintain the session state using either soft-state or hard-state approaches. The reservation holding time specifies the time limitation in support of abnormal recovery. When a stateless PD-FE is used, the resource control session information passed by the other PD-FE or PE-FE can be used to derive the session state and relevant information.

#### 8.8.2 Information exchange requirements

This clause provides the description of the information exchange requirements for the Rd reference point.

**Request-response transactions:** The reference point is required to allow the PD-FE in one administrative domain to request a transaction to be performed by the peer PD-FE in another administrative domain and get a response (that can be correlated with the request) in return.

**Notifications:** The reference point is required to support the notification of asynchronous events (from the PD-FE in the peer administrative domain to the PD-FE in the originating domain).

**Reliable delivery:** The reference point is required to provide reliable delivery of messages.

**Capabilities:** The PD-FE is required to be able to determine capabilities when requesting resources and other transport functions.

**One-to-many/many-to-one communications:** Two modes are required to be supported: 1) One-to-many mode: one PD-FE in a given domain is required to be able to send requests to PD-FEs in multiple peer domains; 2) Many-to-one mode, one PD-FE in a given domain is required to be able to accept the requests from PD-FE in multiple peer domains. Only one PD-FE instance in a single domain will make a request to another PD-FE in the peer domain on behalf of a particular session.

**Granularity of resource control:** The Rd reference point is required to support resource control requests from one administrative domain to another domain at different levels of granularity, e.g., at the media flow level, application session level, service control function level and the operator level between administrative domains.

**Level of resource control:** The Rd reference point is required to support the resources control for the media flow level.

NOTE – Rd resource control for aggregate level is outside the scope of Revision 1.

### 8.8.3 Information components

The information components exchanged across the Rd reference point are categorized as follows:

#### 8.8.3.1 Resource control processing information components

The information components for resource control request processing (e.g., discovery, binding, overload control and state maintenance) are described in Table 34.

**Table 34 – Resource control processing information components (Rd)**

Information component	Description
PD-FE identifier	A unique identifier for different instances of the originating PD-FE within the same administrative domain of a single requestor.
Resource control session identifier	An identifier for the session, which may be composed of multiple media flows for which the resource reservation requests are sent to the peer PD-FE. The identifier has to be unique within the same PD-FE instance.
Globally unique IP address information (Optional, Note 1)	A set of IP address information used for locating the network in which the CPE is requesting the transport resource.
– Unique IP address	The IP address for identifying the CPE.
– Address realm	The addressing domain of the IP address (e.g., Subnet prefix or VPN ID).
Transport subscriber identifier (Optional, Note 1)	A globally unique identifier for the CPE requesting the transport resource. This identifier can be used for locating the transport subscription information for the CPE.
Resource requestor identifier	An identifier for the requestor (i.e., the owner of originating PD-FE (e.g., a Network Provider)) of resource control service. It is unique over the requestors sending requests for the resource control to the same peer domain.
Resource request priority (Optional)	The indication of the importance of a resource control request. It can be used for processing simultaneous requests by peer PD-FE based on the priority level.
Reservation holding time (Optional)	The value of time interval for which the resource is reserved, which can be initiated by originating PD-FE based on the service requirement in the request message; or granted by peer PD-FE based on the network policy decision in the response message. The session is released when the holding time is expired.

**Table 34 – Resource control processing information components (Rd)**

<b>Information component</b>	<b>Description</b>
Resource control session information (Optional)	The record of the resource control session information. This is used for deriving the session state and other information (e.g., association of peer PD-FE and originating PD-FE) and only has a local significance between the originating PD-FE and the peer PD-FE. This component is only applicable when a stateless PD-FE is deployed.
NOTE 1 – One of globally unique IP address or transport subscriber identifier is required to be present.	
NOTE 2 – Only the optional component is explicitly indicated. The use of each information component (i.e., mandatory or optional) also refers to the specific information messages in clause 8.8.4.	
NOTE 3 – How the peer PD-FE obtains the information of transport subscriber ID is an issue for service stratum functionality.	

### 8.8.3.2 QoS resource information components

The QoS resource information sub-components for media session and media flows are described in Table 35.

**Table 35 – QoS resource information sub-components (Rd)**

<b>Information component</b>	<b>Description</b>
Media profile	A set of information sub-components for a media session, which may be composed of data flows and control flows (e.g., RTP and RTCP flows for a VoIP call). The sub-components in a media profile can be represented by a wildcard as needed.
– Media number	An identifier for a media session (e.g., ordinal number of the position of the "m=" line in the SDP).
– Type of service	Indication of service type for the media data flow (e.g., voice, video telephony, or streaming video).
– Application class of service (Optional)	The application service class for the media (e.g., first class) is of local significance between the resource request client (i.e., the owner of originating PD-FE) and the owner of peer PD-FE, and is to be converted by peer PD-FE to network class of service (e.g., Y.1541 class for performance requirement) based on SLA and network policy rules.
– Media priority (Optional)	Information for priority handling (e.g., TDR/ETS).
– Media flow description	A set of sub-components of individual or a group of media flows within a media session.

The information sub-components of the media flow description are described in Table 36.

**Table 36 – Media flow description sub-components (Rd)**

Information component	Description
Media flow description	A set of sub-components of individual media flows or a group of media flows within a media session. The sub-components of a media flow description can be represented by a wildcard as needed.
– Flow direction (in→out, out→in, bidirectional)	Direction of the media flow, where "in" refers to inside the core network so that "out→in" refers to the direction towards the core network.
– Flow number	An identifier for the individual media flow within a media session.
– Flow status	Instruction and indication of enabled or disabled status for a media flow.
– Protocol version	The version of source and destination unicast network address protocol (e.g., IPv4 or IPv6).
– IP addresses	The source and destination network addresses.
– Ports	The source and destination port numbers. Port ranges are required to be supported (e.g., two consecutive ports for RTP, RTCP).
– Protocol number	The protocol ID (e.g., UDP, TCP).
– Bandwidth	The requested maximum bandwidth. The upstream and downstream BW is recommended to be provided separately.

**8.8.3.3 Authorization token information components**

The information component used for binding purpose in the pull mode is described in Table 37.

**Table 37 – Authorization token information component (Rd)**

Information component	Description
Authorization token (Optional)	A unique identifier used in policy pull mode. The token is requested by the originating PD-FE and provided in a response by the peer PD-FE.

**8.8.3.4 Charging correlation information component**

This information component provides the resource usage information, see Table 38.

**Table 38 – Charging correlation information component (Rd)**

Information component	Description
Charging correlation information (Optional)	Charging correlation information, such as charging ID of the originating PD-FE and networks, and resource usage information.

**8.8.3.5 Resource control action information components**

A variety of indicators are used to request a specific resource control action per network event/condition, see Table 39.

**Table 39 – Resource control action information components (Rd)**

Information component	Description
Resource reservation mode	Indication of resource reservation mode (e.g., non-reservation, reservation only or reservation + commitment). In the pull mode of the QoS control scenario, the "non-reservation" option is used. In the push mode, either the "reservation only" or the "reservation + commit" option is used.
Dynamic firewall working mode (Optional)	Service information for dynamic firewall working mode selection (e.g., security level).
Resource request result	Indication of the result for a resource request (initiation, modification, release).
Timestamp	The time when the resources were lost.
Reason	Information describing the cause for an event (e.g., Abort event).
Event notification indication (Optional)	A set of information sub-components indicating the query and notification of a transport event. Note that the listed sub-components may not include all event notifications. Extra events can be added.
– Resource information indicator	Indication of a request for resource information. It is used by the originating PD-FE to ask the peer PD-FE to include the modified service information (such as available bandwidth) in the response message, or is used by peer PD-FE to retrieve the original service information when an event occurs (e.g., node failure).
– Transport loss indicator	The originating PD-FE's subscription for the notification of the transport loss events, or notification of a transport loss event by the peer PD-FE.
– Transport recovery indicator	The originating PD-FE's subscription for the transport recovery events, or notification of a transport recovery event by the peer PD-FE.
– Transport release indicator	The originating PD-FE's subscription for the transport release events, or notification of a transport release event by the peer PD-FE.
NAPT control and NAT traversal indication (Optional)	A set of information sub-components indicating the existence of near-end and/or far-end NAPT. The events of NAPT control and NAT traversal are not mutually exclusive. They can be used in the same information flow.
– Address translation command	Indication to the peer PD-FE for signalling message modification for near-end NAPT. The peer PD-FE may perform the NAPT control, obtain the address binding information, and request the originating PD-FE to modify signalling messages accordingly based on network address hiding policy decision.

**Table 39 – Resource control action information components (Rd)**

Information component	Description
– Address binding information request	Indication of the presence of far-end NAT traversal issued by the peer PD-FE. The peer PD-FE may ask the originating PD-FE for the network address and port translation information (e.g., address latching) in support of far-end NAT traversal.
– Address binding information response	Indication to the peer PD-FE for the response of address latching for far-end NAT traversal.  The originating PD-FE is required to obtain the NAPT information, generate the address binding information and send it to relevant SCF instance. The SCF is required to modify the message body of application signalling accordingly.

**8.8.4 Information flows exchanged over Rd**

This clause describes the information flows (namely requests and responses) exchanged over Rd.

**8.8.4.1 Resource initiation request**

The resource initiation request information flow is sent by the originating PD-FE to the peer PD-FE to initiate a resource control session. Depending on the resource reservation mode desired, a single resource initiation request may be used for authorization only or reservation only or commitment only or some combination of the above. It contains the following information components:

- PD-FE identifier
- Resource control session identifier
- Globally unique IP address information (Optional, see Note)
  - Unique IP address
  - Address realm
- Transport subscriber identifier (Optional, see Note)
- Resource requestor identifier
- Resource request priority (Optional)
- Reservation holding time (Optional)
- Resource control session information (Optional)
- Dynamic firewall working mode (Optional)
- Authorization token (Optional)
- Charging correlation information (Optional)
- Media profile
  - Media number
  - Type of service
  - Application class of service (Optional)
  - Media priority (Optional)
  - Media flow description
    - Flow direction
    - Flow number
    - Flow status

- Protocol version
- IP addresses
- Ports
- Protocol number
- Bandwidth
- Resource reservation mode
- Event notification indication (Optional)
- Resource information indicator
- Transport loss indicator
- Transport recovery indicator
- Transport release indicator
- NAPT control and NAT traversal (Optional)
  - Address binding information request

NOTE – One of these is required to be present.

#### **8.8.4.2 Resource initiation response**

The resource initiation response information flow is sent by the peer PD-FE to the originating PD-FE to confirm the resource initiation request of the originating PD-FE. It contains the following information components:

- PD-FE identifier
- Resource control session identifier
- Reservation holding time (Optional)
- Resource control session information (Optional)
- Resource request result
- Authorization token (Optional)
- Media profile (Optional)
  - Media number
  - Type of service
  - Application class of service (Optional)
  - Media priority (Optional)
  - Media flow description
    - Flow direction
    - Flow number
    - Flow status
    - Protocol version
    - IP addresses
    - Ports
    - Protocol number
    - Bandwidth
- NAPT control and NAT traversal (Optional)
  - Address translation command
  - Address binding information response

### 8.8.4.3 Resource modification request

The resource modification request information flow is sent by the originating PD-FE to the peer PD-FE to request the modification of the resources assigned to an established session. The session state can be retrieved with the resource control session information provided by the originating PD-FE if a stateless PD-FE is used. It contains the following information components:

- PD-FE identifier
- Resource control session identifier
- Resource requestor identifier
- Resource request priority (Optional)
- Reservation holding time (Optional)
- Resource control session information (Optional)
- Dynamic firewall working mode (Optional)
- Charging correlation information (Optional)
- Media profile
  - Media number
  - Type of service
  - Application class of service (Optional)
  - Media priority (Optional)
  - Media flow description
    - Flow direction
    - Flow number
    - Flow status
    - Protocol version
    - IP addresses
    - Ports
    - Protocol number
    - Bandwidth
- Resource reservation mode
- Event notification indication (Optional)
  - Resource information indicator
  - Transport loss indicator
  - Transport recovery indicator
  - Transport release indicator
- NAPT control and NAT traversal (Optional)
  - Address binding information request

### 8.8.4.4 Resource modification response

The resource modification response information flow is sent by the peer PD-FE to the originating PD-FE to confirm that the resource modification request made by the originating PD-FE has been received and indicate the result. The information within this flow is the same as that in the resource initiation response information flow.

#### 8.8.4.5 Resource action request

The resource action request information flow is sent by the peer PD-FE to the originating PD-FE as needed to request a specific resource control action (e.g., retrieving the resource information) for an established session. It contains the following information components:

- PD-FE identifier
- Resource control session identifier
- Resource control session information (Optional)
- Dynamic firewall working mode (Optional)
- Charging correlation information (Optional)
- Media profile
  - Media number
  - Type of service
  - Application class of service (Optional)
  - Media priority (Optional)
  - Media flow description
    - Flow direction
    - Flow number
    - Flow status
    - Protocol version
    - IP addresses
    - Ports
    - Protocol number
    - Bandwidth
- Event notification indication (Optional)
  - Resource information indicator
  - Transport loss indicator
  - Transport recovery indicator
  - Transport release indicator
  - Address binding information response
- NAPT control and NAT traversal (Optional)
  - Address translation command
  - Address binding information response

#### 8.8.4.6 Resource action response

The resource action response information flow is sent by the originating PD-FE to the peer PD-FE to confirm that the request for the specific action has been received and to provide the requested service information. It contains the following information components:

- PD-FE identifier
- Resource control session identifier
- Resource requestor identifier
- Resource request priority (Optional)
- Resource control session information (Optional)

- Dynamic firewall working mode (Optional)
- Charging correlation information (Optional)
- Media profile (Optional)
  - Media number
  - Type of service
  - Application class of service (Optional)
  - Media priority (Optional)
  - Media flow description
    - Flow direction
    - Flow number
    - Flow status
    - Protocol version
    - IP addresses
    - Ports
    - Protocol number
    - Bandwidth
- Event notification indication (Optional)
  - Resource information indicator
  - Transport loss indicator
  - Transport recovery indicator
  - Transport release indicator
- NAPT control and NAT traversal (Optional)
  - Address binding information request

#### **8.8.4.7 Resource notification**

The resource notification information flow is sent by the peer PD-FE to notify the originating PD-FE of transport resource events. It contains the following information components:

- PD-FE identifier
- Resource control session identifier
- Resource control session information (Optional)
- Dynamic firewall working mode (Optional)
- Charging correlation information (Optional)
- Media profile
  - Media number
  - Type of service
  - Application class of service (Optional)
  - Media priority (Optional)
  - Media flow description
    - Flow direction
    - Flow number
    - Flow status
    - Protocol version

- IP addresses
- Ports
- Protocol number
- Bandwidth
- Event notification indication
  - Resource information indicator
  - Transport loss indicator
  - Transport recovery indicator
  - Transport release indicator

NOTE – The use of this information flow for the notification of resource usage information is for further study.

#### **8.8.4.8 Resource release request**

The resource release request information flow is sent by the originating PD-FE to the peer PD-FE to request the release of resources assigned to an established session or individual media flow. The resource release can be resource control session based, flow-based, and a wildcard is used to indicate the release of all of sessions related to this client. When a request is received, all of the relevant resources are released including the transport event notification settings. It contains the following information components:

- PD-FE identifier
- Resource control session identifier
- Resource requestor identifier
- Resource request priority (Optional)
- Resource control session information (Optional)
- Dynamic firewall working mode (Optional)
- Charging correlation information (Optional)
- Media profile
  - Media number
  - Type of service
  - Application class of service (Optional)
  - Media priority (Optional)
  - Media flow description
    - Flow direction
    - Flow number
    - Flow status
    - Protocol version
    - IP addresses
    - Ports
    - Protocol number
    - Bandwidth

#### **8.8.4.9 Resource release response**

The resource release response information flow is sent by the peer PD-FE to the originating PD-FE to confirm the resource release request has been received and indicate the results. It contains the following information components:

- PD-FE identifier
- Resource control session identifier
- Resource request priority (Optional)
- Resource control session information (Optional)
- Resource request result

#### **8.8.4.10 Abort resource request**

The abort resource request information flow is sent by the peer PD-FE to the originating PD-FE to indicate the loss of all resources for the established session to the peer PD-FE. It contains the following information components:

- PD-FE identifier
- Resource control session identifier
- Resource requestor identifier
- Resource control session information (Optional)
- Timestamp
- Reason

#### **8.8.4.11 Abort resource response**

The abort resource response is sent by the originating PD-FE to the peer PD-FE to confirm a resource abort request. It contains the following information components:

- PD-FE identifier
- Resource control session identifier
- Resource control session information (Optional)

### **8.9 Reference point Rn**

The TRC-FE performs element resource control and applies the resulted decisions to the TRE-FE through the Rn reference point at the aggregate level.

Note that the detailed requirements for Rn are different for different transport technologies. These requirements are specified in other related Recommendations (e.g., the MPLS-related specifics are specified in [b-ITU-T Y.2174]).

### **8.10 Reference point Rh**

The Rh reference point allows the final admission decisions to be installed (either pushed or pulled) to the CGPE-FE from the PD-FE. The corresponding procedures are shown in Appendix V.

The Rh reference point is an intra-domain reference point.

#### **8.10.1 Functional requirements**

##### **8.10.1.1 Resource control functional requirements**

The Rh reference point allows the PD-FE to push the policy decisions to the CGPE-FE, and also allows the CGPE-FE to request the admission decisions. The PD-FE is required to specify:

- Resources to be reserved and/or committed for media flows,

- QoS handling such as packet marking and policing to use,
- Gate control (opening/closing) for a media flow,
- Resource usage information request and report for a subscriber.

#### 8.10.1.2 Resource control session processing functional requirements

To assure the reliability and performance of resource control session operations across the Rh reference point, the following capabilities are required:

**Overload control:** The Rh reference point is required to provide the capability to support overload control for preventing the overflow of information messages exchanged between the PD-FE and the CGPE-FE.

**Synchronization and audit:** The Rh reference point is required to provide the capability to support synchronization and audit of the resource control session status in support of recovery and operational information statistics and auditing.

**Session state maintenance:** When a stateful PD-FE is used, it is required to be able to maintain the session state using either soft-state or hard-state approaches. The reservation holding time specifies the time limitation in support of abnormal recovery. When a stateless PD-FE is used, the resource control session information passed by the SCF or CGPE-FE can be used to derive the session state and relevant information.

#### 8.10.2 Information exchange requirements

This clause provides a brief description of the information exchange requirements for the Rh reference point.

**Request-response transactions:** The reference point is required to allow the PD-FE to request a transaction to be performed by the CGPE-FE and get a response (that can be correlated with the request) in return.

**Notifications:** The reference point is required to allow the notification of asynchronous events (from the CGPE-FE to the PD-FE).

**Reliable delivery:** The reference point may provide reliable delivery of messages.

**Capabilities:** The PD-FE is required to be able to determine capabilities when requesting resources and other transport plane functions from the CGPE-FE.

**Security:** The Rh is recommended to support the authentication between the PD-FE and CGPE-FE such that requests to the CGPE-FE from unauthenticated sources will not be performed and such that the PD-FE can verify the source of notifications sent from the CGPE-FE. Refer to clause 11 for other security requirements.

**One-to-many/many-to-one:** Two modes are required to be supported: 1) One-to-many mode, a PD-FE is required to be able to communicate with multiple CGPE-FEs; 2) Many-to-one mode, multiple PD-FEs are required to be able to make requests to a given CGPE-FE.

For either mode, only a single PD-FE is required to make a request to a given CGPE-FE for a particular session.

**Granularity of resource control:** The Rh reference point is required to support resource control requests at different levels of granularity.

**Level of resource control:** The Rh reference point is required to support the resources control for the media flow level.

### 8.10.3 Information flows exchanged over Rh

The majority of the information components at the Rh reference point are similar to those at Rw. However, the value and meaning may be changed in the PD-FE due to the operator's policy decision and QoS mapping. In addition, some components are not applicable and some new parameters are needed at Rh. Appendix VIII provides a detailed comparison of the Rw and Rh reference point.

#### 8.10.3.1 Resource control processing information components

The resource control processing information components at Rh are described in Table 40.

**Table 40 – Resource control processing information components (Rh)**

Information component	Description
PD-FE identifier	A unique identifier for different instances of PD-FE within the same administrative domain of a single network operator.
Resource control session identifier	An identifier for the session, which may be composed of multiple media flows for which the resource reservation requests are sent to the CGPE-FE. The identifier has to be unique within the same PD-FE instance.
Resource requestor identifier (Optional, Notes 1 and 2)	An identifier for the requestor (i.e., the owner of SCF (e.g., a service provider)) of resource control service. It is unique over the requestors sending requests for the resource control to the same RACF domain.
Resource request priority (Optional)	The indication of the importance of a resource control request. It can be used for processing simultaneous requests by CGPE-FE based on the priority level.
Reservation holding time (Optional, Note 3)	The value of time interval for which the resource is reserved, which can be initiated by SCF based on the service requirement and/or granted by PD-FE based on the network policy decision. The PD-FE shall release the session when the holding time is expired.
Resource control session information (Optional, Note 4)	The record of the resource control session information. This is used for deriving the session state and other information (e.g., association of PD-FE and CGPE-FE) and only has a local significance between the PD-FE and pertinent parties. This component is only applicable when a stateless PD-FE is deployed.
<p>NOTE 1 – Only the optional component is explicitly indicated. The use of each information component (i.e., mandatory or optional) also refers to the specific information messages in clause 8.10.4.</p> <p>NOTE 2 – The resource requestor identifier may be used to assist PD-FE in identifying the unique relationship between the resource control session and requestor of the SCF.</p> <p>NOTE 3 – Reservation holding time may be used by CGPE-FE to assist PD-FE in monitoring the resource control session timeout and/or state.</p> <p>NOTE 4 – When a stateless PD-FE is in use, the PD-FE identifier shall be inserted in the resource control session information component and sent to pertinent entities (e.g., CGPE-FE or TRC-FE).</p>	

#### 8.10.3.2 QoS resource information components

The QoS resource information sub-components for media session and media flows are described in Table 41.

**Table 41 – Qos resource information sub-components (Rh)**

<b>Information component</b>	<b>Description</b>
Media profile	A set of information sub-components for a media session, which may be composed of data flows and control flows (e.g., RTP and RTCP flows for a VoIP call).
– Media number	An identifier for a media session (e.g., ordinal number of the position of the "m=" line in the SDP).
– Network class of service (Optional)	Represents the network service class subscribed by a CPE (e.g., Premium, Gold, Silver, and Regular). It may include the QoS performance class (e.g., Y.1541 class).  This parameter is only of local significance for a single operator owning the transport resource, which can be mapped from application CoS issued by the SCF based on network policy rules and SLA and can be used for the transport resource control and authorization of transport subscription.
– Media priority (Optional)	Information for priority handling (e.g., TDR/ETS).
– Media flow description	A set of sub-components of individual or a group of media flows within a media session.
NOTE – The application class of service and the type of service are mapped into the network class of service and relevant media flow description sub-components (e.g., IP QoS handling class and traffic descriptor).	

The information sub-components of the media flow description are described in Table 42.

**Table 42 – Media flow description sub-components (Rh)**

<b>Information component</b>	<b>Description</b>
Media flow description	A set of parameters for the individual media flow within a media session.
– Flow direction (in→out, out→in, bidirectional)	Direction of the media flow, where "in" refers to inside the core network so that "out→in" refers to the direction towards the core network.
– Flow number	An identifier for the individual media flow within a media session.
– Gate status	Instruction and indication of open or closed status of the gate for a media flow or a group of media flows.  The PD-FE shall perform the gate control based on the flow status received from the SCF.
– Protocol version	The version of source and destination unicast network address protocol (e.g., IPv4 or IPv6).
– IP addresses	The source and destination network addresses.
– Ports	The source and destination port numbers. Port ranges shall be supported (e.g., two consecutive ports for RTP, RTCP).
– Protocol number	The protocol ID (e.g., UDP, TCP).

**Table 42 – Media flow description sub-components (Rh)**

Information component	Description
– Bandwidth	The requested maximum bandwidth. The upstream and downstream BW should be provided separately.
– IP QoS handling class (Optional)	A QoS parameter for IP packet marking and handling in CGPE-FE (e.g., IPv4 DSCP and IPv6 traffic class). It can be derived from the service information, network CoS and network policy rules.
– Traffic descriptor (Optional)	The description of the flow characteristics (e.g., peak data rate, sustainable data rate, and maximum burst size as specified in [b-ITU-T Y.1221]).

### 8.10.3.3 Resource control action information components

The resource control action information sub-components for media session and media flows are described in Table 43.

**Table 43 – Resource control action information components (Rh)**

Information Component	Description
Resource reservation mode	Indication of resource reservation mode (e.g., non-reservation, reservation only or reservation + commitment). In the push mode, either the "reservation only" or the "reservation + commit" option is used.
Resource request result	Indication of the result for a resource request (initiation, modification, release).
Timestamp	The time when the resources were lost.
Reason	Information describing the cause for an event (e.g., Abort event).
Event notification indication (Optional)	A set of information sub-components indicating the query and notification of a transport event.  Note that listed sub-components may not include all event notifications. Extra events can be added.
– Resource information indicator	Indication of a request for resource information. It is used by the PD-FE to ask the CGPE-FE to include the modified resource information (such as available bandwidth) in the response message, or is used by the CGPE-FE to retrieve the policy decision information when an event occurs (e.g., node failure).
– Transport loss indicator	The PD-FE's subscription for the notification of the transport loss events, or notification of a transport loss event to the PD-FE.
– Transport recovery indicator	The PD-FE's subscription for the transport recovery events, or notification of a transport recovery event to the PD-FE.
– Transport release indicator	The PD-FE's subscription for the transport release events, or notification of a transport release event to the PD-FE.

### 8.10.4 Messages exchanged over Rh

This clause describes the information flows (namely requests and responses) exchanged over Rh.

#### 8.10.4.1 Resource initiation request

The resource initiation request information flow is sent by PD-FE to CGPE-FE to initiate a resource control session. Depending on the resource reservation mode desired, a single resource initiation request may be used for reservation only or reservation and commitment. The session state can be derived through resource control session information provided by PD-FE if a stateless CGPE-FE is used. It contains the following information components:

- PD-FE identifier
- Resource control session identifier
- Resource requestor identifier (Optional)
- Resource request priority (Optional)
- Reservation holding time (Optional)
- Resource control session information (Optional)
- Media profile
  - Media number
  - Network class of service (Optional)
  - Media priority (Optional)
  - Media flow description
    - Flow direction
    - Flow number
    - Gate status
    - Protocol version
    - IP addresses
    - Ports
    - Protocol number
    - Bandwidth
    - IP QoS handling class (Optional)
    - Traffic descriptor (Optional)
- Resource reservation mode (Optional)
- Event notification indication (Optional)
  - Resource information indicator
  - Transport loss indicator
  - Transport recovery indicator
  - Transport release indicator

#### 8.10.4.2 Resource initiation response

The resource initiation response information flow is sent by CGPE-FE to PD-FE to confirm the resource initiation request. It contains the following information components:

- PD-FE identifier
- Resource control session identifier
- Resource requestor identifier (Optional)
- Reservation holding time (Optional)
- Resource control session information (Optional)

- Resource request result
- Media profile (Optional)
  - Media number
  - Network class of service (Optional)
  - Media priority (Optional)
  - Media flow description
    - Flow direction
    - Flow number
    - Gate status
    - Protocol version
    - IP addresses
    - Ports
    - Protocol number
    - Bandwidth
    - IP QoS handling class (Optional)
    - Traffic descriptor (Optional)

#### **8.10.4.3 Resource modification request**

The resource modification request information flow is sent by PD-FE to CGPE-FE to request the resource modification of an established session. It contains the following information components:

- PD-FE identifier
- Resource control session identifier
- Resource requestor identifier (Optional)
- Resource request priority (Optional)
- Reservation holding time (Optional)
- Media profile
  - Media number
  - Network class of service (Optional)
  - Media priority (Optional)
  - Media flow description
    - Flow direction
    - Flow number
    - Gate status
    - Protocol version
    - IP addresses
    - Ports
    - Protocol number
    - Bandwidth
    - IP QoS handling class (Optional)
    - Traffic descriptor (Optional)
- Resource reservation mode

- Event notification indication (Optional)
  - Resource information indicator
  - Transport loss indicator
  - Transport recovery indicator
  - Transport release indicator

#### **8.10.4.4 Resource modification response**

The resource modification response information flow is sent by CGPE-FE to PD-FE to confirm the resource modification request. The information components are the same as those in the resource initiation response.

#### **8.10.4.5 Resource action request**

The resource action request information flow is sent by CGPE-FE to PD-FE to request a specific resource control action (e.g., retrieving the resource information). It contains the following information components:

- PD-FE identifier
- Resource control session identifier
- Resource requestor identifier (Optional)
- Resource control session information (Optional)
- Media profile (Optional)
  - Media number
  - Network class of service (Optional)
  - Media priority (Optional)
  - Media flow description
    - Flow direction
    - Flow number
    - Gate status
    - Protocol version
    - IP addresses
    - Ports
    - Protocol number
    - Bandwidth
    - IP QoS handling class (Optional)
    - Traffic descriptor (Optional)
- Resource reservation mode
- Event notification indication (Optional)
  - Resource information indicator
  - Transport loss indicator
  - Transport recovery indicator
  - Transport release indicator

#### **8.10.4.6 Resource action response**

The resource action response information flow is sent by PD-FE to CGPE-FE as needed to confirm the request of the specific action and provide the service information. It contains the following information components:

- PD-FE identifier
- Resource control session identifier
- Resource requestor identifier (Optional)
- Resource request priority (Optional)
- Resource control session information (Optional)
- Media profile (Optional)
  - Media number
  - Network class of service (Optional)
  - Media priority (Optional)
  - Media flow description
    - Flow direction
    - Flow number
    - Gate status
    - Protocol version
    - IP addresses
    - Ports
    - Protocol number
    - Bandwidth
    - IP QoS handling class (Optional)
    - Traffic descriptor (Optional)
- Resource reservation mode
- Event notification indication (Optional)
  - Resource information indicator
  - Transport loss indicator
  - Transport recovery indicator
  - Transport release indicator

#### **8.10.4.7 Resource notification**

The resource notification information flow is sent by CGPE-FE to notify PD-FE of the transport resource events. It contains the following information components:

- PD-FE identifier
- Resource control session identifier
- Resource requestor identifier (Optional)
- Resource control session information (Optional)
- Media profile
  - Media number
  - Network class of service (Optional)
  - Media priority (Optional)

- Media flow description
  - Flow direction
  - Flow number
  - Gate status
  - Protocol version
  - IP addresses
  - Ports
  - Protocol number
  - Bandwidth
  - IP QoS handling class (Optional)
  - Traffic descriptor (Optional)
- Event notification indication
  - Resource information indicator
  - Transport loss indicator
  - Transport recovery indicator
  - Transport release indicator

#### **8.10.4.8 Resource release request**

The resource release request information flow is sent by PD-FE to CGPE-FE to request the resource release for an established session or individual media flow. It contains the following information components:

- PD-FE identifier
- Resource control session identifier
- Resource requestor identifier (Optional)
- Resource control session information (Optional)
- Media profile (Optional)
  - Media number
  - Network class of service (Optional)
  - Media priority (Optional)
  - Media flow description
    - Flow direction
    - Flow number
    - Gate status
    - Protocol version
    - IP addresses
    - Ports
    - Protocol number
    - Bandwidth
    - IP QoS handling class (Optional)
    - Traffic descriptor (Optional)

- Event notification indication (Optional)
  - Resource information indicator
  - Transport loss indicator
  - Transport recovery indicator
  - Transport release indicator

#### **8.10.4.9 Resource release response**

The resource release response information flow is sent by CGPE-FE to PD-FE to confirm the resource release request. It contains the following information components:

- PD-FE identifier
- Resource control session identifier
- Resource requestor identifier (Optional)
- Resource control session information (Optional)
- Resource request result

#### **8.10.4.10 Abort resource request**

The abort resource request information flow is sent by CGPE-FE to PD-FE to indicate the loss of all resources for the established session. It contains the following information components:

- PD-FE identifier
- Resource control session identifier
- Resource requestor identifier (Optional)
- Resource control session information (Optional)
- Timestamp
- Reason

#### **8.10.4.11 Abort resource response**

The abort resource response information flow is sent by PD-FE to confirm the resource abort request. It contains the following information components:

- PD-FE identifier
- Resource control session identifier
- Resource requestor identifier (Optional)
- Resource control session information (Optional)

### **8.11 Summary**

Table 44 describes the domain attributes of the reference points.

**Table 44 – Reference points and domain attributes**

<b>Reference Point</b>	<b>Inter-Domain</b>	<b>Intra-Domain</b>
Rs	X	X
Rw		X
Rc		X
Rp		X
Rt		X
Ru		X
Rd		X
Ri	X	
Rh		X

NOTE – In this Recommendation, each reference point may correspond to an interface.

## **9 Procedures**

This clause defines basic procedures triggered by a single event (e.g., a session initiation request). These basic procedures could be further decomposed into any possible composite procedures triggered by a series of events.

### **9.1 Procedures for QoS control**


#### **9.1.1 SCF-requested QoS control procedures**

Scenario 1, described in clause 6.1, uses the SCF-requested QoS resource reservation mechanism, i.e., the SCF sends RACF a resource initiation request to invoke the QoS resource authorization and reservation. The RACF will push the admission control decisions into the network nodes (e.g., border gateway, edge node or access node) if the resource request is authorized and admitted.

##### **9.1.1.1 Basic procedures**

###### **9.1.1.1.1 QoS resource reservation procedure**

The SCF-requested QoS resource reservation procedure is illustrated in Figure 6. It is initiated by a resource initiation request from the SCF.

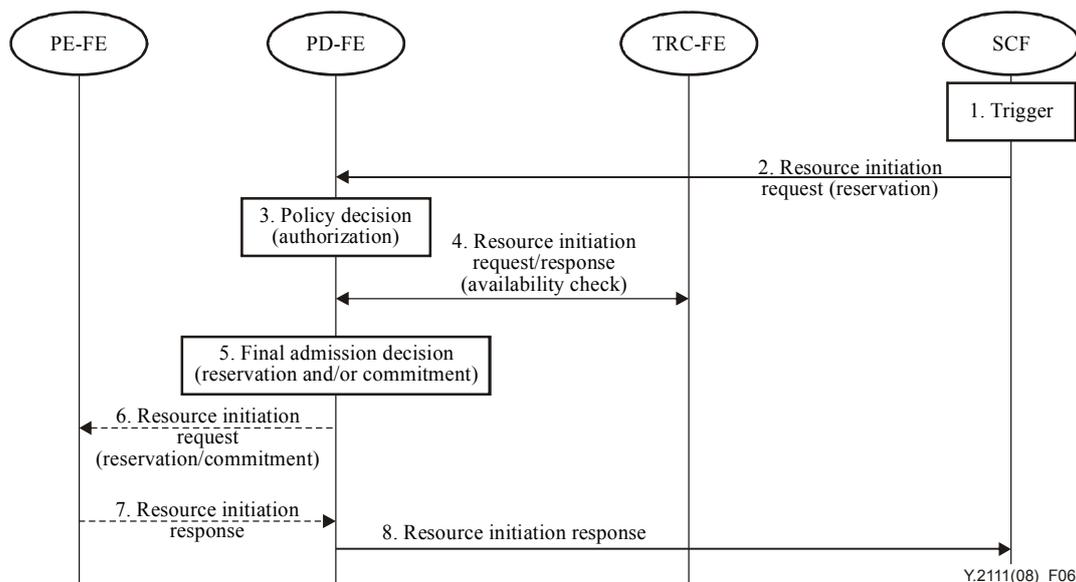


**Figure 6 – SCF-requested QoS resource reservation procedure**

- 1) A resource initiation request (reservation) (i.e., RIR (reservation)) is usually triggered by a service establishment event or an internal action in the SCF. An example event is that a service signalling message is received at or generated by the SCF.
- 2) The SCF determines or derives the QoS requirement parameters (such as bandwidth, class of service) for the media flows of a given service. It then sends a RIR (reservation) with the media flow description and its QoS parameters to the PD-FE across the Rs reference point for QoS resource authorization and reservation.
- 3) On receipt of the RIR (reservation), the PD-FE is required to authorize the required QoS resources for the media flow. The PD-FE checks if the media flow description and the required QoS resources are consistent with network policy rules held in the PD-FE and the transport subscription information held in the NACF.
- 4) The PD-FE positions and determines which access networks and core networks are involved for the media flow. If there are TRC-FE instances in an involved network, the PD-FE sends a RIR (availability check) to one of the TRC-FE instances registered in the PD-FE to check resource availability in the involved network. If there are multiple TRC-FE instances in the involved network, they communicate with each other to determine if the required QoS resource is available from edge to edge in the involved network. The TRC-FE instance which received the RIR (availability check) is required to send a resource initiation response (i.e., RIP) back to the PD-FE. When multiple TRC-FE instances are present in the form of distributed hierarchical structure, the top tier TRC-FE instance forwards the request to other TRC-FE instances in case those instances are in control of resources referenced in the request (i.e., the top tier TRC-FE has delegated resources to other TRC-FE instances). In this case the top tier TRC-FE makes the final resource admission decision based on the results of resource admission from all other instances.
- 5) The PD-FE makes the final admission decisions based on the results of steps 3 and 4. If the media flow is not admitted, the PD-FE sends a RIP with the rejection reason back to the SCF.
- 6) The PD-FE may send a RIR to install the final admission decisions in the PE-FE. The RIR from PD-FE may request the admission decisions to be enforced immediately (i.e., RIR (reservation + commitment)), or may request the installation of admission decisions only (i.e., resource initiation request (reservation only)) and await a separate RIR (commitment) later for gate opening and resource allocation. The detailed procedure for the separate RIR (commitment) is described in clause 9.1.1.1.3.
- 7) The PE-FE installs (and enforces) the final admission decisions sent from the PD-FE and sends a RIP back to the PD-FE.
- 8) The PD-FE sends a RIP back to the SCF.

#### 9.1.1.1.2 QoS resource reservation procedure for nomadicity scenario

The SCF-requested QoS resource reservation procedure for nomadicity scenario, illustrated in Figure 7, is initiated by a resource initiation request from the home SCF. The home PD-FE authorizes the request, and finds that the required resources belong to the visited network. Then the home PD-FE sends the request to the visited PD-FE.

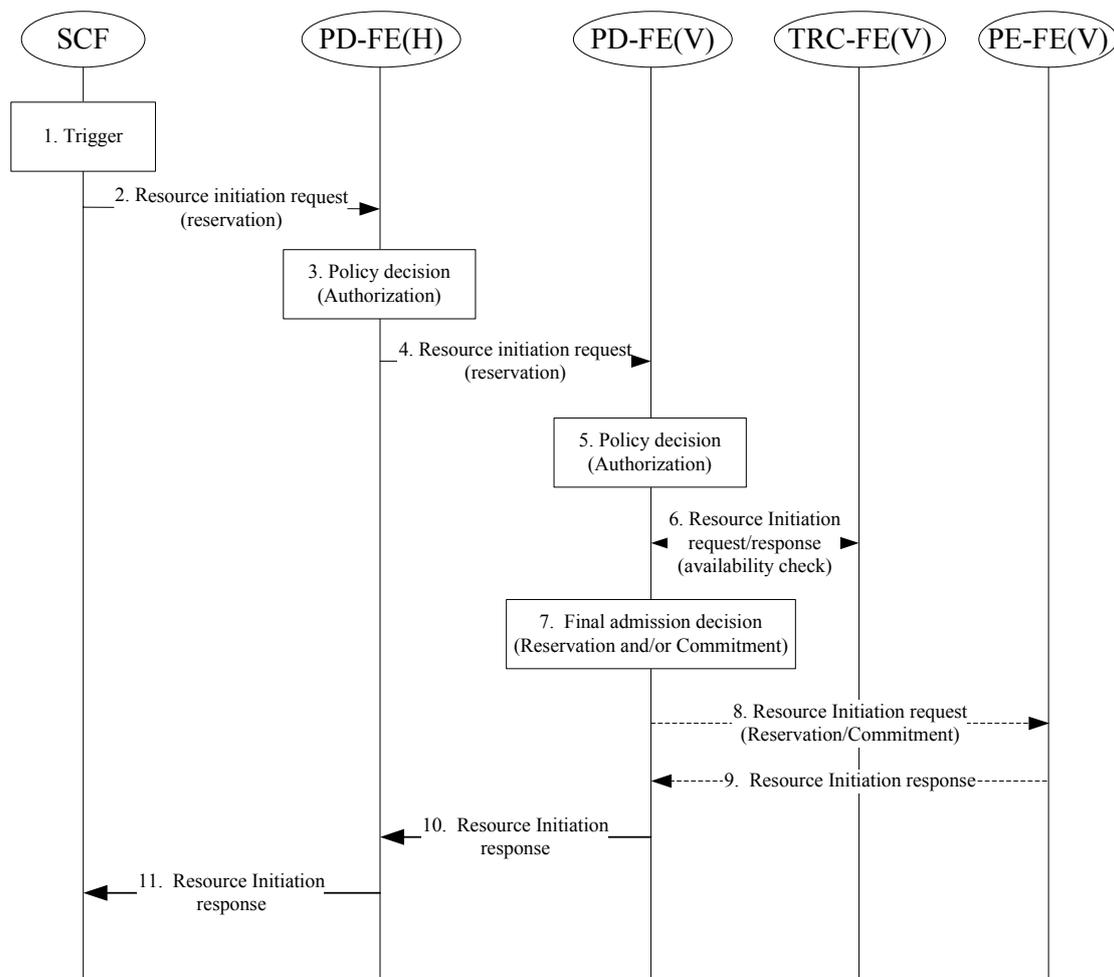

**Figure 7 – SCF-requested QoS resource reservation procedure for nomadicity scenario**

- 1) A resource initiation request (reservation) (i.e., RIR (reservation)) is usually triggered by a service establishment event or an internal action in the SCF. An example event is that a service signalling message is received at or generated by the SCF.
- 2) The SCF determines or derives the QoS requirement parameters (such as bandwidth, class of service) for the media flows of a given service. It then sends a RIR (reservation) with the media flow description and its QoS parameters to the home PD-FE (PD-FE(H)) across the Rs reference point for QoS resource authorization and reservation.
- 3) On receipt of the RIR (reservation), the PD-FE(H) authorizes the required QoS resources for the media flow. The PD-FE(H) checks if the media flow description and the required QoS resources are consistent with network policy rules held in the PD-FE(H) and the transport subscription information held in the NACF. If successfully, the PD-FE(H) makes the initial policy decisions based on the transport subscription information, network policy rules and service information.
- 4) As the PD-FE(H) does not own the resources in the transport network, the RIR is sent further to the visited PD-FE (PD-FE(V)).
- 5) On receipt of the RIR (reservation), the PD-FE(V) authorizes the required QoS resources for the media flow. The PD-FE(V) checks if the media flow description and the required QoS resources are consistent with network policy rules held in the PD-FE(V).
- 6) The PD-FE(V) positions and determines which access networks and core networks are involved for the media flow. The PD-FE(V) sends a RIR (availability check) to the TRC-FE(V) to check resource availability in the involved network.
- 7) The PD-FE(V) makes the final admission decisions based on the results of steps 5 and 6. If the media flow is not admitted, the PD-FE(V) sends a RIP with the rejection reason back to the PD-FE(H).
- 8) The PD-FE(V) may send a RIR to install the final admission decisions in the PE-FE(V).
- 9) The PE-FE(V) installs (and enforces) the final admission decisions sent from the PD-FE(V) and sends a RIP back to the PD-FE(V).
- 10) The PD-FE(V) sends a RIP back to the PD-FE(H).
- 11) The PD-FE(H) sends a RIP back to the SCF.

Note that nomadicity can be supported through inter-SCF communication without the involvement of the Ri reference point.

### 9.1.1.1.3 Admission decision activation procedure

Depending on the network policy rules and service requirement, either single-phase or two-phase resource commitment schemes are applied. In the single-phase scheme, the gates are opened and the requested resource is allocated immediately when the final admission decisions are installed in the PE-FE.

In the two-phase scheme, the final admission decisions are installed in the PE-FE first; however, the admission decisions are not enforced until a RIR (commitment) is received from the SCF. The admission decision activation procedure for the two-phase scheme is illustrated in Figure 8.

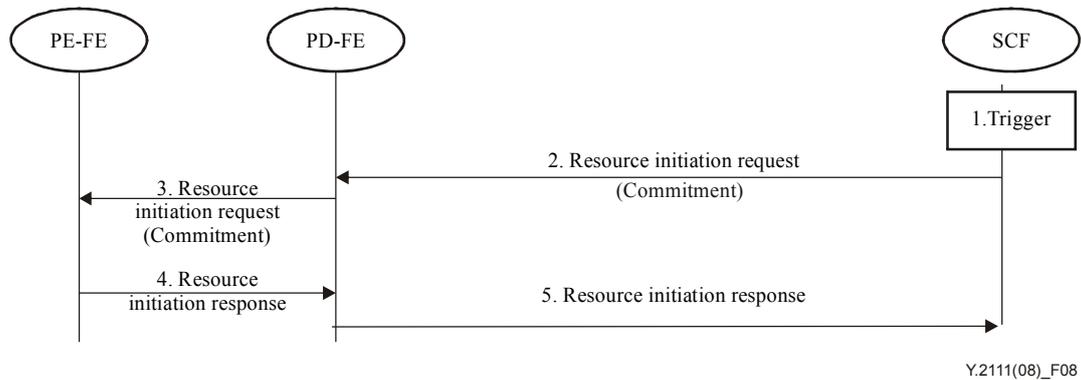


Figure 8 – Admission decision activation procedure

### 9.1.1.1.4 Admission decision de-activation procedure

The admission decision de-activation procedure illustrated in Figure 9 is invoked by a resource modification request (i.e., RMR (de-activation)) from the SCF. It causes the PE-FE to stop enforcing admission decisions previously installed for the media flow, but the admission decisions are not deleted or removed from the PE-FE. The de-activation procedure is only needed when the forwarding of media flow needs to be disabled.


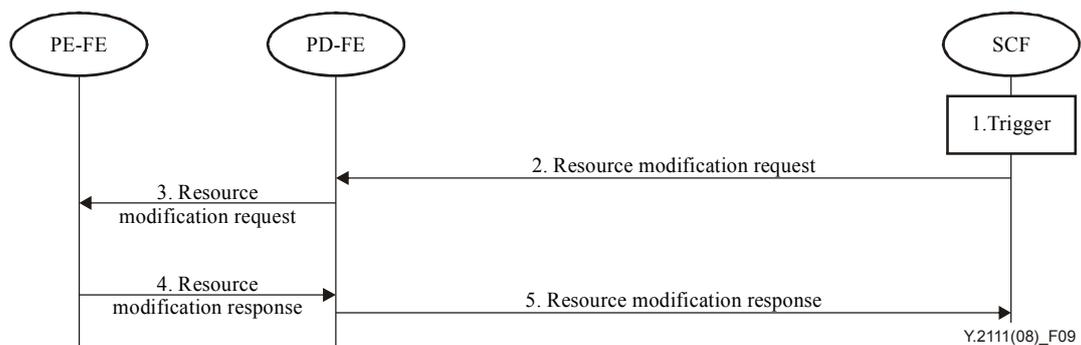


Figure 9 – Admission decision de-activation procedure

### 9.1.1.1.5 QoS resource modification procedure


The SCF-requested QoS resource modification procedure, illustrated in Figure 10, is invoked by a resource modification request (i.e., RMR (modification)) from the SCF. It makes the PD-FE modify the admission decisions (e.g., QoS attributes). The RMR (modification) is usually triggered by a media renegotiation event or an internal action in the SCF. An example event is that a service signalling message is received at or generated by the SCF. The RMR (modification) may be applied to authorization, reservation or commitment phases.

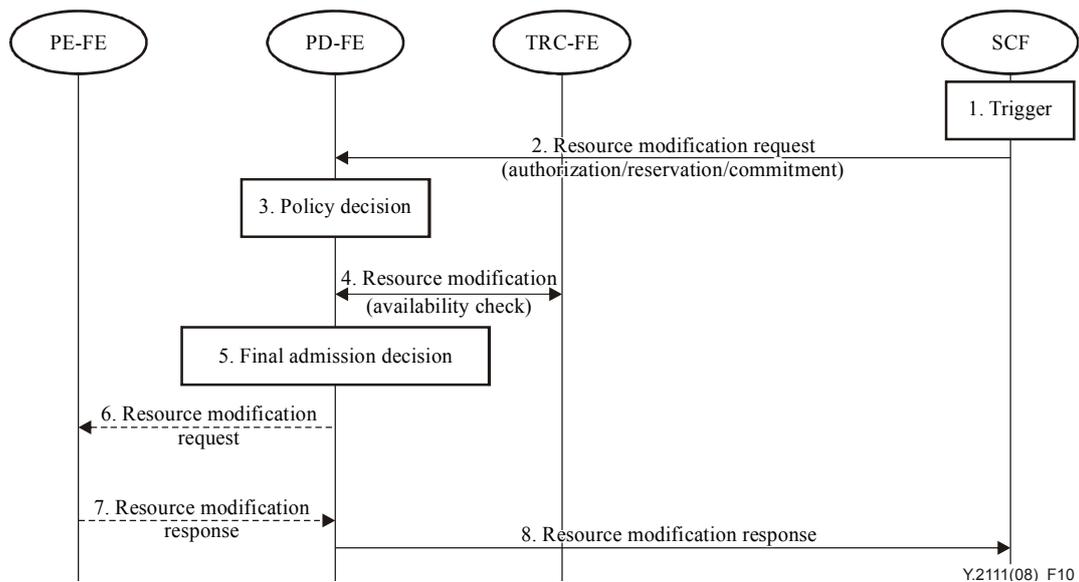

**Figure 10 – SCF-requested QoS resource modification procedure**

### 9.1.1.1.6 QoS resource release procedure

The SCF-requested QoS resource release procedure, illustrated in Figure 11, is invoked by a resource release request (i.e., RRR) from the SCF for a given service. The RRR is triggered usually by a service termination event, a media renegotiation event, or an internal action in the SCF. An example event is that a service signalling message is received at or generated by the SCF. When multiple TRC-FE instances are present in the form of distributed hierarchical structure, the PD-FE contacts the top tier TRC-FE instance for resource release operations.

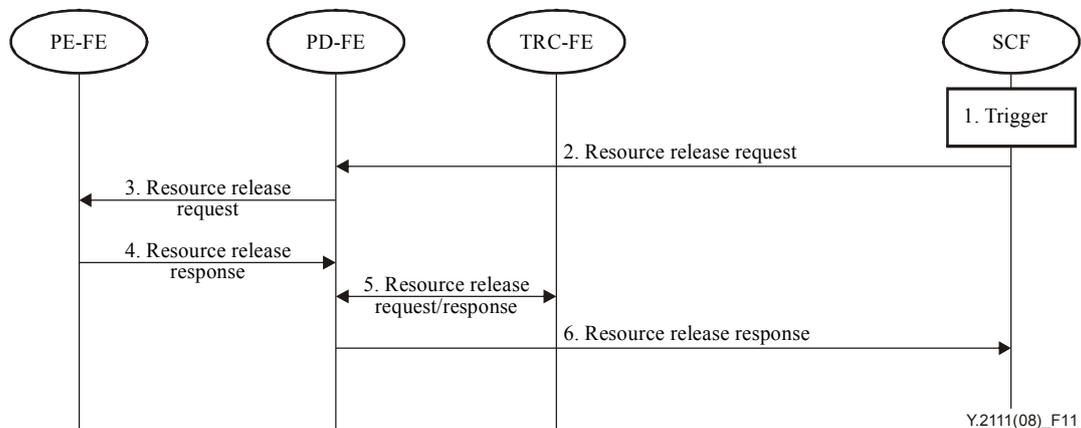


**Figure 11 – SCF-requested QoS resource release procedure**

### 9.1.1.2 Failure handling

NOTE – The complexity of providing network failure indications to SCF needs further study.

#### 9.1.1.2.1 PE-FE-indicated event notification procedure


During the running of a media flow, if the PE-FE cannot provide the requested QoS resource any longer for the media flow due to special events e.g., the reference point path failure, the PE-FE is required to send a resource notification to the PD-FE on its own initiative. The PD-FE is required to forward the resource notification to the relevant SCF for alerting the affected sessions as illustrated in Figure 12.

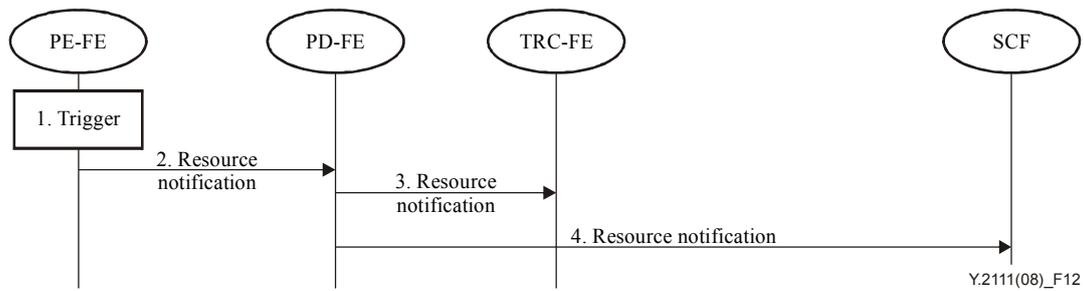

**Figure 12 – PE-FE-indicated event notification procedure**

### 9.1.1.2.2 TRC-FE-indicated event notification procedure

During the running of a media flow, if the TRC-FE detects that the network cannot provide the reserved QoS resource any longer for the media flow due to special events, e.g., network failure, the TRC-FE is required to send a resource notification to the PD-FE on its own initiative. The PD-FE is required to forward the resource notification to the relevant SCF for alerting the affected sessions. The PD-FE may send the resource release request (RRR) to the affected PE-FE to release the network resource as illustrated in Figure 13. When multiple TRC-FE instances are present in the form of distributed hierarchical structure, the co-located TRC-FE may report the events to the top tier TRC-FE instance for event notification operations.

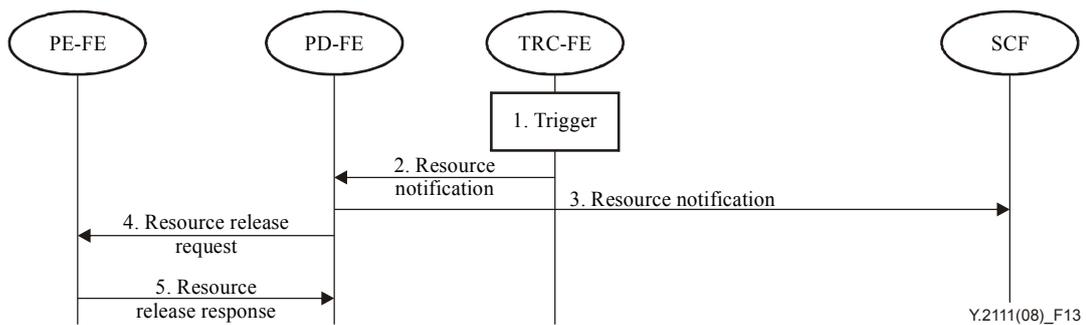

**Figure 13 – TRC-FE-indicated event notification procedure**

## 9.1.2 CPE-requested QoS control procedures


Scenario 2 described in clause 6.1 uses the CPE-requested QoS resource reservation mechanism, i.e., the CPE sends a 'QoS request' over a dedicated path-coupled QoS signalling to invoke the QoS resource reservation for a given flow. Based on the 'QoS request' from the CPE, the network border node is responsible for sending the RACF a resource decision request (i.e., RDR) to pull the admission control decisions from the RACF.

The following procedures are for support of CPE-requested QoS resource reservation mechanism.

### 9.1.2.1 Basic procedures

#### 9.1.2.1.1 SCF-requested QoS initial authorization procedure

The SCF-requested QoS initial authorization procedure, illustrated in Figure 14, is invoked by a service establishment signalling message from CPE.

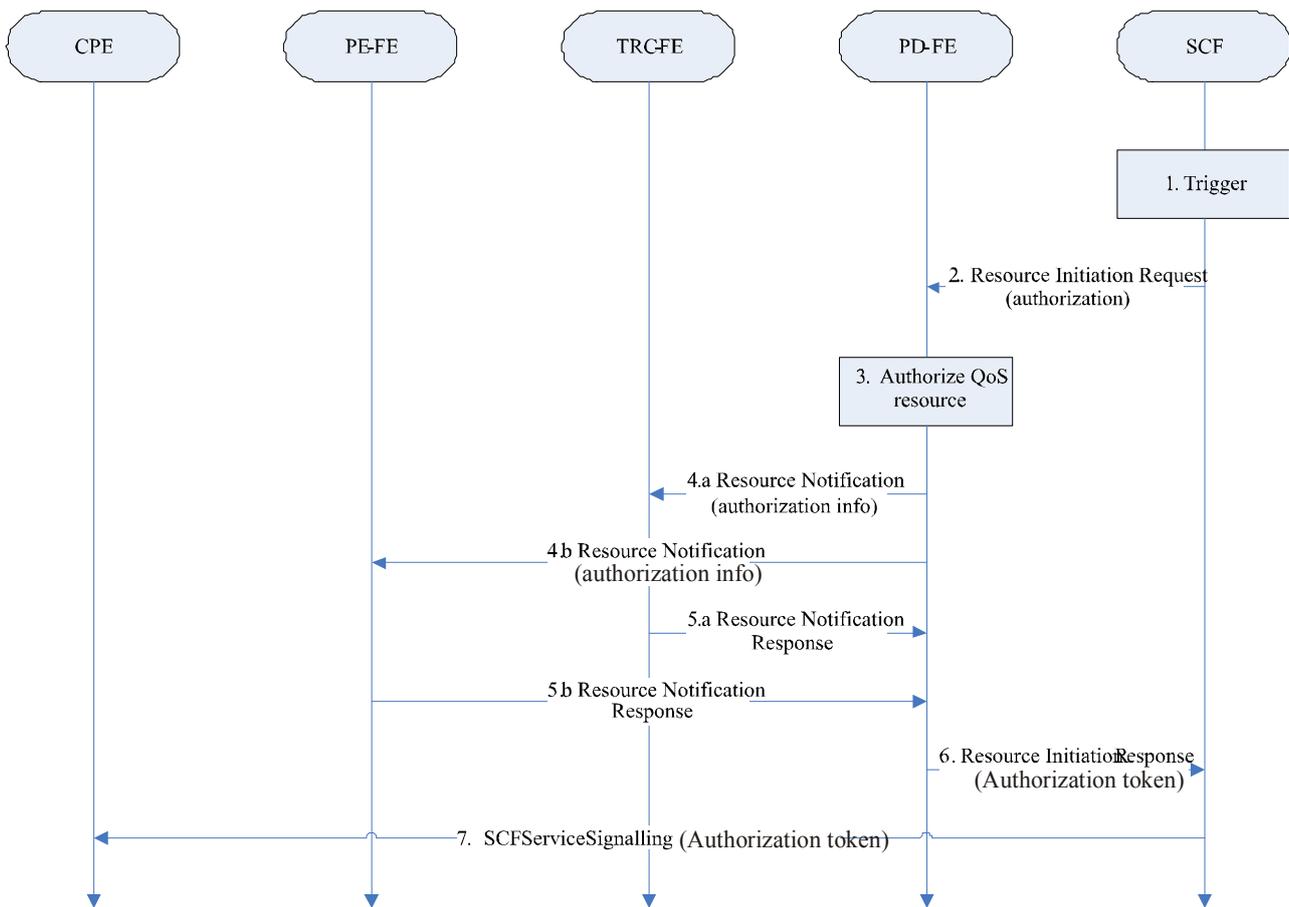


**Figure 14 – SCF-requested QoS initial authorization procedure**

- 1) The SCF-requested QoS initial authorization procedure is usually triggered by a service establishment signalling message.
- 2) The SCF sends a RIR to the PD-FE for requesting authorization.
- 3) The PD-FE makes QoS resource authorization decision based on the subscription profile and the operator policies. Optionally, the PD-FE may generate an authorization token for a given service.
- 4) (Optional)
  - a) The PD-FE sends the resource notification messages with the authorization information to the TRC-FE. The TRC-FE may maintain the binding relation of the PD-FE and the authorization information.
  - b) The PD-FE sends the resource notification messages with the authorization information to the PE-FE. The PE-FE may maintain the binding relation of the PD-FE and the authorization information.
- 5) (Optional)
  - a) The TRC-FE sends the resource notification response message to the PD-FE.
  - b) The PE-FE sends the resource notification response message to the PD-FE.
- 6) The PD-FE sends a RIR to the SCF. If generating the authorization token in step 3), the PD-FE may take the token with the RIR message.
- 7) The SCF continues the service signalling negotiation with CPE. If receiving the authorization token from PD-FE, the SCF may return the token to CPE.

#### 9.1.2.1.2 CPE-requested QoS resource reservation procedure triggered by PE-FE

The CPE-requested QoS resource reservation procedure, illustrated in Figure 15, is invoked by a dedicated path-coupled QoS signalling message from the CPE for a given flow.

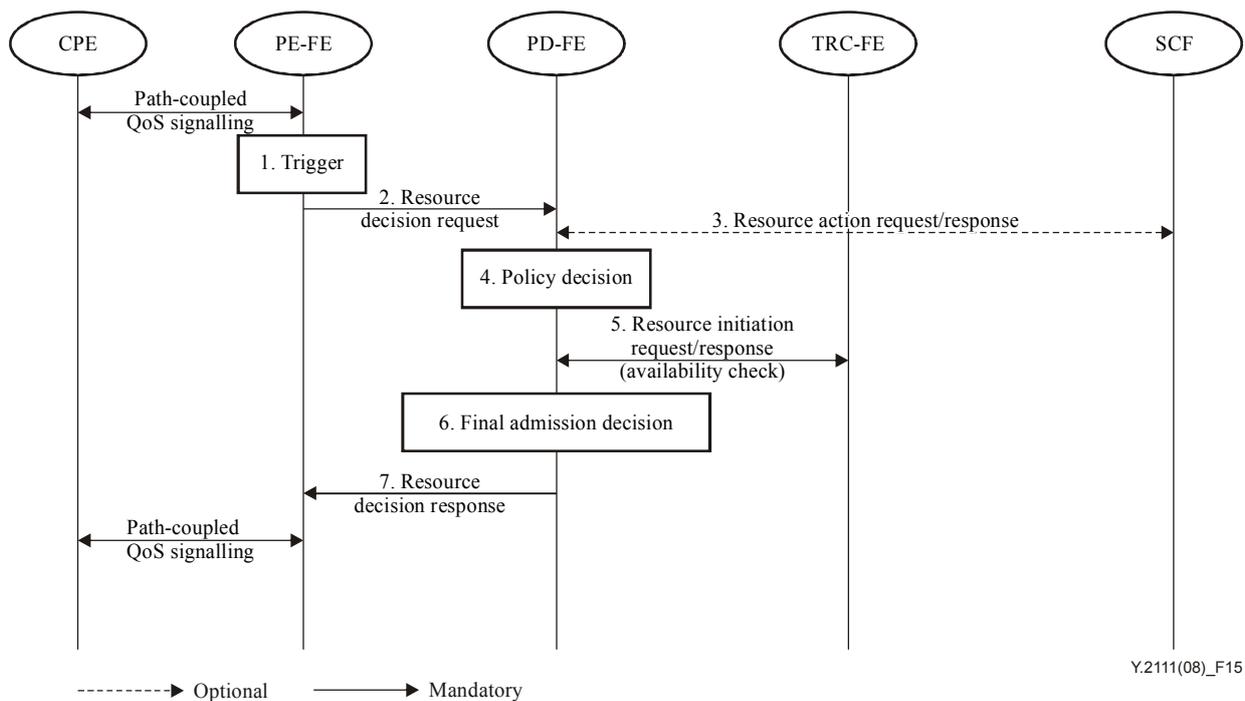

Y.2111(08)\_F15


**Figure 15 – CPE-requested QoS resource reservation procedure triggered by PE-FE**

- 1) A resource decision request (i.e., RDR) is usually triggered by a request indicated through the QoS signalling from the CPE to reserve the required QoS resource for a given flow. Other nodes in the access or core networks may forward the QoS signalling messages transparently or perform the QoS reservation along the path.
- 2) Based on the 'QoS request' from the CPE, the PE-FE selects the right PD-FE according to the binding information, and sends a RDR with the flow description and its QoS parameters to the PD-FE across the Rw reference point to pull the admission control decisions from the PD-FE. The PE-FE is required to be able to filter duplicate or malicious QoS request messages, especially if the QoS signalling is refreshed periodically.
- 3) On receipt of the RDR (if the SCF previously requested the QoS initial authorization related to the flow), the PD-FE is required to send a resource action request (i.e., RAR) to the SCF for retrieving the service information of the flow.
- 4) The PD-FE checks if the flow description, the required QoS resources and the service information are consistent with network policy rules held in the PD-FE and the transport subscription information held in the NACF.
- 5) The PD-FE identifies and determines which access networks and core networks are involved for the media flow. If there are TRC-FE instances in an involved network, the PD-FE sends a RIR (availability check) to one of the TRC-FE instances registered in the PD-FE to check if the required QoS resource is available in the involved network. If there are multiple TRC-FE instances in the involved network, they may communicate with each other to determine if the required QoS resource is available in the involved network. Then the TRC-FE instance that received the RIR (availability check) is required to send a RIP back to the PD-FE. When multiple TRC-FE instances are present in the form of distributed hierarchical structure, the top tier TRC-FE instance forwards the request to other TRC-FE instances in case those instances are in control of resources referenced in the request (i.e., the top tier TRC-FE has delegated resources to other TRC-FE instances). In this case the top tier TRC-FE makes the final resource admission decision based on the results of resource admission from all other instances.
- 6) The PD-FE makes the final admission decision based on the results of steps 4 and 5.
- 7) If the RDR from the PE-FE is admitted, the PD-FE is required to send a resource decision response (commitment) (i.e., RDP) to install the final admission decisions in the PE-FE.

In order to ensure that the PE-FE selects the right PD-FE among multiple PD-FEs, there are the following options:

- If the step 2 of resource reservation procedure is performed, the PE-FE can select the right PD-FE according to the stored PD-FE information received in the RIR.
- If the step 2 of resource reservation procedure is not performed, the PE-FE can select the right PD-FE, based on the pre-configuration.
- If PE-FE cannot identify the right PD-FE through the above options, it sends the message to all of the PD-FEs interacting with it to find the right PD-FE.


Note that the installed admission decisions may be enforced automatically and immediately or may wait for an RIR (commitment) for gate opening and resources allocation. The PE-FE may process the QoS signalling messages in a termination, snooping or proxy way. Refer to Figure 16-a, -b) and -c respectively. If processing in a proxy way, the PE-FE may modify, aggregate and de-aggregate the QoS signalling messages.

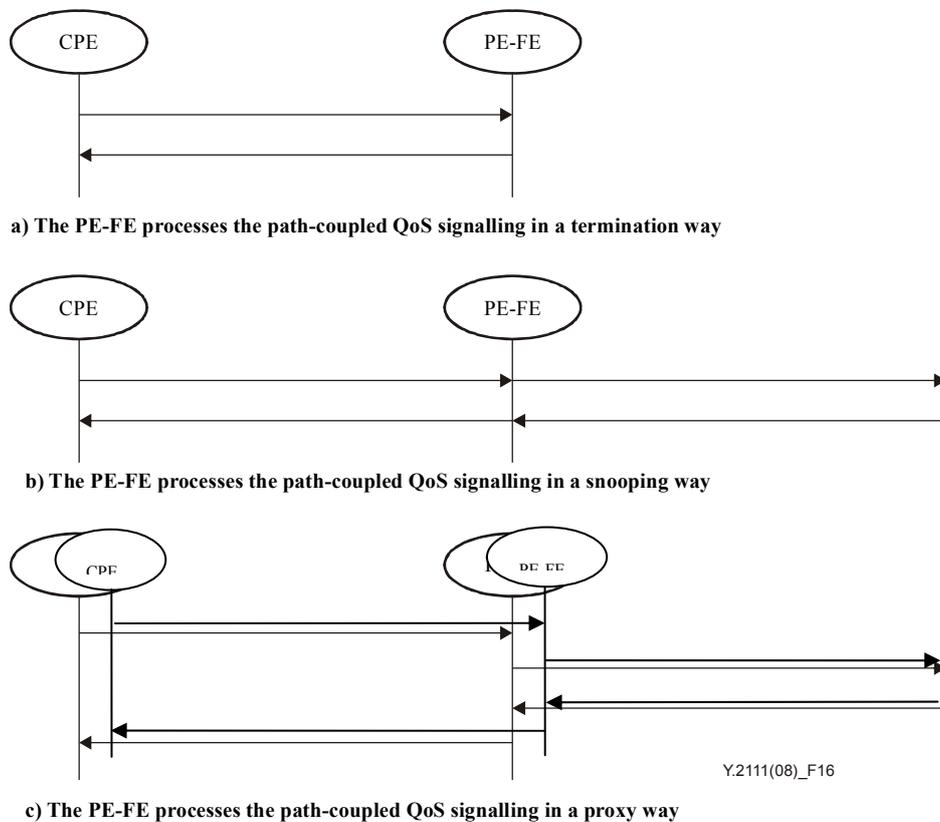

**Figure 16 – Three possible QoS signalling processing ways at the PE-FE (not exhaustive)**

### 9.1.2.1.3 SCF-requested QoS initial authorization procedure for nomadicity scenario

The SCF-requested QoS initial authorization procedure for nomadicity scenario is illustrated in Figure 17. It is invoked by a service establishment signalling message from CPE. The home PD-FE makes QoS resource authorization decision based on the subscription profile and the operator policies. If the required resources belong to the visited network, the home PD-FE sends the request to the visited PD-FE for requesting authorization.

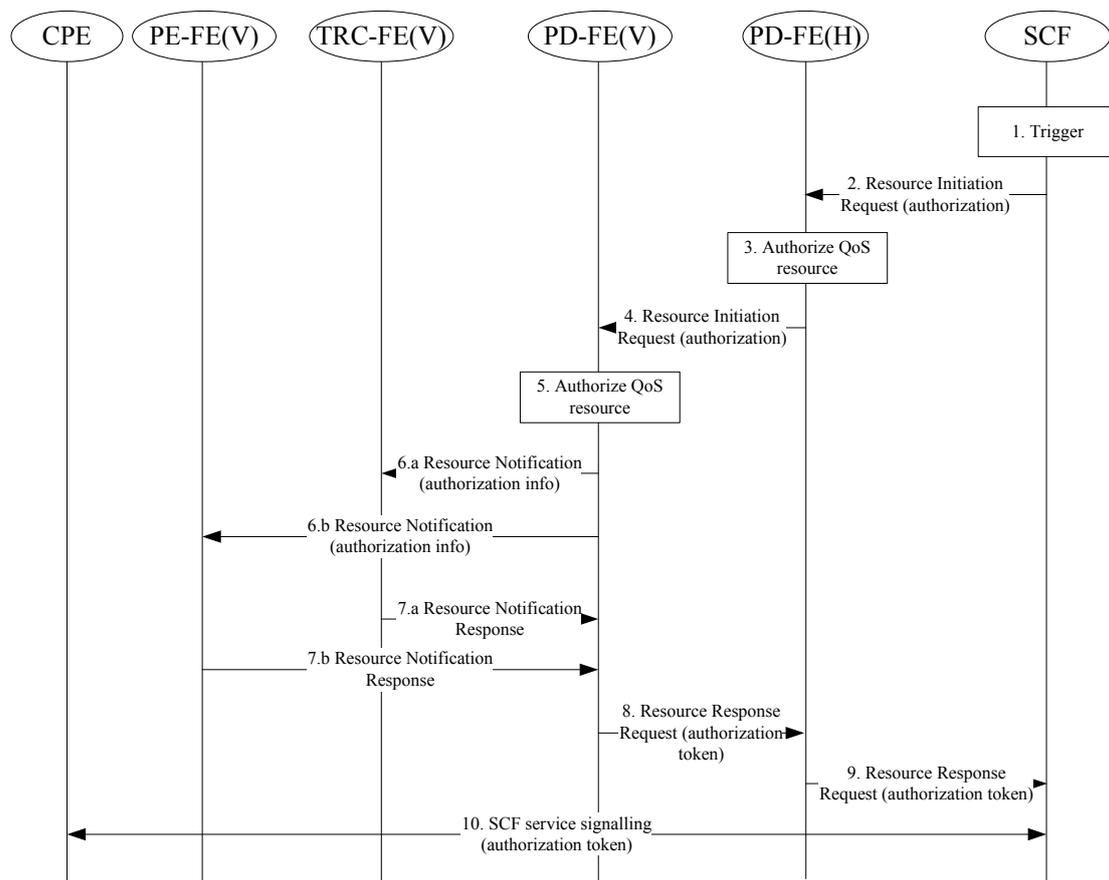


**Figure 17 – SCF-requested QoS initial authorization procedure for nomadicity scenario**

- 1) The SCF-requested QoS initial authorization procedure is usually triggered by a service establishment signalling message.
- 2) The SCF sends a RIR to the PD-FE(H) for requesting authorization.
- 3) The PD-FE(H) makes QoS resource authorization decision based on the subscription profile and the operator policies.
- 4) As the PD-FE(H) does not own the resources in the transport network, the RIR is sent further to the visited PD-FE (PD-FE(V)).
- 5) The PD-FE(V) makes QoS resource authorization decision based on the operator policies. Optionally, the PD-FE(V) generates an authorization token for a given service.
- 6) (Optional)
  - a) The PD-FE(V) sends the resource notification messages with the authorization information to the TRC-FE(V). The TRC-FE(V) maintains the binding relation of the PD-FE(V) and the authorization information.
  - b) The PD-FE(V) sends the resource notification messages with the authorization information to the PE-FE(V). The PE-FE(V) maintains the binding relation of the PD-FE(V) and the authorization information.
- 7) (Optional)
  - a) The TRC-FE(V) sends the resource notification response message to the PD-FE(V).
  - b) The PE-FE(V) sends the resource notification response message to the PD-FE(V).
- 8) The PD-FE(V) sends a RIR to the PD-FE(H). If generating the authorization token in step 5), the PD-FE(V) takes the token with the RIR message.
- 9) The PD-FE(H) sends a RIR to the SCF. If receiving the authorization token from the PD-FE(V), the PD-FE(H) takes the token with the RIR message.
- 10) The SCF continues the service signalling negotiation with the CPE. If receiving the authorization token from the PD-FE(H), the SCF returns the token to the CPE.

### 9.1.2.1.4 CPE-requested QoS resource reservation procedure triggered by PE-FE for nomadicity scenario

The CPE-requested QoS resource reservation procedure for nomadicity scenario, illustrated in Figure 18 is invoked in the visited network by a dedicated path-coupled transport signalling message from the CPE for a given flow. Based on the 'QoS request' from the CPE, the visited PE-FE sends a RDR with the flow description and its QoS parameters to the visited PD-FE. On receipt of the RDR (if the PD-FE(H) previously requested the QoS initial authorization related to the flow), the PD-FE(V) is required to send a resource action request (i.e., RAR) to the PD-FE(H) for retrieving the service information of the flow.

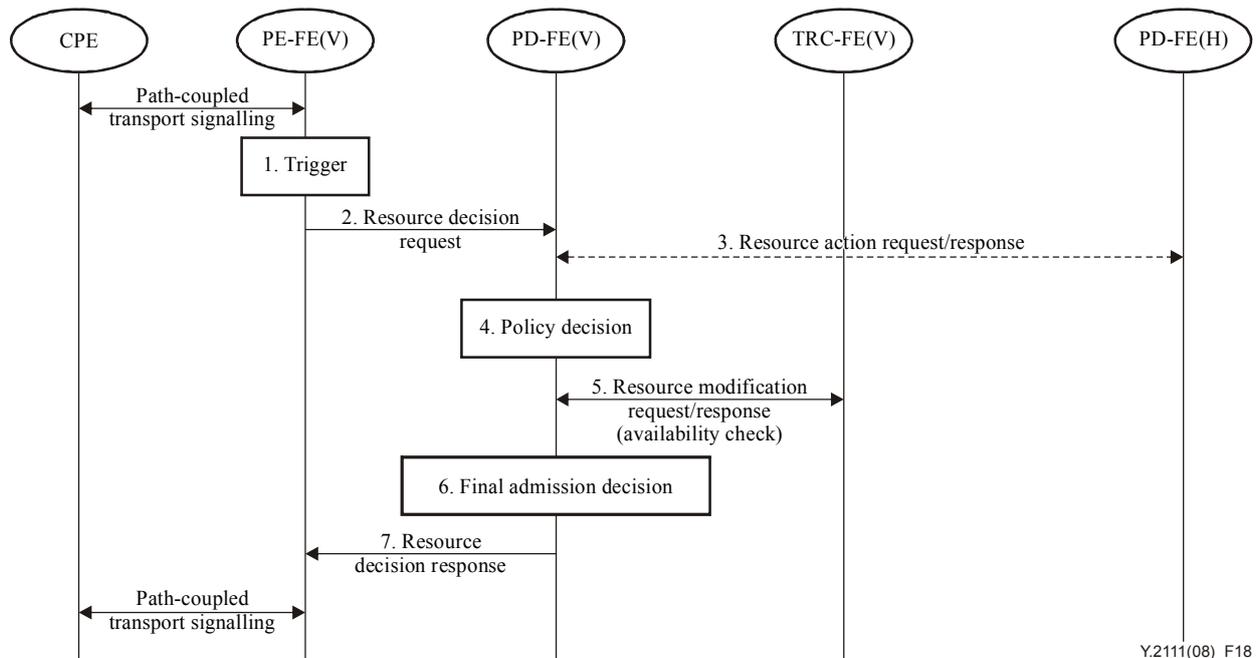

Y.2111(08)\_F18

**Figure 18 – CPE-requested QoS resource reservation procedure triggered by PE-FE for nomadicity scenario**

- 1) A resource decision request (i.e., RDR) is usually triggered by a request indicated through the QoS signalling from the CPE to reserve the required QoS resource for a given flow. Other nodes in the access or core networks may forward the QoS signalling messages transparently or perform the QoS reservation along the path.
- 2) Based on the QoS request from the CPE, the PE-FE(V) selects the right PD-FE(V) according to the binding information, and sends an RDR with the flow description and its QoS parameters to the PD-FE(V) across the R<sub>w</sub> reference point to pull the admission control decisions from the PD-FE(V). It is required that the PE-FE(V) be able to filter duplicate or malicious QoS request messages, especially if the QoS signalling is refreshed periodically.
- 3) On receipt of the RDR (if the PD-FE(H) previously requested the QoS initial authorization related to the flow), the PD-FE(V) sends a resource action request (i.e., RAR) to the PD-FE(H) for retrieving the service information of the flow.
- 4) (Optional) If there is no QoS initial authorization procedure, the PD-FE(V) checks if the flow description, the required QoS resources and the service information are consistent with network policy rules held in the PD-FE(V).
- 5) The PD-FE(V) identifies and determines which access networks and core networks are involved for the media flow. The PD-FE(V) sends a RIR (availability check) to the TRC-FE(V) to check if the required QoS resource is available in the involved network.
- 6) The PD-FE(V) makes the final admission decision based on the results of steps 4 and 5.
- 7) If the RDR from the PE-FE(V) is admitted, the PD-FE(V) sends a resource decision response (commitment) (i.e., RDP) to install the final admission decisions in the PE-FE(V).

### 9.1.2.1.5 CPE-requested QoS resource modification procedure

The CPE-requested QoS resource modification procedure illustrated in Figure 19, is invoked by a resource decision request, i.e., RDR from the PE-FE for a given flow. The RDR is usually triggered by a request indicated through the QoS signalling from the CPE to modify the reserved resource for the flow.

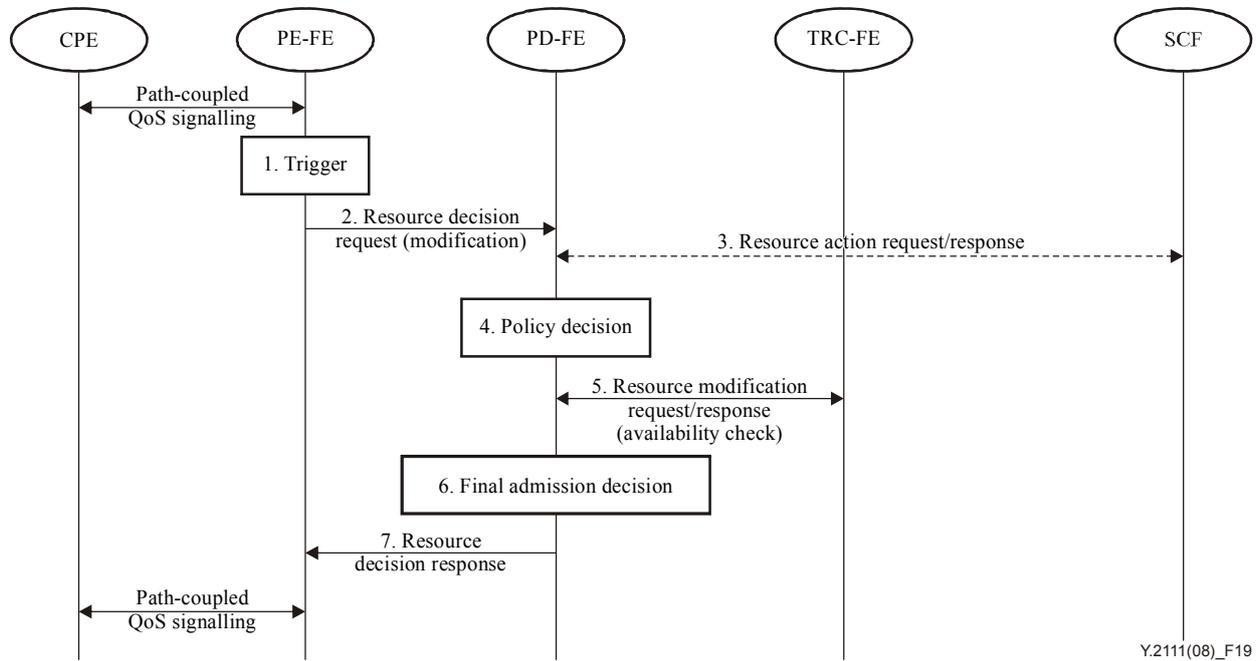


Figure 19 – CPE-requested QoS resource modification procedure

### 9.1.2.1.6 Admission decision activation procedure

In the two-phase or three-phase control scheme, the PD-FE opens the gates and activates the admission decisions installed in the PE-FE only upon receiving the admission activation request from the SCF. The admission decision activation procedure is only needed when the SCF ordered the PD-FE to wait for a RIR (commitment). The admission decision activation procedure is invoked by the RIR (commitment) from the SCF for a given service as illustrated in Figure 20.

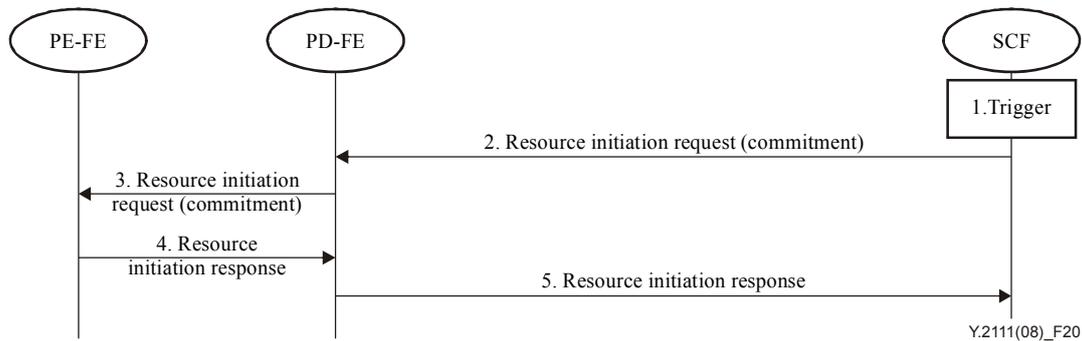


Figure 20 – Admission decision activation procedure

### 9.1.2.1.7 Admission decision de-activation procedure

The admission decision de-activation procedures illustrated in Figure 21, is invoked by a RMR from the SCF for a given service. It causes the PE-FE to stop enforcing admission decisions previously installed for the media flow of the service, but the admission decisions are not deleted or removed from the PE-FE. The de-activation procedure is only needed when the forwarding of media flow of a given service needs to be disabled.

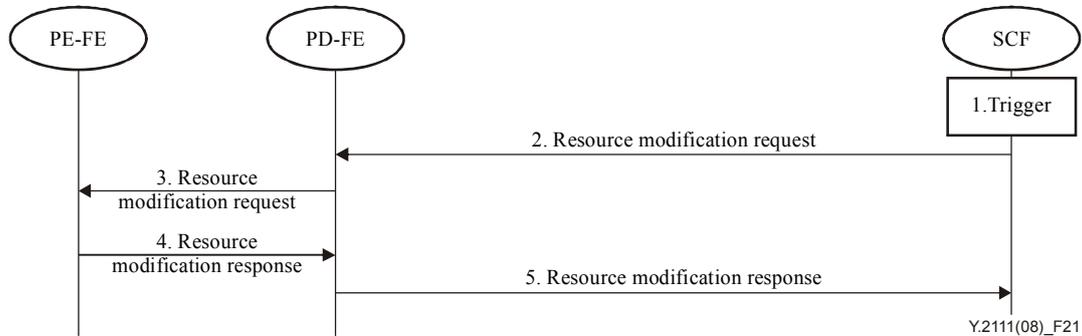


Figure 21 – Admission decision de-activation procedure

### 9.1.2.1.8 CPE-requested QoS resource release procedure

The CPE-requested QoS resource release procedure, illustrated in Figure 22, is invoked by a resource notification from the PE-FE for a given flow. The resource notification is usually triggered by a request indicated through the QoS signalling from the CPE to release the reserved resource for the flow.


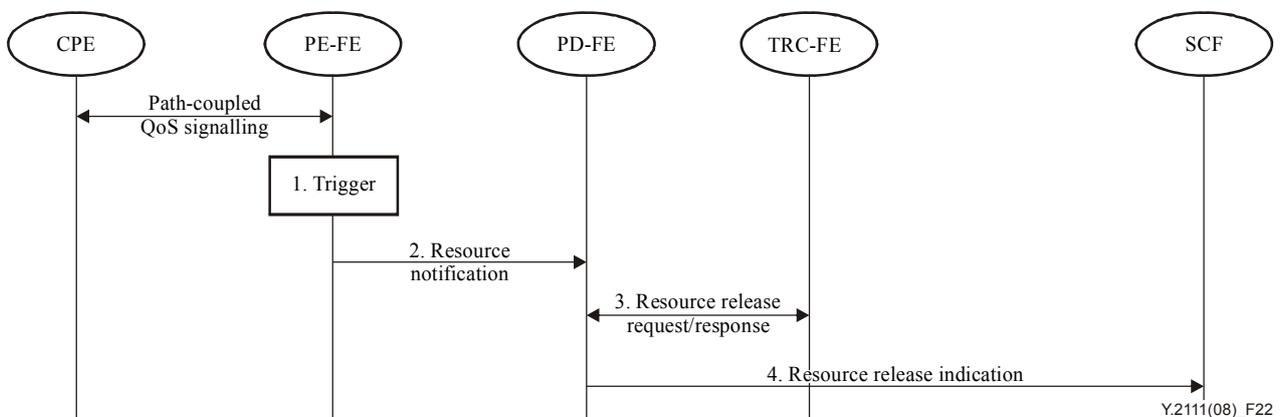


Figure 22 – CPE-requested QoS resource release procedure

### 9.1.2.1.9 SCF-requested QoS resource release procedure

The SCF-requested QoS resource release procedure, illustrated in Figure 23 is invoked by a RRR from the SCF for a given service. The RRR is triggered usually by a service termination event, a media renegotiation event, or an internal action in the SCF. An example event is that a service signalling message is received at or generated by the SCF.

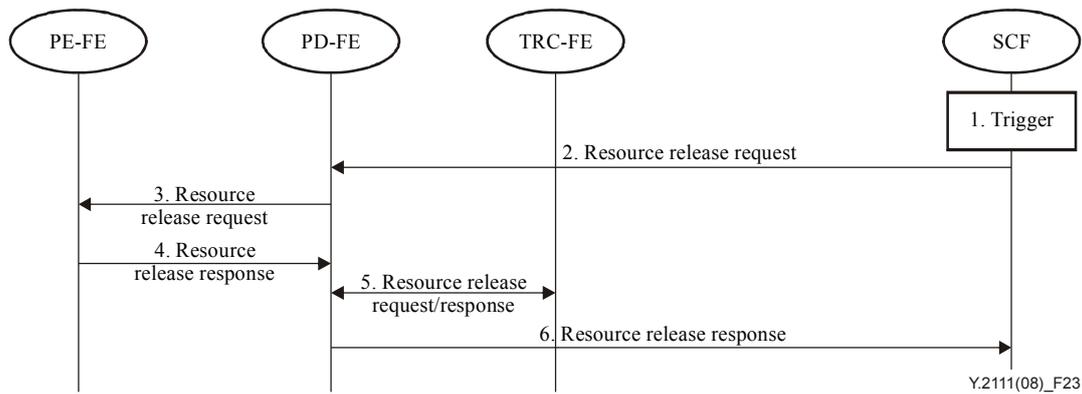

**Figure 23 – SCF-requested QoS resource release procedure**


For both CPE-requested and SCF-requested QoS resource release procedure, when multiple TRC-FE instances are present in the form of distributed hierarchical structure, the PD-FE contacts the top tier TRC-FE instance for resource release operations.

### 9.1.2.2 Failure handling

NOTE – The complexity of providing network failure indications to SCF needs further study.

#### 9.1.2.2.1 PE-FE-indicated event notification procedure


During the running of a media flow, if the PE-FE cannot provide the reserved QoS resource any longer for the media flow due to the failure of the reference point path, the PE-FE is required to send a resource notification to the PD-FE on its own initiative. If the reserved QoS resource is relevant with an SCF session, the PD-FE is required to forward the resource notification to the SCF as illustrated in Figure 24.

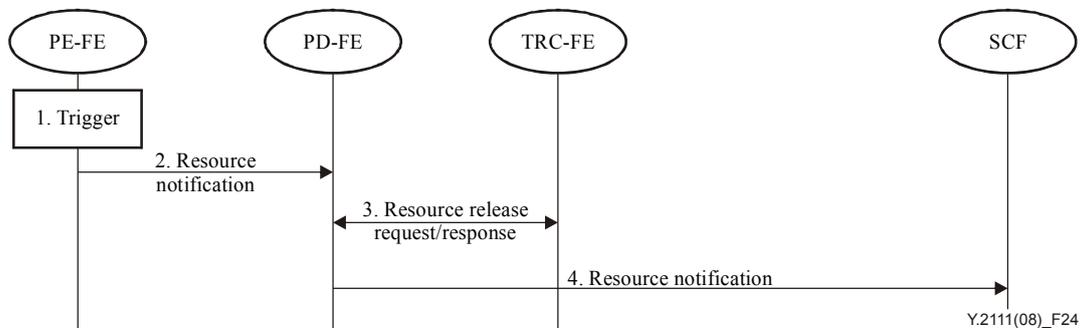

**Figure 24 – PE-FE-indicated event notification procedure**

#### 9.1.2.2.2 TRC-FE-indicated event notification procedure

During the running of a media flow, if the TRC-FE detects that the network cannot provide the reserved QoS resource any longer for the media flow due to the network failure, the TRC-FE is required to send a resource notification to the PD-FE on its own initiative. If the reserved QoS resource is relevant to an SCF session, the PD-FE is required to forward the RN to the SCF as illustrated in Figure 25. When multiple TRC-FE instances are present in the form of distributed hierarchical structure, the co-located TRC-FE may report the events to the top tier TRC-FE instance for event notification operations.

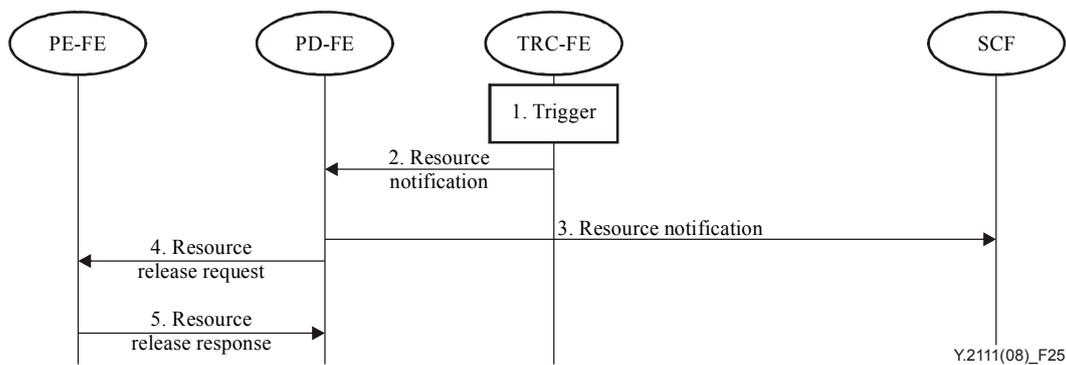

**Figure 25 – TRC-FE-induced event notification procedure**

## 9.2 Procedures for NAPT control and NAT traversal

### 9.2.1 NAPT control procedures

This clause describes the procedures of controlling an IP address and/or port translation in the media path at borders between access and core networks and between core networks. The SCF (e.g., SCPF), PD-FE, TRC-FEs and PE-FEs are involved in performing the IP address and/or port translation.

The NAPT control procedure is required to be invoked by RACF (e.g., PD-FE) based on the network security policy rules (e.g., network address hiding rules). The SCF is required to be able to perform the modification of message body for the NAPT upon the end-to-end call flow status, e.g., when service signalling messages to request and respond the session establishment (e.g., SIP INVITE and 183 Session Progress) are received and the indication of NAPT control is provided by PD-FE. The PD-FE performs NAPT policy control, obtains the address binding information and performs the gate control to open/close the "gate".

#### 9.2.1.1 Upon receipt of a session initiation request

- 1) The SCF is required to extract the source and destination network addresses and port numbers from the signalling message body received from the calling party endpoint, is required to send them to PD-FE, and is required to request the address binding information if a far end NAT traversal is needed.
- 2) Upon the receipt of source/destination network address and port and related information from the SCF, the PD-FE is required to check NAPT policy rules to decide the NAPT control procedure, e.g., whether network address hiding is required or not (e.g., between access and core networks).
- 3) If the NAPT is required at the border between an access and core network, the PD-FE is required to locate the PE-FE based on the network address from the SCF and is required to obtain the local network address/port and public network address/port of the selected PE-FE. If the destination endpoint is in another operator's domain, the PD-FE is required to obtain the public network address and port number from the public network address pool of this operator's network.
- 4) The PD-FE is required to generate the address binding information of the selected PE-FE for the requested media flows, and may store the address binding information if the PD-FE is stateful. The PD-FE is required to return the network address binding information to the SCF.

- 5) Upon receipt of the RACF response, the SCF is required to modify the addresses and/or ports contained in the application signalling message body based on the public address information and NAPT policy decision provided by RACF, and may store the address binding information if the SCF uses a stateful proxy.

#### **9.2.1.2 Upon receipt of a session initiation response**

- 1) The SCF is required to extract the source and destination network addresses and port numbers from the signalling message body received from the called party, and is required to send them to PD-FE.
- 2) Upon the receipt of source/destination network address and port and related information from the SCF, the PD-FE is required to check the NAPT policy rules to decide the NAPT control procedure, e.g., whether network address hiding is required or not (e.g., between core networks).
- 3) If the NAPT is required at the border between core networks, the PD-FE is required to locate the PE-FE based on the network address information received from the SCF and obtain a local network address/port and a public network address/port of selected PE-FE.
- 4) The PD-FE is required to generate the network address binding information of the selected PE-FE for the requested media flows, and may store the address binding information if the PD-FE is a stateful functional entity. The PD-FE is required to return the network address binding information to the SCF. In the originating network, the PD-FE is required to return the public network address binding information of selected PE-FE to the SCF. In the terminating network, the PD-FE is required to return the network address binding information of selected PE-FE to the SCF.
- 5) Upon receipt of NAPT information from PD-FE, the SCF is required to modify the addresses and/or ports contained in the application signalling message body based on the address information and NAPT policy decision provided by RACF, and may store the address binding information if the SCF uses a stateful proxy.

#### **9.2.1.3 Upon receipt of media connection change request for an established session**

The SCF is required to decide the possible change of media connection based on the recorded network address binding information if SCF uses a stateful proxy, and/or request the PD-FE to make a decision and perform the appropriate NAPT control procedure. The possible scenarios include:

- 1) New network address(es) and/or port number(s) have been added: additional binding(s) is required to be provided by the SCF/RACF as detailed for the aforementioned procedures;
- 2) Existing network address(es) and/or port number(s) have been eliminated: the relevant binding(s) is required to be released by the SCF/RACF;
- 3) Network address(es) and port number(s) have been re-committed to the users: the binding(s) is required to reflect the re-allocation;
- 4) No change has been made to the network address(es) and port number(s): no operation is required to be conducted to the existing binding(s).

#### **9.2.1.4 Upon receipt of a session release request**

- 1) The SCF is required to request the RACF to release the bindings established for the session.

## 9.2.2 NAT traversal procedure

This clause describes the procedure for controlling the traversal of a far-end NAT for both signalling flows and media flows at the border between the access and core network. The SCF, PD-FE, TRC-FEs and PE-FEs are involved in performing the IP address and/or port translation in accordance with the procedure.


### 9.2.2.1 NAT traversal procedure for signalling flows

In order to support the NAT traversal procedure for signalling flows, the SCF is required to return the application signalling packets to CPE on the same address and port number from which the signalling packets were sent.

The relevant operations are required to be performed in the following stages as illustrated in Figure 26:

#### Registration


- 1) When the SCF receive a registration request, it is required to store the network address and port number information of the calling CPE in the registration message (e.g., contact header in SIP registration).
- 2) The SCF may request a registration interval shorter than the keep alive time for the gate in the far-end NAT.

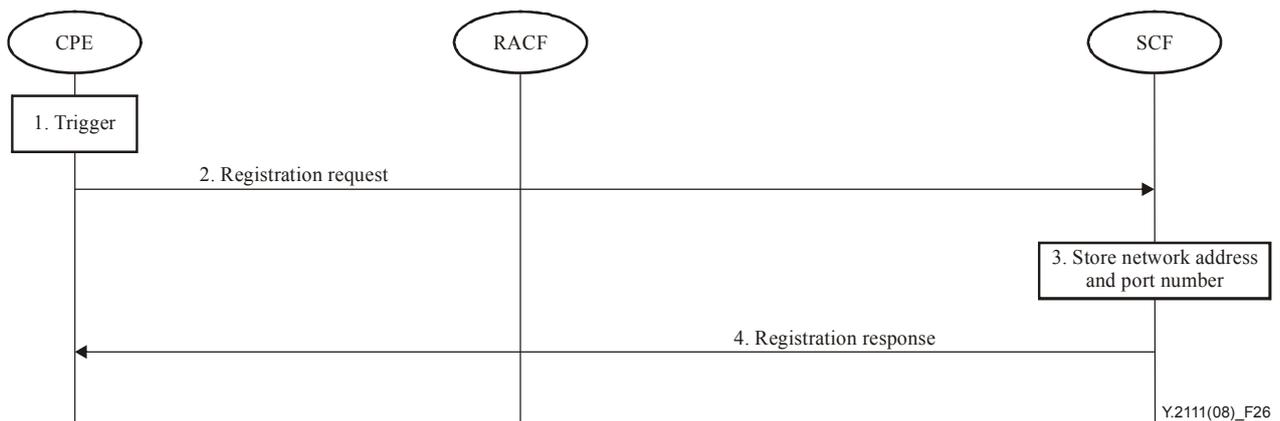

**Figure 26 – NAT traversal procedure for signalling registration flows**

#### Session setup process as illustrated in Figure 27

- 1) When a session setup request signalling message is received, the pertinent instance of SCF is required to request the RACF to obtain public network address and port number, and is required to replace the network address and port number (e.g., contact header in SDP) of the originating endpoint with the requested network address and port number.
- 2) When a session setup response is received, the pertinent instance of SCF is required to modify the network address and port number field of the calling CPE in the message body and replace it by CPE's original network address information, and forward the modified message to the CPE.

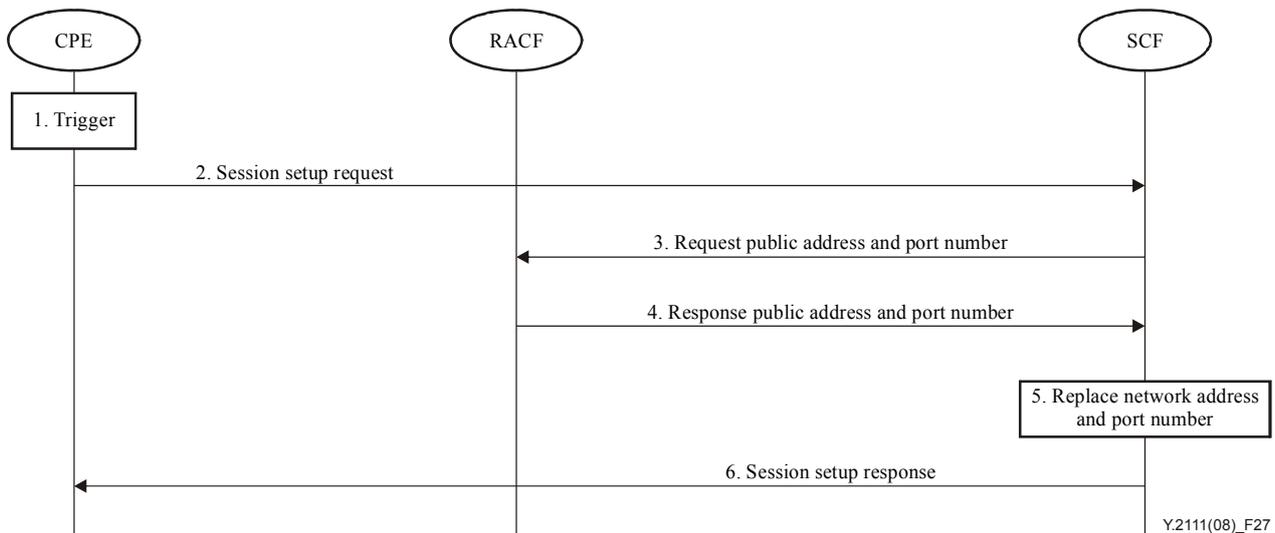

**Figure 27 – NAT traversal procedure for signalling session setup flows**

### 9.2.2.2 NAT traversal procedure for media flows

The NAT traversal procedure for media flows is similar to NAPT control procedure between access and core networks as described in clause 9.2.1. However, the NAT traversal procedure is required to be invoked by the SCF based on access network and/or CPN configurations, rather than by the PD-FE based on network security policy rules. The PE-FE is required to serve as an anchor point in support of the media relay function to forward the media flows behind the far-end NAT. For certain applications, both media packets and accompanying media control packets are required to be controlled by the same procedure (e.g., RTP and RTCP for VoIP).

### 9.2.2.3 Correlation between QoS control and NAT traversal procedures for media flows

When the far-end NAT is deployed in the CPN, the end user IP addresses are not required to be used directly as the source and destination addresses in the QoS control procedure involving RACF-related entities (e.g., SCF, PD-FE, TRC-FE, and PE-FE). Instead, the public source and destination addresses of the involved media flow received by the PE-FEs in the media path are required to be used.

## 10 Inter-operator communications


### 10.1 End-to-end QoS control

There are two scenarios for passing the QoS information for a given service over an end-to-end path:

- 1) In scenario 1, the QoS requirements for a given service can be passed over the end-to-end path through application layer signalling or through the Ri reference point.
- 2) In scenario 2, the QoS requirements for a given service can be passed over the end-to-end path through path-coupled QoS signalling (e.g., RSVP-like).

In both scenarios, inter-operator RACF communications may not be needed. Because application layer signalling or path-coupled QoS signalling can pass the QoS information between different operators' domains, the RACF in each operator's domain can work independently, without any inter-operator RACF communications via the Ri reference point.



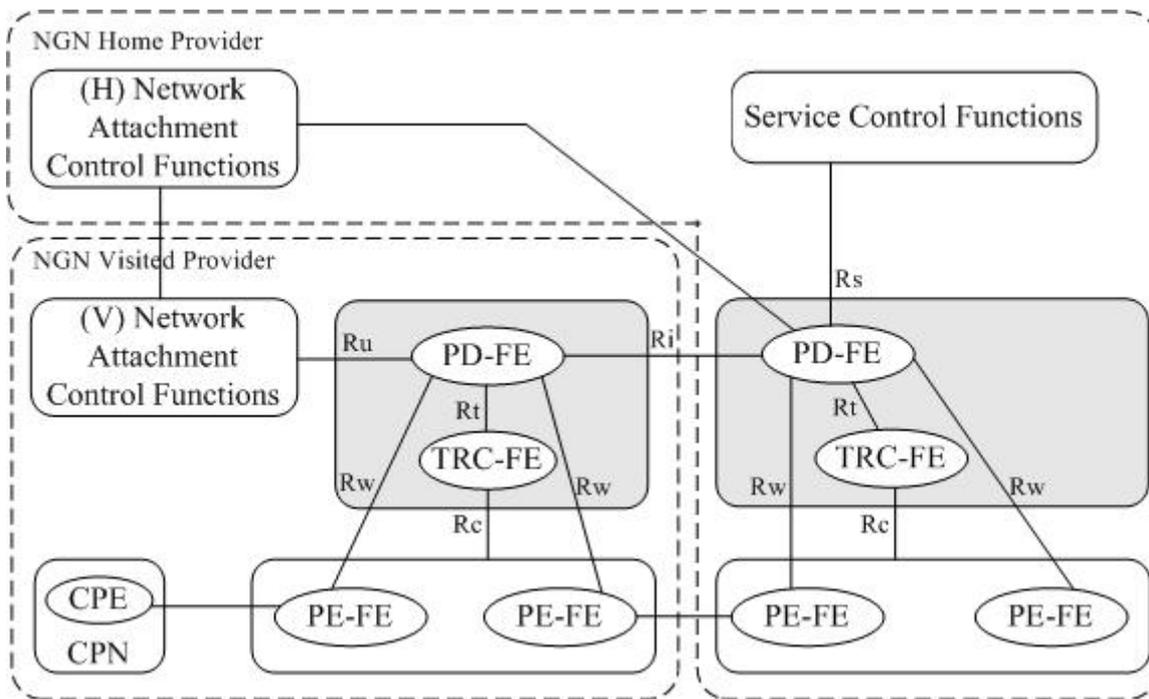

**Figure 29 – Inter-operator communications for nomadicity scenario**

NOTE – Inter-NACF communication across domains is outside the scope of this Recommendation.

## 11 Security considerations and requirements

This clause describes security threats and potential attacks and defines security requirements for RACF. The security requirements are based on [b-ITU-T Y.2701]. These considerations are relevant only insofar as the reference points are concerned; the internal security of each RACF is controlled by the security policy rules set forth by the owner of a specific network.

### 11.1 Overview of threats and potential attacks

The taxonomy of generic threats and their applicability to RACF are as follows:

***Destruction of information:*** This threat refers to the deletion of information pertaining to RACF operations, such as transaction state information, resource usage information, accounting information, topology information, or policy rules. An example of potential consequences is that, when the information about the existence (or availability) of a particular resource has been destroyed, the resource effectively becomes unavailable. (This is one aspect of the interruption or denial of services described below.)

***Corruption or modification of information:*** This threat has three aspects:

- 1) Corruption of the recorded resource information (or policy rules) so that such data are rendered meaningless or unusable. This can result in a total loss of resource information or policy rules, which is in itself a threat to the reliability of the RACF.
- 2) Undetected modification of the recorded resource information or policy rules so that such data appear to be meaningful. This can result in theft of service, degradation of service, loss of service, or fraudulent accounting, or any combination of the above.
- 3) Corruption or modification of a signalling message, with the same results as the above.

**Theft, removal, or loss of information:** This threat refers to the theft or loss of recorded resource information. It may result in 1) violation of a subscriber's privacy (in case of theft of subscriber information), 2) theft of service, and 3) degradation, interruption, and, ultimately, unavailability of service (in case of the loss of information).

Theft-of-service attacks can be achieved through *repudiation*, that is the denial that a certain transaction has taken place.

**Disclosure of information:** This can take place because of the interception of the signalling messages or because of granting access to an illegitimate user. The consequence is the same as in the case of theft, removal, or loss of information.

**Interruption of services:** This threat is typically realized through a denial of service (DoS) attack. Such attacks can make the RACF partially or totally unavailable. Specifically, the resources (including the computing power) can be exhausted by forcing it to process too many requests, or by authorization of illegitimate requests. A few known DoS attacks involve:

- 1) *Replaying* the resource request (or response) messages;
- 2) *Injection* or *modification* of the resource request (or response) messages; and
- 3) *Flooding*, where an adversary sends a large number of resource requests. The processing of such requests may exhaust the resources, rendering them unavailable for QoS requests from the legitimate users.

A number of well-known security mechanisms have been either proven or deemed appropriate for mutual authentication and provision of integrity and confidentiality. Transport layer security (TLS) [b-IETF RFC 2246] and IPsec [b-IETF RFC 4301], [b-IETF RFC 2403], [b-IETF RFC 2404], [b-IETF RFC 2405], [b-IETF RFC 4304], [b-IETF RFC 4305], [b-IETF RFC 4307], [b-IETF RFC 4308], [b-IETF RFC 2410], and [b-IETF RFC 2412] protocols already employ such mechanisms for provision of the transport and network layer security, respectively. Various aspects of the use of these protocols are also described in [b-ITU-T Y.2701]. In addition, networks can employ back-end authentication, authorization, and accounting (AAA) servers, which keep the information necessary for these functions.

Denial of service (DoS) attacks, however, cannot be prevented. They can only be mitigated.

## 11.2 Security requirements

The major security requirements for RACF are:

- 1) Protection of the signalling exchange in support of resource requests
- 2) Protection of the information contained in all RACF entities involved in this exchange
- 3) Ensuring the availability and overall expected performance of the RACF
- 4) Prevention of illegitimate access to RACF:
  - RACF is required to take the threats identified in clause 11.1 into account, and is required to include measures to counter relevant attacks.
  - In particular, mechanisms are required to be explicitly defined for mitigation of the flooding attack. Even in the presence of a DoS attack, RACF is required to retain its availability.
  - Any two entities located in different trust environments (e.g., PD-FE and SCF) are required to authenticate each other before a security association is established. This requires special treatment in support of redundancy (which may, in turn, be needed to ensure reliability or performance or both). If the service of RACF or any of its components is replicated, an entity that communicates with any such replica is required to use the same authentication information. With that, an eavesdropper is required to be unable to repeat a recorded authentication handshake with another replica.

- During the association, all messages are required to be protected against insertion, deletion, or replay.
- Depending on a specific reference point, the confidentiality protection of the messages may be left optional; however, the integrity of all messages is required to be protected. The decisions are recommended to be made for specific reference points, and they are recommended to leave open a choice of standard cryptographic algorithms to be used in support of confidentiality or integrity.
- Non-repudiation is required to be supported for all requests (unless specifically overridden by a PD-FE policy rule in effect).
- A reference point between un-trusted domains is recommended to make use of commonly used firewall functions.
- Except for the DoS *flooding* attack, which is systemic, the above requirements are required to be implemented using existing secure-channel mechanisms such as TLS or IPsec (or both) to ensure that well-tested security mechanisms are used.

## Appendix I

### Examples of the implementation of the RACF architecture

(This appendix does not form an integral part of this Recommendation)

This appendix provides examples of the RACF architecture implementation.

From the viewpoint of the end-to-end association between functional entities of RACF, there are different approaches for QoS control. One is the approach in which the RACF performs the QoS control with the intermediation of the SCF (Figure I.1). Another is the approach in which the RACF performs the QoS coordination at the RACF level without the intermediation of the SCF (Figure I.2). There is also a specific case where both access and core networks are managed by the same operator (Figure I.3). The implementation and physical configuration of PE-FE in transport functions is flexible, and outside the scope of this appendix.

#### Example 1 (Figure I.1)

Access networks and core networks are in separate administrative domains, the SCF communicates with and controls both PD-FEs in access and core networks via Rs reference points. There is no information exchange between the two PD-FEs in the access and core networks. QoS coordination is performed at the SCF level.


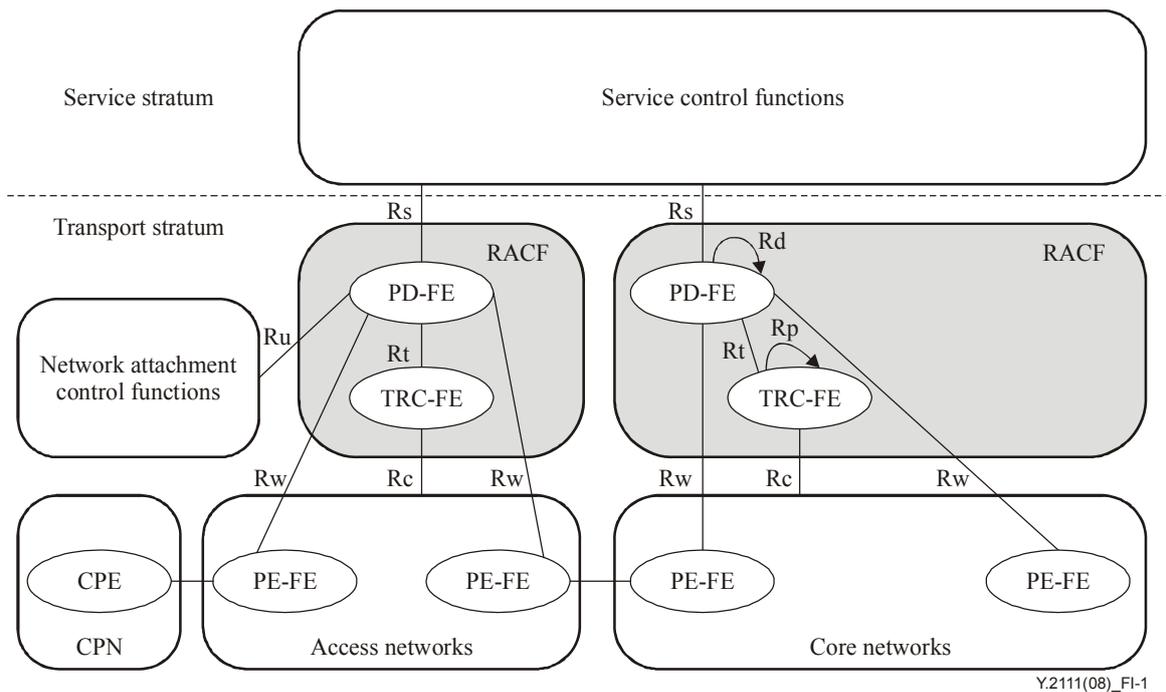


Figure I.1 – Example 1

#### Example 2 (Figure I.2)

Access networks and core networks are in separate administrative domains. There is no information exchange between the SCF and PD-FEs in the access networks, and SCF communicates with the PD-FE only via the PD-FE in core networks. The PD-FEs in access and core networks communicate via the Ri reference point. QoS coordination is performed at the RACF level.


Note the details of the Ri interface are for further study.

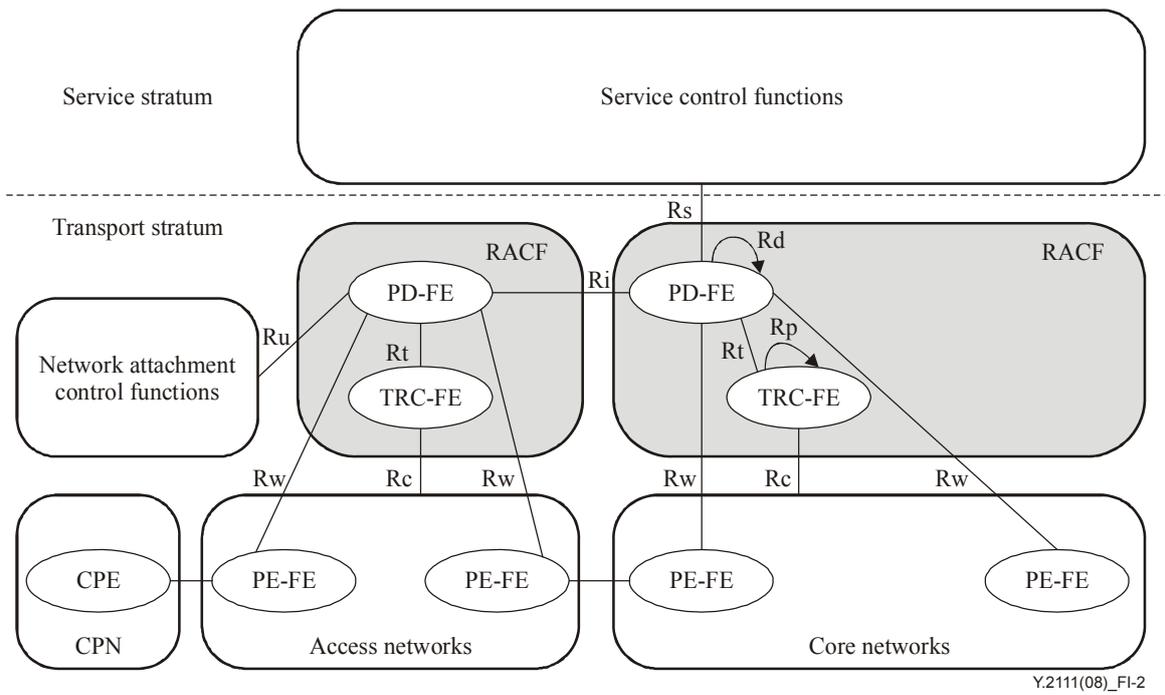

**Figure I.2 – Example 2**

**Example 3 (Figure I.3)**

This example describes a specific case where access and core networks are managed by the same operator (access networks and core networks are in a single administrative domain). The PD-FE communicates with and controls both TRC-FEs in access and core networks, and the PD-FE controls both PE-FEs in access and core networks.

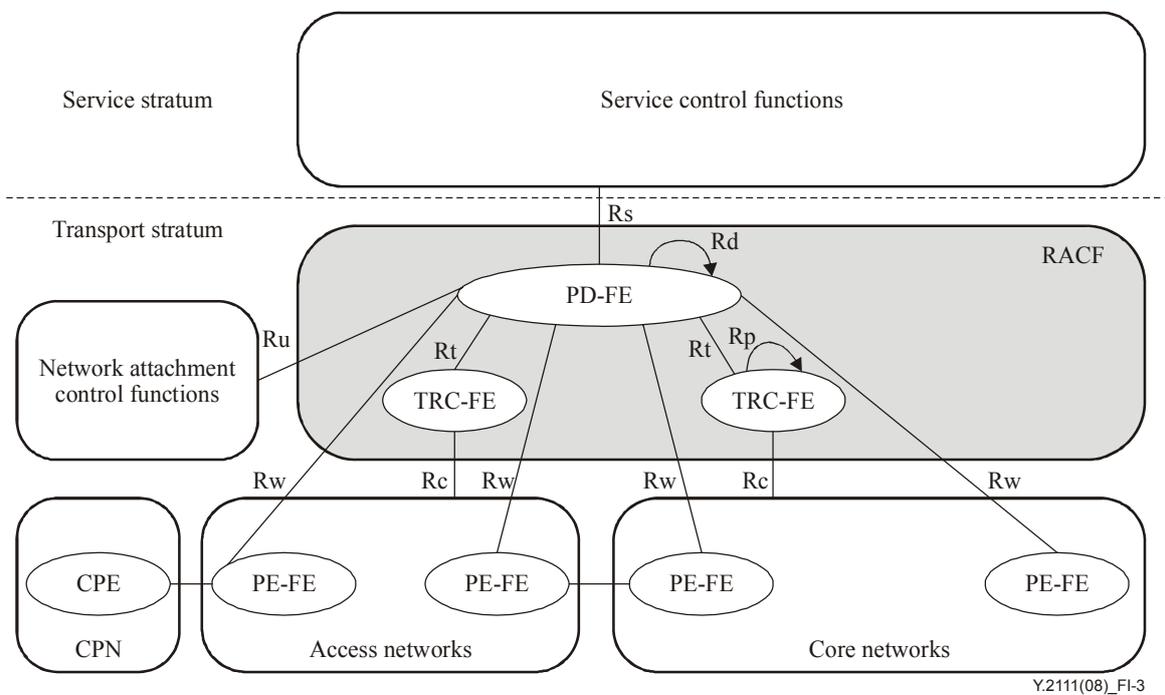

**Figure I.3 – Example 3**

## Appendix II

### TRC-FE over different transport technologies

(This appendix does not form an integral part of this Recommendation)

This appendix describes examples of TRC-FE implementation over different transport technologies, including IP, MPLS, Ethernet and broadband wireless.

#### II.1 TRC-FE over IP network

In an IP network without MPLS support, most nodes can only handle packets in the conventional IP routing way. Routing and forwarding of all traffic is under the control of conventional IP routing protocols and IP Diffserv [b-IETF RFC 2475]. If TRC-FE is implemented, the admission control and resource allocation are dynamically applied with the link-by-link resource reservation.

One or multiple TRC-FE instances are deployed to directly manage all of the physical link resources within an administrative domain. A TRC-FE instance holds and maintains a network topology and resource database (NTRD) of a sub-domain or area within its purview. Based on the information in the NTRD, the TRC-FE instance handles route look-up, link-by-link resource allocation and admission control for each media flow that requires a QoS guarantee. If a media flow is admitted with high priority, it will not interfere with other traffic. If multiple TRC-FE instances are deployed in a domain, they interact with each other through the Rp reference point.

#### II.2 TRC-FE over MPLS network

In a packet network with MPLS support, most nodes can handle packets in the label switching way. LSP technology is used to pre-provision a virtual MPLS transport network (VMTN) for each service type over the underlying packet network infrastructure, either manually or automatically through RSVP-TE or CR-LDP protocol. (Diffserv-aware) MPLS TE [b-IETF RFC 2702], [b-IETF RFC 3272], [b-IETF RFC 3346], [b-IETF RFC 3564] and [b-IETF RFC 4124] can be applied for optimizing network performance. The topology planning and bandwidth reservation of a VMTN depends on the traffic metering and forecasting, network policy rules, and SLAs. For purposes of LSP protection, capacity changes and network performance optimization, VMTN can be adjusted automatically or manually in accordance with traffic engineering constraints. The admission control, route selection, resource allocation and label forwarding for the media flows belonging to a service type are dealt within the same one VMTN.

One or multiple TRC-FE instances are deployed to manage the bandwidth resources of each VMTN or all VMTNs within an administrative domain. A TRC-FE instance records and maintains a network topology and resource database (NTRD) separately for each VMTN within its purview. Based on the NTRDs and policy rules, the TRC-FE instance makes intra-domain route selection, resource allocation and admission control for a media flow within its corresponding VMTN. If multiple TRC-FE instances are deployed for one VMTN in a domain, they interact with each other through the Rp reference point.

The QoS route for a media flow specified by the TRC-FE instance is a label stack that represents a concatenated LSP set. The edge router encapsulates the packets with this label stack, which in turn makes the intermediate transit routers forward the packets of a media flow along the specified route with the specified priority.

#### II.3 TRC-FE over Ethernet network

In an Ethernet network, most nodes handle packets in the Ethernet MAC bridging or virtual bridged way. Generally, only edge nodes are IP-capable. The admission control and resource allocation are dynamically applied with the Ethernet link-by-link resource reservation.

One or multiple TRC-FE instances are deployed to directly manage all of the physical link resources within an Ethernet network. A TRC-FE instance holds and maintains a link layer network topology and resource database (NTRD) for the whole network. Based on the information in the NTRD, the TRC-FE instance makes admission control and resource allocation to ensure that sufficient resources are available within the network for the admitted flows. If multiple TRC-FE instances are deployed in a domain, they interact with each other through a protocol for master/standby communication or load balancing.

#### **II.4 TRC-FE over broadband wireless network**

In a broadband wireless network, mobile nodes handle packets through the wireless MAC protocol. Broadband wireless MAC protocol provides QoS signalling mechanisms such as the connection setup bandwidth request uplink information. The QoS classes for QoS signalling define four QoS services: unsolicited grant service (UGS) used for CBR-like service flows, real-time polling service (rtPS) used for rt-VBR-like service flows, non-real-time polling service (nrtPS) used for non-real-time service flows, and best effort service (BE). Efficient queuing policy rules for such different QoS classes can support priority scheduling and dynamic bandwidth allocation.

Therefore, TRC-FE can be applied for the resource control to provide priority scheduling and dynamic bandwidth allocation. TRC-FE manages the access transport resource based on a network topology and resource database (NTRD). As a result, the admission control and resource allocation are dynamically applied according to each media flow with different QoS requirements.

One or multiple TRC-FE instances are deployed to directly manage the bandwidth resources within an administrative domain. A TRC-FE instance records and maintains a network topology and resource database (NTRD) for the whole network. Based on the information in the NTRD, the TRC-FE instance realizes admission control and resource allocation to maintain QoS levels and fairness for media flows of different applications, thus achieving high resource utilization. If multiple TRC-FE instances are deployed in a domain, they interact with each other through Rp reference point for master/standby communication or load balancing.

## Appendix III

### Example of methods for detecting and determining resource availability in TRC-FE

(This appendix does not form an integral part of this Recommendation)

This appendix provides high-level descriptions of the example of methods by which TRC-FE may detect and determine whether requested resources are available.

If the accounting-based method is deployed, the TRC-FE checks whether sufficient resources are available in the transport function by comparing the transport function capacity with the bandwidth (or the number of sessions) already assigned. If the transport function has the required resources, the TRC-FE updates the resource status information to include the new application request and returns a positive response to the PD-FE. If the transport function does not have the required resources, the TRC-FE returns a negative response to the PD-FE.

If the out-of-band measurement-based method is deployed, the TRC-FE admits service requests based on resource status information obtained through periodic polling of routers or switches. To handle high-volume service requests, the TRC-FE can compute admission rules based on the most recent resource measurements, and apply these rules when the PD-FE requests a resource availability check. An example of the TRC-FE admission rules is to block a certain fraction of service requests between a pair of PE-FEs. The TRC-FE admission rules are updated based on transport function resource utilization information obtained through out-of-band measurements. Note that in the out-of-band measurement-based method, there is no need to reserve resources per service request. Furthermore, the TRC-FE admission rules can be uploaded to the PD-FE so that the PD-FE can apply the rules locally without consulting the TRC-FE per service request. The rules cached in the PD-FE are updated by the TRC-FE to reflect the changes in the resource usage in the transport function.

If the in-band measurement-based method is deployed, the TRC-FE admits service requests based on network performance information obtained using active probes or other in-band performance measurement mechanisms. The probing can be done when PD-FE requests a resource availability check or can be done periodically independent of the PD-FE requests. In the latter case, TRC-FE can compute admission rules similar to those suggested for the out-of-band measurement-based method. These rules can be cached in the PD-FE and updated to reflect rule changes. Note that with the in-band measurement-based method, there is no need to reserve resources per service request. Such caching is a challenge to PD-FE, because there are many TRC-FE instances in access networks and core networks with different transport technologies.

With the reservation-based method, the TRC-FE explicitly requests bandwidth reservation from the transport functions. To handle high-volume service requests, the TRC-FE can compute admission rules based on per-aggregation resource reservation, and apply these rules when the PD-FE requests a resource availability check. Note that per-session resource reservation is inefficient, so per-aggregation resource reservation is applied in a pre-configuration way and can be adjusted based on the resource usage.

The MPM (measurement of performance management described in [b-ITU-T Y.2173]) can measure and collect in real-time the performance information such as bandwidth as well as other performance attributes like one-way delay, delay variation, and packet loss ratio. If the MPM-based method is deployed, the TRC-FE admits service requests based on performance information obtained by the MPM. The information can be collected when the PD-FE requests a resource availability check or can be done periodically independent of the PD-FE requests. In the latter case, the TRC-FE can compute admission rules similar to those suggested for the out-of-band measurement-based method. These rules can be cached in the PD-FE and updated to reflect rule changes. Note the requirement for resource reservation per service requests and other details on how to interact with the MPM is for further study.

## Appendix IV


### Examples of admission control procedures for unicast and multicast

(This appendix does not form an integral part of this Recommendation)

#### IV.1 Examples of admission control procedures for unicast and multicast

When the CPE requests multicast service (e.g., broadcast TV) to transport functions via transport-level signalling (e.g., IGMP, MLD) while requesting unicast service (e.g., video on demand or bandwidth on demand) to SCF via service-level signalling, in order to accommodate the performance requirement (e.g., channel zapping), the MTCF, MRF and a local TRC-FE instance co-locate in the same physical node for admission control.

Figure IV.1 illustrates the reference architecture:

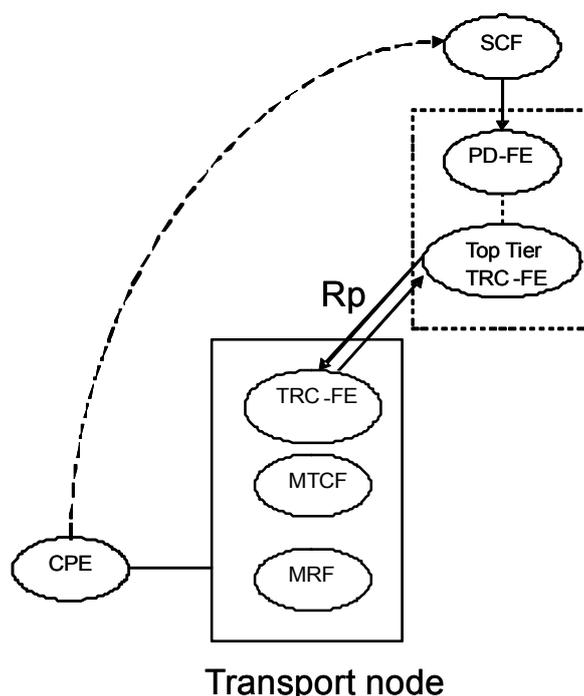

**Figure IV.1 – Reference architecture for unicast and multicast admission control**


In this scenario, all multicast flows reach access node. The MTCF is located within transport node (i.e., access node). The resource admission decision is made based on the resources of access loop. The MTCF processes multicast request (e.g., IGMP or MLD), parses the message and sends the trigger for resource admission to the co-located TRC-FE. The co-located TRC-FE is responsible for the resource admission control for pertinent network segment (e.g., access network) and makes the resource decision based on the resource availability. The top-tier TRC-FE is responsible for overall resource admission control across multiple network segments through the interaction with co-located TRC-FE. The interaction between top-tier TRC-FE and co-located TRC-FE through the Rp reference point operates in either outsourcing or designating mode depending on resource admission control approaches deployed in the network.

#### IV.1.1 Admission control for fully shared resources between unicast and multicast

In this case, the resources are fully shared by unicast and multicast services in a specific network segment, a co-located TRC-FE in the transport node is responsible for resource admission control for both unicast and multicast services over that network segment.

For multicast services, the co-located TRC-FE makes a final decision to authorize the multicast resource request from the MTCF immediately without interaction with the top-tier TRC-FE. For unicast services, the top-tier TRC-FE is required to query the co-located TRC-FE for resource availability and make a final decision based on the result of resource admission control in the co-located TRC-FE, i.e., the outsourcing mode is used for this case.

*Scenario 1*

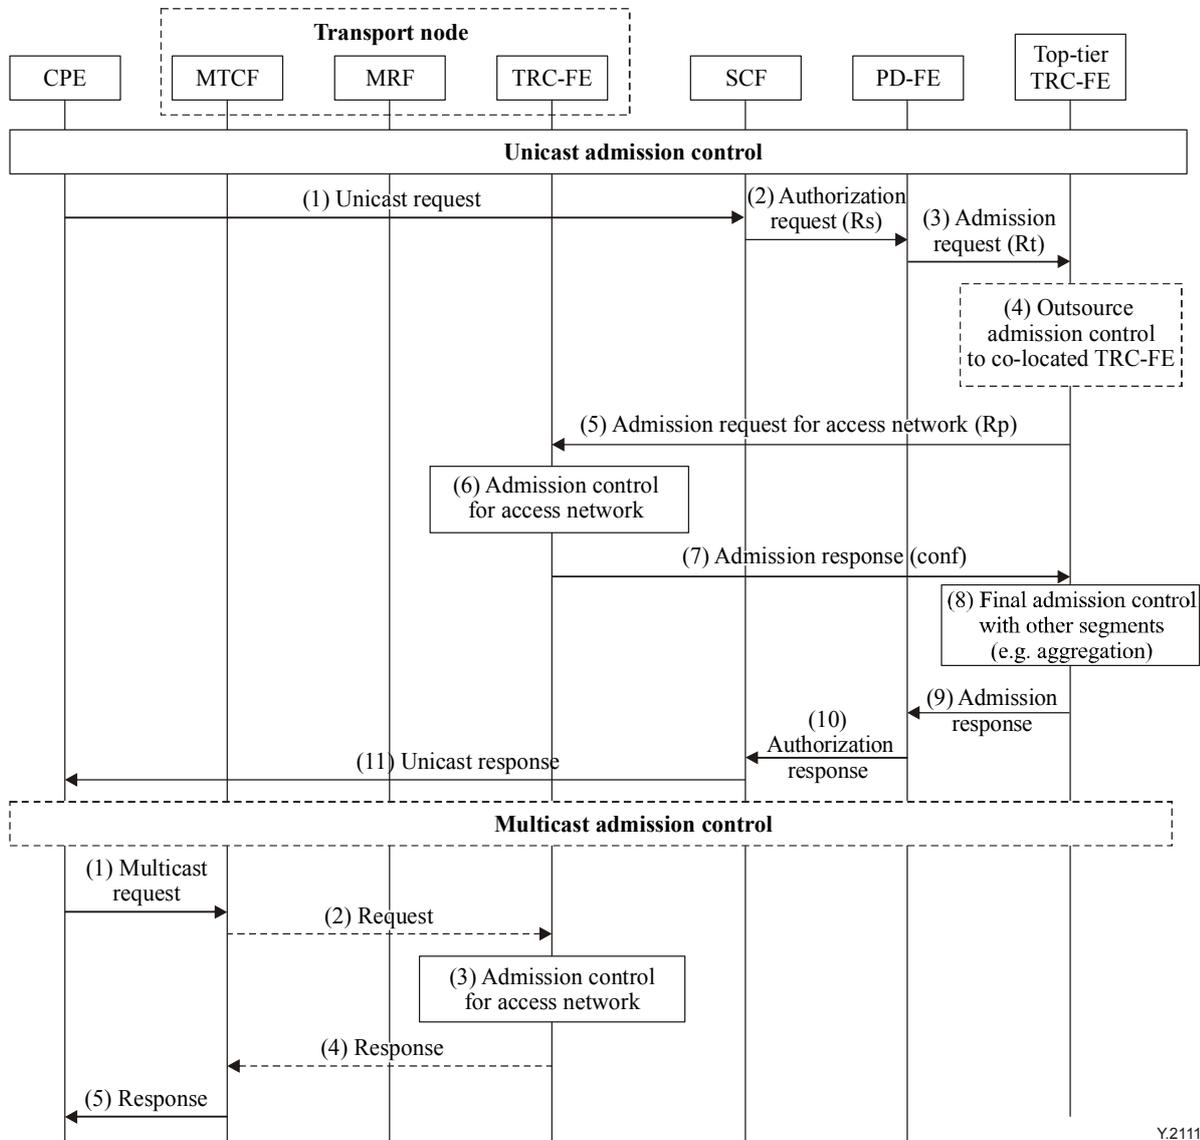

Y.2111(08)\_FIV-2

**Figure IV.2 – Unicast and multicast admission control for fully shared resources**

**For unicast services:**

- 1) CPE sends a request (e.g., SIP Invite) to the SCF.
- 2) SCF initiates an authorization request to the PD-FE.
- 3) PD-FE performs network policy authorization and sends a resource admission request to top tier TRC-FE that serves as the single point of contact for resource admission control.
- 4,5) Top tier TRC-FE identifies specific co-located TRC-FE and forwards the request; meanwhile, top tier TRC-FE performs the resource availability checking in other segments, e.g., aggregate network.
- 6) Co-located TRC-FE performs resource admission control for first mile and AN node (maybe upstream of second mile as well).
- 7) Co-located TRC-FE responds to top tier TRC-FE with local admission decision.
- 8) Top tier TRC-FE makes final resource admission decision based on the result of local TRC-FE in AN and result of resource admission for other segments.
- 9) Top tier TRC-FE responds to the PD-FE with resource admission decision.
- 10) PD-FE may perform other policy control and respond to SCF.
- 11) SCF replies to CPE or forwards the request to next hop.

**For multicast services:**

- 1) CPE sends a multicast request (e.g., IGMP join) to AN.
- 2) The multicast signalling function in AN processes the multicast message, e.g., IGMP join request, and sends a request to co-located TRC-FE if the channel is not yet available in AN associated with the corresponding end-user.
- 3) Co-located TRC-FE performs resource admission control on multicast resources associated at the first-mile with the corresponding end user and decides if the enforcement operation (e.g., media replication) is required.
- 4,5) Co-located TRC-FE responds to MTCF that responds to CPE or forwards to next hop.


*Scenario 2*

When the share resource approach is deployed, i.e., no dedicated resources are allocated to multicast services and the resources are fully shared by unicast and multicast services in a specific network segment, a co-located TRC-FE in the transport node is responsible for resource admission control for multicast services over that network segment and a top-tier TRC-FE is responsible for resource admission control for unicast services.

For multicast services, the co-located TRC-FE makes resource admission control based on the available resource upon receipt of a multicast request for joining a multicast group (e.g., IGMP, etc.). If the available resource is sufficient for the requested resource, the co-located TRC-FE admits the request and reports the resource status information of the specific network segment to the top-tier TRC-FE according to the predefined policies (e.g., after admission, periodically, etc.). Upon receipt of the report of resource status, the top-tier TRC-FE makes resource admission decision for unicast services based on the updated resource status information. Note the top-tier TRC-FE maintains the consistency of the resource status information.

For unicast service, the top-tier TRC-FE makes resource admission control based on the available resource. If the available resource is sufficient for the requested resource, the top-tier TRC-FE admits the request and implements the resource policy on the transport node of the specific network segment. The co-located TRC-FE in the transport node updates the resource status information of the specific network segment based on the implemented resource policy.

The granularity of interaction between top-tier TRC-FE and co-located TRC-FE can be either at per session level or at aggregate level.

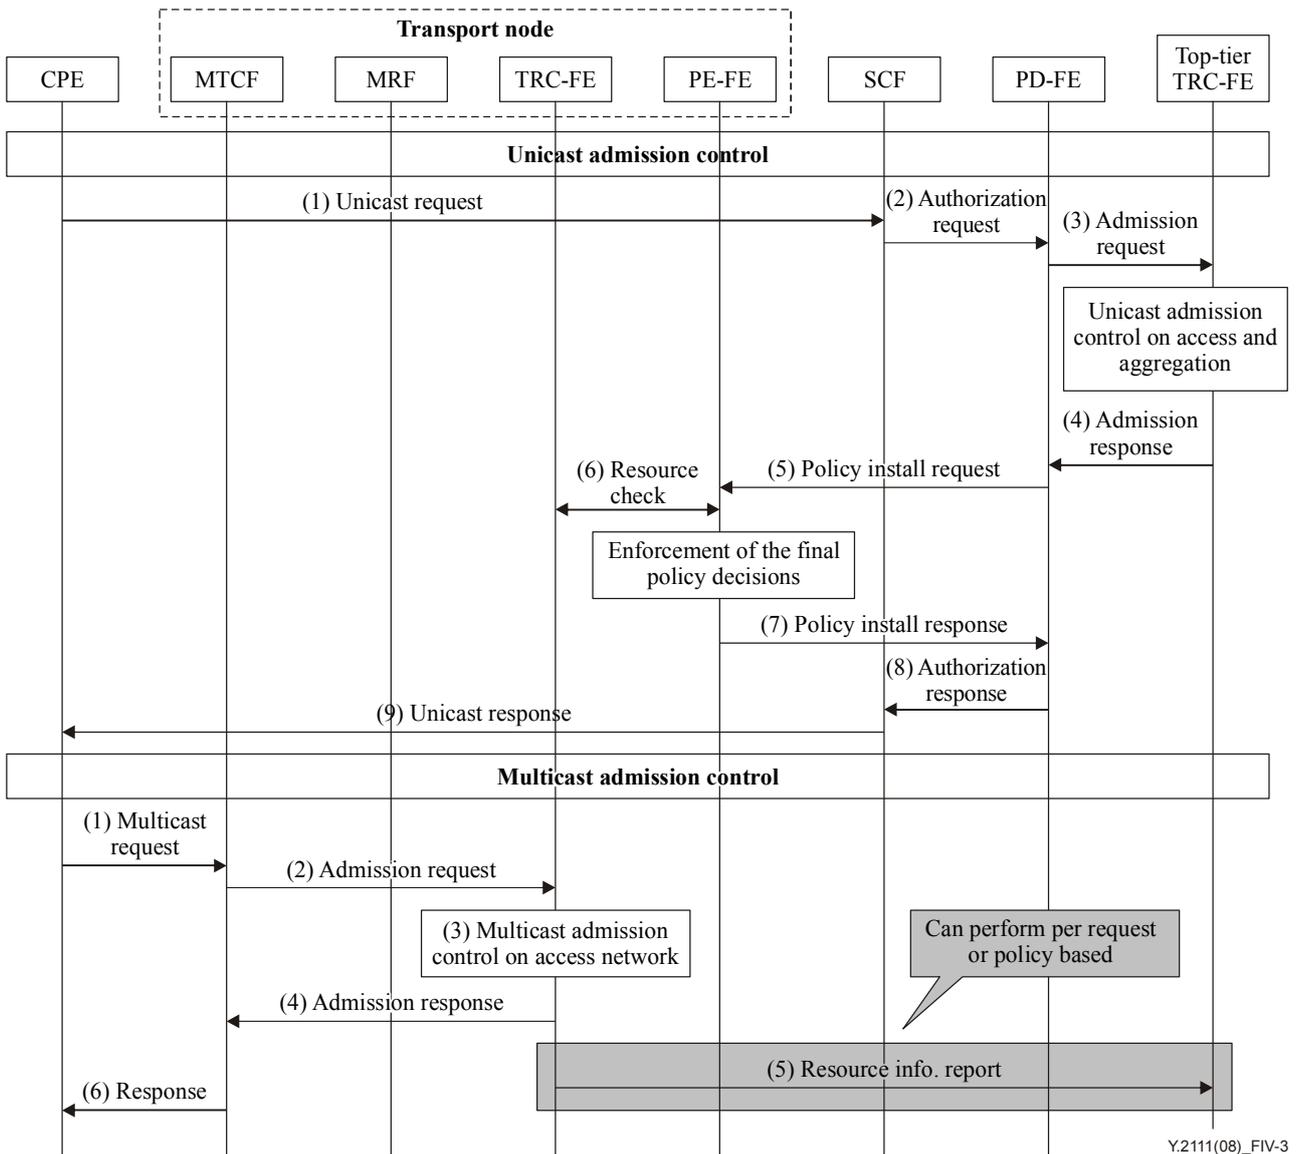

Y.2111(08)\_FIV-3

**Figure IV.3 – Unicast and multicast admission control for reporting resource**

**For unicast services:**

- 1) CPE sends a request (e.g., SIP Invite) to the SCF.
- 2) SCF initiates an authorization request to the PD-FE.
- 3) PD-FE performs network policy authorization and sends a resource admission request to top-tier TRC-FE that serves as the single point of contact for resource admission control. Top-tier TRC-FE checks the network and subscriber policy against the request and does admission control on both aggregation and access segment.
- 4) Top-tier TRC-FE sends the response to PD-FE.
- 5) PD-FE sends policy install request to PE-FE.
- 6) PE-FE informs the resource check of the access line to the co-located TRC-FE to assure if co-located TRC-FE has enough resource for the resource request and accord the resource information with top-tier TRC-FE.
- 7) PE-FE enforces the policy decisions and sends the policy install response to PD-FE.
- 8) PD-FE may perform other policy control and respond to SCF.
- 9) SCF sends unicast response to CPE.

**For multicast services:**


- 1) CPE sends a multicast request (e.g., IGMP join) to AN.
- 2) The multicast signalling function in AN processes the multicast message e.g., IGMP join request and sends a request to co-located TRC-FE if the channel is not yet available in AN associated with the corresponding end-user.
- 3) Co-located TRC-FE performs resource admission control on multicast resources associated at the first-mile with the corresponding end user and decides if the enforcement operation (e.g., media replication) is required.
- 5) Co-located TRC-FE sends resource information report to top tier TRC-FE to inform the resource usage on access line.
- 4,6) Co-located TRC-FE responds to MTCF that responds to CPE or forwards to next hop.

**IV.1.2 Admission control for adjustable resources between unicast and multicast**

In this case, the dedicated resources are pre-provisioned to unicast and multicast services respectively in a specific network segment, the threshold of aggregate resources are adjustable based on network policy and resource status. A co-located TRC-FE in the transport node is responsible for resource admission control for unicast and multicast services, respectively, according to pre-provisioned resource budget and network policy, i.e., designating mode is used.

For multicast services, based on resource availability within pre-provisioned threshold, the co-located TRC-FE makes final decision to authorize the multicast resource request from the MTCF immediately without interaction with top-tier TRC-FE. For unicast services, the top-tier TRC-FE makes a final decision based on resource availability within pre-provisioned threshold. When the resources reach the threshold, either top-tier TRC-FE can authorize the increase or decrease of the threshold to co-located TRC-FE directly or the co-located TRC-FE can request the increase or decrease of the threshold from top-tier TRC-FE.

For reducing the channel zapping time for BTV service, the co-located TRC-FE, based on the provider policy, admits the request and marks the multicast flow as low priority when the multicast resources reach the threshold. Meanwhile, the co-located TRC-FE requests the top-tier TRC-FE to allocate more resource for multicast service. If the request is admitted by the top-tier TRC-FE, the co-located TRC-FE remarks the admitted multicast flow as the priority corresponding to the requested service; otherwise, the co-located TRC-FE, based on the provider policy, terminates the multicast flow.

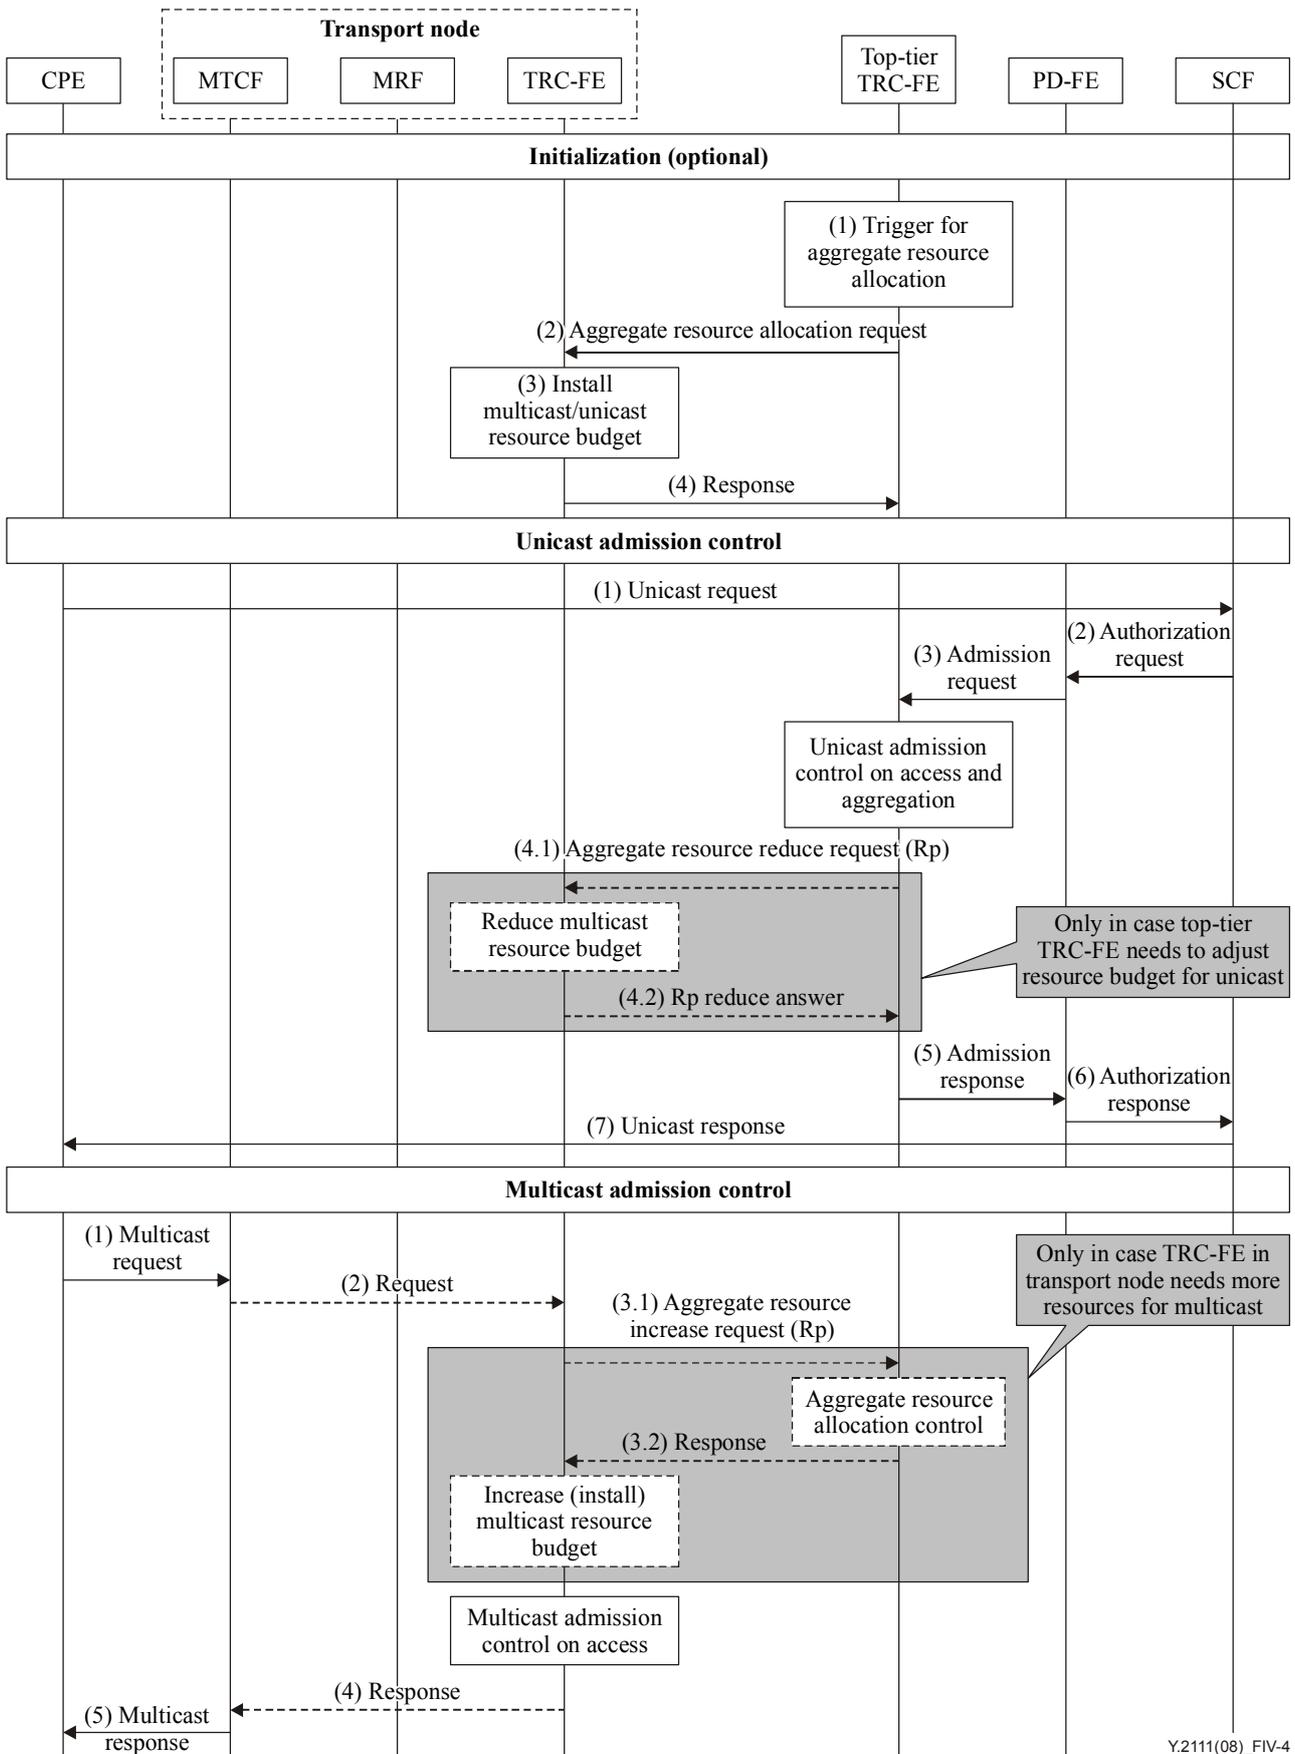

**Figure IV.4 – Unicast and multicast admission control for adjustable resources**

**Initialization (Optional):**

- 1) A trigger occurs towards top tier TRC-FE for provisioning the aggregate resource budget for multicast and unicast service.
- 2) Top tier TRC-FE sends the request to co-located TRC-FE to install the resource budget.
- 3) The co-located TRC-FE installs the resource budget.
- 4) The co-located TRC-FE sends a confirmation to top tier TRC-FE.

**For unicast services:**


- 1) CPE sends a request (e.g., SIP Invite) to the SCF.
- 2) SCF initiates an authorization request to the PD-FE.
- 3) PD-FE performs network policy authorization and sends a resource admission request to top tier TRC-FE that serves as the single point of contact for resource admission control. Top tier TRC-FE performs the resource admission control based on pre-provisioned resource budget and resource availability in other segments, e.g., aggregate network.
- 4.1) In the case top tier TRC-FE needs to adjust resource budget for unicast services, it sends a resource allocation request to co-located TRC-FE.
- 4.2) The co-located TRC-FE performs resource budget adjustment for first mile and AN node (maybe upstream of second mile as well) and responds to top tier TRC-FE.
- 5) Top tier TRC-FE makes final resource admission decision based on the result of co-located TRC-FE in AN and result of resource admission for other segments and responds to the PD-FE with resource admission decision.
- 6) PD-FE may perform other policy control and respond to SCF.

**For multicast services:**

- 1) CPE sends a multicast request (e.g., IGMP join) to AN.
- 2) The MTCF in AN processes the multicast message e.g., IGMP join request, and sends a request to co-located TRC-FE if the channel is not yet available in AN associated with the corresponding end-user.
- 3) Co-located TRC-FE performs resource admission control on multicast resources associated at the first-mile with the corresponding end user and decides if the enforcement operation (e.g., media replication) is required.
- 3.1) In the case co-located TRC-FE needs to adjust resource budget for multicast services, it sends a resource allocation request to top tier TRC-FE.
- 3.2) The top tier TRC-FE performs resource budget adjustment and responds to co-located TRC-FE.
- 4,5) Co-located TRC-FE responds to MTCF that responds to CPE or forwards to next hop.

**IV.2 Example of multicast resource control scenario**

In this scenario, multicast resource control is performed on a bundle of channels basis. Within a bundle, all channels have the same authorization and charging policy. The user sends a service request to IPTV server to access IPTV service. Upon receipt of the request, service provider can request network provider via RACF to activate the policy of the requested bundle of channels on transport node. Then the user can use transport signalling to select channels in the bundle without triggering the resource authorization and reservation process for each individual TV channel. By this means, it can achieve the goal of fast channel changing.

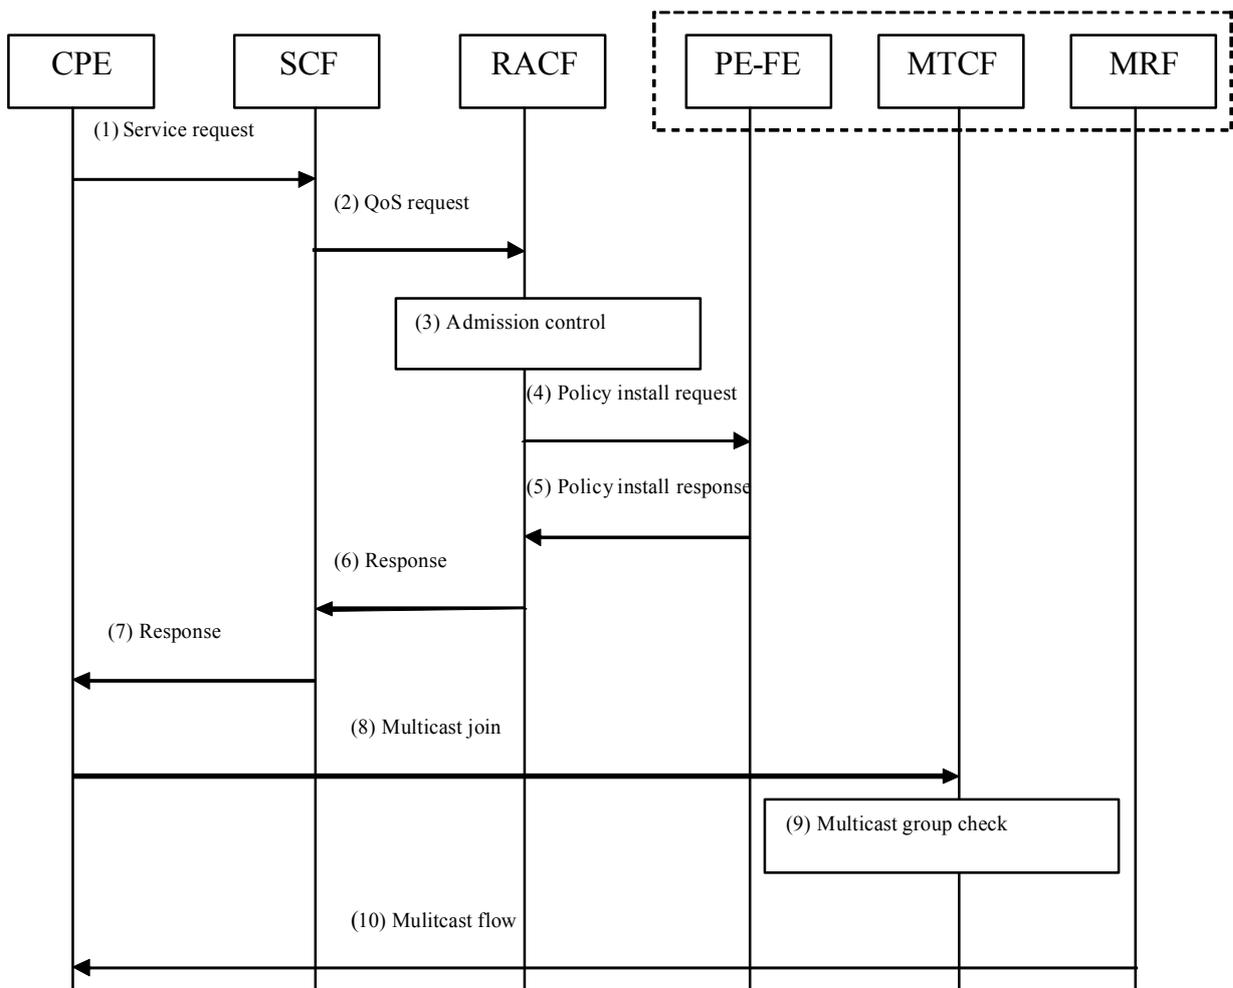

**Figure IV.5 – Example of multicast resource control**

- (1) The CPE initiates a service request to the SCF. The request is for a set of channels which have the same QoS requirement, authorization and charging policy. There is an identifier in the request to present the requested bundle.
- (2) The SCF extracts the QoS requirements for the set of channels from the service request and requests the resource authorization and reservation from RACF by sending a QoS request to RACF.
- (3) The RACF performs authorization and admission control based on policy rules, resource admission decision and transport subscription profile.
- (4) The RACF sends the policy install request to the PE-FE for the set of channels. The mapping of the bundle and the set of channels may be pre-installed in the PE-FE. In this case, the RACF sends an indicator to activate the bundle instead of installing the policies for each individual channel.
- (5) The PE-FE sends the policy install response to the RACF.
- (6) The RACF sends the response to SCF.
- (7) The SCF sends the response to CPE. If it is a positive response, an application session (i.e., application session for IPTV services) is established between SCF and CPE.
- (8) The CPE requests a TV channel by sending transport signalling (e.g., IGMP JOIN) to transport functions (i.e., MTCF).
- (9) Upon receiving the transport signalling (e.g., IGMP JOIN), the MTCF checks if the requested multicast group belongs to the authorized multicast groups included in the requested service bundle.
- (10) The MRF replicates the requested multicast flow to the CPE.




- Traffic policing and shaping.
- Mapping of IP-layer QoS information onto link layer QoS information based on predefined static policy rules (e.g., setting 802.1p priority values).
- Collecting and reporting resource usage information (e.g., start-time, end-time, and octets of sent data).

In this scenario, the CPN gateway only has a special policy enforcement functional entity (CGPE-FE) controlled by the RACF at the network side. The RACF at the network side is required to support two QoS resource control modes: PULL mode and PUSH mode. The PULL mode is for further study.

**For PUSH mode**, the application within CPE/CPN sends a service request to the SCF including resource requirements. The SCF then forwards the request to the RACF. Upon the request of the SCF, the RACF at the network side makes the authorization and resource control decision based on policy rules and autonomously instructs the policy enforcement functional entity in CPN gateway and the PE-FE at the network side to enforce the policy decision.

**PUSH mode (Figure V.2)**

The QoS resource reservation procedure is illustrated in Figure V.2 that is initiated by a resource initiation request from the SCF.

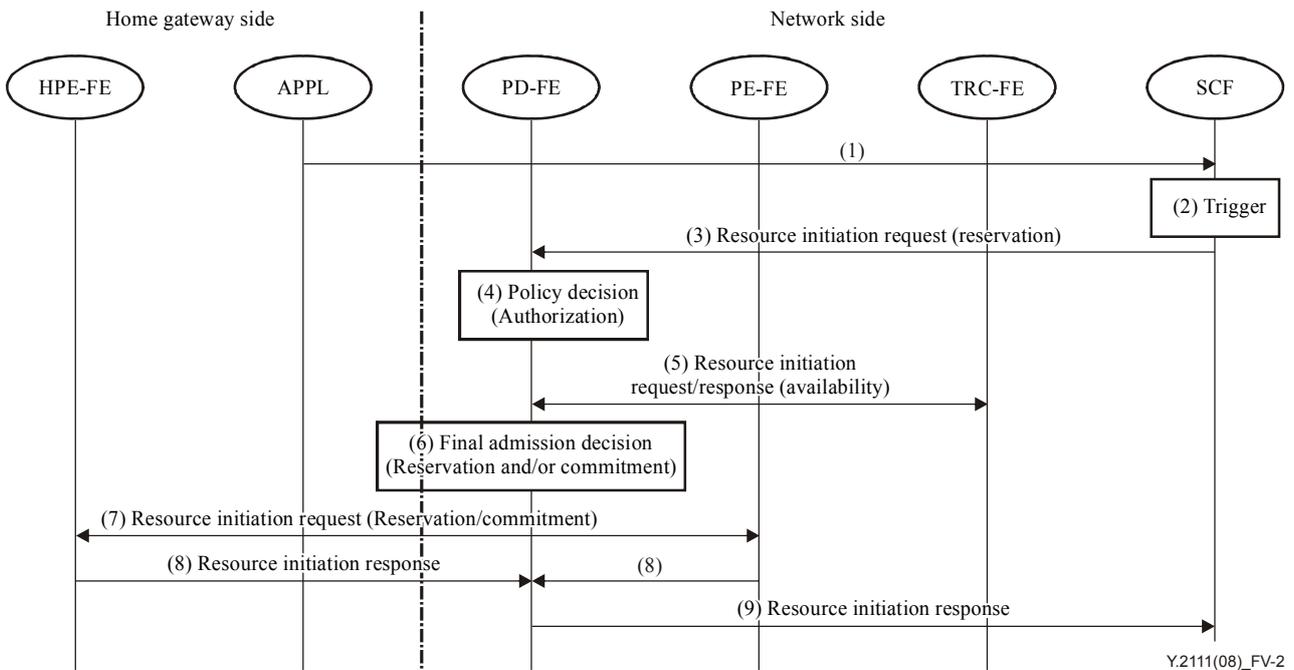

**Figure V.2 – QoS reservation procedure in Push mode of CPN gateway**



The local PD-FE performs the following functions:

- Decision point: This function checks the QoS resource request based on service information from PD-FE, network policy rules and transport subscription information, to detect and determine the requested QoS resource in CPN and access line.
- Rate limiting control (RLC).
- IP packet marking control (IPMC).
- Gate control (GC).


## Appendix VI

### Resource control deployment scenarios for multicast

(This appendix does not form an integral part of this Recommendation)

#### Scenario 1: MSCF requested multicast resource control

The multimedia multicast session management service allows for a third party (e.g., AS) to be provided with multicast presence information via a universal service interface, to control a multicast session and to manage multicast group membership. The AS plays the role of a service control function (e.g., CSCF). A request for multicast services involves exchange of signalling between the user equipment and the AS. Based on subscriber information and service request information, the AS may initialize resource allocation to the access network to which the user equipment is connected. Also the user equipment may exchange with the subscriber access network to facilitate resource allocation. In the access network, access node, edge node, and aggregation nodes in the aggregation network are required to support the transport function. In this deployment scenario, the multicast service control function is located in the AS while the multicast replication function and multicast transport control function are located in access node or edge node.

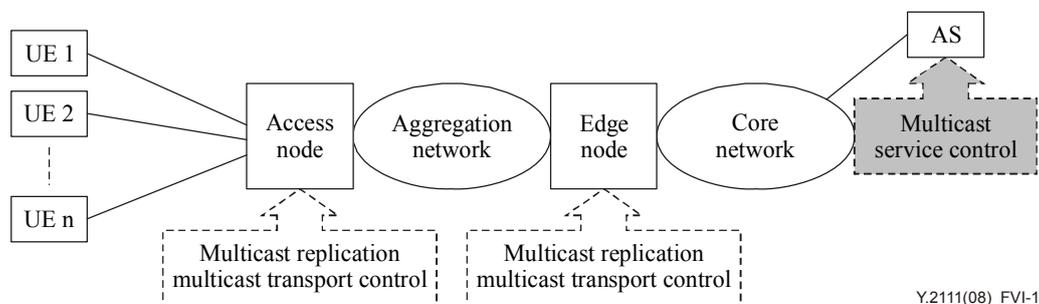


Y.2111(08)\_FVI-1

Figure VI.1 – MSCF requested multicast resource control scenario

#### Scenario 2: Multicast resource control with MTCF requested from access node

There are scenarios where reception of some video stream programs may be forbidden due to non-appropriate subscriber privileges. These scenarios may require the network provider to limit the number of streams admitted for a single UE. Admission control is required to be applied on multicast services. Request for multicast services involves exchange of signalling between user equipment and an access node which obtains subscriber privileges from a policy server residing in the edge node. The access node may receive a multicast services request. Based on subscriber privileges, the access node may reject this request or forward it to a multicast router transparently and then allow the media stream to be transferred from the multicast router to the UE. In the access network, access node, edge node, and aggregation nodes in the aggregation network are required to support the transport function. In this deployment scenario, the multicast replication function and the multicast transport control function are located in the access node.

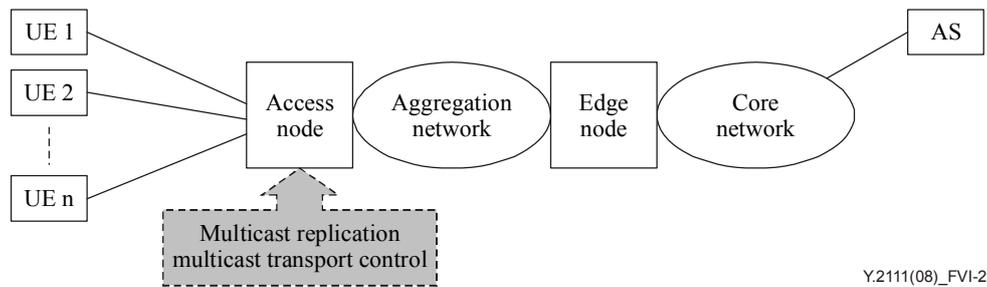


Y.2111(08)\_FVI-2

**Figure VI.2 – Access node requested multicast resource control scenario**

**Scenario 3: Multicast resource control with MTCF requested from edge node**

The limited bandwidth can only allow a certain number of channels to be carried over the access and aggregation network simultaneously. If the number of multicast channels offered to customers is greater than the number of channels that are carried over the access and aggregation network simultaneously, it usually results in traffic congestion and degradation of QoS. To address this limitation, we can guarantee the resource can be efficiently utilized by the multicast channels with higher channel priority. For this purpose (i.e., channel difference disposal), access nodes may collect user multicast behaviour information including subscriber number, programme item number, start viewing time, stop viewing time, etc. and report them to the edge node. The edge node plays both the role of multicast control function and the role of policy control function and retrieves audience rating statistics information from user multicast behaviour information. Then, based on this audience rating statistics information, the edge node can determine channel priority and provision to the access nodes. Thus, the access nodes may apply channel difference disposal based on specific channel priority. In the access network, the access node, edge node, and aggregation nodes in the aggregation network are required to support the transport function. In this deployment scenario, the edge node is required to support the multicast replication function as well as the multicast transport control function in order to deliver the selected multicast services to the UE.

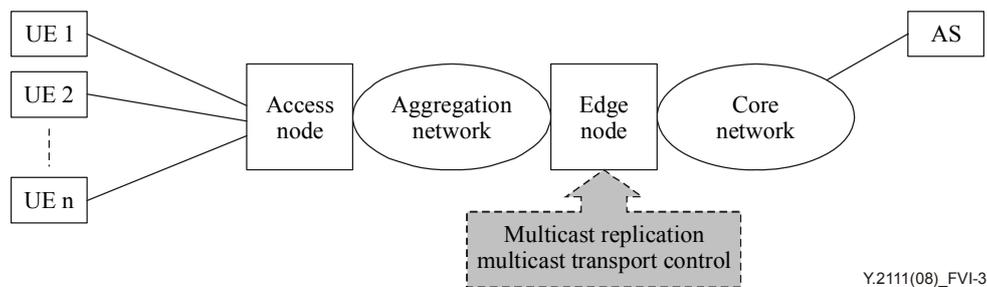

Y.2111(08)\_FVI-3

**Figure VI.3 – Edge node requested multicast resource control with MTCF Scenario**

## Appendix VII

### Inter-operator RACF communication scenarios for end-to-end QoS control involving nomadicity

(This appendix does not form an integral part of this Recommendation)


The media flow involving multiple transport networks requires inter-operator RACF communications, if the application layer signalling or the path-coupled QoS signalling cannot be used for end-to-end resource reservation. Typical scenarios requiring inter-operator RACF communications with Ri reference point are described in this appendix. Mechanisms of the application layer signalling and the path-coupled QoS signalling are out of scope of this appendix. Note that nomadicity is the only use case for Ri in this revision.

These scenarios involves the following entities.

- CPE-x\_n: Number n of CPE provided by operator x
- RACF-x: RACF provided by operator x
- Transport network-x: Transport network provided by operator x

#### Scenario 1: One CPE is accommodated in a visited operator


Both CPE-A\_1 and CPE-A\_2 directly communicate with SCF owned by operator A. Operator B transfers application layer signalling between CPE-A\_2 and the SCF. SCF sends the QoS information to RACF-A. According to the QoS information sent by the SCF, RACF-A reserves QoS resources in transport network-A. RACF-A also communicates with RACF-B using Ri reference point to reserve QoS resources in transport network-B. Upon receipt of the QoS information, RACF-B reserves QoS resources between CPE-A\_2 and transport network-A. Then, end-to-end QoS resources between CPE-A\_1 and CPE-A\_2 are reserved.

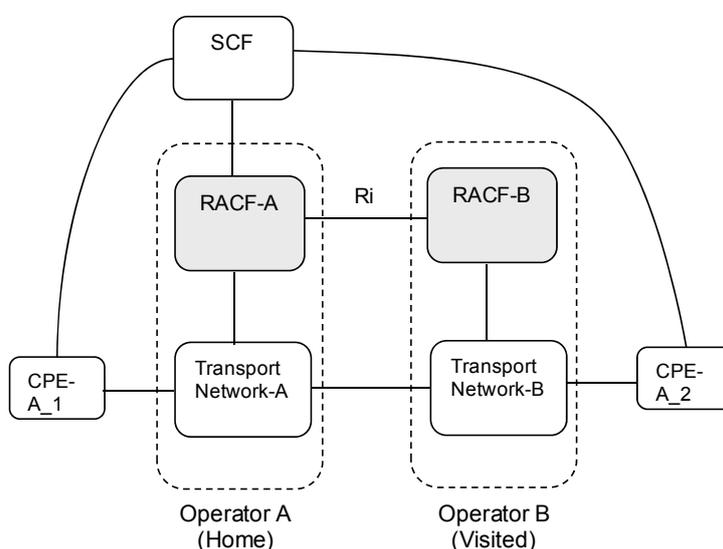

**Figure VII.1 – Inter-operator RACF communications where one CPE is accommodated in a visited operator**

### Scenario 2: Two CPEs are accommodated in the same visited operator


Both CPE-A\_1 and CPE-A\_2 directly communicate with SCF owned by operator A. Operator B transfers application layer signalling between CPE-A\_1 and the SCF. Operator B also transfers application layer signalling between CPE-A\_2 and the SCF. SCF sends the QoS information to RACF-A. According to the QoS information sent by the SCF, RACF-A communicates with RACF-B using Ri reference point to reserve QoS resources in transport network-B. Upon receipt of the QoS information, RACF-B reserves QoS resources between CPE-A\_1 and CPE-A\_2. Then, end-to-end QoS resources between CPE-A\_1 and CPE-A\_2 are reserved.

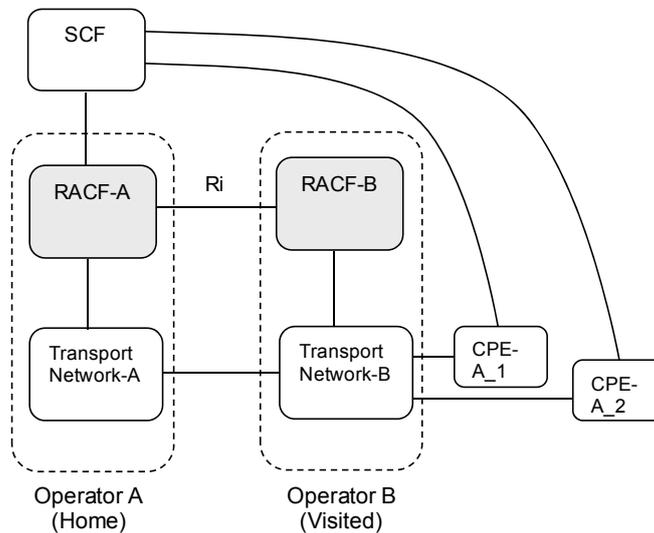

**Figure VII.2 – Inter-operator RACF communications where two CPEs are accommodated in the same visited operator**

### Scenario 3: Two CPEs are accommodated in different visited operators

Both CPE-A\_1 and CPE-A\_2 directly communicate with SCF owned by operator A. Operator B transfers application layer signalling between CPE-A\_1 and the SCF. Operator C transfers application layer signalling between CPE-A\_2 and the SCF. SCF sends the QoS information to RACF-A. According to the QoS information sent by the SCF, RACF-A reserves QoS resources in transport network-A. RACF-A also communicates with RACF-B and RACF-C using Ri reference point to reserve QoS resources in transport network-B and transport network-C, respectively. Upon receipt of the QoS information, RACF-B reserves QoS resources between CPE-A\_1 and transport network-A, and RACF-C reserves QoS resources between CPE-A\_2 and transport network-A. Then, end-to-end QoS resources between CPE-A\_1 and CPE-A\_2 are reserved.

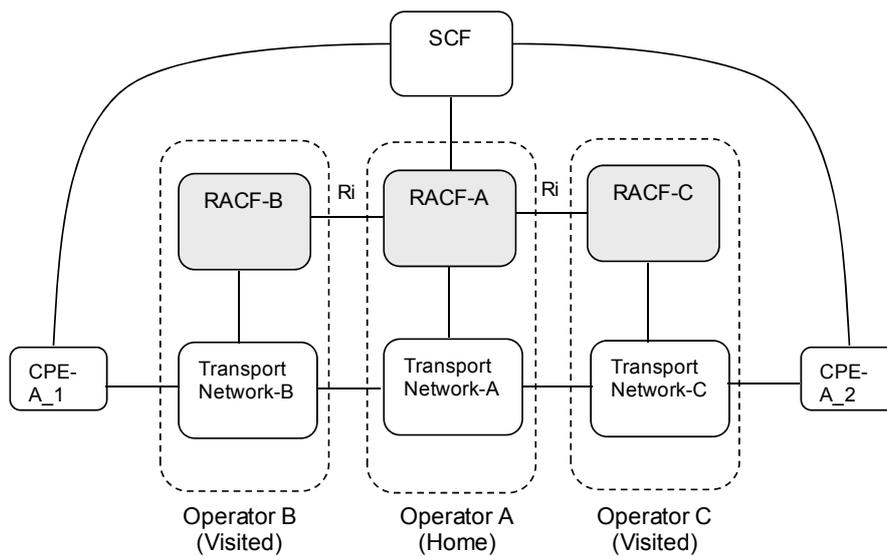

**Figure VII.3 – Inter-operator RACF communications where two CPEs are accommodated in different visited operators**

## Appendix VIII

### Comparison between reference point Rw and Rh

(This appendix does not form an integral part of this Recommendation)

The information components of Rh reference point is a subset of those of Rw reference point. The following components of Rw are not included in Rh.

#### VIII.1 NAT traversal and dynamic firewall working mode

NAPT control and NAT traversal indication (Conditional)	A set of information sub-components indicating the existence of near-end and/or far-end NAPT's.  The events of NAPT control and NAT traversal are not mutually exclusive. They can be used in the same information flow.
– Address translation command	Indication to the PD-FE for signalling message modification for near-end NAPT.  The PE-FE may perform the NAPT enforcement, and ask the PD-FE to request the SCF to modify signalling messages accordingly based on network address hiding policy decision.
– Address binding information request	Indication of the presence of far-end NAT traversal issued by the PD-FE. The PD-FE may ask the PE-FE for the network address and port translation information (e.g., address latching) in support of far-end NAT traversal.
– Address binding information response	Indication to the PD-FE for the response of address latching for far-end NAT traversal.  The PE-FE shall obtain the NAPT information, generate the address binding information and send it to relevant PD-FE instance. The PD-FE shall ask the relevant SCF instance to modify the message body of application signalling accordingly.
Dynamic firewall working mode (Optional)	Service information for dynamic firewall working mode selection (e.g., security level).

#### VIII.2 Related information components used in pull mode

Resource reservation mode	Indication of resource reservation mode (e.g., non-reservation, reservation only or reservation + commitment). In the pull mode of the QoS control scenario, the "non-reservation" option is used. In the push mode, either the "reservation only" or the "reservation + commit" option is used.
Authorization token (Optional)	A unique identifier used in policy pull mode. The token is produced by the PD-FE and may be sent back by the PE-FE to the PD-FE for the re-authorization of the resource request in the pull mode.

NOTE – Only applicable to policy pull mode as an optional binding method.

### **VIII.3 Information components specific to core network**

- Path selection information (Optional) The technology independent core network ingress/egress path information at the PE-FE for a media flow (e.g., VPN ID).

### **VIII.4 Information components related to charging**

Charging correlation information (Optional) Charging correlation information, such as charging ID of the SCF and networks, and resource usage information.

The information flow exchanges of Rh reference point is a subset of those of Rw reference point. The following components of information exchange are not included in Rh:

- Resource decision request, Resource decision response

## Bibliography

- [b-ITU-T Y.1221] Recommendation ITU-T Y.1221 (2002), *Traffic control and congestion control in IP-based networks*.
- [b-ITU-T Y.1541] Recommendation ITU-T Y.1541 (2006), *Network performance objectives for IP-based services*.
- [b-ITU-T Y.2171] Recommendation ITU-T Y.2171 (2006), *Admission control priority levels in Next Generation Networks*.
- [b-ITU-T Y.2173] Recommendation ITU-T Y.2173 (2008), *Management of performance measurement for NGN*.
- [b-ITU-T Y.2174] Recommendation ITU-T Y.2174 (2008), *Distributed RACF architecture for MPLS networks*.
- [b-ITU-T Y.2701] Recommendation ITU-T Y.2701 (2007), *Security requirements for NGN Release 1*.
- [b-ITU-T Q-Sup.51] ITU-T Q-series Recommendations – Supplement 51 (2004), *Signalling requirements for IP-QoS*.
- [b-ETSI TR 069] ETSI Technical Report 069, ed. 1 (1993), *Radio Equipment and Systems (RES); High Performance Radio Local Area Network (HIPERLAN); Services and facilities*.  
[http://pda.etsi.org/pda/home.asp?wki\\_id=xzz4r\\_n7KeZacecKynKY](http://pda.etsi.org/pda/home.asp?wki_id=xzz4r_n7KeZacecKynKY)
- [b-ETSI TS 123 207] ETSI TS 123 207 V6.6.0 (2005-09), *Digital cellular telecommunications system (Phase 2+); Universal Mobile Telecommunications System (UMTS); End-to-end Quality of Service (QoS) concept and architecture*.  
[http://pda.etsi.org/pda/home.asp?wki\\_id=kyilEfqhmOXZadce2gl@6](http://pda.etsi.org/pda/home.asp?wki_id=kyilEfqhmOXZadce2gl@6)
- [b-ETSI TS 123 228] ETSI TS 123 228 V7.3.0 (2006-03), *Digital cellular telecommunications system (Phase 2+); Universal Mobile Telecommunications System (UMTS); IP Multimedia Subsystem (IMS); Stage 2*.  
[http://pda.etsi.org/pda/home.asp?wki\\_id=XXqUZ\\_1KdJBDGKIHmF'zu](http://pda.etsi.org/pda/home.asp?wki_id=XXqUZ_1KdJBDGKIHmF'zu)
- [b-IETF RFC 2205] IETF RFC 2205 (1997), *Resource ReSerVation Protocol (RSVP) Version 1 Functional Specification*.  
<http://www.ietf.org/rfc/rfc2205.txt>
- [b-IETF RFC 2246] IETF RFC 2246 (1999), *The TLS Protocol Version 1.0*.  
<http://www.ietf.org/rfc/rfc2246.txt>
- [b-IETF RFC 2403] IETF RFC 2403 (1998), *The Use of HMAC-MD5-96 within ESP and AH*.  
<http://www.ietf.org/rfc/rfc2403.txt>
- [b-IETF RFC 2404] IETF RFC 2404 (1998), *The Use of HMAC-SHA-1-96 within ESP and AH*.  
<http://www.ietf.org/rfc/rfc2246.txt>
- [b-IETF RFC 2405] IETF RFC 2405 (1998), *The ESP DES-CBC Cipher Algorithm With Explicit IV*.  
<http://www.ietf.org/rfc/rfc2405.txt>
- [b-IETF RFC 2410] IETF RFC 2410 (1998), *The NULL Encryption Algorithm and Its Use With IPsec*.  
<http://www.ietf.org/rfc/rfc2410.txt>

- [b-IETF RFC 2412] IETF RFC 2412 (1998), *The OAKLEY Key Determination Protocol*.  
<<http://www.ietf.org/rfc/rfc2412.txt>>
- [b-IETF RFC 2475] IETF RFC 2475 (1998), *An Architecture for Differentiated Services*.  
<<http://www.ietf.org/rfc/rfc2475.txt>>
- [b-IETF RFC 2702] IETF RFC 2702 (1999), *Requirements for Traffic Engineering Over MPLS*.  
<<http://www.ietf.org/rfc/rfc702.txt>>
- [b-IETF RFC 3261] IETF RFC 3261 (2002), *SIP: Session Initiation Protocol*.  
<<http://www.ietf.org/rfc/rfc3261.txt>>
- [b-IETF RFC 3272] IETF RFC 3272 (2002), *Overview and Principles of Internet Traffic Engineering*.  
<<http://www.ietf.org/rfc/rfc3272.txt>>
- [b-IETF RFC 3312] IETF RFC 3312 (2002), *Integration of Resource Management and Session Initiation Protocol (SIP)*.  
<<http://www.ietf.org/rfc/rfc3312.txt>>
- [b-IETF RFC 3346] IETF RFC 3346 (2002), *Applicability Statement for Traffic Engineering with MPLS*.  
<<http://www.ietf.org/rfc/rfc3346.txt>>
- [b-IETF RFC 3520] IETF RFC 3520 (2003), *Session Authorization Policy Element*.  
<<http://www.ietf.org/rfc/rfc3520.txt>>
- [b-IETF RFC 3564] IETF RFC 3564 (2003), *Requirements for Support of Differentiated Services-aware MPLS Traffic Engineering*.  
<<http://www.ietf.org/rfc/rfc3564.txt>>
- [b-IETF RFC 4124] IETF RFC 4124 (2005), *Protocol Extensions for Support of Diffserv-aware MPLS Traffic Engineering*.  
<<http://www.ietf.org/rfc/rfc4124.txt>>
- [b-IETF RFC 4301] IETF RFC 4301 (2005), *Security Architecture for the Internet Protocol*.  
<<http://www.ietf.org/rfc/rfc4301.txt>>
- [b-IETF RFC 4304] IETF RFC 4304 (2005), *Extended Sequence Number (ESN) Addendum to IPsec Domain of Interpretation (DOI) for Internet Security Association and Key Management Protocol (ISAKMP)*.  
<<http://www.ietf.org/rfc/rfc4304.txt>>
- [b-IETF RFC 4305] IETF RFC 4305 (2005), *Cryptographic Algorithm Implementation Requirements for Encapsulating Security Payload (ESP) and Authentication Header (AH)*.  
<<http://www.ietf.org/rfc/rfc4305.txt>>
- [b-IETF RFC 4306] IETF RFC 4306 (2005), *Internet Key Exchange (IKEv2) Protocol*.  
<<http://www.ietf.org/rfc/rfc4306.txt>>

- [b-IETF RFC 4307] IETF RFC 4307 (2005), *Cryptographic Algorithms for Use in the Internet Key Exchange Version 2 (IKEv2)*.  
<http://www.ietf.org/rfc/rfc4307.txt>
- [b-IETF RFC 4308] IETF RFC 4308 (2005), *Cryptographic Suites for IPsec*.  
<http://www.ietf.org/rfc/rfc4308.txt>
- [b-IETF RFC 4566] IETF RFC 4566 (2006), *SDP: Session Description Protocol*.  
<http://www.ietf.org/rfc/rfc4566.txt>



## SERIES OF ITU-T RECOMMENDATIONS

Series A	Organization of the work of ITU-T
Series D	General tariff principles
Series E	Overall network operation, telephone service, service operation and human factors
Series F	Non-telephone telecommunication services
Series G	Transmission systems and media, digital systems and networks
Series H	Audiovisual and multimedia systems
Series I	Integrated services digital network
Series J	Cable networks and transmission of television, sound programme and other multimedia signals
Series K	Protection against interference
Series L	Construction, installation and protection of cables and other elements of outside plant
Series M	Telecommunication management, including TMN and network maintenance
Series N	Maintenance: international sound programme and television transmission circuits
Series O	Specifications of measuring equipment
Series P	Telephone transmission quality, telephone installations, local line networks
Series Q	Switching and signalling
Series R	Telegraph transmission
Series S	Telegraph services terminal equipment
Series T	Terminals for telematic services
Series U	Telegraph switching
Series V	Data communication over the telephone network
Series X	Data networks, open system communications and security
<b>Series Y</b>	<b>Global information infrastructure, Internet protocol aspects and next-generation networks</b>
Series Z	Languages and general software aspects for telecommunication systems