





2-6 December 2024 Geneva, Switzerland













Coordination under No. **9.21**of the RR for Terrestrial Services (FXM)



Contents




- 1. Introduction
- 2. Frequency bands
- 3. Coordination Procedure
- 4. Coordination criteria
- 5. Propagation models
- 6. Practical considerations
- 7. Coordination examples















Radio Regulations

Articles

Edition of 2024

CHAPTER III – Coordination, notification and recording of frequency assignments and Plan modifications

RR9-1



Procedure for effecting coordination with or obtaining agreement of other administrations^{1, 2, 3, 4, 5, 6, 7, 8} (WRC-19)





When does the coordination under provision No. 9.21 apply?

Solution 1

- ➤ 9.6 Before an administration notifies to the Bureau or brings into use a frequency assignment in any of the cases listed below, it shall effect coordination, as required, with other administrations identified under No. 9.27: (WRC-03)
- ➤ 9.21 p) for any station of a service for which the requirement to seek the agreement of other administrations is included in a footnote to the Table of Frequency Allocations referring to this provision. (WRC-2000)









Please identify the different points between coordination under No. 9.21 and Nos. 9.18 and 9.19 in general.





- > The service to be protected
 - ✓ For No. 9.18 coordination, it is a satellite service(receiving earth station)
 - ✓ For No. 9.19 coordination, it is BSS (service area)
 - ✓ For No. 9.21 coordination, it is any service to which the frequency band is allocated on an equal or higher status with the notified frequency assignment.


See also <u>ITU Web-page</u> on coordination




Solution 2 (2)




See also ITU Web-page



RR 9.18 coordination



RR 9.19 coordination

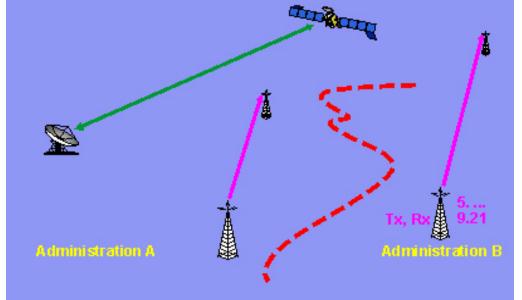

RR 9.21 coordination



www.itu.int/wrs-24

Solution 2 (3)



- For No. 9.18 coordination and No. 9.19 coordination,
 - ✓ the notifying administration should identify potentially affected
 administrations and send the request for coordination directly to the
 identified administrations to effect the coordination without BR's
 involvement
- For No. **9.21** coordination,
 - ✓ the notifying Administration should send its request for coordination to
 the BR to effect the coordination. The BR identifies the potentially
 affected administrations and inform them of the request.



Please identify which footnotes are referring to No. 9.21.

Which ones are for allocation to the services and which ones are for identification for IMT?





- > RR contains 52 footnotes for TS referring to No. 9.21
 - ✓ For FXM allocation: RR Nos. 5.61, 5.87A, 5.92, 5.93, 5.181, 5.190, 5.197, 5.225A, 5.251, 5.259, 5.279, 5.292, 5.293, 5.295A, 5.297, 5.307A, 5.308, 5.309, 5.312A, 5.316B, 5.323, 5.325, 5.326, 5.410, 5.430A, 5.431A, 5.432B, 5.434A, 5.447, 5.480A, 5.431B, 5.431E, 5.434A and 5.482
 - ✓ For BS allocation: RR Nos. 5.123, 5.177, 5.252 and 5.322
 - ✓ For IMT identification: RR Nos. 5.295, 5.296A, 5.308A, 5.341A, 5.341C, 5.346, 5.346A, 5.429D, 5.429F, 5.431B, 5.434, 5.441B, 5.457F, 5.531E and 5.553A
 - ✓ For HIBS identification: RR Nos. <u>5.312B</u> and <u>5.314A</u>
 - ✓ Most of the footnotes are intended to allocate a frequency bands, however some of them are to identify the frequency bands for IMT or HIBS.





Please explain what the disadvantages would be, if an ADM does not effect coordination for the services mentioned in the footnotes listed in Solution 3.



- ➤ If an ADM does not effect coordination in the frequency bands allocated subject to coordination under No. 9.21,
 - ✓ It is considered as there is no allocation at all in its country;
 - ✓ Any assignments for the service subject to coordination under No. 9.21 could not get a favorable findings in the examination with respect to No. 11.31; and
 - ✓ They have no right to international recognition stipulated by No. 8.3.

8.3 Any frequency assignment recorded in the Master Register with a favourable finding under No. 11.31 shall have the right to international recognition. For such an assignment, this right means that other administrations shall take it into account when making their own assignments, in order to avoid harmful interference. In addition, frequency assignments in frequency bands subject to coordination or to a plan shall have a status derived from the application of the procedures relating to the coordination or associated with the plan.



From the frequency table in the following slides,

- 1. Please find the frequency bands allocated to the terrestrial services in your country.
- 2. Please find the frequency bands identified for IMT in your country.



RR No.	Freq. band	Service	Coordination criteria	Area *
5.61	70-90 kHz 110-130 kHz	MARITIME RADIONAVIGATION	RoP B4	XR2
5.87A	526.5-1606.5 kHz	RADIONAVIGATION	RoP B4	• UZB
5.92	1606.5-1625 kHz 1635-1800 kHz 1850-2160 kHz 2194-2300 kHz 2502-2850 kHz 3500-3800 kHz	RADIODETERMINATION	RoP B5	Region 2 XR1
5.93	1 625-1 635 kHz 1 800-1 810 kHz 2 160-2 170 kHz	FIXED LAND MOBILE	RoP B4	ARM, AZE, BLR, GEO, HNG, KAZ, KGZ, LVA, LTU, MNG, NIG, POL, SVK, RUS, TJK, TCD, TKM, UKR, UZB
5.123	3 900-3 950 kHz	BROADCASTING	RoP B4	AFS, MRN, BOT, LSO, MOZ, MWI, NMB, SWZ, ZMB, ZWE
5.177	73-74 MHz	BROADCASTING	Recs. ITU-R SM.851 and ITU-R BS.412	ARM, AZE, BLR, GEO, KAZ, KGZ, RUS, TJK, TKM, UKR, UZB

^{*} The areas in Region 2 are highlighted with green, in Region 3 with blue and in Region 1 without highlight.



Solution 5 (2)



Return to the first band.

RR No.	Freq. band	Service	Coordination criteria	Area *
5.181	74.8-75.2 MHz	Mobile	Not available yet	EGY, ISR, SYR
5.190	87.5-88 MHz	LAND MOBILE	Not available yet	MCO
5.197	108-111.975 MHz	Mobile	Not available vet	SYR
5.225A	154-156 MHz	RADIOLOCATION	No. 5.225A	ALC, ARM, AZE, BLR, CHN, HKG, MAC, XCN, F, CRO, MYT, REU, IRN, KAZ, KGZ, RUS, TJK, TKM, UKR, UZB, VTN
5.251	230-235 MHz	AERONAUTICAL RADIONAVIGATION	Not available yet	NIG
5.252	230-238 MHz 246-254 MHz	BROADCASTING	Rec. ITU-R SM.851	AFS, MRN, BOT, LSO, MWI, MOZ, NMB, SWZ, ZMB, ZWE
5.259	328.6-335.4 MHz	Mobile	Not available yet	EGY, SYR
5.279	430-435 MHz 438-440 MHz	Fixed MOBILE except aero.	Not available yet	MEX
5.292	470-512 MHz	MOBILE	RoP B6	ARG, URG, VEN

^{*} The areas in Region 2 are highlighted with green, in Region 3 with blue and in Region 1 without highlight.



Solution 5 (2)



Return to the first band.

RR No.	Freq. band	Service	Coordination criteria	Area *
5.293	470-512 MHz	MOBILE	RoP B6	ARG, BAH, BRB, CAN, CHL, CUB, EQA, GUY, JMC, MEX, PNR, USA, ALS, HWA, JON, MDW, PAQ, PTR, VIR
	470-512 MHz	FIXED		ARG, CAN, CHL, CUB, EQA, GUY, JMC, PNR, USA, ALS, HWA, JON, MDW, PAQ, PTR, VIR
	614-698 MHz	MOBILE		BAH, BRB, CAN, CHL, CUB, GUY, MEX, PNR, USA, ALS, HWA, JON, MDW, PAQ, PTR, VIR
	614-806 MHz	FIXED		CAN, CHL, CUB, GUY, JMC, PNR, USA, ALS, HWA, JON, MDW, PAQ, PTR, VIR
5.295	470-608 MHz	LAND MOBILE (IMT)	Covered by 5.293 & 5.297	BAH, BRB, CAN, MEX, USA, ALS, HWA, JON, MDW, PTR, VIR
5.295A	470-694 MHz	Mobile, except aeronautical mobile	RoP B6	ALB, AND, AUT, BEL, BIH, BUL, CVA, CYP, CZE, D, DNK, EST, F, CRO, MYT, REU, FIN, G, ASC, GCA, GIB, SHN, TRC, GEO, GRC, HNG, HOL, HRV, IRL, ISL, LIE, LTU, LUX, LVA, MCO, MDA, MKD, MLT, MNE, NOR, BVT, POL, POR, ROU, S, SMR, SRB, SUI, SVK, SVN, TUR, UKR,
* The average in	Danian O ana himblimht	ed with light green, in Pegion 2 with	salas blisa and in Dania	UZB

^{*} The areas in Region 2 are highlighted with light green, in Region 3 with sky blue and in Region 1 without highlight.



Solution 5 (4)



Return to the first band.

	RR No.	Freq. band	Service	Coordination criteria	Area *
	5.296A	470-698 MHz /	LAND MOBILE (IMT)	RoP B6	FSM, SLM, TUV, VUT /
		610-698 MHz			BGD, MLD, LAO, NZL, CKH, NIU, TKL, VTN
	5.297	512-608 MHz	FIXED	RoP B6	CAN, CTR, CUB, SLV, GTM, GUY, JMC, USA,
					ALS, HWA, JON, MDW, PTR, VIR
			MOBILE		CAN, CTR, CUB, BAH, BRB, SLV, GTM, GUY,
					JMC, MEX, USA, ALS, HWA, JON, MDW, PTR,
					VIR
<	5.307A	614-694 MHz	MOBILE	RoP B6	ARS, BHR, EGY, IRQ, JOR, KWT. OMA, PSE,
					QAT, SYR, UAE
	5.308	614-698 MHz	MOBILE	RoP B6	BLZ, CLM, GTM, SLV
	5.308A	614-698 MHz	MOBILE (IMT)	Covered by RR5.293	BAH, BLZ, BRB, CAN, CLM, GTM, JMC, MEX,
				and RR 5.308	SLV, USA, ALS, HWA, JON, MDW, PTR, VIR
	5.309	614-806 MHz	FIXED	RoP B6	SLV

^{*} The areas in Region 2 are highlighted with green, in Region 3 with blue and in Region 1 without highlight.

Solution 5 (5)



Return to the first band.

RR No.	Freq. Band **	Service	Coordination criteria	Area
5.312A	694-790 MHz	MOBILE except aero.	RoP 5.312A Res. 760 (Rev.WRC- 23)	XR1 countries within 450 km from countries listed in No. 5.312 (ARM, AZE, BLR, BUL, GEO, KAZ, KGZ, RUS, TJK, TKM, UKR
5.316B	790-862 MHz	MOBILE except aero.	RoP 5.316B Res. 749 (Rev.WRC- 23)	UZB): ALB, ARM, AUT, AZE, BIH, BLR, BUL, CZE, D, DNK, EST, FIN, GEO, GRC, HNG, HRV, I, IRQ, KAZ, KGZ, LTU, LVA, MKD, MDA, MNE, MNG, NOR, POL, ROU, RUS, S, SRB, SVK, SYR, TJK, TKM, TUR, UKR, UZB
5.312B	694/698-960 MHz	LAND MOBILE (HIBS)	RoP 5.312B	XR1, XR2
5.314A	698-960 MHz 703-733 MHz, 758-788 MHz, 890-915 MHz and 935-960 MHz	LAND MOBILE (HIBS)	RoP 5.314A	AUS, CHR, HMD, ICO, NFK, MLD, FSM, PNG, TON, VNU CHN, HKG, MAC, XCN, IND, INS, J, KOR, MLA, PHL, THA

Solution 5 (6)



Return to the first band.

RR No.	Freq. Band **	Service	Coordination criteria	Area
5.322	862-960 MHz	BROADCASTING	Rec. ITU-R SM.851	ABA (African broadcasting area) except AFS, ALG, BDI, E, EGY, LSO, LBY, MRC, MWI, NIG, NMB, TZA, ZMB, ZWE
5.323	862-960 MHz	AERONAUTICAL RADIONAVIGATION	RoP B6	ARM, AZE, BLR, KAZ, UZB, KGZ, RUS, TJK, TKM, UKR
	862-880 MHz 915-925 MHz			BUL, ROU
5.325	890-942 MHz	RADIOLOCATION	RoP B6	USA, ALS, HWA, JON, MDW, PTR, VIR
5.326	903-905 MHz	MOBILE except aero.	RoP B6	CHL, PAQ

^{*} The areas in Region 2 are highlighted with green, in Region 3 with blue and in Region 1 without highlight.

Solution 5 (7)



Return to the first band.

RR No.	Freq. band	Service	Coordination criteria	Area *
5.341A	1429-1452 MHz 1492-1518 MHz	LAND MOBILE (IMT)	RoP 5.341A, RoP B6	XR1 countries within 670 km from countries listed in No. 5.342 (ARM, AZE, BLR, KGZ, RUS, UKR, UZB): ALB, ARM, AUT, AZE, BIH, BLR, BUL, CZE, D, DNK, EST, FIN, GEO, GRC, HNG, HRV, I, IRQ, KAZ, KGZ, LTU, LVA, MDA, MKD, MNE, MNG, NOR, POL, ROU, RUS, S, SRB, SVK, SVN, SYR, TJK, TKM, TUR, UKR, UZB
5.341C	1429-1452 MHz 1492-1518 MHz	LAND MOBILE (IMT)	RoP B6	XR3
5.346	1452-1492 MHz	LAND MOBILE (IMT)	RoP 5.346 RoP B6	Countries mentioned in No. 5.346 and located within 670 km from countries listed in No. 5.342 (ARM, AZE, BLR, KGZ, RUS, UZB, UKR): IRQ
5.346A	1452-1492 MHz	LAND MOBILE (IMT)	RoP B6	XR3
5.410	2500-2690 MHz	FIXED (ST)	Not available	XR1
5.429D	3300-3400 MHz	LAND MOBILE (IMT)	RoP B6	ARG, URG, PRG

^{*} The areas in Region 2 are highlighted with light green, in Region 3 with sky blue and in Region 1 without highlight.



Solution 5 (8)



Return to the first band.

RR No.	Freq. band	Service	Coordination criteria	Area *
5.429F	3300-3400 MHz	LAND MOBILE (IMT)	RoP B6	CBG, IND, INS, LAO, PAK, PHL*, SNG, VTN
				(* no allocation to the LMS)
5.430A	3400-3600 MHz	MOBILE except aero.	RoP B6	XR1
5.431A	3400-3500 MHz	MOBILE except aero.	RoP B6	XR2
5.431B	3400-3600 MHz	LAND MOBILE (IMT)	RoP B6	XR2
5.432B	3400-3500 MHz	MOBILE except aero.	RoP B6	AUS, CKH, HMD, ICO, NFK, BGD, BRU, CHN, HKG,
				MAC, XCN, IND, INS, IRN, MLA, NZL, PHL, SNG,
				THA, AMS, KER, NCL, OCE, WAL, NIU, TKL
5.434	3600-3700 MHz	LAND MOBILE (IMT)	RoP B6	CAN, CHL, PAQ, CLM, CTR, PRG, SLV, USA, ALS,
				HWA, JON, MDW, PTR, VIR
5.441B	4800-4825 MHz	MOBILE (IMT)	Res. 223 (Rev.	AFS, MRN, AGL, ARG, ARM, AZE, B, BDI, BEN,
	4825-4835 MHz	MOBILE except aero. (IMT)	WRC-23)	BFA, BOT, CBG, CHL, PAQ, CHN, HKG, MAC, XCN,
	4835-4950 MHz	MOBILE (IMT)		CLM, CME, COD, COG, CPV, CTI, DJI, GAB, GHA,
	4950-4990 MHz	MOBILE except aero. (IMT)		GMB, GUI, IRN, IRQ, KAZ, KEN, KGZ, KRE, LAO,
		. ,		LBR, LSO, MAU, MDG , MLI, MNG, MOZ, MWI, NGR,
				NG, NMB, RUS, SDN, SSD, SWZ, TCD, TGO, , TZA,
				UGA, UZB, VTN, ZMB, ZWE

Solution 5 (9)



Return to the first band.

RR No.	Freq. band	Service	Coordination criteria	Area
5.447	5150-5250 MHz	MOBILE	Not available yet	CTI, EGY, ISR, LBN, SYR, TUN
5.457F	6425-7125 MHz	LAND MOBILE (IMT)	RoP B6	B, MEX
5.480A	10-10.5 GHz	LAND MOBILE (IMT)	RoP B6	MEX
5.482	10.6-10.68 GHz	FIXED MOBILE except aero.	Not available yet	XAA except ALG, ARM, ARS, AZE, BGD, BHR, BLR, EGY, GEO, IND, INS, IRN, IRQ, JOR, KAZ, KGZ, KWT, LBN, LBY, MDA, MRC, AOE, MTN, NIG, OMA, PAK, PHL, QAT, SNG, SYR, TJK, TKM, TUN, UAE, UZB, VTN
5.531B and	22-22.2 GHz	AERONAUTICAL	RR5.531B and	XR1 (RR5.531B) and Ctry_in_RR5.531E (BRU, IRN,
5.531E		MOBILE	5.531E	MLA, SNG and THA)
5.553A	45.5-47 GHz	LAND MOBILE (IMT)	RoP B6	AFS, MRN, AGL, ALG, B, BEN, BFA, BHR, BLR, BOT, CPV, CTI, DJI, EGY, EST, HRV, GAB, GHA, GMB, GNB, GRC, GUI, HNG, IRN, IRQ, JOR, KOR, KWT, LBR, LSO, LTU, LVA, MAU, ROD, MDG, MLI, MOZ, MRC, AOE, MTN, MWI, NGR, NIG, NMB, OMA, QAT, S, SDN, SEN, SEY, SOM, SRL, SVN, SWZ, TGO, TUN, TZA, UAE, ZMB, ZWE

Solution 5 (10)



- For example, Switzerland is involved in eight (8) footnotes.
 - ✓ Some frequency bands are allocated subject to RR 9.21 coordination.
 - 5.92: 1606.5-1625 kHz, 1635-1800 kHz, 1850-2160 kHz, 2194-2300 kHz, 2502-2850 kHz, 3500-3800 kHz for radiodetermination service
 - 5.295A: 470-694 MHz, Mobile, except aeronautical service (Secondary)
 - 5.312B: 694-960 MHz, Land mobile service (HIBS)
 - **5.410**: 2 500-2 690 MHz, Fixed service (Tropospheric scatter systems)
 - 5.430A: 3400-3600 MHz, Mobile, except aeronautical service
 - 5.434A: 3600-3800 MHz, Mobile, except aeronautical service
 - **5.482**: 10.6-10.68 GHz, Mobile, except aeronautical service
 - 5.331B: 23-22.2 GHz, Aeronautical mobile service (aircraft station)
 - ✓ They are all related to additional allocations in Switzerland.




From the coordination procedure in the following slides,

- 1. Please find the statutory period of the coordination under No. 9.21.
- 2. What will happen if an affected ADM does not reply to the request?



- ➤ Coordination Procedure is described in Article 9 (Nos. 9.23 9.65)
- > It shows the procedure in the aspects of
 - ✓ the notifying administration;
 - ✓ the potentially affected administrations; and
 - √ the BR

The flow chart is available at ITU web page.

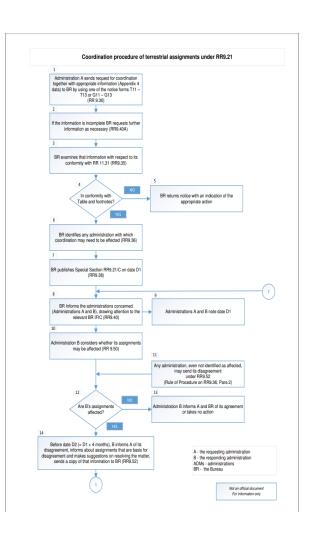



Solution 6 (2)



Notifying ADM	Step	BR	Step	Affected ADM
Requests for coordination (RR 9.30)	1	Acknowledges the receipt of the request		
	1-1	Requests further information as necessary (RR 9.40A)		
	2	Examines with respect to conformity with RR 11.31	>	
	2-1	If not conform, returns notice with an indication of the appropriate action		
	3	Identifies any administration with which coordination may need to be effected (RR 9.36)		
	4	Publishes Special Section RR9.21/C on date D1 (RR 9.38)	>	
	4-1	Informs the concerned administrations (notifying and affected), drawing their attention to the relevant BR IFIC (RR 9.40)	4-1	Note date D1

Solution 6 (3)



Notifying ADM		BR		Affected ADM
			5	Examines whether its assignments may be affected (RR 9.50)
			6	Before date $D2 = D1 + 4$ months) informs notifying ADM of its disagreement, informs about assignments that are basis for disagreement and makes suggestions on resolving the matter, sends a copy of that information to BR (RR 9.52)
			6-1	Any administration, even not identified as affected, may send its disagreement under RR 9.52 (Rule of Procedure on RR 9.36, Para 2)
Consultations with affected ADMs (RR 9.53, RR 9.54 and RR 9.55)	7	Assists administrations if requested (RR 9.59 or RR 9.63)	7	Consultations with notifying ADM (RR 9.53, RR 9.54 and RR 9.55)

Solution 6 (4)



Notifying ADM		BR	Affected ADM
Before or on date <i>D2</i> , informs BR about coordination results including ADMs agreed, disagreed and not replied if any, also about modifications of characteristics (RR 9.55 and RR 9.58)	8	If characteristics were changed, publishes a new Special Section <i>RR9.21/C</i> with modified characteristics (RR 9.58) based on principles of RoP on RR 9.27	
	8-1	If not, publishes Special Section RR9.21/D after D2 (RR 9.53A) with list of ADMs: 1) submitted their agreement; 2) submitted their disagreement; 3) not responded and regarded as unaffected (RR 9.52C).	

Solution 6 (5)



Notifying ADM		BR		Affected ADM
Consultations with affected ADMs (RR 9.53 , RR 9.54 and RR 9.55)	12	Assists administrations if requested (RR 9.59 or RR 9.63)	12	Consultations with notifying ADM (RR 9.53, RR 9.54 and RR 9.55)
	13	Proposes solution	13	
Proceed for Article 11 notification	15		14	Agreement
Disagreement remains unresolved and defers Article 11 notification for 6 months (RR 9.64)	15		14	Disagreement



Where are the coordination criteria used for the identification of the affected administrations?



- The criteria for identification of affected administrations required for the application of the No. 9.21 procedure are fully or partially available
 - ✓ in the footnotes, e.g. Nos. 5.225A, 5.430A, 5.431B and 5.432B;
 - ✓ in the WRC Resolutions, e.g. Resolutions 223 (Rev.WRC-23), 749
 (Rev.WRC-23) and 760 (Rev.WRC-23); or
 - ✓ in the associated Rules of Procedure (e.g. RoP B4, B5 and B6)
- Coordination criteria is normally given in the form of
 - electric field strength level (dBµV/m),
 - ✓ power flux density (dBW/m²); or
 - coordination distance (km).





Coordination criteria given in RoP

- ✓ RoP Section B4
 - Rules in the context of the frequency allocations in Nos. 5.61, 5.87A, 5.92, 5.93 and 5.123 in the frequency range between 9 kHz and 28 MHz
- ✓ RoP Section B5
 - Rules in the context of the frequency allocation to the RDS in No. 5.92 in the frequency bands 1 606.5-1 625 kHz, 1 635-1 800 kHz, 1 850-2 160 kHz, 2 194-2 300 kHz, 2 502-2 850 kHz and 3 500-3 800 kHz
- ✓ RoP Section B6
 - Rules in the context of frequency allocations or identifications governed by Nos. 5.292, 5.293, 5.295, 5.295A, 5.296A, 5.297, 5.307A, 5.308, 5.308A, 5.309, 5.323, 5.325, 5.326, 5.341A, 5.341C, 5.346A, 5.346A, 5.429D, 5.429F, 5.430A, 5.431A, 5.431B, 5.432B, 5.434A, 5.457F, 5.480A and 5.553A in the frequency ranges between 470 MHz and 47 GHz





www.itu.int/wrs-24

Footnote No. 5.225A provides two types of criteria.

Please identify the more stringent one.





Coordination criteria in the footnotes

- ✓ No. 5.225A in the frequency band 154-156 MHz for the RLS operating from terrestrial locations, the following criteria shall be used:
 - in Region 1, the field-strength value o 12 dB(μV/m) or 10% of the time produced at 10 m above ground level in the 25 kHz reference frequency band at the border of the territory of any other administration
 - in Region 3, the interference-to-noise ratio (I/N) value of −6 dB (N → −161 dBW/4 kHz), or −10 dB for applications with greater protection requirements, such as PPDR, for 1% of the time produced at 60 m above ground level at the border
- ✓ Nos. 5.430A, 5.431B, 5.432B, 5.434 in the frequency band 3 400-3 700 MHz, the MS except AMS shall ensure that
 - pfd produced at 3 m above ground does not exceed -154.5 dB(W/(m².4 kHz)) for more than 20% of time at the border of the territory of any other administration



36 www.itu.int/wrs-24

Solution 8 (2)



- Comparison of the criteria in No. 5.225A.
 - \checkmark E = N + I/N + 20 log(4 π f/c) + 10 log(30) + 10 log(25kHz/4kHz) + 120
 - ✓ For given values N = -161 dBW/4kHz and N = -10 dB in Region 3,
 - $E = -12 dB(\mu V/m^2 25 kHz)$.
 - ✓ Therefore, the criteria for Region 3 is 24 dB more stringent than the criteria for Region 1.
 - ✓ Furthermore, the antenna height 60 m and the time percentage 1% in Region 3 are also much more stringent than those (10 m and 10%) in Region 1.






From the coordination criteria given in Resolutions 749 and 760, please explain the benefit of the harmonized frequency arrangement.



Coordination criteria in WRC Resolutions

- ✓ Resolution 749 (Rev. WRC-19)
 - Base station in 791-821 MHz: 70/125/175 km*
 (* land path ≥ 90% / 50% ≤ land path < 90% / land path < 50%)
 - Mobile station in 832-862 MHz: 150/175 km** (** land path ≥ 50% / land path < 50%)</p>
 - Other cases base station: 432/450 km**, mobile station: 410 km
- ✓ Resolution 760 (Rev. WRC-19)
 - Base station in 758-788 MHz: 70/125/175 km*
 - Mobile station in 703-733 MHz: 0 km
 - Other cases base station: 432/450 km**, mobile station: 410 km
- The benefit of frequency arrangement Shortening of the coordination distance.





From the RoP on 5.312A, 5.316B, 5.341A and 5.346, please check if your administration needs to request No. 9.21 coordination in the bands 694-862 MHz and 1429-1518 MHz. (Only for Region 1 countries)

Solution 10 (2)



- Coordination criteria given in RoP
 - ✓ RoP 5.312A and RoP 5.316B
 - Those Region 1 administrations whose territories are located beyond the distance 450 km from the countries mentioned in No. 5.312 are exempted from application of No. 9.21 procedure to their MS except AMS assignments in the frequency bands 694-790 MHz and 790-862 MHz.
 - ✓ RoP 5.341A and RoP 5.346
 - Those Region 1 administrations whose territories are located beyond the distance of 670 km from the countries mentioned in No. 5.342 are exempted from application of No. 9.21 procedure to their IMT stations operating in the frequency band 1 429 -1 518 MHz.









Please explain the coordination criteria for No. 9.21 coordination and No. 9.19 coordination in the frequency band 1429-1518 MHz.



Summary of requirements in the frequency band 1 429-1 518 MHz

Process	Freq. band	Service (App.)	Criteria	Area
RR 9.21	1429-1518	AND MOBILE (IMT)	-181	Regions 1 countries within 670 km from
Coord.	MHz		dB(W/(m² · 4 kHz))	countries listed in No. 5.342 (ARM, AZE,
			See RoP B6	BLR, KGZ, RUS, UKR, UZB): ALB, ARM, AUT, AZE, BIH, BLR, BUL, CZE, D, DNK, EST, FIN, GEO,
				GRC, HNG, HRV, I, IRQ, KAZ, KGZ, LTU, LVA,
				MDA, MKD, MNE, MNG, NOR, POL, ROU, RUS, S, SRB, SVK, SVN, SYR, TJK, TKM, TUR, UKR and
				UZB) and Region 3
RR9.19	1452-1492	MOBILE except Aero.	-154	Regions 1 and 3
Coord.	MHz	(IMT)	dB(W/(m² · 4 kHz))	
		Other cases of	See RoP 9.19	
		Terrestrial service		

- ✓ The coordination requirement under No. 9.21 is effected by making coordination request to the BR.
- ✓ The coordination requirement under No. 9.19 should be effected bilaterally with affected ADMs without involvement of the BR





Please describe the difference between the coordination criteria given in Resolution 223 and pfd limit given in No. 5.441B for the frequency band 4800-4990 MHz.



Summary of requirements in the frequency band 4 800-4 990 MHz

Process	Freq band	Service (Application)	Criteria	Area
RR9.21	4800-4825 MHz	MOBILE (IMT)	300/450 km to the	Countries listed in No. 5.441B (AFS, MRN, AGL,
Coord.	4825-4835 MHz	MOBILE except aero. (IMT)	border for	ARG, ARM, AZE, B, BDI, BEN, BFA, BOT, CBG, CHL,
	4835-4950 MHz	MOBILE (IMT)	protection of AMS	PAQ, CHN, HKG, MAC, XCN, CLM, CME, COD, COG,
	4950-4990 MHz	MOBILE except aere. (IMT)	70 km for the	CPV, CTI, DJI, GAB, GHA, GMB, GUI, IRN, IRQ, KAZ,
			protection of FS	KEN, KGZ, KRE, LAO, LBR, LSO, MAU, MDG, MLI,
			p	MNG, MOZ, MWI, NGR, NIG, NMB, RUS, SDN, SSD,
				SWZ, TCD, TGO, TZA, UGA, UZB, VTN, ZMB and ZWE)
5.441B			-155	Countries listed in No. 5.441B except
PFD limit			$dB(W/(m^2 \cdot MHz))^*$	Countries listed in 1 (35: 225 (7(5L, 7(1(5, 7)2L,
			up to19 km above	BDI, BEN, BFA, BOT, CHL, PAQ, CLM, CME, COD, COG,
			sea level and 20	CPV, CTI, DJI, GAB, GHA, GUI, IRN, IRQ, KGZ, KRE,
			km from the coast	LBR, LSO, MDG, MLI, MNG, MWI, NGR, NMB, SSD,
				SWZ, TCD, TGO, UGA and ZMB)
				* AFS, ARM, B, CBG, CHN, KAZ, LAO, RUS, UZB, VTN and
				ZWE are exempted from the pfd limit by Res. 223

- ✓ The coordination requirement is effected by making coordination request to the BR, under No. 9.21.
- ✓ The PFD limit would be checked when the assignment is notified under Article 11 to the BR.



Please investigate which propagation models are used in application of No. **9.21** in the range 694 MHz-47 GHz.



Propagation Models

- ✓ The calculation results of power flux density or electric field strength may vary according to the path loss <u>prediction methods</u> (e.g. Recommendations ITU-R P.452, P.525, P.528, P.1546 and etc.)
- ✓ Therefore, it is important to have an agreement among concerned parties on a propagation model for a coordination procedure.
- ✓ If no propagation model is specified with a given criteria in the Radio Regulations, the BR would request the **RRB to decide** it based on the available ITU-R Recommendations and Reports.



Solution 13 (2)



- Propagation Models mentioned in RoP B6
 - ✓ Recommendation ITU-R P.452
 - Valid for prediction of interference between stations on the surface of the Earth at frequencies from about 100 MHz to 50 GHz, accounting for both clear-air and hydrometeor scattering interference mechanisms (See <u>example</u>.)
 - ✓ Recommendation ITU-R P.1546
 - Valid for point-to-area radio propagation predictions for terrestrial services in the frequency range 30 MHz to 4 000 MHz, up to 1 000 km distance and effective transmitting antenna heights less than 3 000 m.
 - ✓ Recommendation ITU-R P.528
 - Valid for prediction of transmission loss in the frequency range 100 MHz -130 GHz for aeronautical services.
- More information related to propagation models and software
 - ✓ P-series ITU-R Recommendations <u>link</u>
 - ✓ ITU-R Study Group 3 Software and data <u>link</u>
 - ✓ GNU Octave <u>link</u>



As a notifier, please think about what do you need to do for effecting the coordination under No. 9.21.



- Before notifying frequency assignments for recording in the MIFR in accordance with Article 11
 - Check if the corresponding frequency allocation is subject to coordination under No. 9.21
 - Using the footnotes of Article 5 of the RR (See also file attached in the link 'Frequency bands')
 - ✓ Submit a request for coordination to the BR through WISFAT
 - Using the notice type G11, G12 or G13 (for GE06 Agreement bands), and T11, T12 or T13 (for all other bands)
 - WISFAT process for the request for coordination is the same as that of a notification under Article 11
- After submitting a request for coordination
 - ✓ Check if the request is published in a Special Section RR9.21 (in Part C) correctly
 - ✓ Implement necessary steps for coordination with the administrations identified as affected.



50 www.itu.int/wrs-24

Solution 14 (2)



- > At the end of the statutory coordination period of 4 months
 - ✓ Inform the BR of the coordination results, including the names of administrations giving their agreement, disagreement and those that did not reply, together with any modification, if necessary.
 - ✓ Check if the assignment is published in a Special Section RR9.21 (Part D)
- ➤ After the publication of SS RR9.21 (Part D)
 - ✓ Notify the frequency assignment to the BR through WISFAT in accordance with RR Article 11
 - Including the name(s) of administration(s) which gave an agreement to the assignment in the coordination information of the notice
 - ✓ Check if the assignment is published in a BR IFIC (Part 1)
 - ✓ Check if the assignment is published in a BR IFIC (Part 2)





As an affected administration, please think about what do you need to do for effecting the coordination under No. 9.21.



- ➤ Upon receiving a coordination request or publication of the coordination request in a special section RR9.21 (Part C)
 - Check if the special section includes your country name in the list of administrations, identified as potentially affected
 - ✓ Identify stations of your country, located within the coordination distance
 - ✓ Respond to the coordination request
 - Agreement; or
 - Disagreement with information of assignments upon which that disagreement is based
 - ✓ Send a copy of that information to the BR

Solution 15 (2)



- ➤ After the publication of SS RR9.21 (Part D)
 - Check if the decision of your Administration is correctly reflected in relation to the corresponding assignment.
- A point that should be kept in mind
 - ✓ For coordination requests under No. 9.21 an administration, not responding within the statutory 4 months period, shall be regarded as unaffected. (No. 9.52C)





1. Which frequency bands are mostly interested in your country?

2. For which frequency allocations, the specific criteria is not available yet for identification of affected administrations?





- ➤ During the period of 2012-2024/09, there have been 5 287 requests for coordination under No. 9.21 for TS except BS
 - ✓ All of them are in accordance with Nos. 5.312A, 316B, 5.430A and 5.441B
- For some bands, no clear guidance is available yet, for the criteria applicable for identification of affected administrations under No. **9.21**:
 - ✓ for the frequency bands 74.8-75.2 MHz, 87.5-88 MHz, 108-111.975 MHz, 230-235 MHz, 328.6-335.4 MHz, 430-440 MHz, 2 500-2 690 MHz, 5 150-5 250 MHz and 10.6-10.68 GHz mentioned in Nos. 5.181, 5.190, 5.197, 5.251, 5.259, 5.279, 5.410, 5.447 and 5.482 respectively.



From an example notice with a frequency of 3 550 MHz in a Region 1 country, please check why one neighboring country is identified as affected while others are not.



➤ Example 1 for RR9.21

BR ID: 120184205

Administration: LVA

Adm's unique ID: T13 Test

Fragment: Req_agrt **Provision:** RR9.21

Notice type: T13 / ADD Date Rcv: 02 Jul 2020

Date In Use: 20 Feb 2019

Assigned frequency: 3550 MHz

Bandwidth: 100M

Examination category: C9 21

Class of station: ML Geographic area: LVA

Site name: Test

Coordinates: 23°40'25"E - 56°32'7"N **Coordinates:** 23.6736°; 56.5353°

Administration **Provision Coord Status** Source **Date effective Declared by** BLR COORD COORD COMPLETED **NOTIFIER** 02-Jul-2020 **NOTIFIER EST** COORD COMPLETED COORD NOTIFIER 02-Jul-2020 NOTIFIER COORD COMPLETED COORD **NOTIFIER NOTIFIER** LTU 02-Jul-2020 RR9.36 COORD REQUIRED LTU ITU 19-Oct-2020 ITU S COORD COORD COMPLETED **NOTIFIER** 02-Jul-2020 **NOTIFIER**

Solution 17 (2)



- > 6 test cases were checked (BLR, EST, LTU, POL, RUS, S)
 - ✓ Case 2.1: Considered Administration: LTU Status: COORD REQUIRED
 - ✓ Case 2.1: Tx antenna parameters: Location 23°41'46"E 56°34'54"N Gain: 0.0 dB Height: 2 m Polarization: Unknown Radiated power: 47.5 dBW Protection Criteria ROP B6 (3.8)
 - ✓ Case 2.1: Test point antenna parameters: Location 23°40'51"E 56°21'47"N Country LTU Gain 0.0 dB Height 3.0 m
 - ✓ Case 2.1: Calculation results: Distance 24.3 km Path Loss 172.8 dB Maximum Calculated pfd -136.9 dB(W/m²·4kHz) Trigger pfd -154.5 dB(W/m²·4kHz)
 - ✓ Case 2.1: Observation: LTU in coord list (shortest path case heuristic)
 - ✓ Case 2.2: Considered Administration: BLR Status: COORD NOT REQUIRED
 - Case 2.2: Tx antenna parameters: Location 23°36'27"E 56°39'12"N Gain: 0.0 dB Height: 2 m Polarization: Unknown Radiated power: 47.5 dBW Protection Criteria: ROP B6 (3.8)
 - ✓ Case 2.2: Test point antenna parameters: Location 26°34'11"E 55°39'41"N Country BLR Gain 0.0 dB Height 3.0 m
 - Case 2.2: Calculation results: Distance 214.1 km Path Loss 211.3 dB Maximum Calculated pfd -175.3 dB(W/m²·4kHz) Trigger pfd -154.5 dB(W/m²·4kHz)
 - ✓ Case 2.2: Observation: BLR not in coord list (brute force case)



From an example notice with frequency 600 MHz in a Region 2 country, please check which coordination criteria are used.



➤ Example 2 for RR9.21

BR ID: 120184194

Administration: CUB

Administration's unique ID: CUB-T11-2

Fragment: Req agrt **Provision:** RR9.21

Notice type: T11 / ADD

Date Rcv: 02 Jul 2020

Assigned frequency: (600 MHz)

Bandwidth: 6M00

Examination category: C9 21

Class of station: FX Geographic area: CUB

Site name: LOS PALACIOS

Coordinates: 83°13'37"W - 22°39'12"N

➤ No country was identified as affected.

- 14 test cases were considered (BAH, BLZ, CLM, G/CYM, GTM, HND, HTI, JMC, MEX, NCG, SLV, HND/SWN, G/TCA, USA)
 - ✓ Case 14: Tx antenna parameters: Location 83°13'37"W 22°39'12"N Gain: 22.8 dBd Height: 15 m Polarization: Vertical Radiated power: 22.8 dBW Protection Criteria: ROP B6
 - ✓ Case 14: Test point antenna parameters: Location 82°07'26"W 24°32'48"N Country USA Gain 0.0 dB Height 10 m
 - ✓ Case 14: Calculation results: Distance 238 7 km Path Loss 105.0 dB Maximum Calculated Field Strength 4.8 dB(uV/m) Trigger Field Strength 20.0 dB(uV/m)





From an example notice with frequency 1 462 MHz in a Region 3 country, please follow the process for identification of affected administrations.



➤ Example 3 for RR9.21 with nature of service = 'IM'

BR ID: 119107006

Administration: KOR

Adm's unique ID: 32201211008376702013

Fragment: NTFD_RR

Provision: RR11.2

Notice type: T12

Date Rcv: 08 Nov 2019

Assigned frequency: 1462 MHz

Bandwidth: 20M0

Examination category: C9_21

Class of station: FB

Geographic area: KOR

Site name: SKT Backryung

Coordinates: 124°38'04"E - 37°57'08"N

Administration	Provision	Coord Status	Source	Date effective	Declared by
CHN	RR9.36	COORD REQUIRED	ITU	19-Oct-2020	ITU
KRE	RR9.36	COORD REQUIRED	ITU	19-Oct-2020	ITU
CHN	RR9.36	COORD COMPLETED	NOTIFIER	02-Jul-2020	NOTIFIER
KRE	RR9.36	COORD COMPLETED	NOTIFIER	02-Jul-2020	NOTIFIER

Solution 19 (2)



➤ 5.346A The frequency band 1 452-1 492 MHz is identified for use by administrations in Region 3 wishing to implement International Mobile Telecommunications (IMT) in accordance with Resolution 223 (Rev.WRC-19) and Resolution 761 (Rev.WRC-19). The use of this frequency band by the above administrations for the implementation of IMT is subject to agreement obtained under No. 9.21 from countries using stations of the aeronautical mobile service. This identification does not preclude the use of this frequency band by any application of the services to which it is allocated and does not establish priority in the Radio Regulations. (WRC-19)

➤ RoP B6

For protection of ground-based stations in the aeronautical mobile service in the frequency band 1 429-1 518 MHz from IMT, in the context of the provisions of Nos. **5.341A**, **5.341C**, **5.346** and **5.346A**, the coordination distances are calculated using the propagation curves given in Recommendation ITU-R P.1546-5 for 10% of time and 50% of locations with the coordination trigger power flux density of -181 dB(W/m²) within 4 kHz of reference bandwidth produced at the height of 10 m above ground level as given in Recommendation ITU-R M.1459-0.


For protection of stations on-board aircraft in the aeronautical mobile service, the coordination distance of 450 km is used.

Solution 19 (3)



> RR9.21 exam is applicable.

pwr_xyz	Υ
pwr_ant	12
pwr_dbw	24.85
pwr_eiv	- 1
ant_dir	D
azm_max_e	120
gain_max	12.85
gain_type	I
bmwdth	30
elev	-3
polar	
hgt_agl	35
tx_rx	TX




eTools Disclaimer The processing sys		ocumentations ntly ONLINE (28 pr	ocesses avail	able)
Please select the c	alculation ty	pe		
Propagation		•	P1546 Poi	nt to Area (BETA)
Back to calculation	n history			
Please label your s	ubmission	test		
Propagation p 30 MHz to 300	rediction)0 Mz	method for terr	estrial ser	rvices in the frequency range
Tx (long)	1243804	Tx (lat)	375708	
Tx hgt agl(m)	35	Rx hgt agl(m)	10	
Frequency(MHz)	1462	Erp(dBW)	22.7	
% of time	10	% of location	50	
Environment type	Rural 🕶			Converted from
Wanted FS (dB(µV/m))	28.7427			-181 dB(W/m²)
http	os://wv	ww.itu.int/l	TU-R/e	eBCD/ebcd.aspx

Solution 19 (4)




- > RR9.21 exam is applicable.
 - ✓ Criteria for protection of AMS aeronautical station: 181 dB (W/m².4kHz) for 10% time and 50% location using Rec. ITU-R P.1546
 - ✓ Countries within this criteria: 2 countries (CHN, KRE)

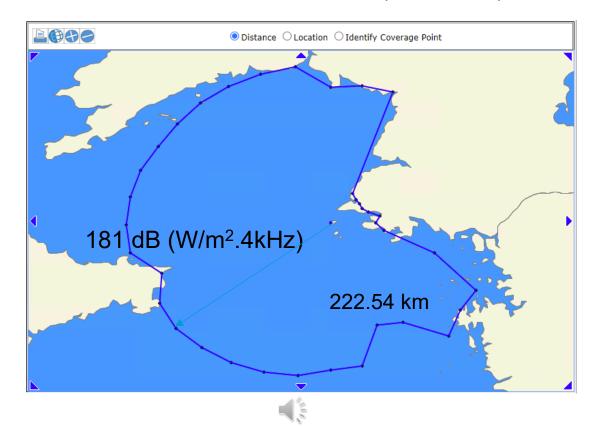

Solution 19 (5)



- > RR9.21 exam is applicable.
 - Criteria for protection of AMS aircraft station: 450 km.
 - ✓ Countries within 450 km: 2 country (CHN, KRE)

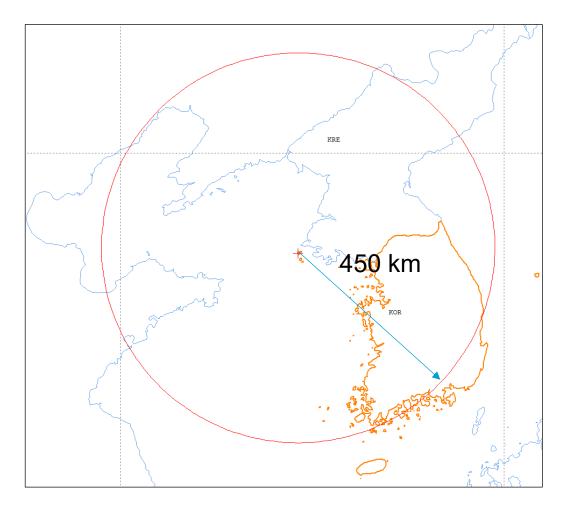






As a potentially affected administration, please find the minimum field strength to be protected in your country from a J3E SSB public telephony stations of neighboring countries using 2 165 kHz and 1 kW under the allocation of No. 5.93.



- The answer varies country by country.
- > The following answer is for the case of Switzerland
 - ✓ From the noise grade figures for four seasons (DC, MR, JN and SE) and 6 time slots (N1 N2, J1, J2, T1 and T2) in Table 1 to 4 of the RoP B4, the median value should be selected, if no specific condition is given. For SUI, the value of 53 can be selected.
 - ✓ From the Table 5A of RoP B4, the worst-case criteria would be selected.
 In Switzerland, it is 2 dB(µV/m).
 - For the J3E public telephony, from the same Table, it should be compensated by 25dB and results in 27 dB(μV/m).

Solution 20 (2)



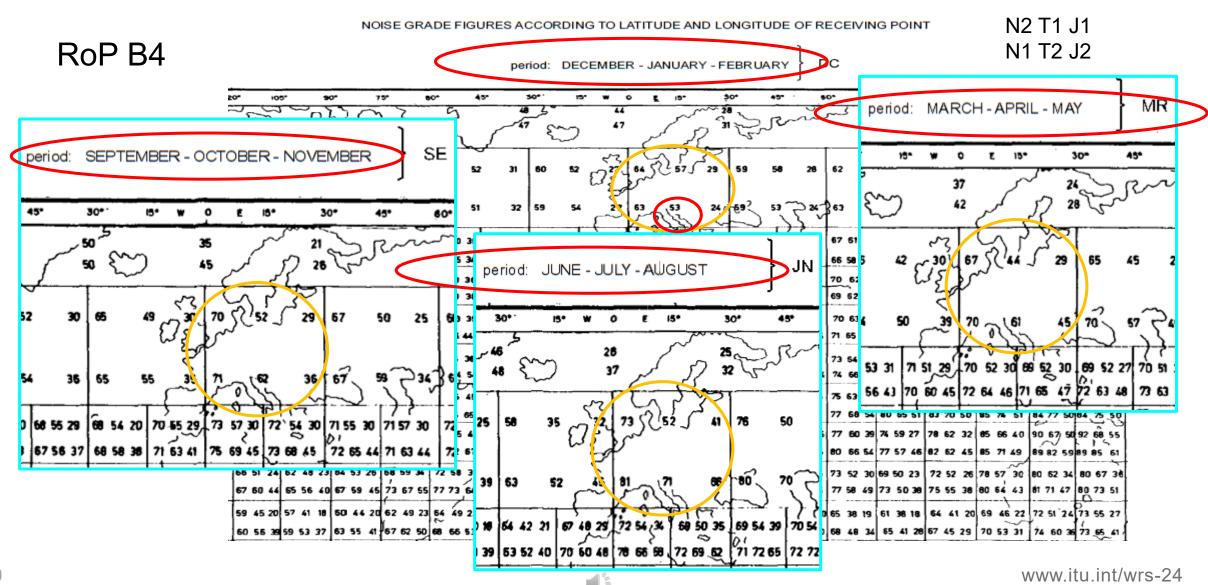

Solution 20 (3)



Minimum field strength to be protected (dB relative to 1 $\mu V/m$)

Type of transmission: Telegraphy, aural reception

(B > 0.5 kHz)



									(kl	Hz)															(MHz	z)						
NOISE		10			20			50			100			200		500		1		1.5		2			3		4						
GRADE	N2	T1	J1	N2	T1	J1	N2	T1	J1	N2	T1	J1	N2	T1	J1	N2	T1	J1	N2	T1	J1	N2	T1	J1	N2	T1	J1	N2	T1	J1	N2	T1	J1
	N1	T2	J2	N1	T2	J2	N1	T2	J2	N1	T2	J2	N1	T2	J2	N1	T2	J2	N1	T2	J2	N1	T2	J2	N1	T2	J2	N1	T2	J2	N1	T2	J2
100	72	72	74	70	72	81	72	72	74	70	72	81	72	72	74	70	72	81	52	54	52	47	50	41	44	47	34	38	42	23	34	38	16
	72	74	77	71	75	81	72	74	77	71	75	81	72	74	77	71	75	81	51	55	54	47	49	43	42	45	36	36	39	27	32	35	22
90	69	69	72	67	69	77	69	69	72	67	69	77	69	69	72	67	69	77	42	44	42	38	40	32	35	38	26	31	34	17	28	31	11
	70	71	74	67	71	77	70	71	74	67	71	77	70	71	74	67	71	77	41	45	44	37	40	33	34	36	28	30	31	20	27	28	15
80	66	66	69	63	65	73	66	66	69	63	65	73	66	66	69	63	65	73	32	34	32	28	31	23	27	29	18	24	27	10	22	25	5
	67	68	71	63	66	72	67	68	71	63	66	72	67	68	71	63	66	72	31	35	34	28	30	25	26	28	20	23	24	13	21	22	9
70	64	63	66	60	61	68	64	63	66	60	61	68	64	63	66	60	61	68	22	24	22	19	22	14	18	20	10	17	19	3	16	18	1
	64	65	68	59	61	68	64	65	68	59	61	68	64	65	68	59	61	68	21	25	24	19	22	16	18	20	12	16	18	6	15	16	4
60	61	60	64	57	57	64	61	60	64	57	57	64	61	60	64	57	57	64	12	14	12	10	12	6	10	12	2	10	12	-1	10	12	-1
	61	61	66	56	56	63	61	61	66	56	56	63	61	61	66	56	56	63	11	15	14	9	12	7	9	11	4	9	11	0	9	10	-1
50	58	57	61	53	53	60	58	57	61	53	53	60	58	57	61	53	53	60	4	4	4	3	3	3	2	3	2	3	4	-1	4	5	-1
	58	58	63	52	52	59	58	58	63	52	52	59	58	58	63	52	52	59	4	5	4	3	3	3	2	3	2	2	3	-1	4	4	-1
40	55	55	58	49	50	56	38	39	46	26	28	35	14	16	22		7			4			3			2			-1			-1	
	55	55	60	49	47	55	38	35	43	26	24	32	14	14	20																$ldsymbol{f eta}$		
30	52	52	56	46	47	52	33	34	40	19	22	27	11	11	13		7			4			3			2			-1			-1	
	52	51	58	45	42	50	32	28	36	20	16	24	11	11	11																		
20	50	49	54	43	42	48	28	28	33	15	15	20	11	11	11		7			4			3			2			-1			-1	
	49	48	55	40	37	46	27	20	30	15	15	15	11	11	11																igsqcup		

Constants to be added to obtain other types of emissions											
Digital J2D	transn	nissions,	-8								
Narrow- TG (B	-band < 0.5 kH	z)	- 5								
Telegrap aut. (B	phy > 0.5 kH	Iz)	4								
Photote	16										
T e	со	J3E R3E B8E	14								
1		НЗЕ	20								
e p		A3F	23								
h	h J3E R3E										
n y	CP	НЗЕ	31								
		A3E	34								

13





Please find the coordination distance to assure a protection ratio of 17 dB in your country from the frequency assignments to a radiodetermination station using 30 W in a neighboring country under the allocation of No. 5.92.



- > The answer can vary country by country.
- > The following answer is for the case of Switzerland.
 - ✓ From the Table 1 to 4 of the RoP B4, the median value of noise grade figures over the four seasons were selected because no information on operating seasons was given. The selected noise figure is 53.
 - ✓ Having the protection criteria 17 dB and power 30 W, the coordination distance can be directly read as 5 000 km from the Table 1 of RoP B5.

Solution 21 (2)



ROP B5

TABLE 1

Coordination distance for assuring protection ratio of 17 dB (protected transmission: telegraphy, automatic reception)

Noise degree	50		60	70	80
Minimum field strength (dB relative to 1 μ V/m)	4	$\sqrt{}$	13	22	30

	wer ng transmission)			on distance m)	
1 W	0 dBW	4 400	3 400	1 800	800
3 W	5 dBW	4 900	3 900	2 800	1 400
10 W	$10~\mathrm{dBW}$	5 000	4 500	3 500	2 200
30 W	15 dBW	5 000	5 000	4 000	3 100
50 W	17 dBW	5 000	5 000	4 2 0 0	3 400




Please create a notice file for a request for coordination using TerRaNotice.




> Hint

- Example test notice is in the following slide.
- ✓ Open TerRaNotice.
- ✓ Select "RR9.21"
- ✓ Fill in all the required fields from the information of the station that you have chosen in your country.
- Save the file after validation.





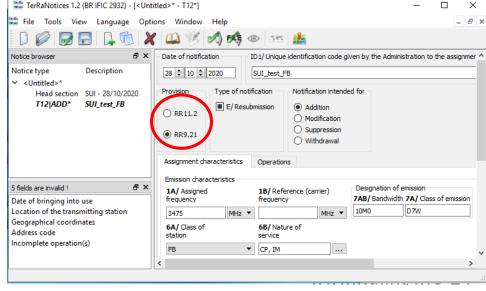



Solution 22 (2)



> Example notices

<HEAD>

t_email_addr=chungsang.r

t adm=SUI

t_d_sent=2018-11-01

</HEAD>

<NOTICE>

t_notice_type=T12

t_fragment=NTFD_RR

t_prov=RR11.2

t action=ADD

t adm ref id=SUI test F

Е

t freq assgn=3475.00

t long=+0085307

t lat=+460636

t site name=SUI test

t addr code=A

t op hh fr=00:00

t op hh to=24:00

t_emi_cls=D7W

t d inuse=2010-04-22

t site alt=80

t station id=3L KNS312 1

t d adm ntc=2010-05-21

t bdwdth cde=10M0

t is resub=FALSE

t stn cls=FB

t ctry=SUI

t nat srv=CP

<COORD>

t adm=F

t_adm=l

</COORD>

<ANTENNA>

t_pwr_xyz=Y

t_ant_dir=D

t elev=-8

t_pwr_dbw=48

t azm max e=90

t_pwr_eiv=l

t_hgt_agl=30

t gain max=23

t pwr ant=25

t bmwdth=65

t gain type=I

<RX STATION>

-KA_STATION

t_long=+0085307

t_lat=+460636

t_geo_type=CIRCLE

t radius=5

</RX STATION>

</ANTENNA>

</NOTICE>

<NOTICE>

t notice type=T13

t_fragment=NTFD_RR

t_prov=RR11.9

t_action=ADD

t_adm_ref_id=SUI_test_M

L

t freq assgn=3475.00000

0

t_long=+0085307

t lat=+460636

t site name=SUI test

t addr code=A

t op hh fr=00:00

t op hh to=24:00

t emi cls=D7W

t d inuse=2010-04-22

t d adm ntc=2010-05-21

t bdwdth cde=10M0

t is resub=FALSE

t stn cls=ML

t ctry=SUI

t_nat_srv=CP

<COORD>

t adm=RUS

</COORD>

<ANTENNA>

t pwr xyz=Y

t pwr dbw=-5

t pwr eiv=l

t pwr ant=-7

<TX STATION>

t long=+0085307

t lat=+460636

t_geo_type=CIRCLE

t radius=5

</TX_STATION>

</ANTENNA>

</NOTICE>

<TAIL>

t_num_notices=2

</TAIL>



77 www.itu.int/wrs-24





Please create a notice file for a request for coordination by converting an existing notice file.



> Hint

- ✓ Example notice is in Solution 22.
- Open the test notice with Notepad, Notepad++ or MS Word.
- Replace "t_fragment=NTFD_RR" with "t_fragment=Req_agrt"
- ✓ Replace "t_prov=RR11.2" with "t_prov=RR9.21"
- ✓ Replace "t_prov=RR11.9" with "t_prov=RR9.21"
- ✓ Save the file.

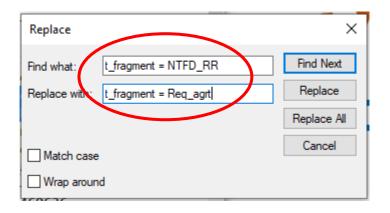

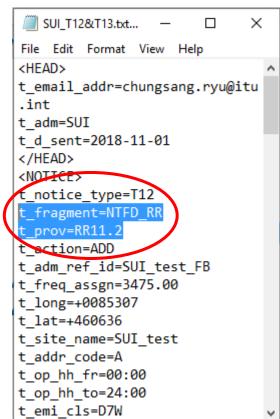




- 1. From SS RR9.21/C/1062 and 1061 (Part C) on the BR IFIC webpage, please check whether your administration is involved.
- 2. From RR9.21/D/500 and 499 (Part D), please check the coordination results of the RR9.21 coordination procedure.



➤ BR IFIC (Terrestrial)

- SS RR9.21/C/1062 or RR9.21/C/1061
- SS RR9.21/D/500 or RR9.21/D/499

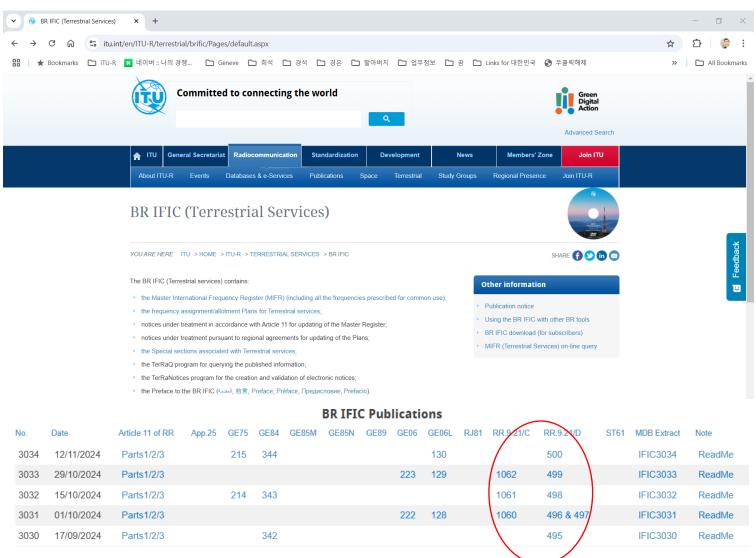













Terrestrial Service Workshop

Thank you!

ITU – Radiocommunication Bureau

Questions to brmail@itu.int or brfmd@itu.int